Exploratory archived-checkpoint playback

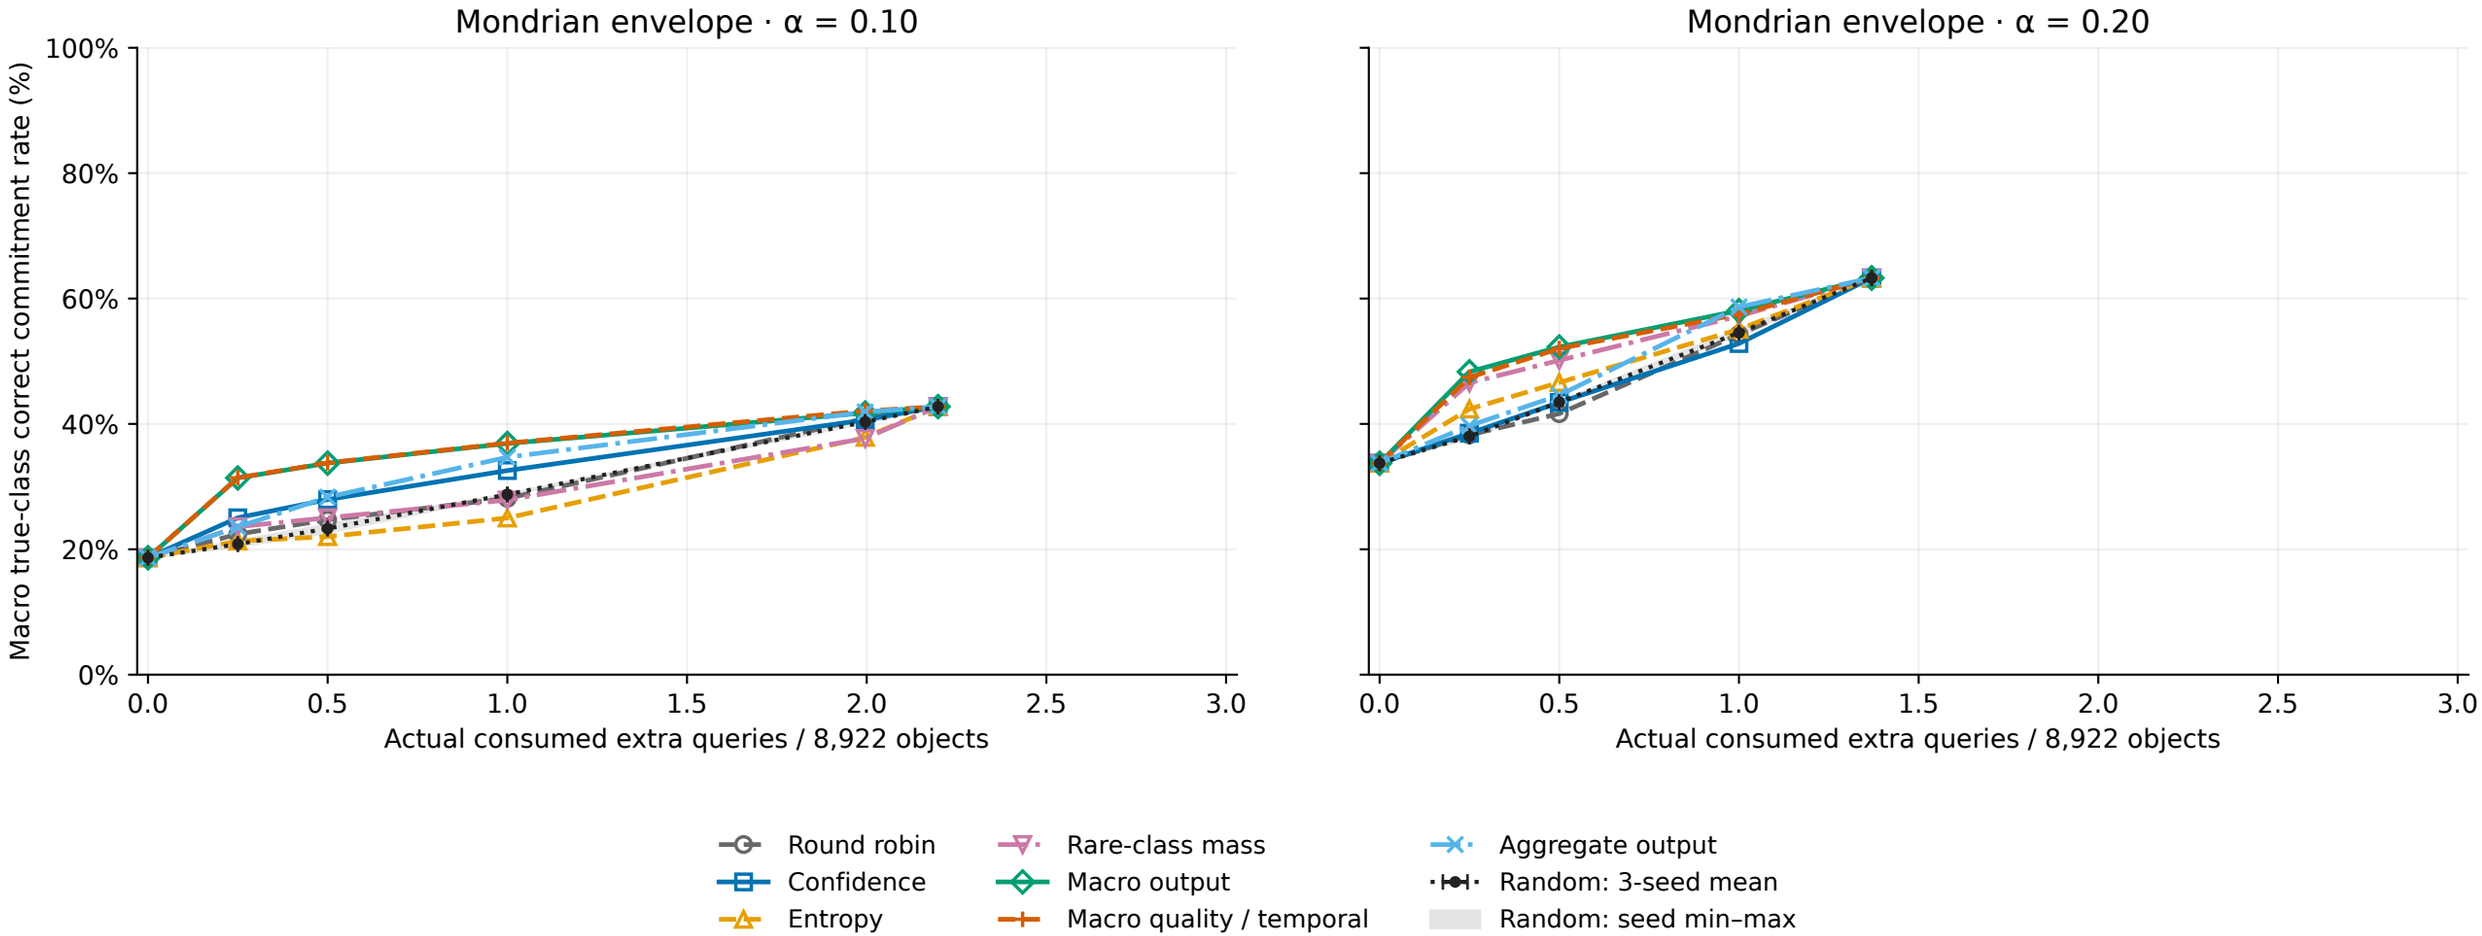

Points follow equal allocated quotas b = 0, 0.25, 0.5, 1, 2, 3; closure can make actual consumption differ by policy.

Random means/ranges pair seeds at each quota: shaded y range and horizontal x bars are algorithmic min–max, not confidence intervals.

Macro = mean correct/all over six true classes. Initial checkpoints excluded from x; reused development data, no telescope intervention.