



Why pair-bagging is not enough

Group A: balanced incidence

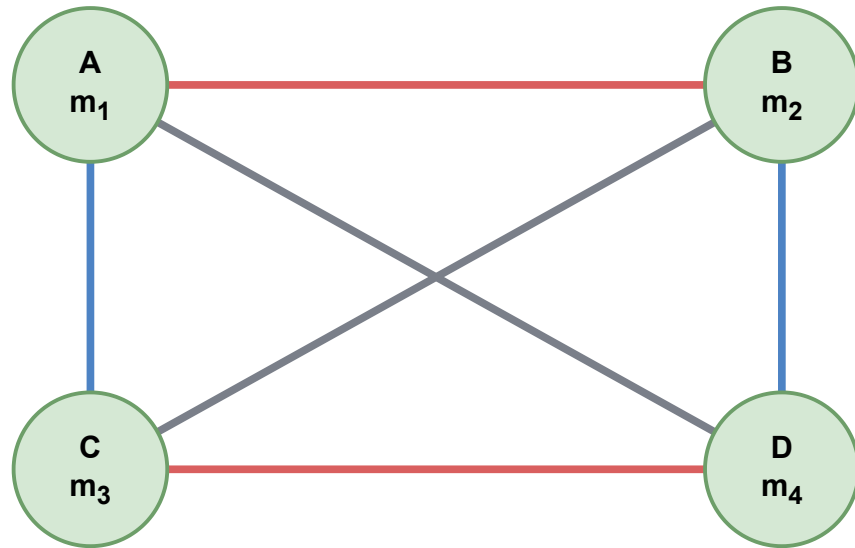

Every actor: 1 red + 1 blue + 1 gray incident relation

Group B: concentrated incidence

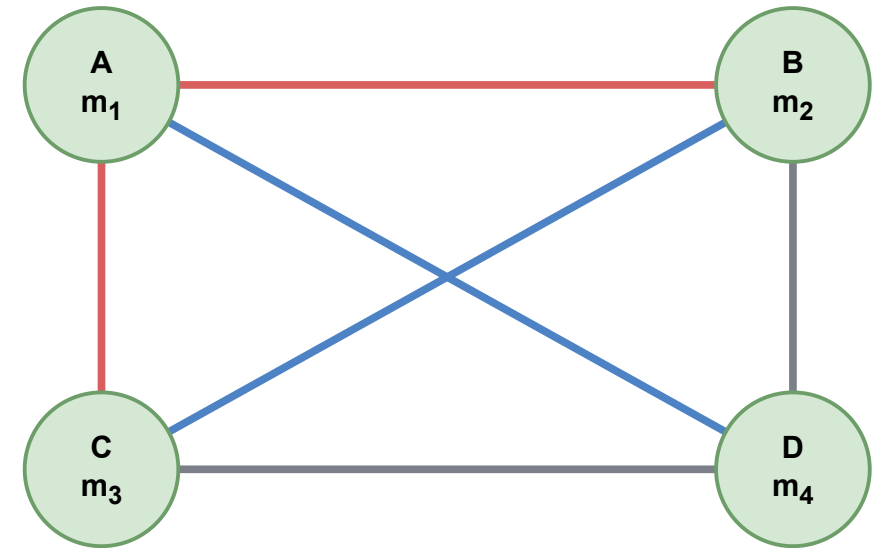

A: 2 red; D: 2 gray; B/C: mixed incident relations

Identical actor marginals: $\{m_1, m_2, m_3, m_4\}$
Identical pair-token multiset: $\{\text{red} \times 2, \text{blue} \times 2, \text{gray} \times 2\}$

**Pair-bag mean
identical**

**PhaseSet incidence moments
distinguishable**