



Why pair-bagging is not enough

Group A: balanced incidence

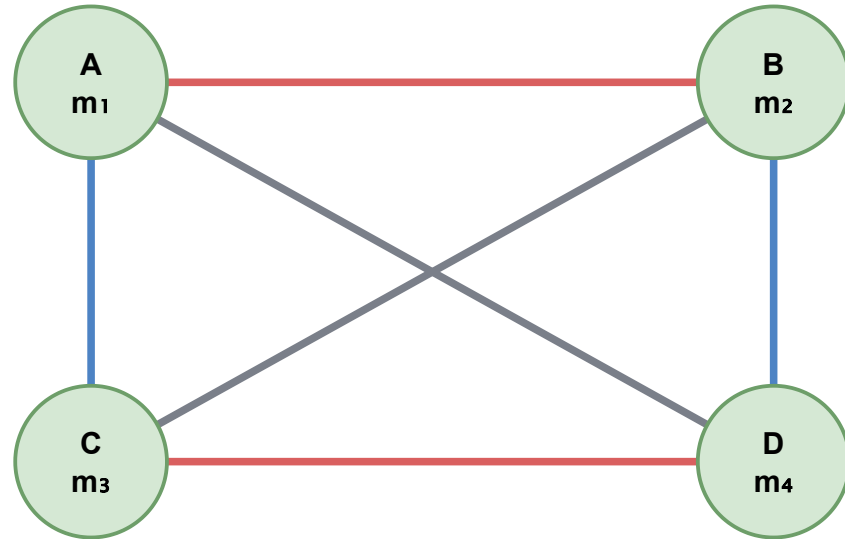

Every actor: 1 red + 1 blue + 1 gray incident relation

Group B: concentrated incidence

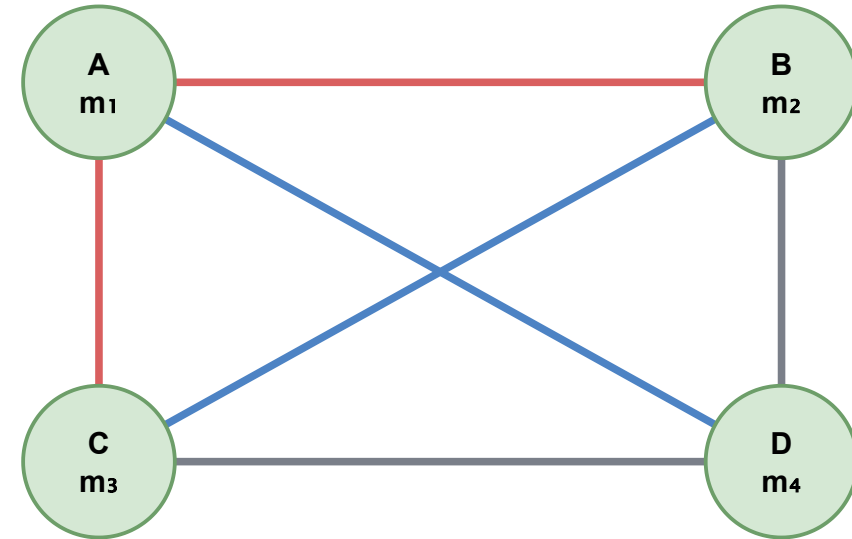

A: 2 red; D: 2 gray; B/C: mixed incident relations

Identical actor marginals: {m₁, m₂, m₃, m₄}
Identical pair-token multiset: {red×2, blue×2, gray×2}

Pair-bag mean
identical

PhaseSet incidence moments
distinguishable