



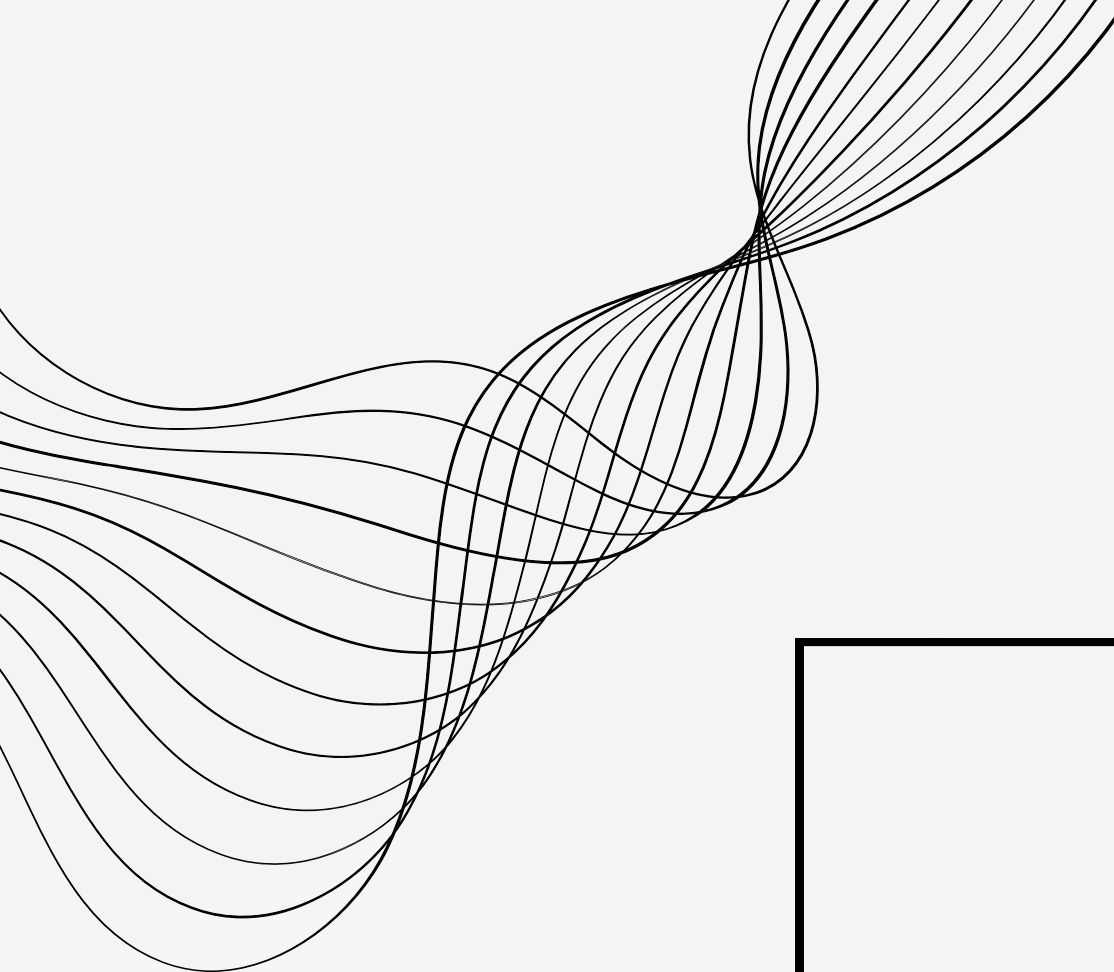

PHPMYADMIN

111010540 資工二 陳先正

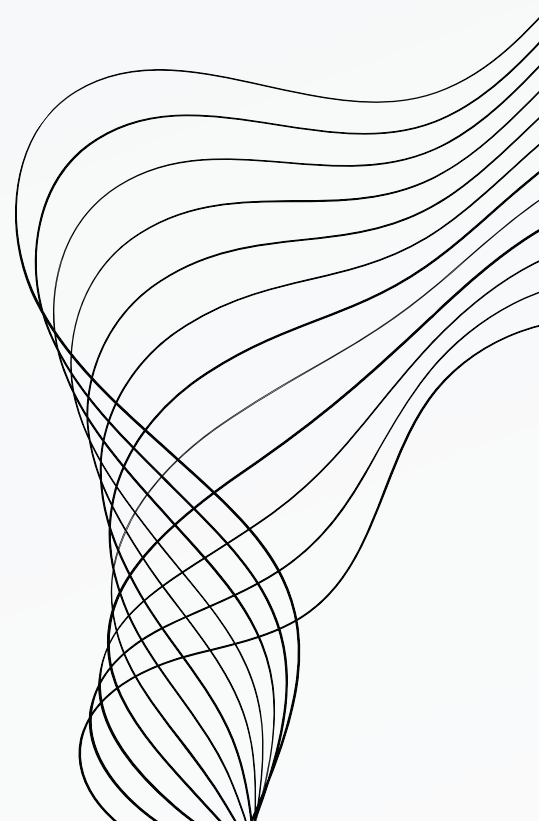

目錄

01

介紹 PHPMYADMIN

02

安裝PHPMYADMIN並進行配置

03

PHPMYADMIN的功能


04

結論

PHPMYADMIN



phpMyAdmin 是一個用於管理 MySQL 資料庫的開源網頁應用程式。它提供了一個直觀和功能豐富的用戶界面，讓用戶能夠通過網頁瀏覽器輕鬆地管理和操作 MySQL 資料庫。

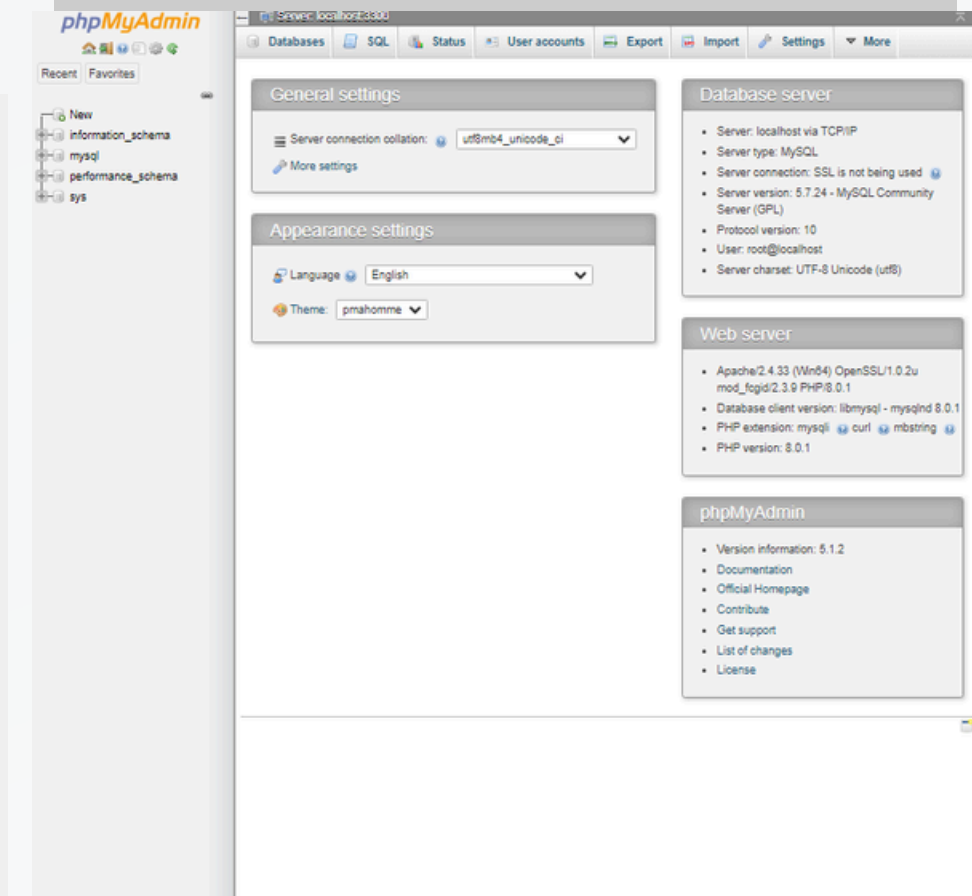

安裝 APACHE

```
[root@mycentos7-1 user]# yum install httpd -y
Loaded plugins: fastestmirror, langpacks
Loading mirror speeds from cached hostfile
* base: centos.ccns.ncku.edu.tw
* centos-sclo-rh: centos.ccns.ncku.edu.tw
* centos-sclo-sclo: centos.ccns.ncku.edu.tw
* epel: mirror.01link.hk
* extras: centos.ccns.ncku.edu.tw
* updates: centos.ccns.ncku.edu.tw
Package httpd-2.4.6-99.el7.centos.1.x86_64 already installed and latest version
Nothing to do
```

PROJECT 1

安裝 APACHE 出現錯誤



```
[root@mycentos7-1 user]# systemctl start httpd  
Job for httpd.service failed because the control process exited with error code. See "systemctl status httpd.service" and "journalctl -xe" for details.
```

PROJECT 2

安裝 APACHE

顯示目前系統中所有監聽 TCP 連線的狀態，並且只顯示監聽於 port 80 的連線。

```
[root@mycentos7-1 user]# netstat -lnp | grep 80
tcp        0      0 0.0.0.0:80          0.0.0.0:*          LISTEN     1390/nginx
inx: master
tcp6       0      0 :::80             :::*               LISTEN     1299/lib
ghttpd
unix  2      [ ACC ]     STREAM    LISTENING   29802      1316/libvirtd  /var/run/
n/libvirt/libvirt-sock
unix  2      [ ACC ]     STREAM    LISTENING   29803      1316/libvirtd  /var/run/
n/libvirt/libvirt-sock-ro
unix  2      [ ACC ]     STREAM    LISTENING   29804      1316/libvirtd  /var/run/
n/libvirt/libvirt-admin-sock
[root@mycentos7-1 user]# kill -QUIT 1390
[root@mycentos7-1 user]# kill -QUIT 1299
```

PROJECT 3

解決方法

防火牆設定

```
[root@mycentos7-1 user]# systemctl start firewalld
```

PROJECT 4

防火牆設定

```
[root@mycentos7-1 user]# firewall-cmd --permanent --add-service=http
Warning: ALREADY_ENABLED: http
success
[root@mycentos7-1 user]# firewall-cmd --reload
success
[root@mycentos7-1 user]# firewall-cmd --list-all
public (active)
  target: default
  icmp-block-inversion: no
  interfaces: enp0s3 enp0s8
  sources:
  services: dhcpv6-client http ssh
  ports: 80/tcp
  protocols:
  masquerade: no
  forward-ports:
  source-ports:
  icmp-blocks:
  rich rules:
```

PROJECT 1

事先安裝完MYSQL後進入容器

```
[root@mycentos7-1 user]# systemctl start docker
[root@mycentos7-1 user]# docker exec -it mydb bash
root@eda6b21c715e:/# mysql -uroot -p123456
mysql: [Warning] Using a password on the command line interface can be insecure.
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 3
Server version: 5.7.24 MySQL Community Server (GPL)

Copyright (c) 2000, 2018, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.
```

PROJECT 1



資料庫密碼先記住

安裝PHP

yum localinstall <http://rpms.remirepo.net/enterprise/remi-release-7.rpm> -y

```
[root@mycentos7-1 /]# yum localinstall http://rpms.remirepo.net/enterprise/remi-release-7.r
pm -y
Loaded plugins: fastestmirror, langpacks
remi-release-7.rpm                               | 28 kB  00:00:00
Examining /var/tmp/yum-root-ahBQCg/remi-release-7.rpm: remi-release-7.9-6.el7.remi.noarch
Marking /var/tmp/yum-root-ahBQCg/remi-release-7.rpm to be installed
Resolving Dependencies
--> Running transaction check
---> Package remi-release.noarch 0:7.9-6.el7.remi will be installed
--> Finished Dependency Resolution

Dependencies Resolved

=====
Package                Arch      Version      Repository      Size
=====
Installing:
remi-release            noarch    7.9-6.el7.remi  /remi-release-7  39 k

Transaction Summary
=====
Install 1 Package

Total size: 39 k
Installed size: 39 k
Downloading packages:
Running transaction check
Running transaction test
Transaction test succeeded
Running transaction
  Installing : remi-release-7.9-6.el7.remi.noarch        1/1
  Verifying   : remi-release-7.9-6.el7.remi.noarch        1/1
```

PROJECT 1

安裝PHP

yum-config-manager --enable remi-php73

```
[root@mycentos7-1 ~]# yum-config-manager --enable remi-php73
Loaded plugins: fastestmirror, langpacks
===== repo: remi-php73 =====
[remi-php73]
async = True
bandwidth = 0
base_persistdir = /var/lib/yum/repos/x86_64/7
baseurl =
cache = 0
cachedir = /var/cache/yum/x86_64/7/remi-php73
check_config_file_age = True
compare_providers_priority = 80
cost = 1000
deltarpm_metadata_percentage = 100
deltarpm_percentage =
enabled = 1
enablegroups = True
exclude =
failovermethod = priority
ftp_disable_epsv = False
gpgcadir = /var/lib/yum/repos/x86_64/7/remi-php73/gpgcadir
gpgcakey =
gpgcheck = True
gpgdir = /var/lib/yum/repos/x86_64/7/remi-php73/gpgdir
gpgkey = file:///etc/pki/rpm-gpg/RPM-GPG-KEY-remi
hdrdir = /var/cache/yum/x86_64/7/remi-php73/headers
http_caching = all
includepkgs =
ip_resolve =
keepalive = True
keepcache = False
mddownloadpolicy = sqlite
mdpolicy = group:small
mediaid =
metadata_expire = 21600
metadata_expire_filter = read-only:present
```

PROJECT 2

安裝PHP

yum --enablerepo=remi-php73 install php php-mysqldb -y

```
[root@mycentos7-1 /]# yum --enablerepo=remi-php73 install php php-mysqldb -y
Loaded plugins: fastestmirror, langpacks
Loading mirror speeds from cached hostfile
 * base: centos.ccns.ncku.edu.tw
 * centos-sclo-rh: centos.ccns.ncku.edu.tw
 * centos-sclo-sclo: centos.ccns.ncku.edu.tw
 * epel: fedora.cs.nctu.edu.tw
 * extras: centos.ccns.ncku.edu.tw
 * remi-php73: cdn.centos.no
 * remi-safe: cdn.centos.no
 * updates: centos.ccns.ncku.edu.tw
remi-php73                                     | 3.0 kB  00:00:00
remi-safe                                     | 3.0 kB  00:00:00
(1/2): remi-php73/primary_db                  | 262 kB  00:00:00
(2/2): remi-safe/primary_db                   | 2.6 MB  00:00:01
Resolving Dependencies
--> Running transaction check
---> Package php.x86_64 0:5.4.16-48.el7 will be updated
---> Package php.x86_64 0:7.3.33-14.el7.remi will be an update
--> Processing Dependency: php-cli(x86-64) = 7.3.33-14.el7.remi for package: php-7.3.33-14.el7.remi.x86_64
--> Processing Dependency: php-common(x86-64) = 7.3.33-14.el7.remi for package: php-7.3.33-14.el7.remi.x86_64
--> Processing Dependency: libargon2.so.0()(64bit) for package: php-7.3.33-14.el7.remi.x86_64
---> Package php-mysql.x86_64 0:5.4.16-48.el7 will be obsoleted
---> Package php-mysqldb.x86_64 0:7.3.33-14.el7.remi will be obsoleting
--> Processing Dependency: php-pdo(x86-64) = 7.3.33-14.el7.remi for package: php-mysqldb-7.3.33-14.el7.remi.x86_64
--> Running transaction check
---> Package libargon2.x86_64 0:20161029-3.el7 will be installed
---> Package php-cli.x86_64 0:5.4.16-48.el7 will be updated
---> Package php-cli.x86_64 0:7.3.33-14.el7.remi will be an update
```

PROJECT 3

安裝 PHPMYADMIN

yum install phpmyadmin -y

```
[root@mycentos7-1 /]# yum install phpmyadmin -y
Loaded plugins: fastestmirror, langpacks
Loading mirror speeds from cached hostfile
 * base: centos.ccns.ncku.edu.tw
 * centos-sclo-rh: centos.ccns.ncku.edu.tw
 * centos-sclo-sclo: centos.ccns.ncku.edu.tw
 * epel: epel.01link.hk
 * extras: centos.ccns.ncku.edu.tw
 * remi-php73: mirrors.tuna.tsinghua.edu.cn
 * remi-safe: mirrors.tuna.tsinghua.edu.cn
 * updates: centos.ccns.ncku.edu.tw
Resolving Dependencies
--> Running transaction check
---> Package phpMyAdmin.noarch 0:4.4.15.10-7.el7 will be installed
--> Processing Dependency: php-gd >= 5.3.7 for package: phpMyAdmin-4.4.15.10-7.el7.noarch
--> Processing Dependency: php-mbstring >= 5.3.7 for package: phpMyAdmin-4.4.15.10-7.el7.noarch
--> Processing Dependency: php-php-gettext for package: phpMyAdmin-4.4.15.10-7.el7.noarch
--> Processing Dependency: php-simplexml for package: phpMyAdmin-4.4.15.10-7.el7.noarch
--> Processing Dependency: php-tcpdf for package: phpMyAdmin-4.4.15.10-7.el7.noarch
--> Processing Dependency: php-tcpdf-dejavu-sans-fonts for package: phpMyAdmin-4.4.15.10-7.el7.noarch
--> Processing Dependency: php-xmlwriter for package: phpMyAdmin-4.4.15.10-7.el7.noarch
--> Processing Dependency: php-zip for package: phpMyAdmin-4.4.15.10-7.el7.noarch
--> Running transaction check
---> Package php-gd.x86_64 0:7.3.33-14.el7.remi will be installed
--> Processing Dependency: libgd.so.103()(64bit) for package: php-gd-7.3.33-14.el7.remi.x86_64
---> Package php-mbstring.x86_64 0:7.3.33-14.el7.remi will be installed
--> Processing Dependency: libonig.so.105()(64bit) for package: php-mbstring-7.3.33-14.el7.
```

PROJECT 1

安裝 PHPMYADMIN


```
[root@mycentos7-1 ~]# systemctl restart httpd
```

PROJECT 2

開啟 FIREFOX 瀏覽器


網址列輸入：

HTTP://LOCALHOST/PHPMYADMIN

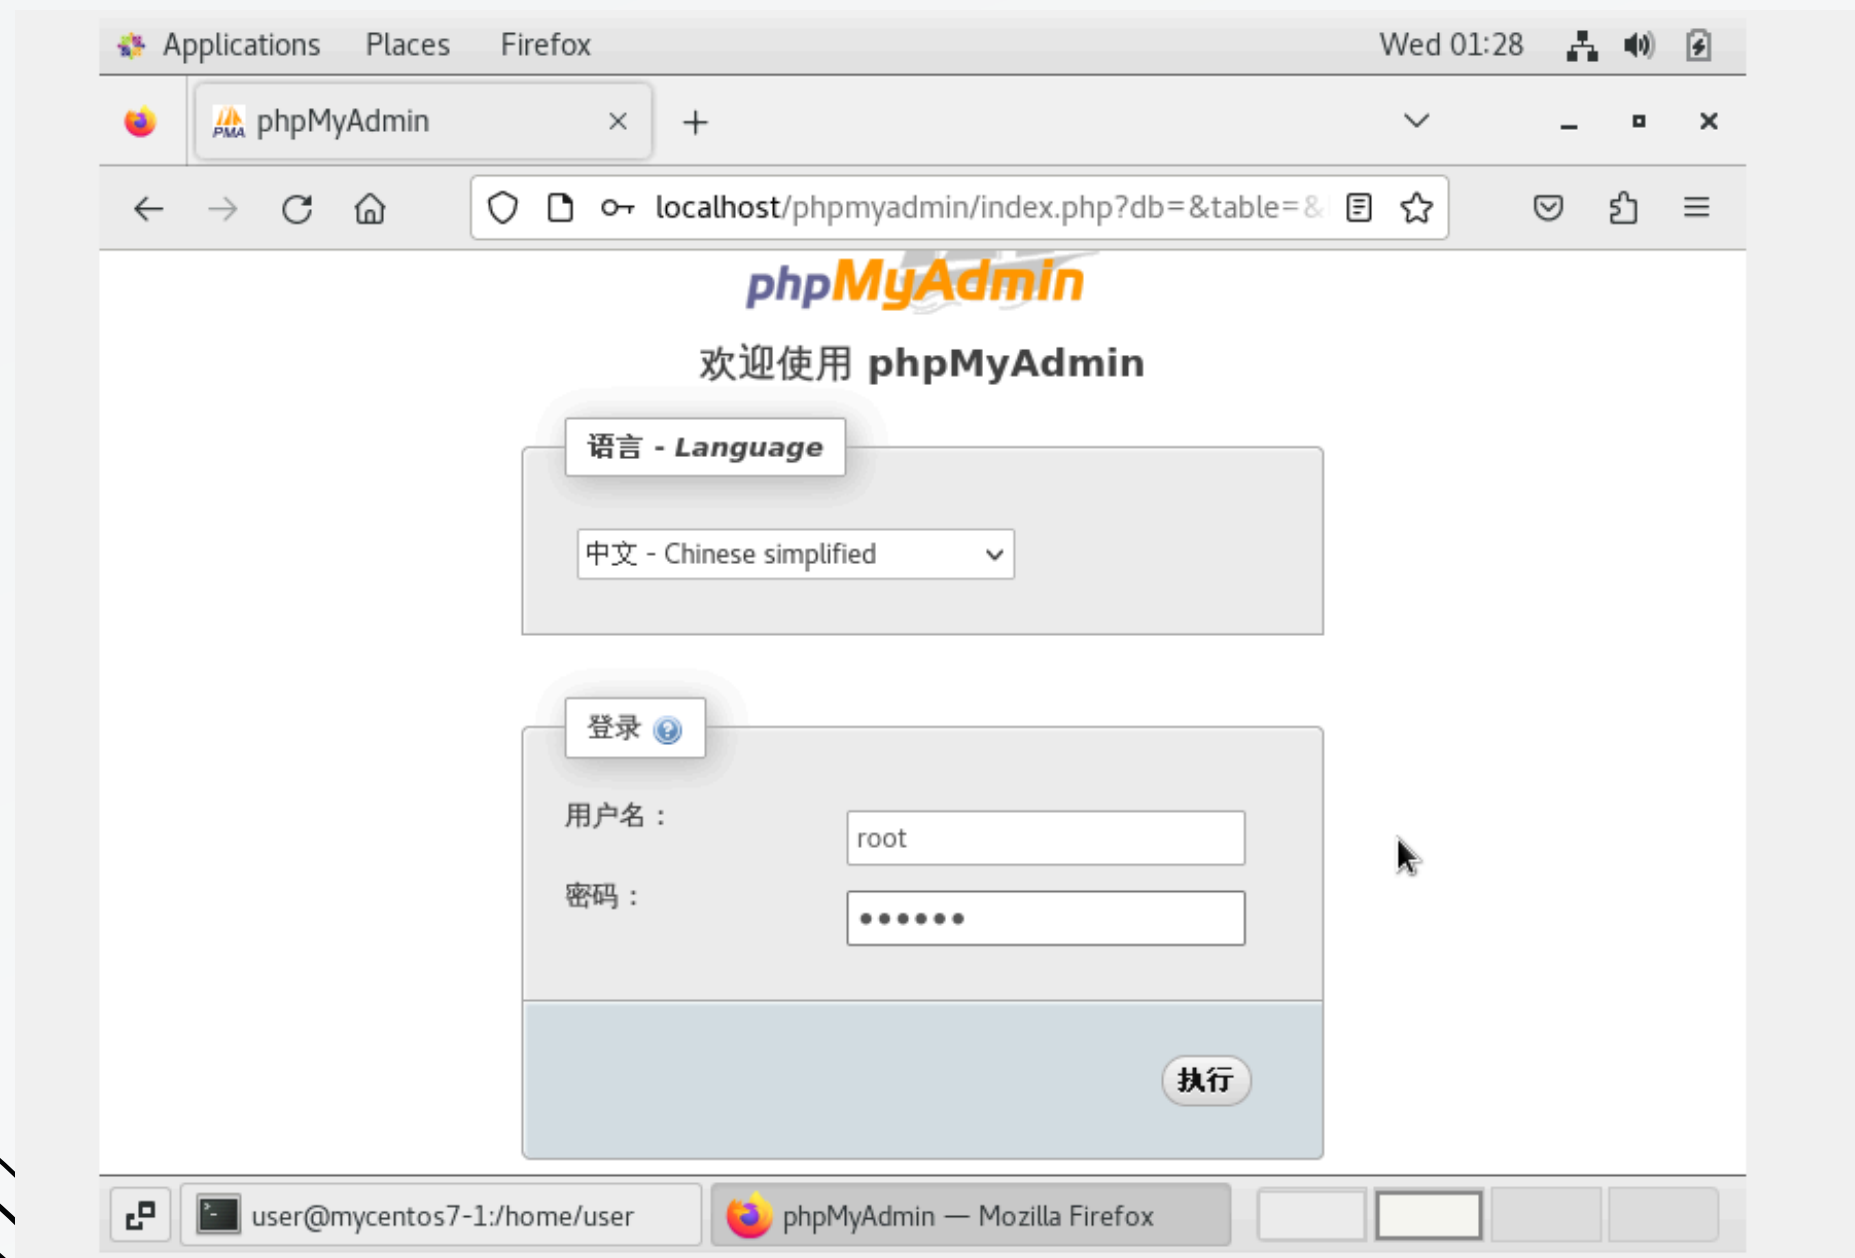

使用者名稱先輸入 root（此為
MuSQL 資料庫的 root 帳號，而不是
作業系統的 root 帳號），再輸入 root
的密碼，即可登入。

PHPMYADMIN介面

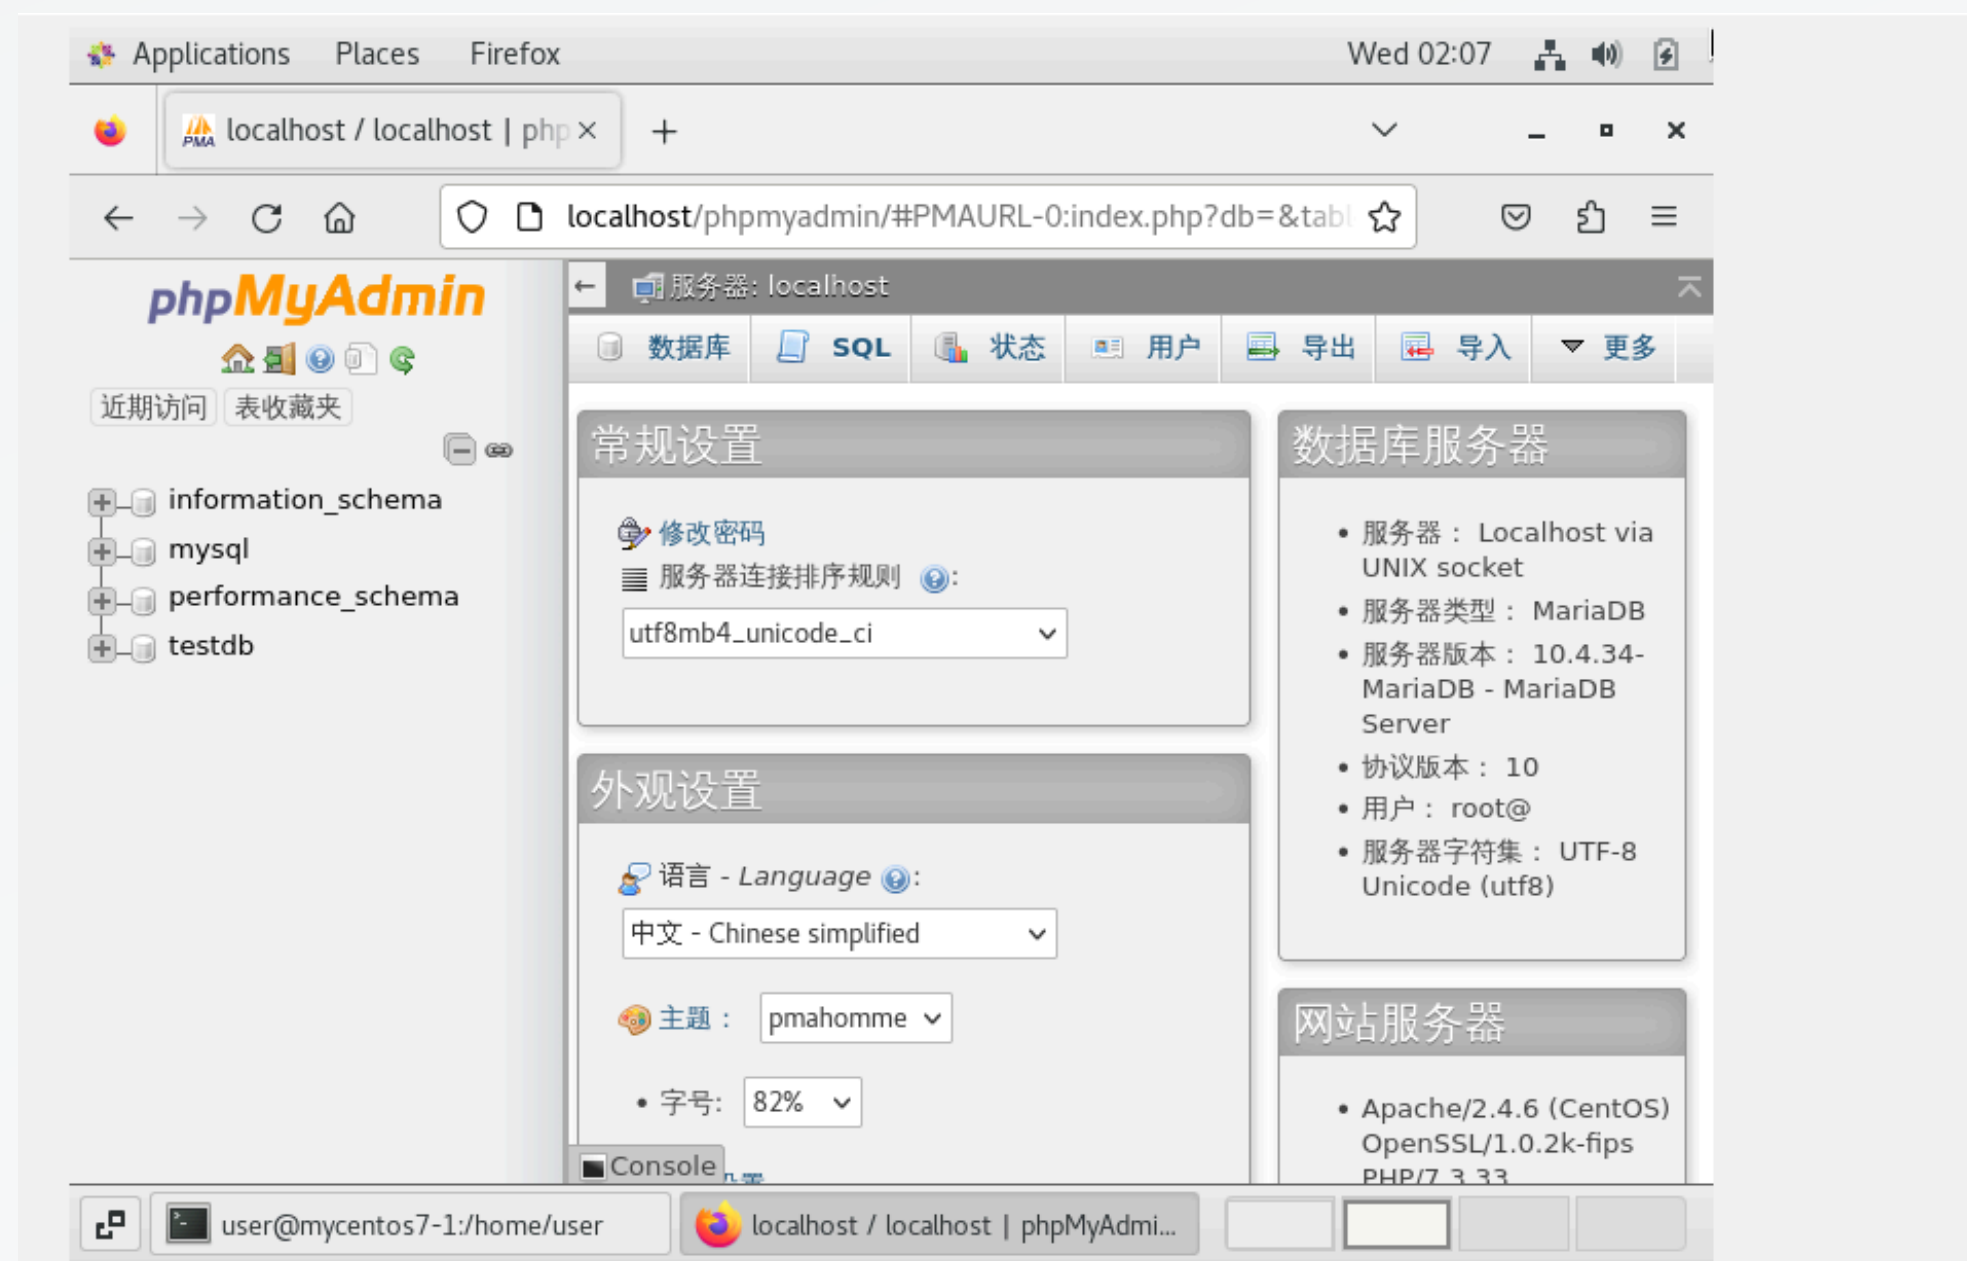

PHPMYADMIN的功能

01

資料庫管理

phpMyAdmin 允許用戶創建新的資料庫，刪除資料庫，修改資料庫結構以及執行資料庫相關操作。

02

資料表管理

用戶可以建立新的資料表，修改資料表結構，添加、刪除或修改列，設置索引和主鍵等。

03

資料操作

phpMyAdmin 提供了強大的工具，讓用戶能夠輕鬆地插入、編輯、更新和刪除資料。


04

監視和優化

用於檢視資料庫的性能和狀態，並提供了一些優化建議。


其他功能:SQL 查詢、用戶管理、導入和導出資料

設置資料庫和資料表

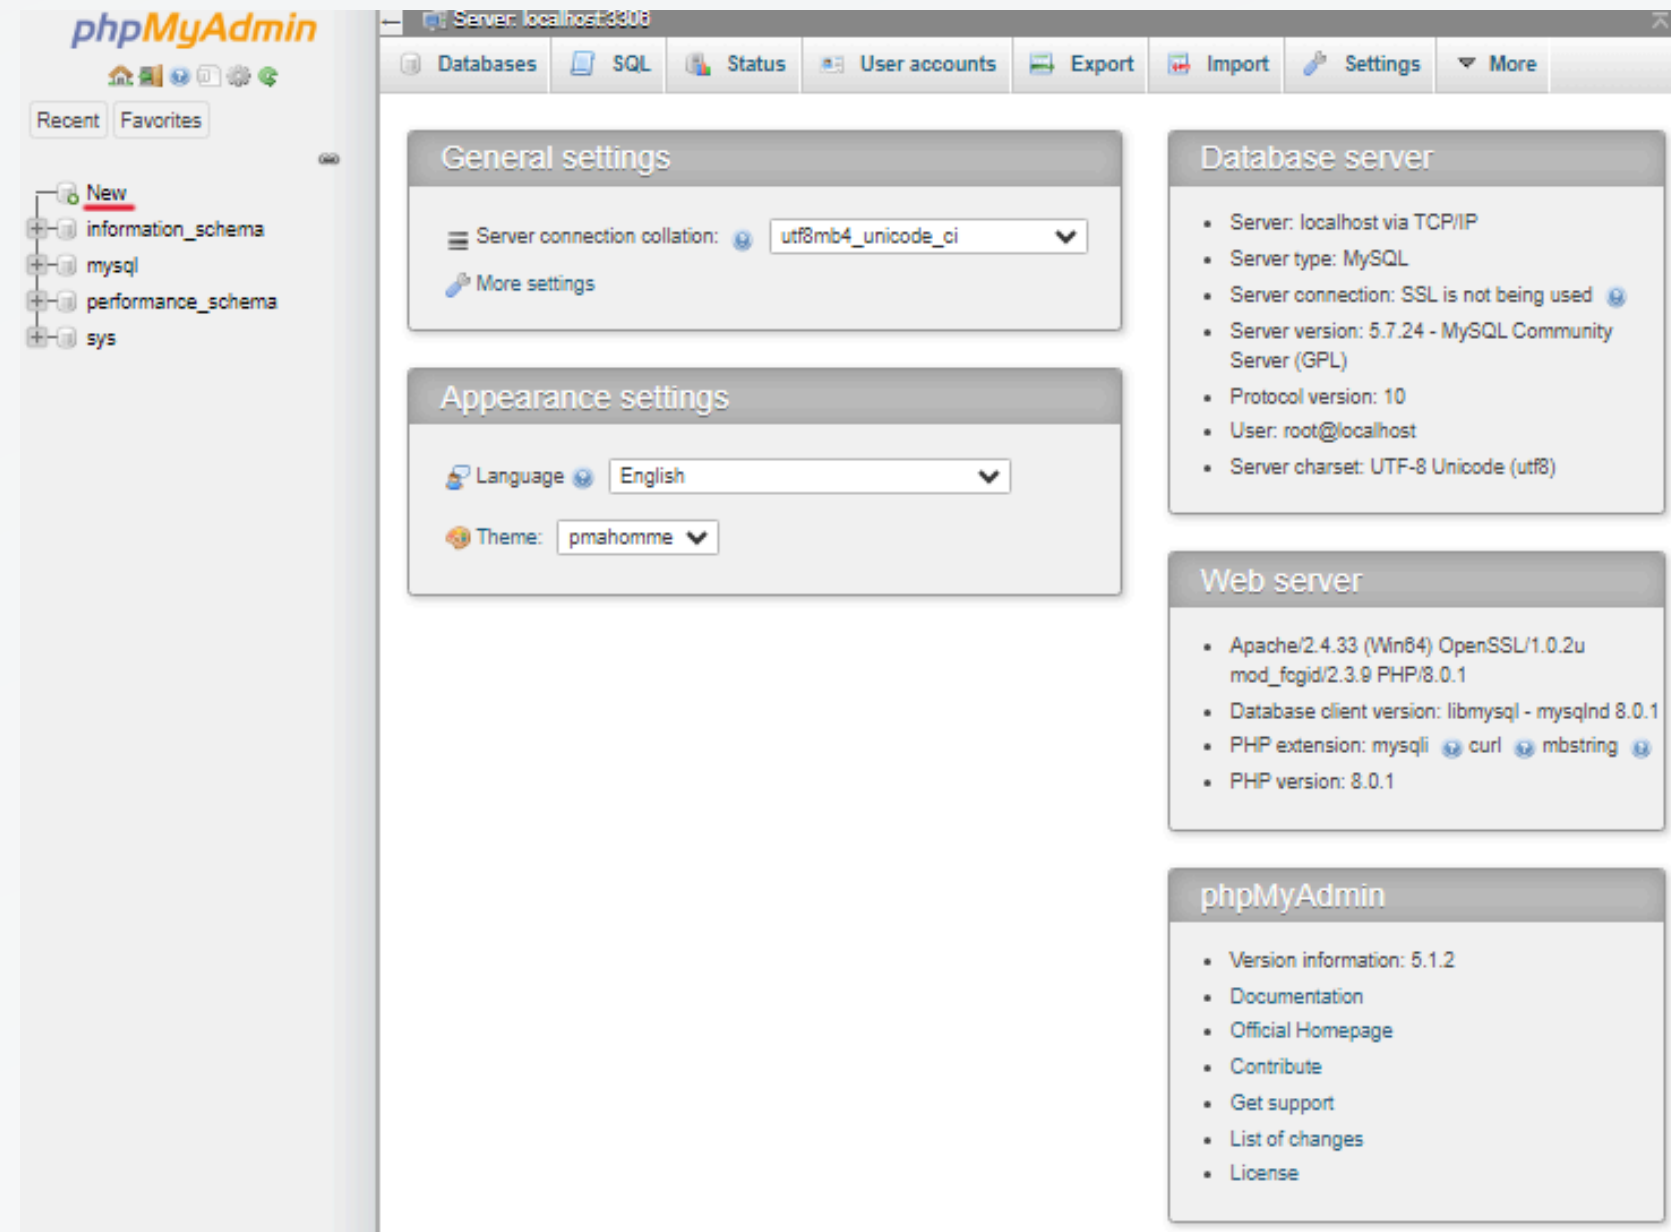


點擊 "New" ->


建立新的資料庫並命名為 "player_data"，維持預設utf8_general_ci,
點擊 "Create" ->

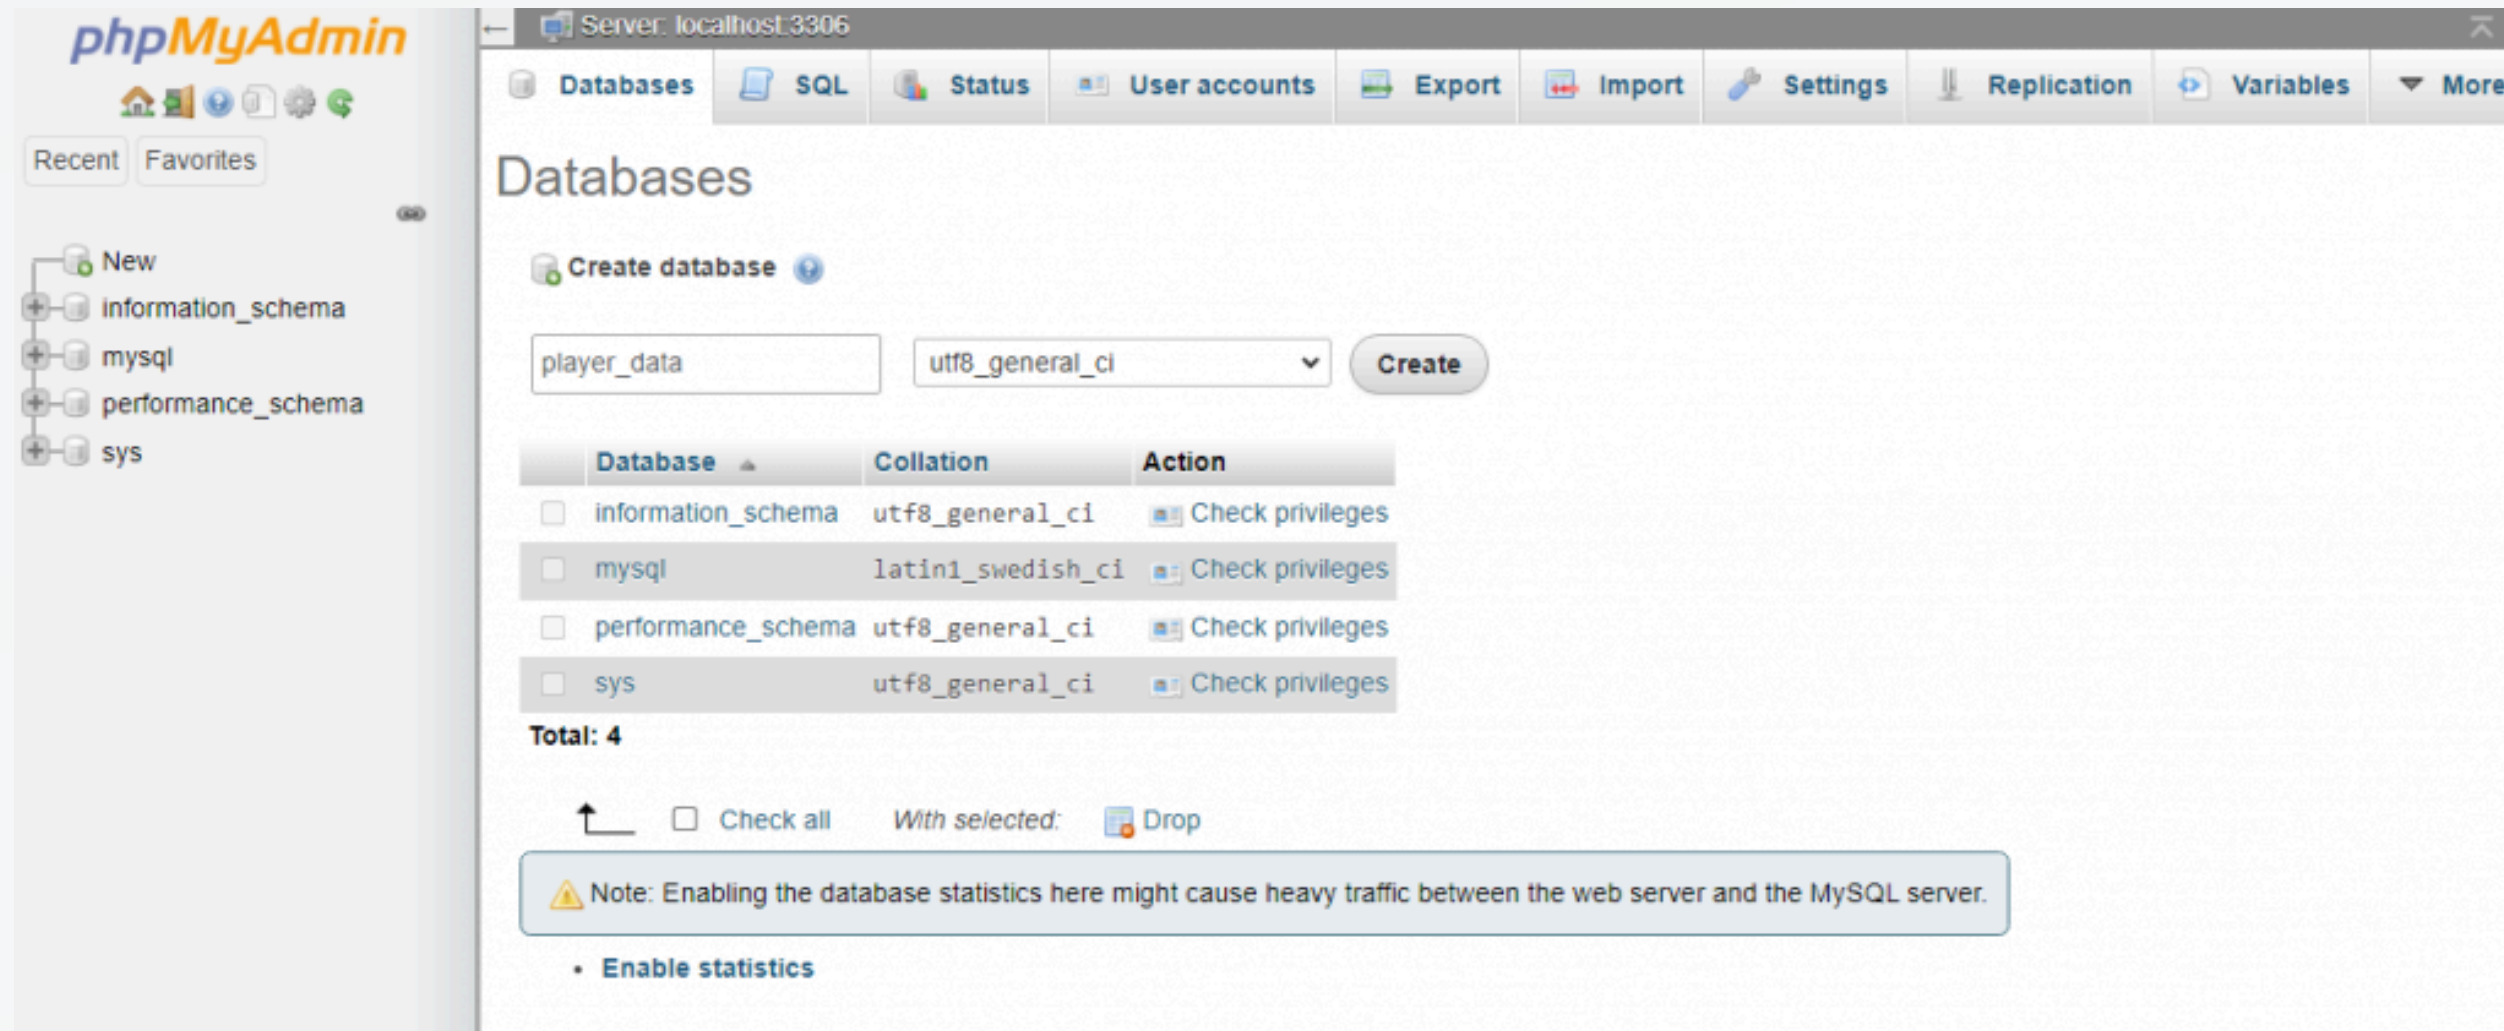


創建資料庫後，
您在剛創建的資料庫中使用SQL建立玩家資料表：
點擊 "player_data" 資料庫，將焦點設定在該資料庫上。

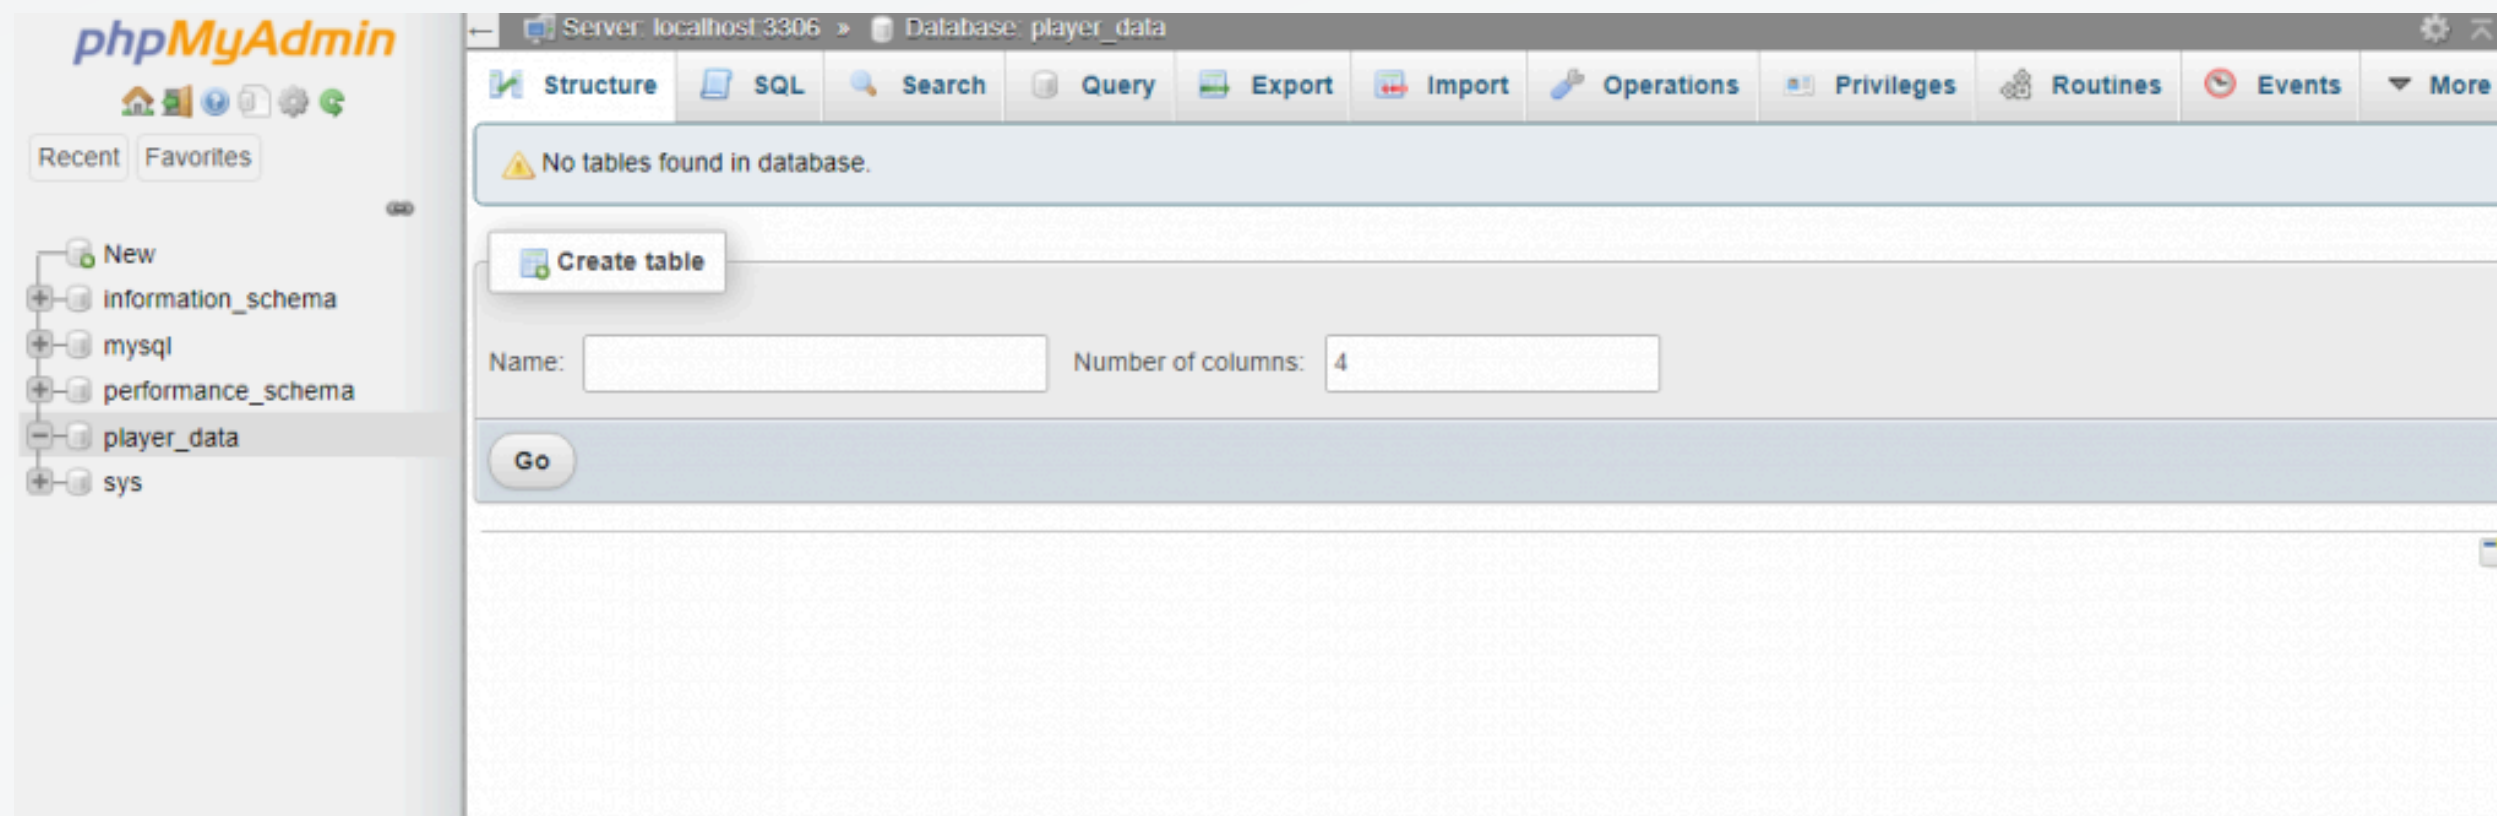


在頂部菜單中，選擇 "SQL" 選項卡，以進入SQL查詢模式

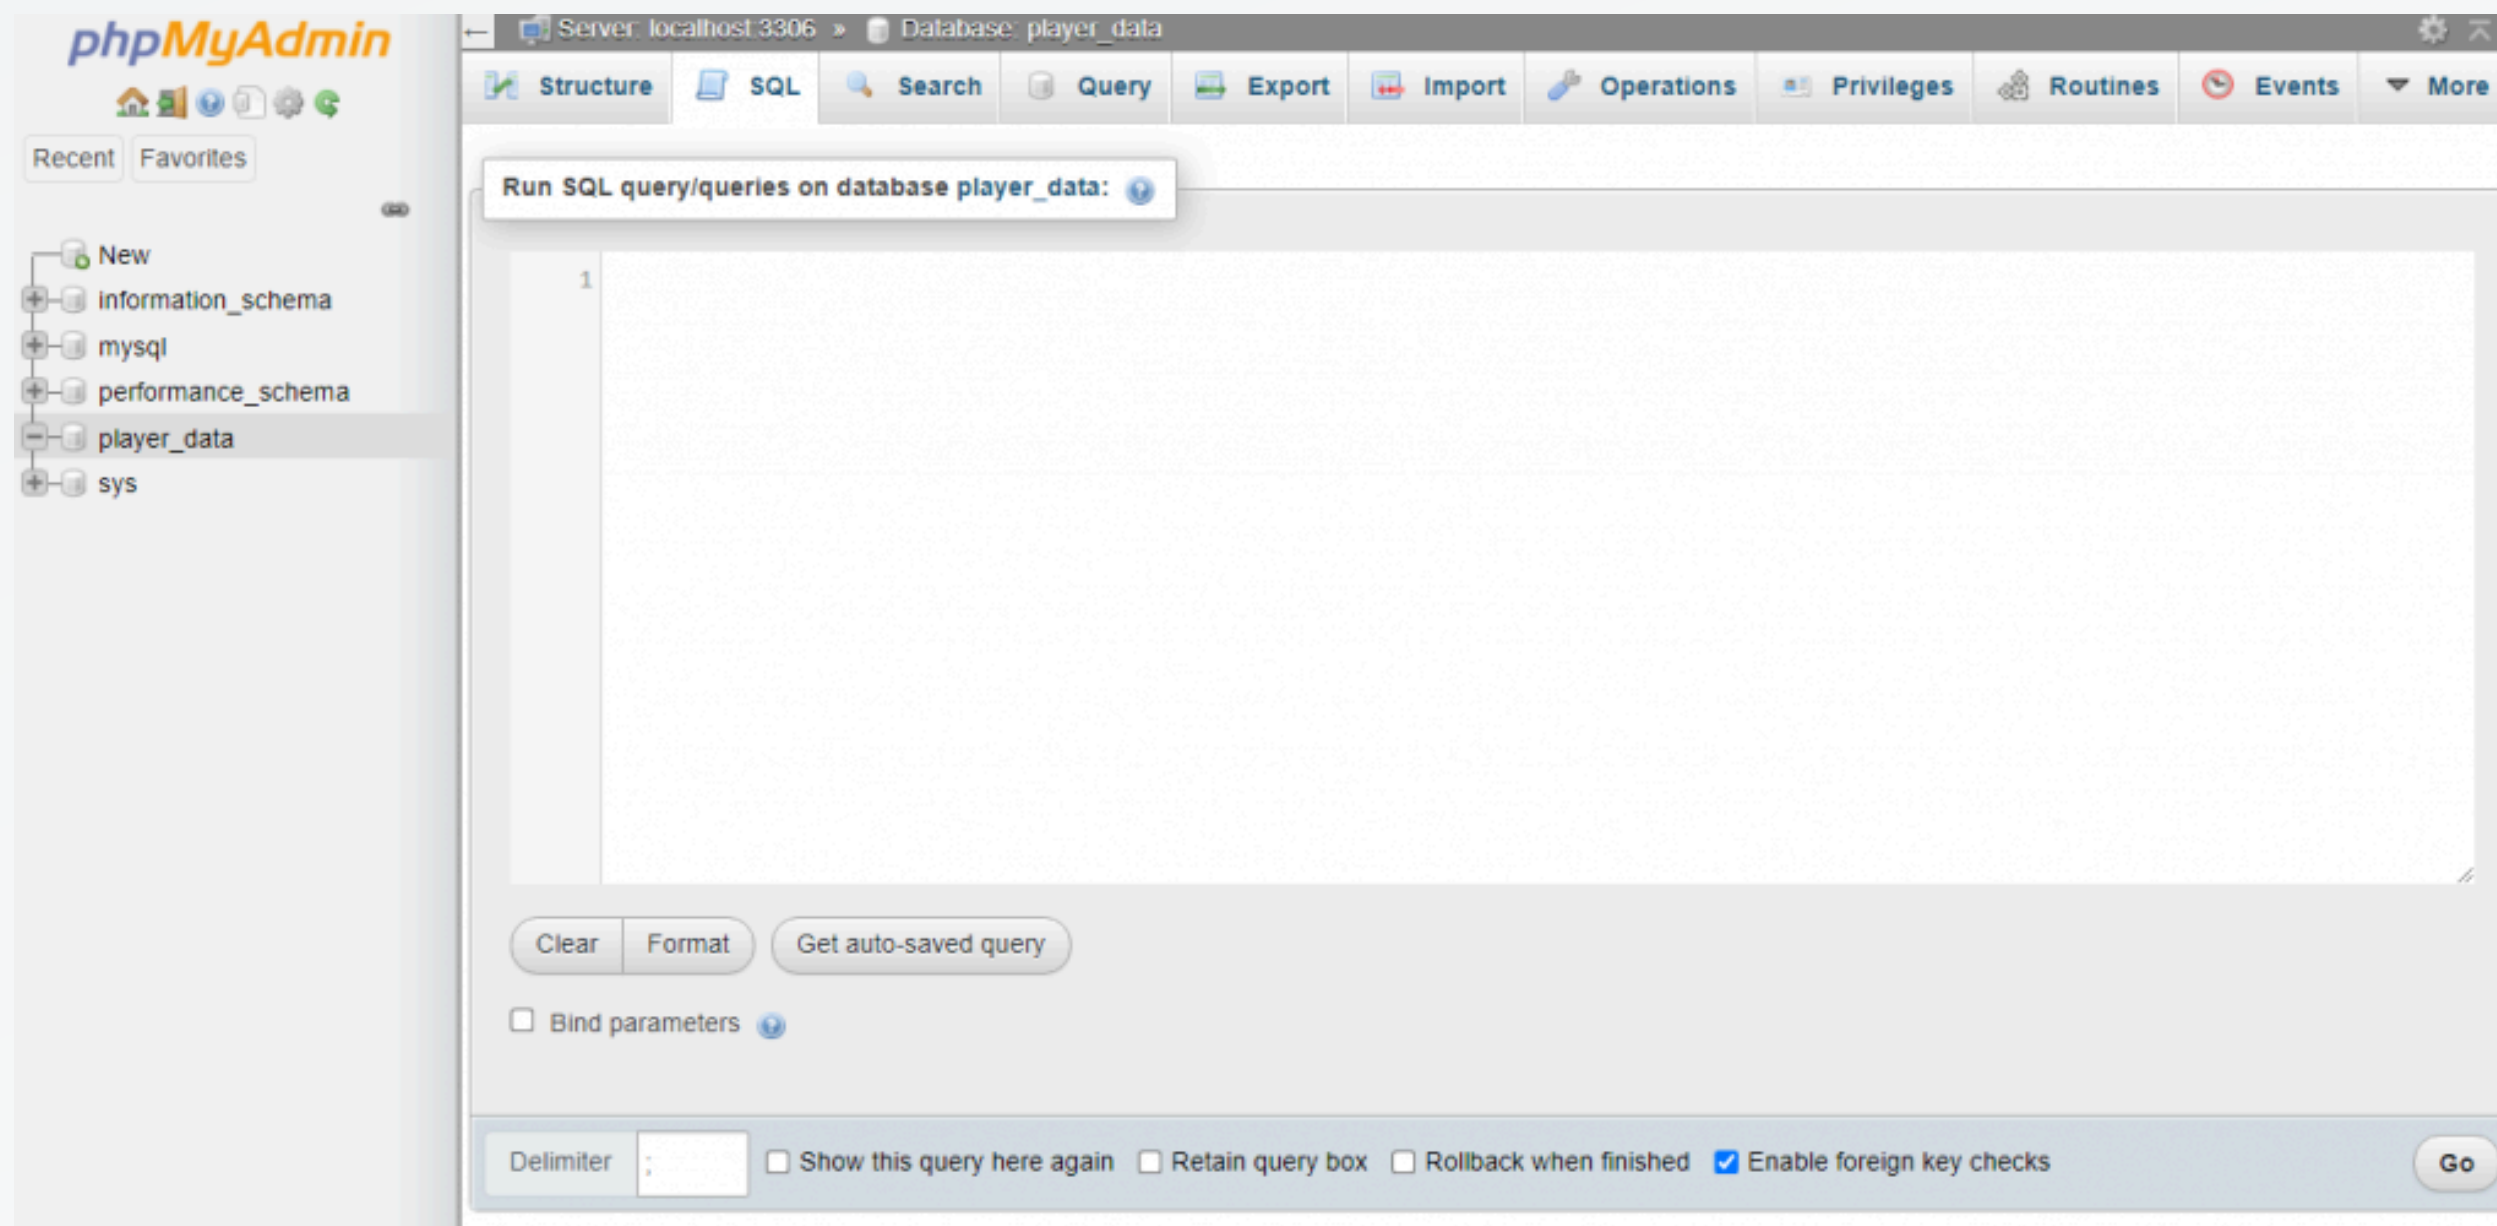


創建資料表前

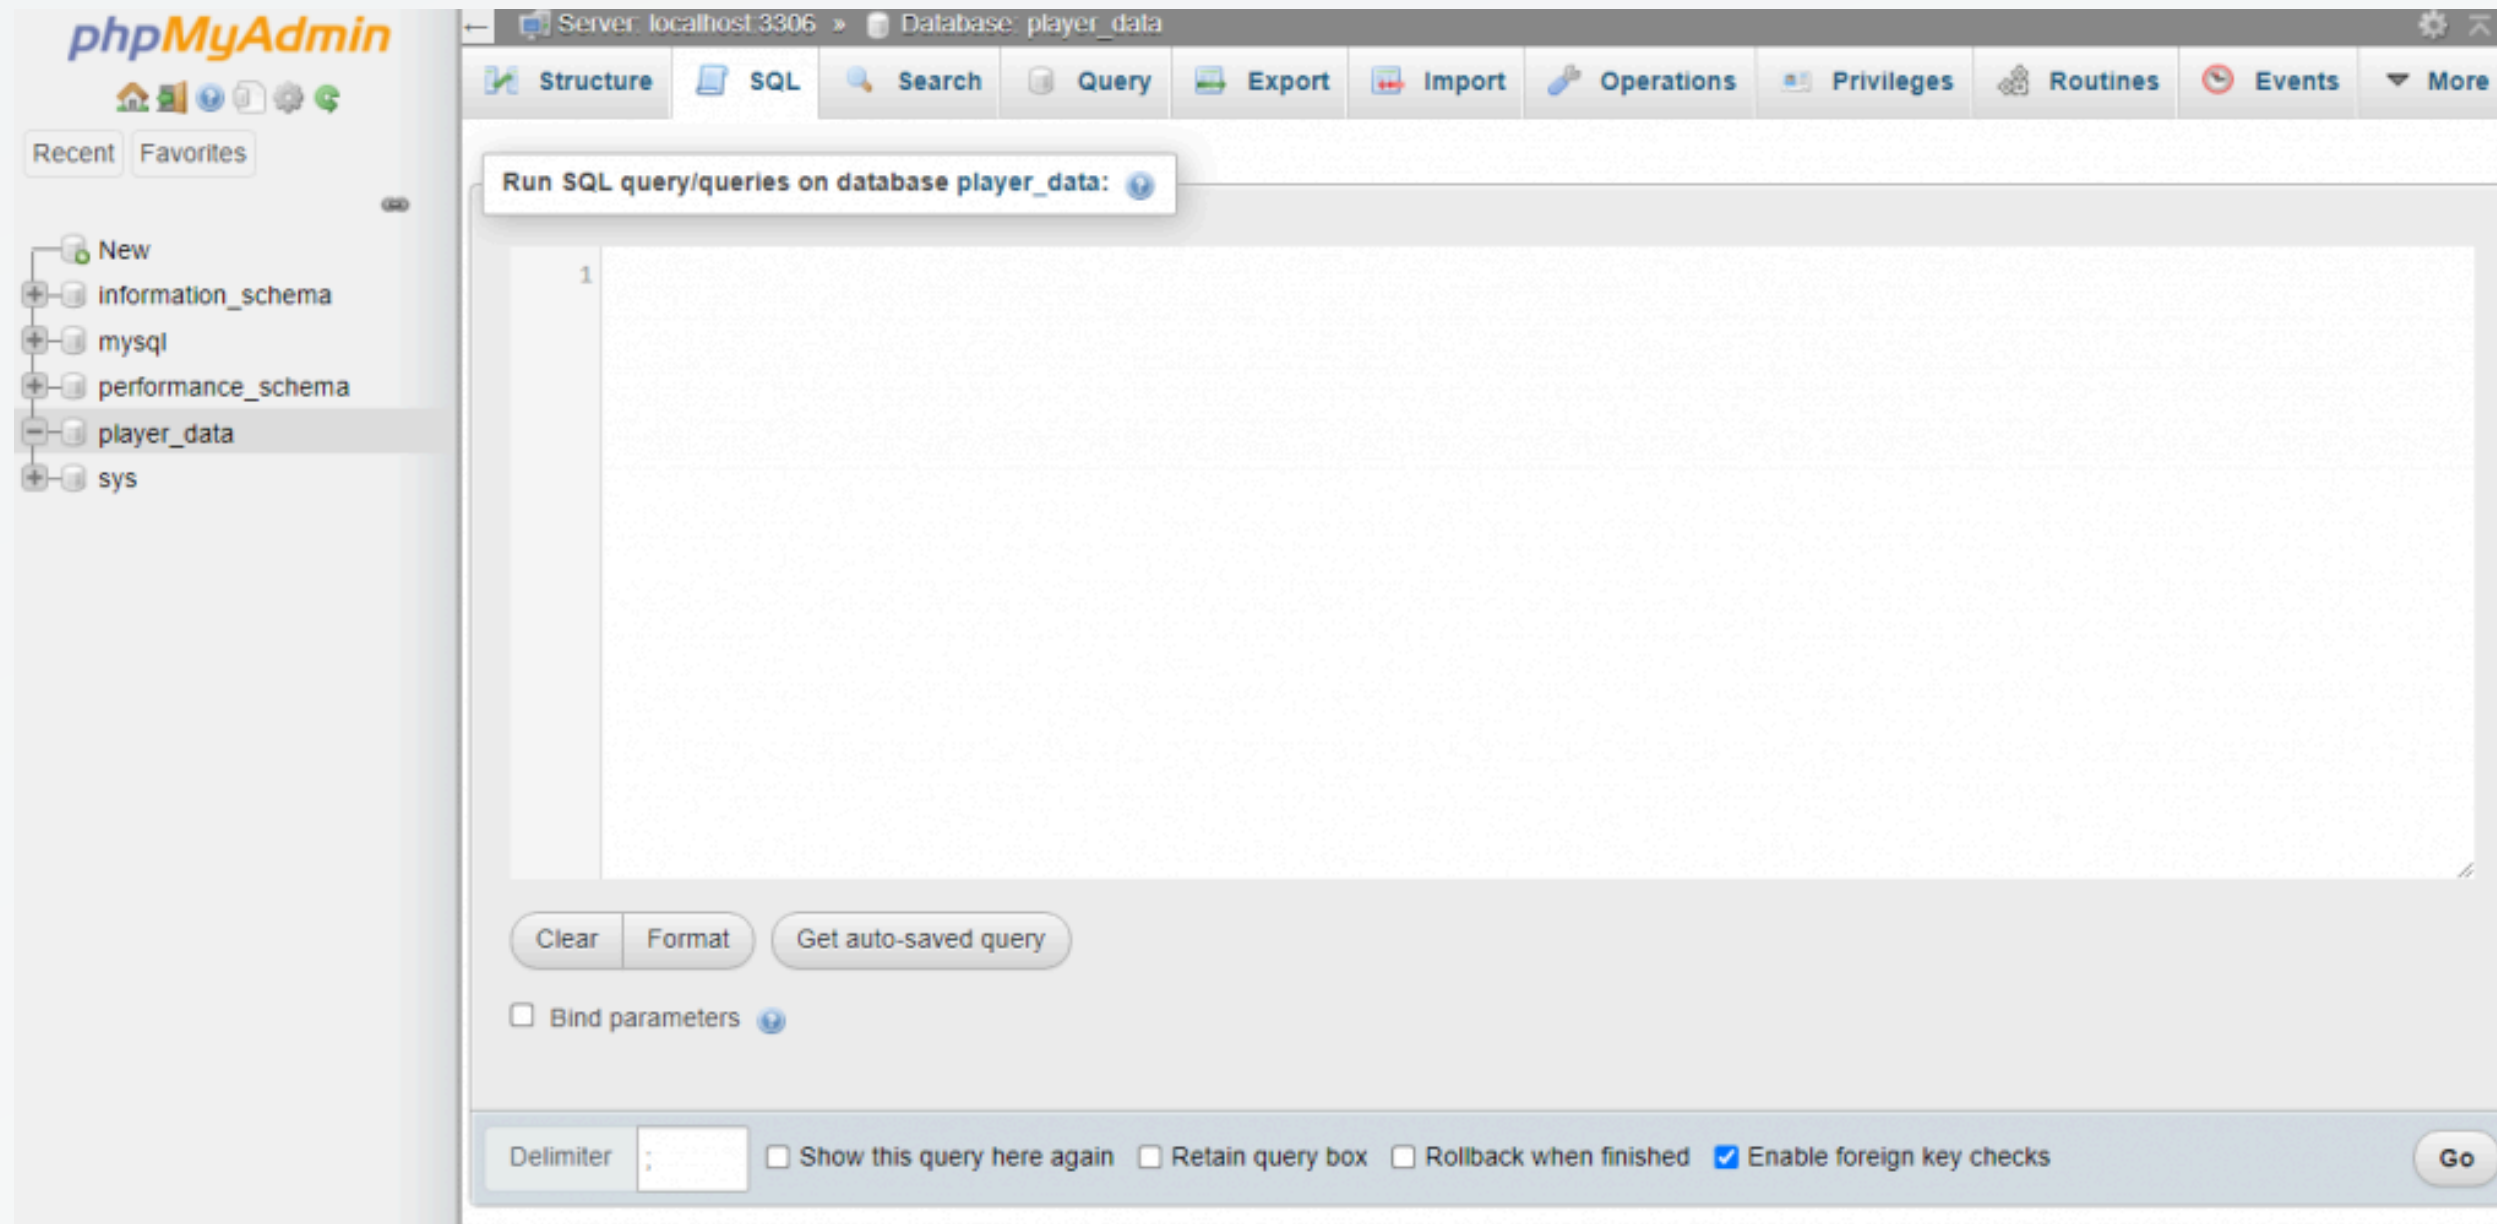

創建資料表後

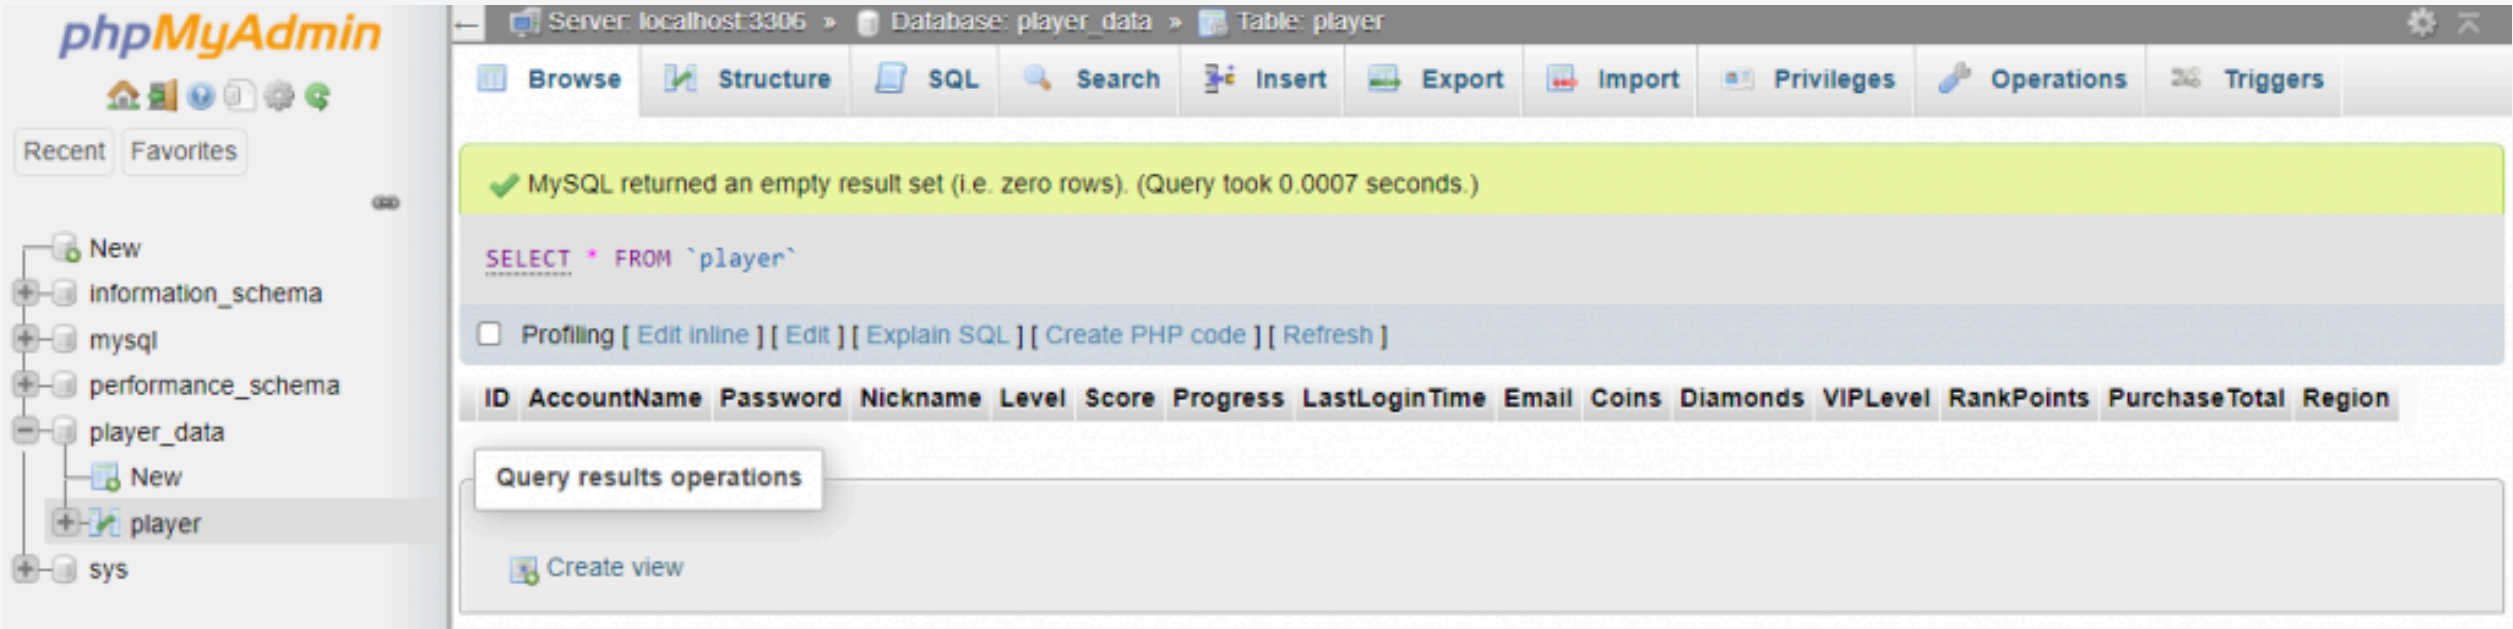

點選 "Structure" 看 玩家資料表 的結構

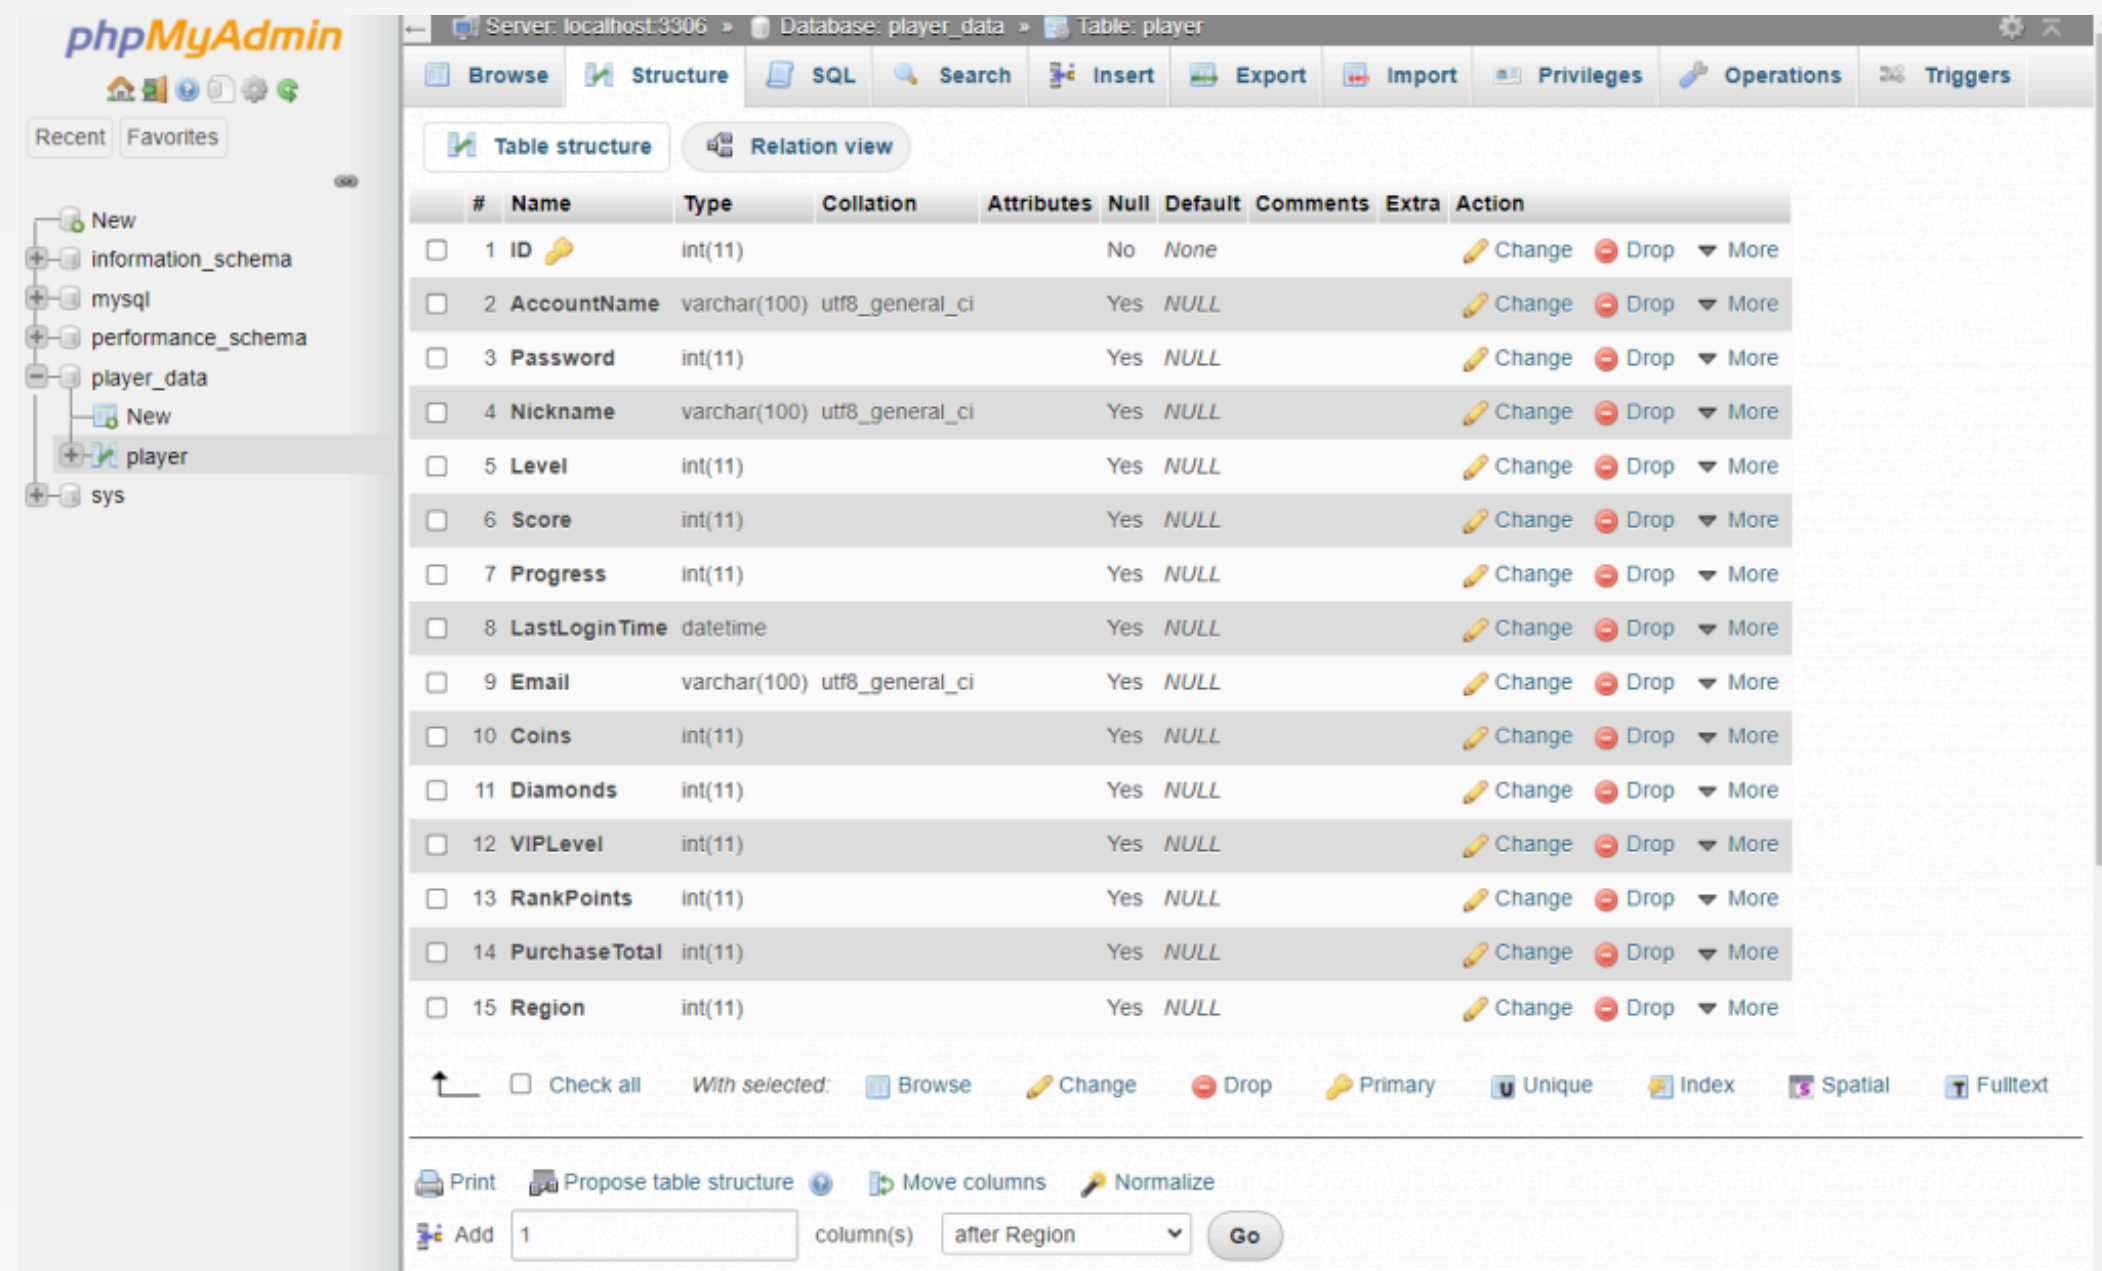


The screenshot displays the phpMyAdmin interface. On the left, the database navigation tree shows the 'player_data' database selected, with the 'player' table highlighted. The main panel shows the 'Structure' tab for the 'player' table. The table structure is as follows:

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
☐	1 ID	int(11)			No	None			Change Drop More
☐	2 AccountName	varchar(100)	utf8_general_ci		Yes	NULL			Change Drop More
☐	3 Password	int(11)			Yes	NULL			Change Drop More
☐	4 Nickname	varchar(100)	utf8_general_ci		Yes	NULL			Change Drop More
☐	5 Level	int(11)			Yes	NULL			Change Drop More
☐	6 Score	int(11)			Yes	NULL			Change Drop More
☐	7 Progress	int(11)			Yes	NULL			Change Drop More
☐	8 LastLoginTime	datetime			Yes	NULL			Change Drop More
☐	9 Email	varchar(100)	utf8_general_ci		Yes	NULL			Change Drop More
☐	10 Coins	int(11)			Yes	NULL			Change Drop More
☐	11 Diamonds	int(11)			Yes	NULL			Change Drop More
☐	12 VIPLevel	int(11)			Yes	NULL			Change Drop More
☐	13 RankPoints	int(11)			Yes	NULL			Change Drop More
☐	14 PurchaseTotal	int(11)			Yes	NULL			Change Drop More
☐	15 Region	int(11)			Yes	NULL			Change Drop More

Below the table structure, there are options to 'Check all', 'With selected:', and a list of actions: Browse, Change, Drop, Primary, Unique, Index, Spatial, and Fulltext. At the bottom, there are links for 'Print', 'Propose table structure', 'Move columns', and 'Normalize'. A form at the bottom allows adding a new column, with '1' entered in the 'Add' field, 'column(s)' in the 'column(s)' field, and 'after Region' in the 'after' dropdown menu, followed by a 'Go' button.


將資訊插入到資料表：(INSERT)

INSERT INTO Player (ID, AccountName, Password, Nickname, Level, Score) VALUES (3, 'player3', 333333, 'nickName3', 30, 3000);

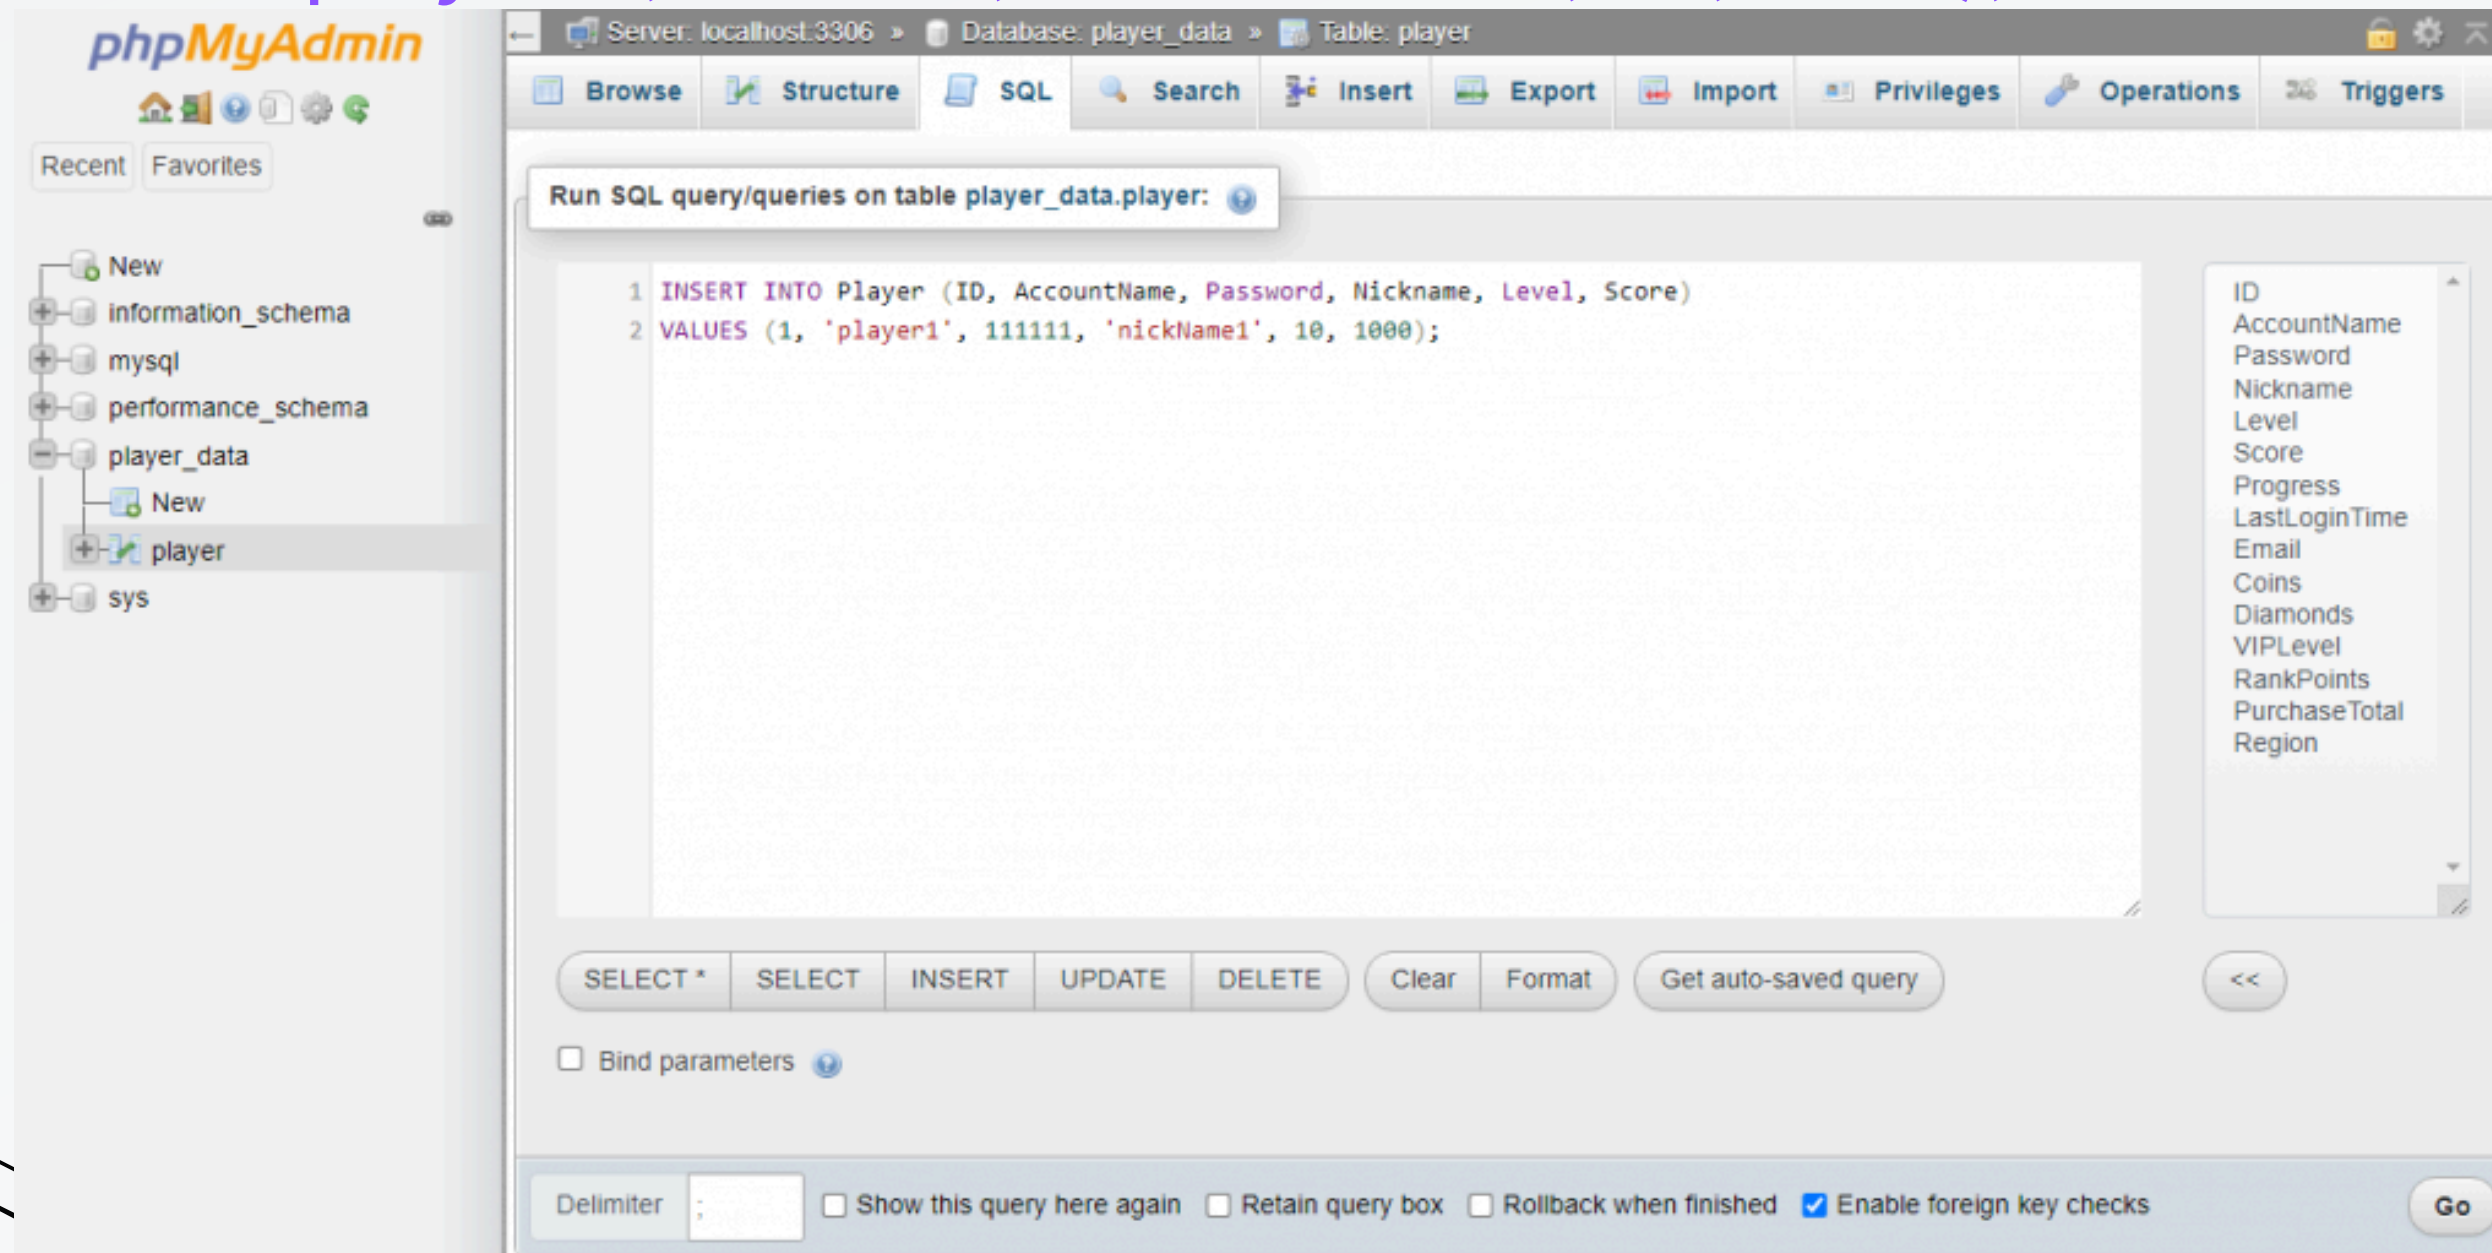

點擊"執行"按鈕以將資訊插入到資料表中

原本資料表沒有資料

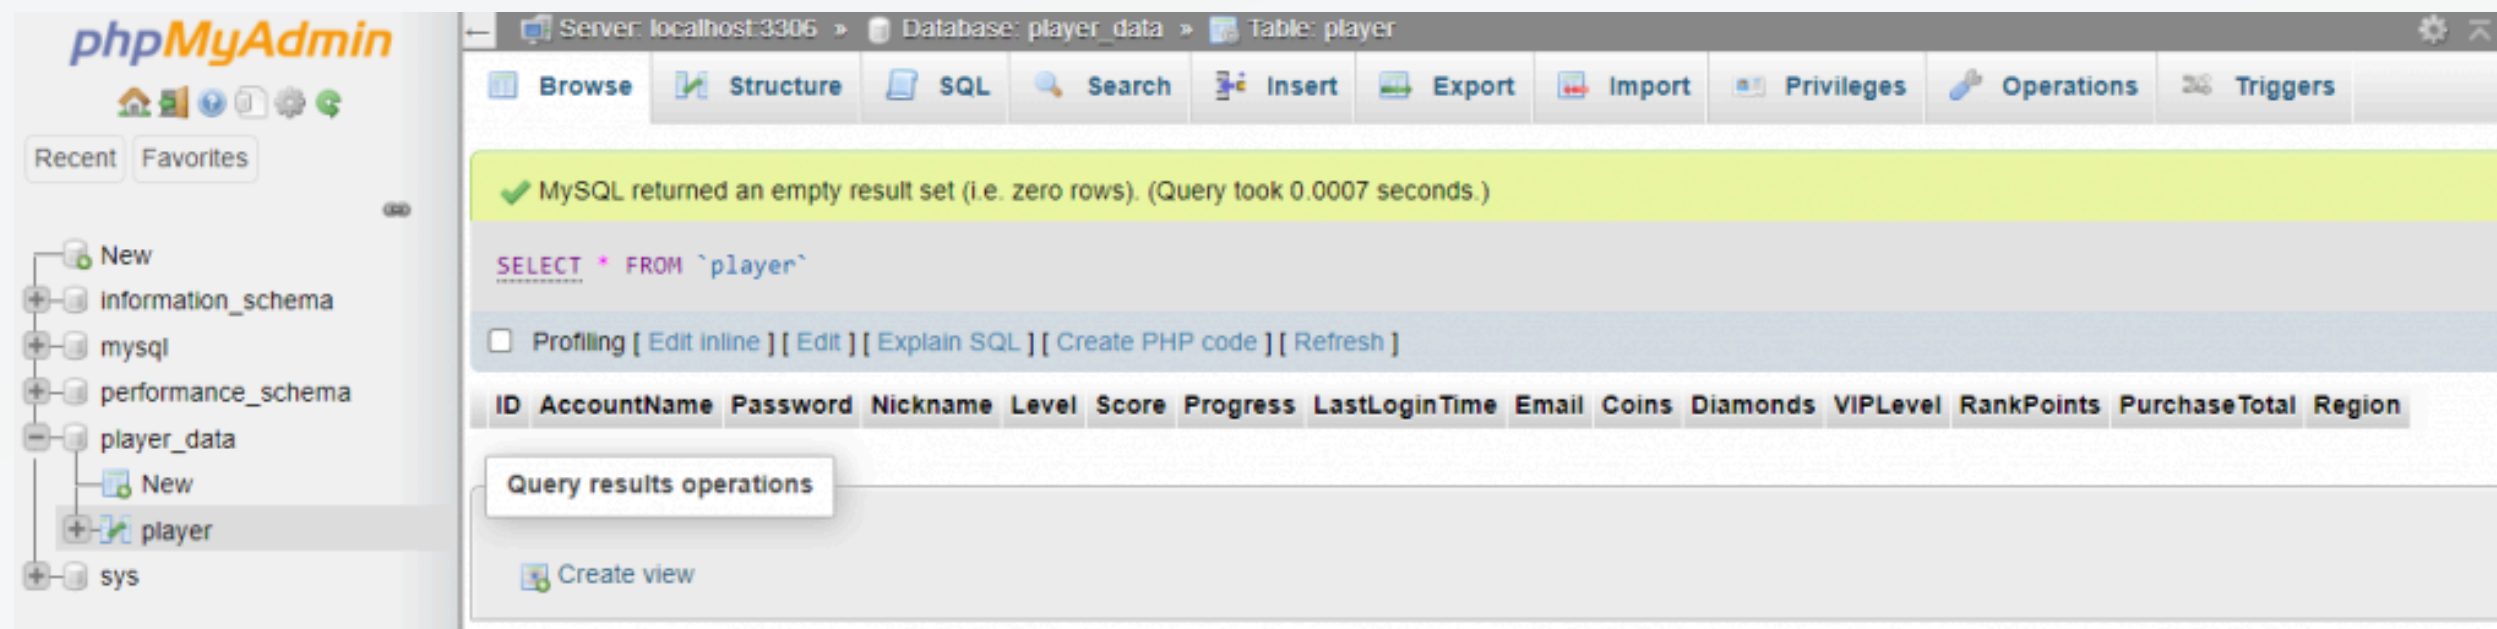

The screenshot shows the phpMyAdmin web interface. On the left, the database structure tree is visible, with 'player_data' expanded and 'player' selected. The main panel shows the 'Table: player' view. A green message bar at the top states: 'MySQL returned an empty result set (i.e. zero rows). (Query took 0.0007 seconds.)'. Below this, the SQL query 'SELECT * FROM `player`' is displayed. A toolbar with various actions like 'Browse', 'Structure', 'SQL', 'Search', 'Insert', 'Export', 'Import', 'Privileges', 'Operations', and 'Triggers' is visible. Below the query, there are links for 'Profiling', 'Edit inline', 'Edit', 'Explain SQL', 'Create PHP code', and 'Refresh'. A table header is shown with columns: ID, AccountName, Password, Nickname, Level, Score, Progress, LastLoginTime, Email, Coins, Diamonds, VIPLevel, RankPoints, PurchaseTotal, and Region. Below the header, a 'Query results operations' button is present, and a 'Create view' link is at the bottom.

執行結果：

phpMyAdmin

Recent Favorites

- New
- information_schema
- mysql
- performance_schema
- player_data
 - New
 - player
- sys

Server: localhost:3306 > Database: player_data > Table: player

Browse Structure SQL Search Insert Export Import Privileges Operations Triggers

Showing rows 0 - 0 (1 total, Query took 0.0003 seconds.)

SELECT * FROM `player`

☐ Profiling [Edit inline] [Edit] [Explain SQL] [Create PHP code] [Refresh]

☐ Show all | Number of rows: 25 | Filter rows: Search this table

+ Options

	ID	AccountName	Password	Nickname	Level	Score	Progress	LastLoginTime	Email	Coins	Diamonds	VIPLevel	RankPoints	PurchaseTotal	Region
☐ Edit Copy Delete	1	player1	111111	nickName1	10	1000	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL

☐ Check all | With selected: Edit Copy Delete Export

☐ Show all | Number of rows: 25 | Filter rows: Search this table

Query results operations

Print Copy to clipboard Export Display chart Create view

其他指令

資料表中讀取/選取資訊：(SELECT)

更新資料表中的資訊：(UPDATE)

使用LIMIT子句限制選取的資料行數(LIMIT)

使用ORDER BY子句對選取的資料進行排序(ORDER BY)

使用WHERE子句在SELECT語句中加入條件，以過濾所選取的資料(WHERE)

結論

01

PHPMYADMIN
可以直覺的用滑
鼠快速操作指令

02

透過 PHP 對 MYSQL
下達指令時，也是需
要用純文字命令溝通

03

能夠高效地管理
和操作 MYSQL
資料庫。

04

適用於初學者

參考資料

<https://ithelp.ithome.com.tw/articles/10312650>

<https://ithelp.ithome.com.tw/articles/10218765>

[https://downloads.mariadb.org/mariadb/repositories/
#distro=CentOS&distro_release=centos7-amd64--
centos7&mirror=hostag&version=10.4](https://downloads.mariadb.org/mariadb/repositories/#distro=CentOS&distro_release=centos7-amd64--centos7&mirror=hostag&version=10.4)

<https://mariadb.com/kb/en/library/yum/>

謝謝大家

