

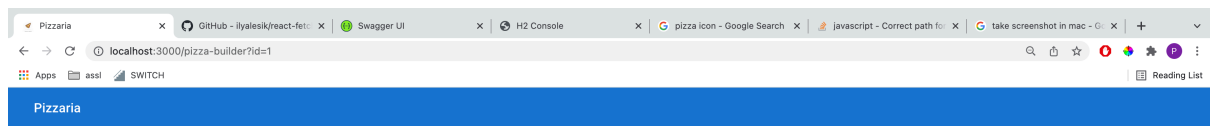


Steps to follow

Screenshots

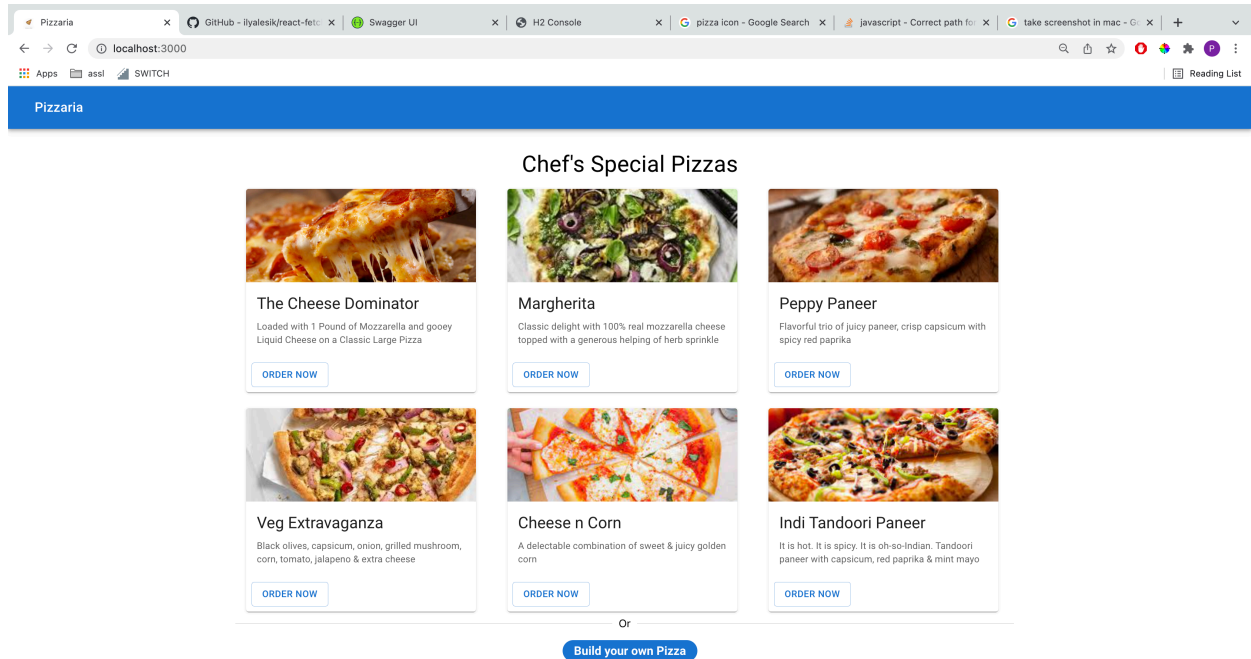

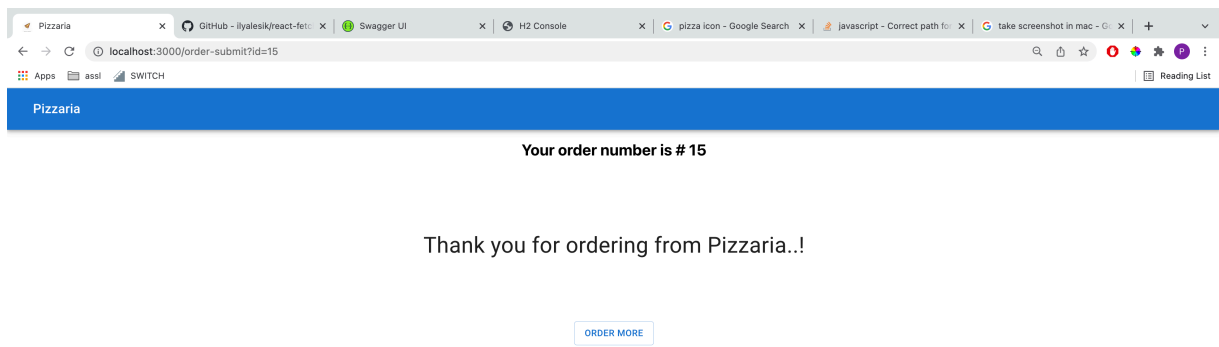

Application is divided in two parts

- Server Side => Java, Spring boot, JPA, H2
- UI side => React
- Running server side code
 1. Checkout sever code & Run PizzariaApplication.java to start server
 2. Swagger : <http://localhost:8080/swagger-ui/index.html?configUrl=/v3/api-docs/swagger-config#/>
 3. H2 database :
 - URL : <http://localhost:8080/h2-console>
 - username: sa
 - password: password is not set... continue with blank
 4. On application start, it crates default entries which can be viewed using show tables;

```
select * from PRODUCT;
select * from MENU_ITEM;
select * from MENU_DETAILS;
select * from CUSTOMER_ORDER;
```

- Running UI code
 1. Checkout UI code and run npm start