Visualizing Texas: `beamer_presentation`

Alison Hill

2019-03-15
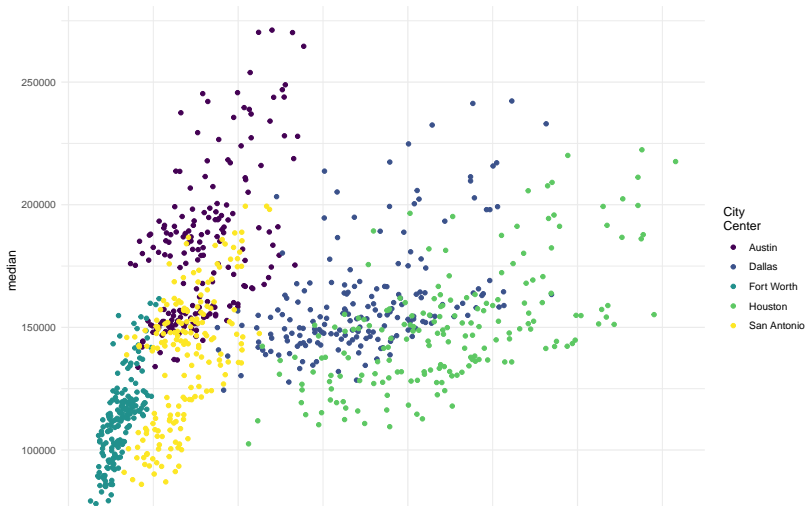
Packages and data

We'll use `ggplot2` for visualization, and some light `dplyr` for data wrangling. The `txhousing` data is loaded for you when you install and load the `ggplot2` package.

```r
library(ggplot2) # plotting
library(dplyr) # wrangling
txsamp <- txhousing %>%
  filter(city %in% c("Houston", "Fort Worth", "San Antonio"
```
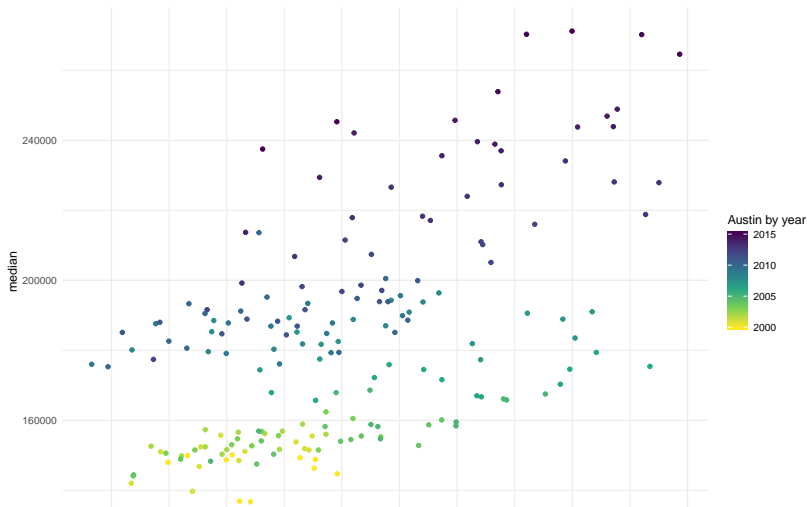
Austin is expensive

```
ggplot(data = txsamp, aes(x = sales, y = median)) +
    geom_point(aes(colour = city)) +
    scale_colour_viridis_d("City\nCenter", option = params$v
```
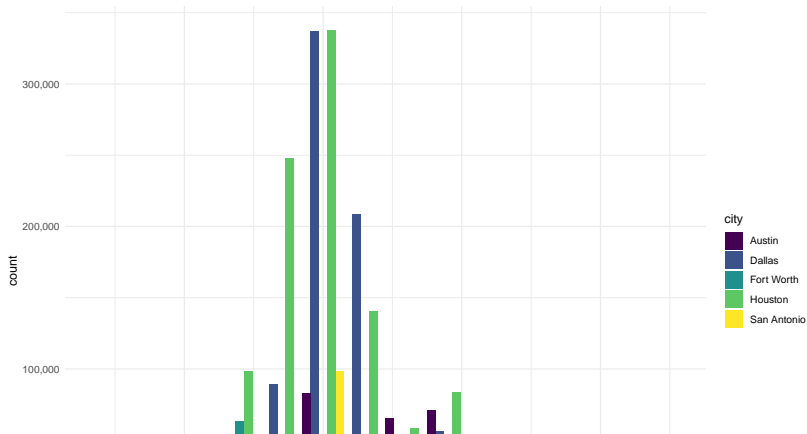
Austin prices on the rise

```
ggplot(data = filter(txsamp, city == "Austin"), aes(x = sal
  geom_point(aes(colour = year)) +
  scale_colour_viridis_c("Austin by year", option = params
```
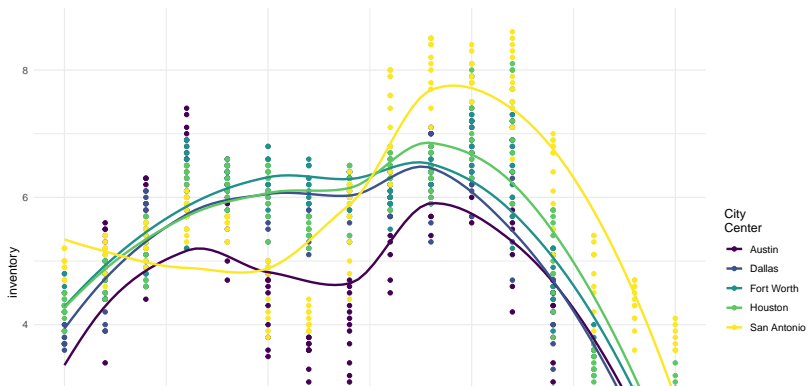
Fort Worth has more affordable housing

```
library(scales) # to make y-axis in non-scientific notation
ggplot(txsamp, aes(x = median, fill = city)) +
  geom_histogram(aes(weight = sales), position = "dodge", b
    scale_fill_viridis_d(option = params$viridis_palette)+
    scale_y_continuous(labels = comma)
```

The current pace of sales is fast

"Months inventory": amount of time it would take to sell all current listings at current pace of sales.

```
ggplot(data = txsamp, aes(x = year, y = inventory, colour =
  geom_point() +
  geom_smooth(se = FALSE) +
  scale_colour_viridis_d("City\nCenter", option = params$vi
```

Thanks to. . .

- Jennifer Thompson:
  https://github.com/jenniferthompson/ParamRmdExample
- Garrett Grolemund:
  https://rmarkdown.rstudio.com/lesson-6.html