



A. P. SHAH INSTITUTE OF TECHNOLOGY

Department of Information Technology

(NBA Accredited)

Academic Year: 2025-2026 Semester: V

Class / Branch: TE IT **Subject: Security Lab**

Subject Incharge: Prof. Apeksha Mohite

Experiment No. 07

1. Aim: To study Intrusion Detection system SNORT and its log analysis.

2. Software Required: Ubuntu 14.04 OS,

3. Theory:

Snort is a popular choice for running a network intrusion detection systems or NIDS. It monitors the package data sent and received through a specific network interface. NIDS can catch threats targeting your system vulnerabilities using signature-based detection and protocol analysis technologies. NIDS software, when installed and configured appropriately, can identify the latest attacks, malware infections, compromised systems, and network policy violations.

Snort can run in two modes:

- Packet Sniffing
 - This mode have no special use, all you can do is just look at the traffic coming at the interface.
- Network Intrusion detection
 - This mode is the actual use of snort, in this mode snort monitor the traffic and block any unwanted traffic using the rules.



A. P. SHAH INSTITUTE OF TECHNOLOGY


Department of Information Technology

(NBA Accredited)

Snort

- Snort is an open source networkbased intrusion detection system (NIDS)
 - It has the ability to perform realtime traffic analysis and packet logging on Internet protocol (IP) networks
 - It performs protocol analysis, content searching, and content matching
- Snort can be configured in three main modes:
 - · Sniffer mode
 - Packet logger mode
 - Network intrusion detection system (NIDS)



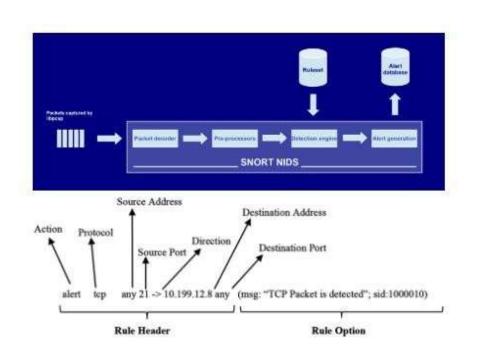





A. P. SHAH INSTITUTE OF TECHNOLOG

Department of Information Technology

(NBA Accredited)

Step 1: Prepare to install

Before actually installing snort, their are some of its per-requisites, you can run following commands to install all the required per-requisites.

sudo apt-get update

sudo apt-get dist-upgrade

Step 2 : sudo apt-get install snort

Snort is now installed on your system, but you need to configure snort to make use of it. To make sure snort is installed on your system, run \mathtt{snort} $-\mathtt{V}$, if you see the following output, then you are on right track.

```
apeksha@apeksha-VirtualBox:/var/log/snort$ snort -V

-*> Snort! <*-
o" )~ Version 2.9.7.0 GRE (Build 149)
By Martin Roesch & The Snort Team: http://www.snort.org/contact#team
Copyright (C) 2014 Cisco and/or its affiliates. All rights reserved.
Copyright (C) 1998-2013 Sourcefire, Inc., et al.
Using libpcap version 1.7.4
Using PCRE version: 8.38 2015-11-23
Using ZLIB version: 1.2.8

apeksha@apeksha-VirtualBox:/var/log/snort$
```

Step 4: Editing snort configuration files

Next, we need to configure our HOME_NET value: the network we will be protecting. First, enter if config in your terminal shell to see the network configuration. Note the IP address and the network interface value. See the image below (your IP may be different).

This command will open the snort.conf file and move you to 45th line, make sure your following line look like this

sudo vi +45 /etc/snort/snort.conf

ipvar HOME_NET 192.168.43.130/24



A. P. SHAH INSTITUTE OF TECHNOLOGY

Department of Information Technology

(NBA Accredited)

```
snort.conf
           F
45 ipvar HOME_NET 192.168.43.130/24
46 # Note to Debian users: this value is overriden when starting
47 # up the Snort daemon through the init.d script by the
48 # value of DEBIAN_SNORT_HOME_NET s defined in the
49 # /etc/snort/snort.debian.conf configuration file
51 ipvar HOME_NET 192.168.43.130/24
53 # Set up the external network addresses. Leave as "any" in most situations
54 ipvar EXTERNAL_NET any
55 # If HOME_NET is defined as something other than "any", alternative, you can
56 # use this definition if you do not want to detect attacks from your internal
57 # IP addresses:
58 #ipvar EXTERNAL_NET !$HOME_NET
60 # List of DNS servers on your network
61 ipvar DNS_SERVERS $HOME_NET
63 # List of SMTP servers on your network
64 ipvar SMTP_SERVERS $HOME_NET
66 # List of web servers on your network
67 ipvar HTTP_SERVERS $HOME_NET
69 # List of sql servers on your network
70 ipvar SQL_SERVERS $HOME_NET
72 # List of telnet servers on your network
73 ipvar TELNET_SERVERS $HOME_NET
```

sudo vi +104 /etc/snort/snort.conf

Following the line at 104, make sure your paths look like this.

var RULE_PATH /etc/snort/rules
var SO_RULE_PATH /etc/snort/so_rules
var PREPROC_RULE_PATH /etc/snort/preproc_rules
var WHITE_LIST_PATH /etc/snort/rules/iplists
var BLACK_LIST_PATH /etc/snort/rules/iplists
sudo vi +545 /etc/snort/snort.conf

UN-comment the 545th line and make it look like this

include \$RULE_PATH/local.rules

Let's create our first simple test rule. This rule will generate an alert whenever Snort detects an ICMP Echo request (ping) or Echo reply message. Open the local rules file in a text editor as root with the following command:

sudo gedit /etc/snort/rules/local.rules

You should see that the file is empty. Add the following rule (as one string of code, no line breaks):

A.

A. P. SHAH INSTITUTE OF TECHNOLOG

Department of Information Technology

(NBA Accredited)

alert icmp any any -> \$HOME_NET any (msg:"ICMP test";
sid:1000001; rev:1;)

Open ▼	ı⊐	local.rules /etc/snort/rules	Save
1 # \$Id:	local.rules,v	1.11 2004/07/23 20:15:44 bmc Exp \$	
2 #			
3 # LOCAL	L RULES		
4 #			
5 # This	file intention	ally does not come with signatures	Put your local
6 # addit	tions here.	TO A DO SER THE SECOND STATE OF THE SECOND S	20) (Certification of the Committee of
7 alert i		192.168.43.130/24 any (msg:"ICMP	est"; sid:1000001;
8 alert t	tcp any any ->	any 80 (msg:"TCP RULE TEST"; sid:	.000002; rev:1;)
		CONTROL SPORT STATE OF THE SPORT	STATE OF THE STATE

Let's walk through the syntax of this rule:

Rule Header

alert - Rule action. Snort will generate an alert when the set condition is met.

any - Source IP. Snort will look at all sources.

any - Source port. Snort will look at all ports.

-> - Direction. From source to destination.

\$HOME NET - Destination IP. We are using the HOME_NET value from the snort.conf file.

any - Destination port. Snort will look at all ports on the protected network.

Rule Options

msg:"ICMP test" - Snort will include this message with the alert.

sid:1000001 - Snort rule ID. Remember all numbers < 1,000,000 are reserved, this iswhy we are starting with 1000001 (you may use any number, as long as it's greater than 1,000,000).

rev:1 - Revision number. This option allows for easier rule maintenance.

classtype:icmp-event - Categorizes the rule as an "icmp-event", one of the predefined Snort categories. This option helps with rule organization.

Click Save and close the file. Now let's run the Snort configuration test command again:

Test Snort :

sudo snort -T -c /etc/snort/snort.conf ^C



A. P. SHAH INSTITUTE OF TECHNOLOGY

Department of Information Technology

(NBA Accredited)

<u>Test Snort :</u>
sudo snort -T -c /etc/snort/rules/local.rules



A. P. SHAH INSTITUTE OF TECHNOLOGY

Department of Information Technology

(NBA Accredited)

Now, let's start Snort in IDS mode and tell it to display alerts to the console:

Now in order to work snort as IDS first we need to keep snort in listening mode so that it will get the alerts which we have set in local.rules file

sudo snort -A console -c /etc/snort/snort.conf

```
Acquiring network traffic from "enp0s3".
Reload thread starting...
Reload thread started, thread 0x7f3346447700 (5907)
Decoding Ethernet
            --== Initialization Complete ==--
                 -*> Snort! <*-
                 Version 2.9.7.0 GRE (Build 149)
                By Martin Roesch & The Snort Team: http://www.snort.org/contact#team
Copyright (C) 2014 Cisco and/or its affiliates. All rights reserved.
Copyright (C) 1998-2013 Sourcefire, Inc., et al.
                 Using libpcap version 1.7.4
Using PCRE version: 8.38 2015-11-23
                 Using ZLIB version: 1.2.8
                 Rules Engine: SF_SNORT_DETECTION_ENGINE Version 2.4
                                                                                                    <Build 1>
                 Preprocessor Object: SF_SIP Version 1.1 <Build 1>
                 Preprocessor Object: SF_POP Version 1.0 <Build 1>
Preprocessor Object: SF_SMTP Version 1.1 <Build 9>
Preprocessor Object: SF_SDF Version 1.1 <Build 1>
                 Preprocessor Object: SF_DNP3 Version 1.1 <Build 1>
                 Preprocessor Object: SF_GTP Version 1.1 <Build 1>
Preprocessor Object: SF_FTPTELNET Version 1.2 <Build 13>
                 Preprocessor Object: SF_IMAP Version 1.0 <Build 1>
                 Preprocessor Object: SF_SSLPP Version 1.1 <Build 4>
Preprocessor Object: SF_SSH Version 1.1 <Build 3>
Preprocessor Object: SF_DCERPC2 Version 1.0 <Build 3>
                 Preprocessor Object: SF_MODBUS Version 1.1 <Build 1>
Preprocessor Object: SF_REPUTATION Version 1.1 <Build 1>
Preprocessor Object: SF_DNS Version 1.1 <Build 4>
Commencing packet processing (pid=5902)
```

While snort in listening mode ping it from other system in our case 192.168.43.24

Here we are getting ICMP alert messages as "ICMP Testing Rule", when another machine tries to ping the snort configured machine.



A. P. SHAH INSTITUTE OF TECHNOLOGY

Department of Information Technology

(NBA Accredited)

While snort in listening mode perform a scan on the system from other system in our case 192.168.43.24

```
10/10-11:55:43.936916 [**] [1:1000002:1] TCP RULE TEST [**] [Priority: 0] {TCP} 192.168.43.24:45768 -> 192.168.43.130:80 10/10-11:55:44.039264 [**] [1:1000002:1] TCP RULE TEST [**] [Priority: 0] {TCP} 192.168.43.24:45814 -> 192.168.43.130:80 10/10-11:55:44.085212 [**] [1:1418:11] SNMP request tcp [**] [Classification: A ttempted Information Leak] [Priority: 2] {TCP} 192.168.43.24:59838 -> 192.168.43.130:161 10/10-11:55:44.100870 [**] [1:1421:11] SNMP AgentX/tcp request [**] [Classification: Attempted Information Leak] [Priority: 2] {TCP} 192.168.43.24:33120 -> 192.168.43.130:705
```

As soon as the alert gets generated snort also creates log file of all the activity. Which can be seen in /var/log/snort path.

```
apeksha@apeksha-VirtualBox:/$ cd /var/log/snort
apeksha@apeksha-VirtualBox:/var/log/snort$ ls
alert snort.log.1665381307 snort.log.1665381687 snort.log.1665383016
archived_logs snort.log.1665381601 snort.log.1665382116
apeksha@apeksha-VirtualBox:/var/log/snort$
```





A. P. SHAH INSTITUTE OF TECHNOLOGY

Department of Information Technology

(NBA Accredited)

```
peksha@apeksha-VirtualBox:/var/log/snort$ cat alert
 **] [1:1000001:1] ICMP test [**]
[Priority: 0]
10/10-11:25:26.339631 192.168.43.24 -> 192.168.43.130
ICMP TTL:64 TOS:0x0 ID:42860 IpLen:20 DgmLen:84 DF
Type:8 Code:0 ID:3240
                          Seq:1 ECHO
[**] [1:1000001:1] ICMP test [**]
[Priority: 0]
10/10-11:25:27.340885 192.168.43.24 -> 192.168.43.130
ICMP TTL:64 TOS:0x0 ID:42923 IpLen:20 DgmLen:84 DF
Type:8 Code:0 ID:3240
                         Seq:2 ECHO
[**] [1:1000001:1] ICMP test [**]
[Priority: 0]
10/10-11:25:28.340139 192.168.43.24 -> 192.168.43.130
ICMP TTL:64 TOS:0x0 ID:43167 IpLen:20 DgmLen:84 DF
Type:8 Code:0 ID:3240
                           Seq:3 ECHO
 **] [1:1000001:1] ICMP test [**]
[Priority: 0]
```

The log file can be read by using command mentioned in the following screenshot

```
apeksha@apeksha-VirtualBox:/var/log/snort$ sudo tcpdump -r snort.log.1665381601
reading from file snort.log.1665381601, link-type EN10MB (Ethernet)
11:30:09.625700 IP 192.168.43.24 > 192.168.43.130: ICMP echo request, id 3252, s
eq 1, length 64
11:30:10.626688 IP 192.168.43.24 > 192.168.43.130: ICMP echo request, id 3252, s
eq 2, length 64
11:30:11.627072 IP 192.168.43.24 > 192.168.43.130: ICMP echo request, id 3252, s
eq 3, length 64
11:30:12.628298 IP 192.168.43.24 > 192.168.43.130: ICMP echo request, id 3252, s
eq 4, length 64
11:30:13.630351 IP 192.168.43.24 > 192.168.43.130: ICMP echo request, id 3252, s
eq 5, length 64
11:30:14.631738 IP 192.168.43.24 > 192.168.43.130: ICMP echo request, id 3252, s
eq 6, length 64
11:30:15.633914 IP 192.168.43.24 > 192.168.43.130: ICMP echo request, id 3252, s
eq 7, length 64
apeksha@apeksha-VirtualBox:/var/log/snort$
```

4. Conclusion: Hence we have successfully studied Snort which is network intrusion prevention system, capable of performing real-time traffic analysis and packet logging on IP networks. It can perform protocol analysis, content searching/matching, and can be used to detect a variety of attacks and probes, such as buffer overflows, stealth port scans, CGI attacks, SMB probes, OS fingerprinting attempts, and much more. Also we have done analysis of log generated by snort.