CyberPatriot Introduction

By Clement Chan

What is CyberPatriot?

https://www.uscyberpatriot.org/home

- Competition heavily focused on securing various types of systems
  - Windows
  - Linux
    - Ubuntu
    - Debian
  - Router networks (Cisco)
- These “virtual images” have “vulnerabilities”, and they will have “services” that you will need to keep up
  - virtual images - OS within OS, “sandbox”
  - vulnerabilities - vary from deleting unauthorized users to securing well-known security flaws
  - services - email, file transfer
- Rounds get progressively harder, score affects which category you land into

Last year’s competition

More on CyberPatriot

Three categories to compete in

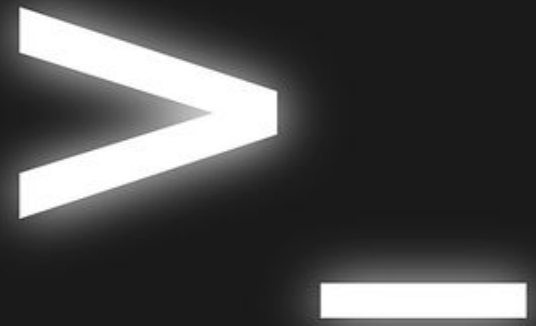
- Open
- All Service
- Middle School

Each online round lasts for six hours, which can be started anytime within the allowed time frame

Competition Timeline

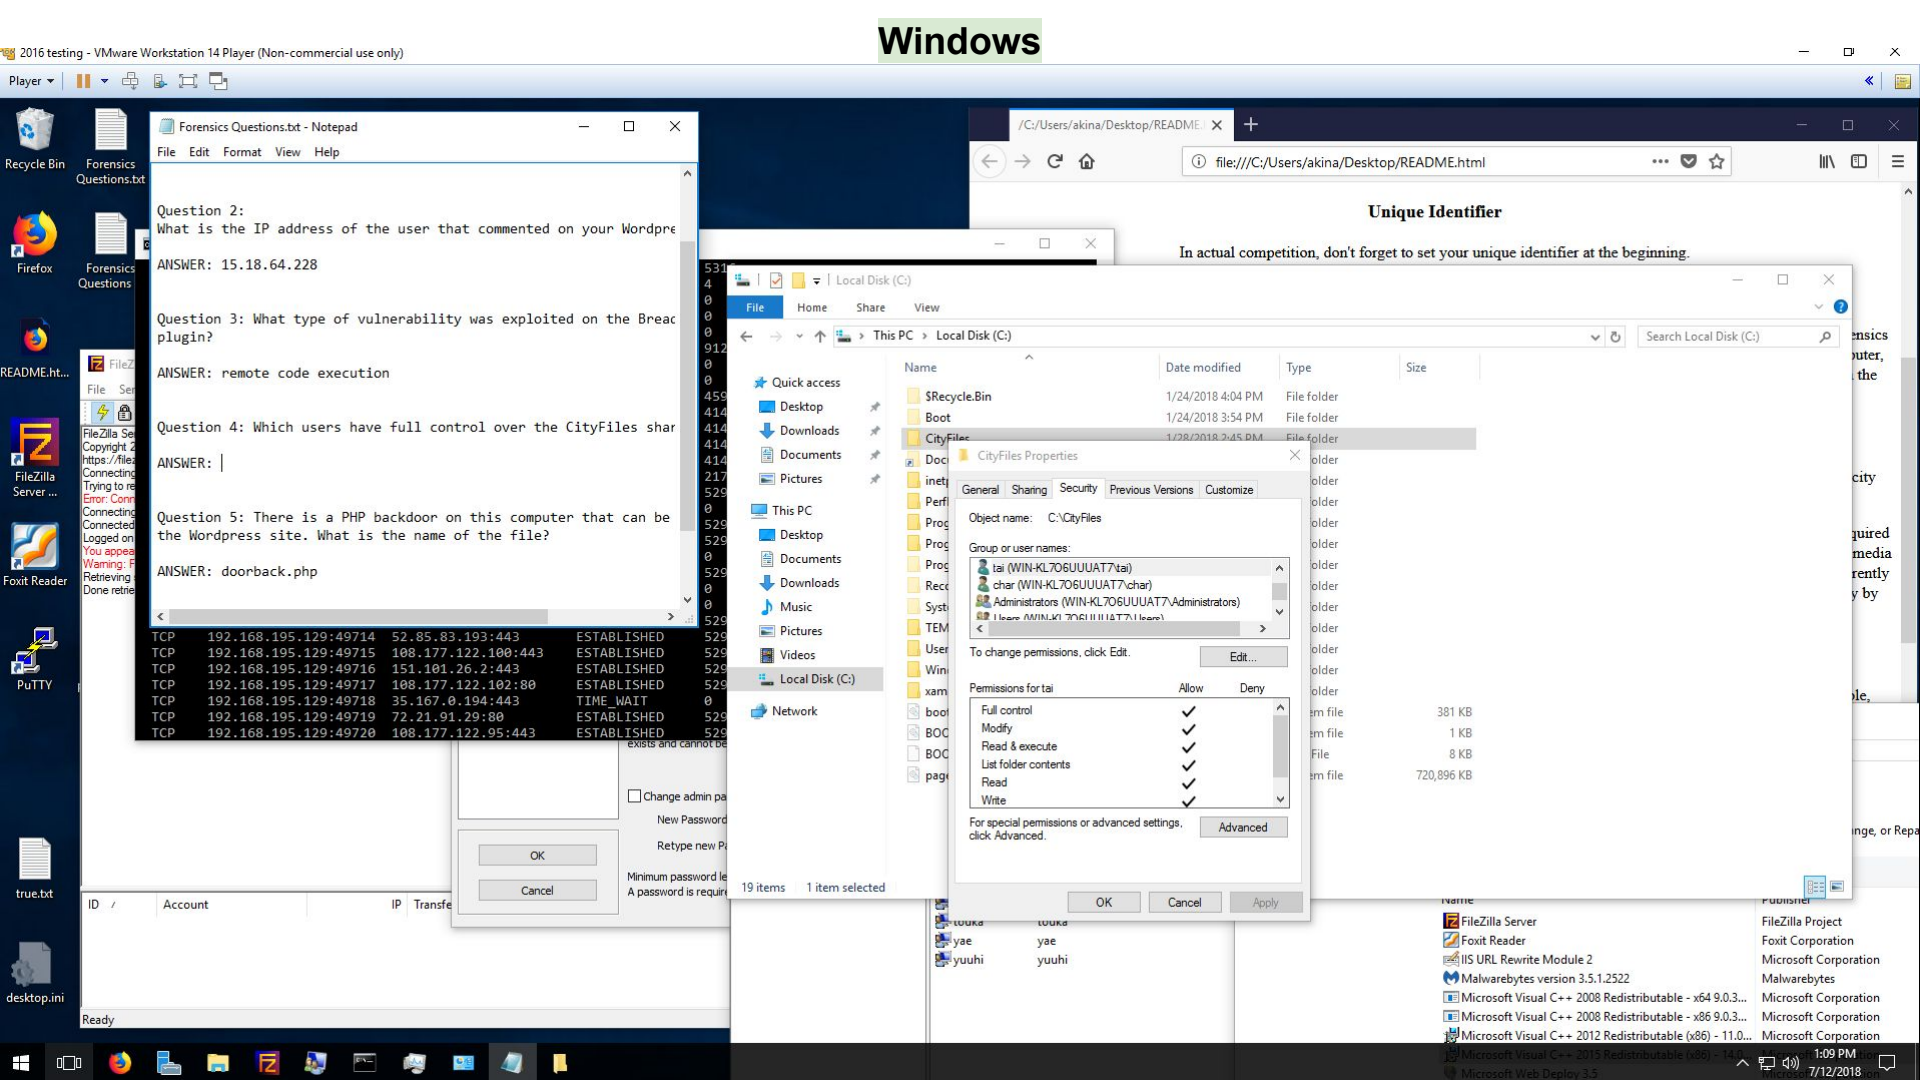
Each round consists of two sections:

- Network Security Challenge
  - Finding and fixing vulnerabilities in Windows and Linux
- Cisco Networking Challenge
  - Taking a quiz and setting up a network in a virtual lab

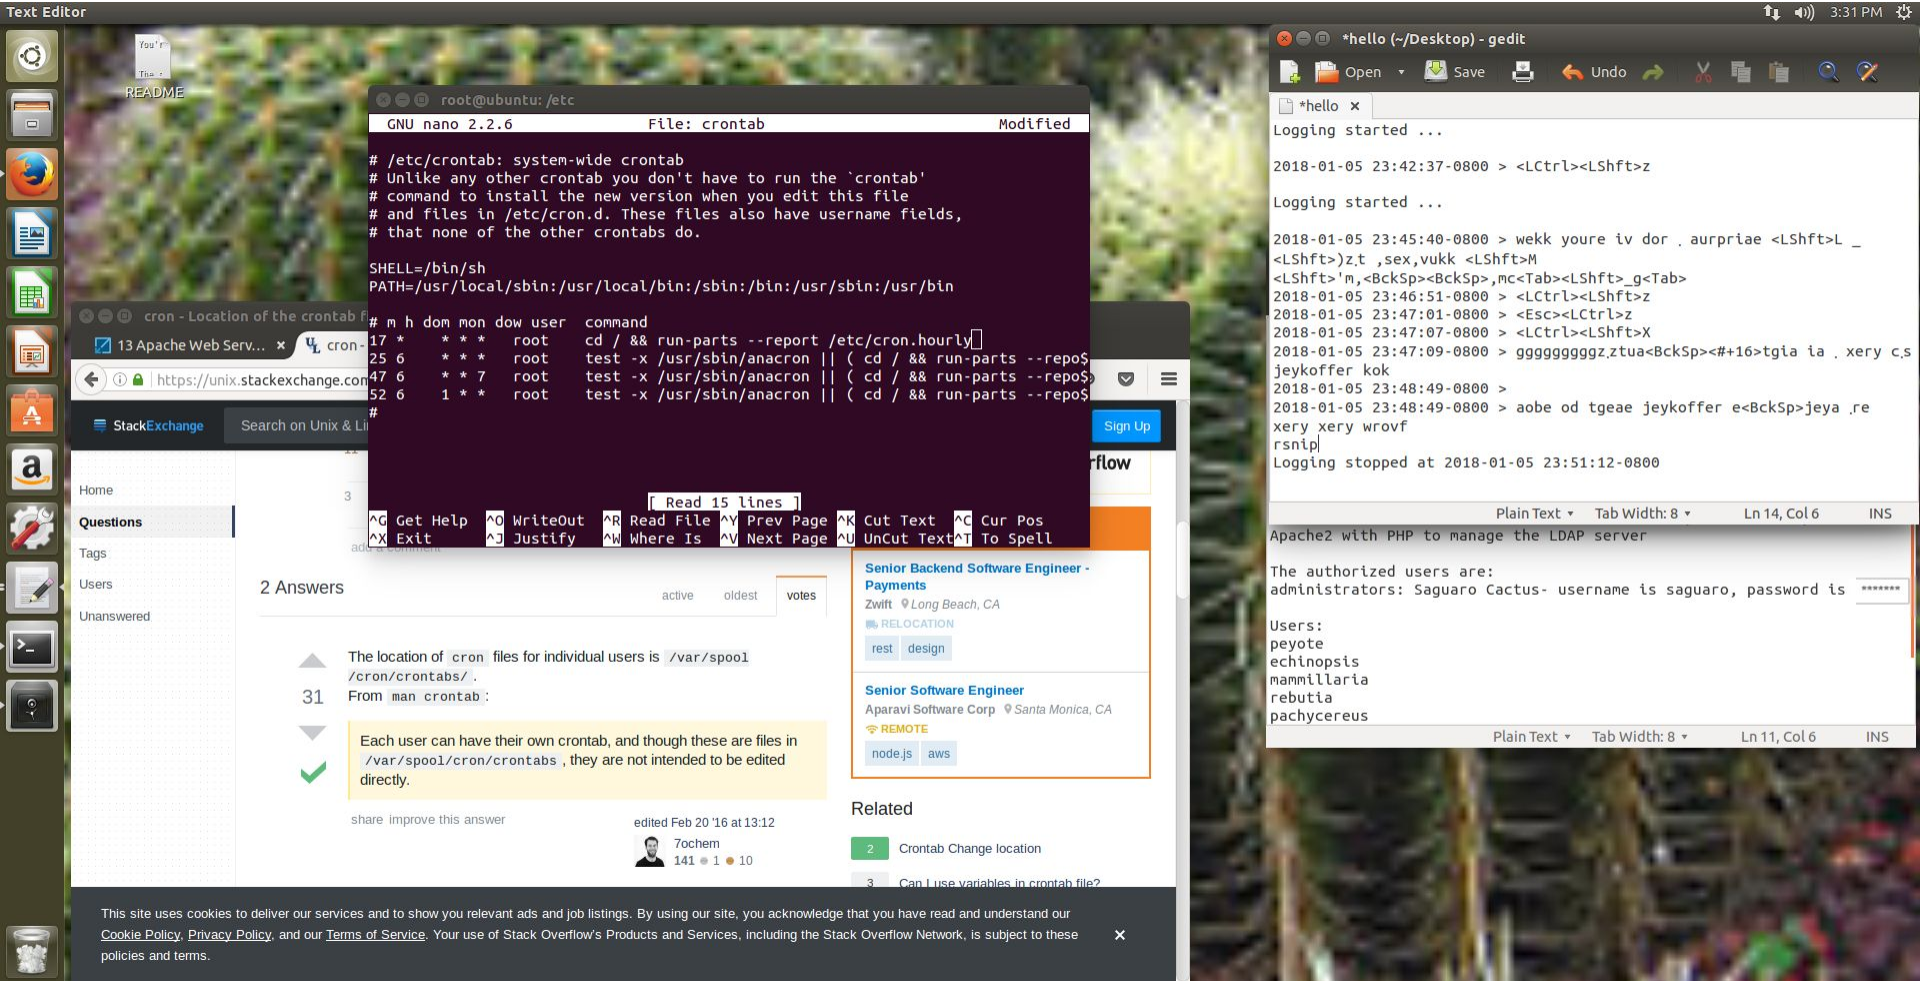


[How the competition works]

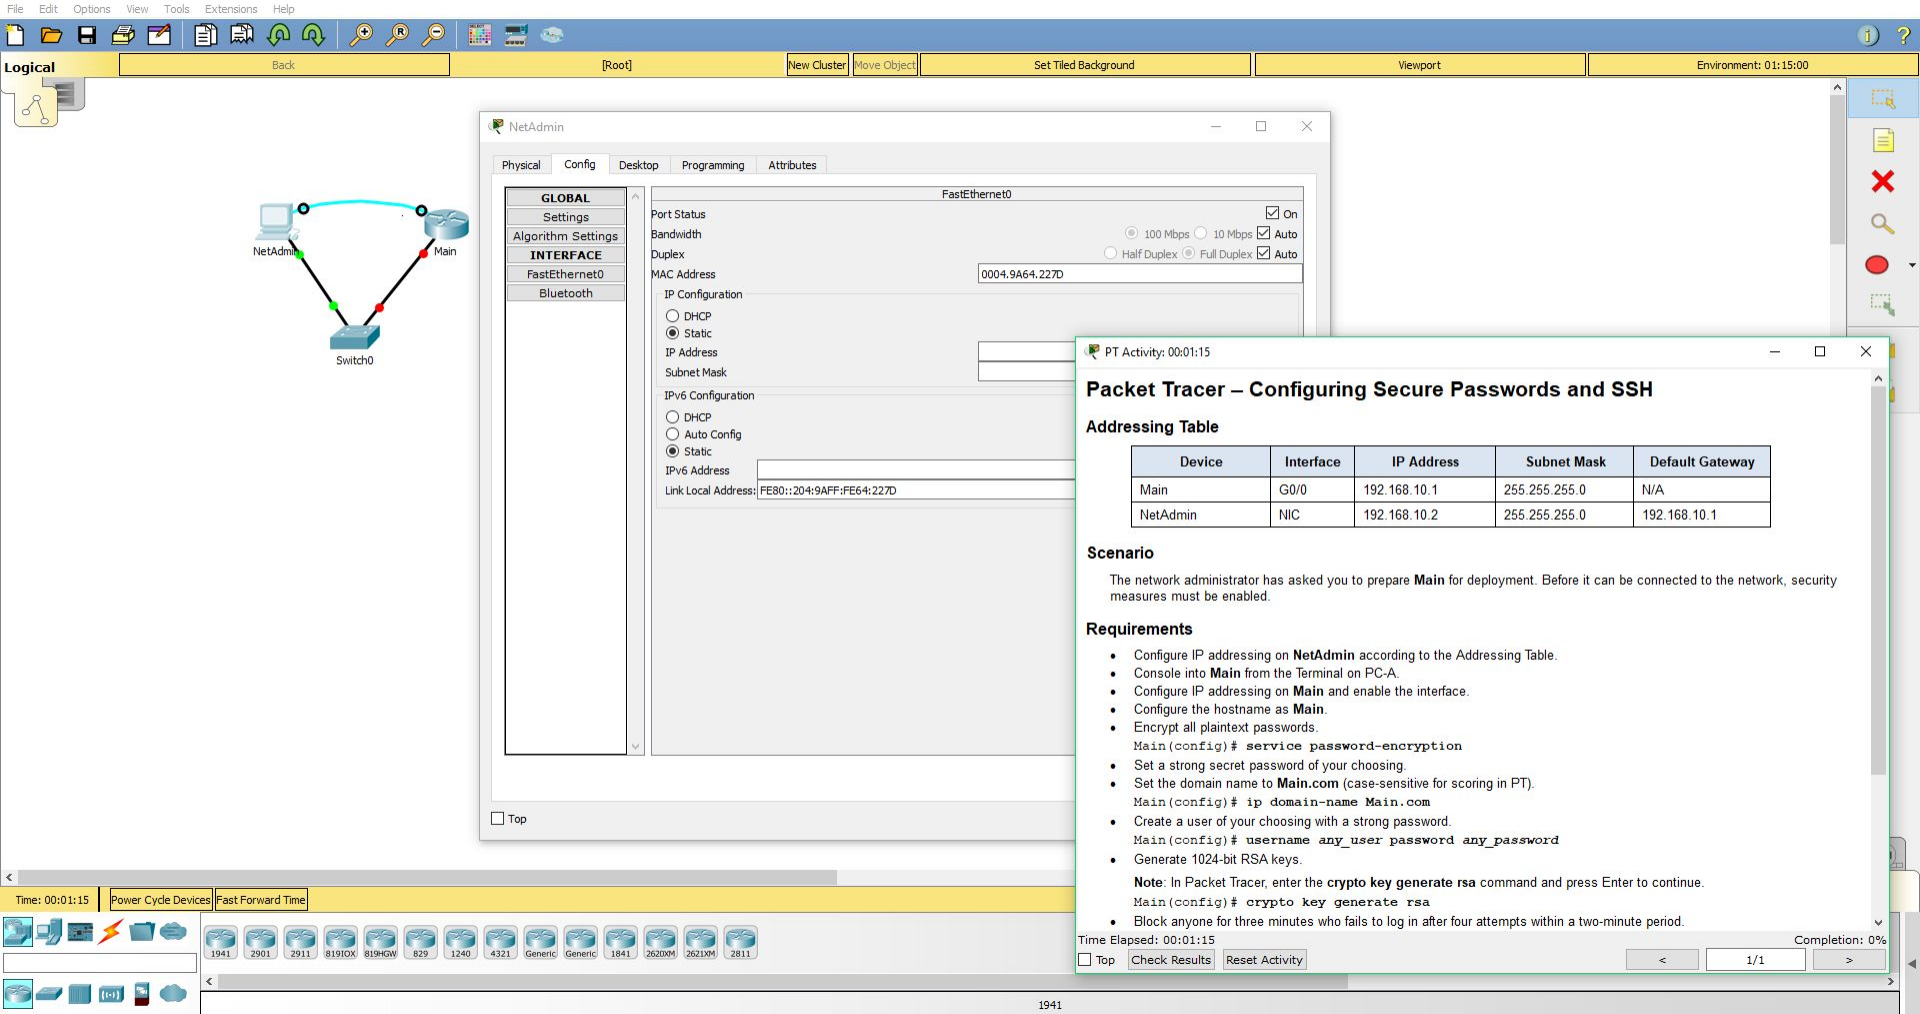
Windows


2016 testing - VMware Workstation 14 Player (Non-commercial use only)
Player
Forensics Questions.txt - Notepad
File Edit Format View Help
Question 2:
What is the IP address of the user that commented on your Wordpre
ANSWER: 15.18.64.228
Question 3: What type of vulnerability was exploited on the Breac
plugin?
ANSWER: remote code execution
Question 4: Which users have full control over the CityFiles shar
ANSWER:
Question 5: There is a PHP backdoor on this computer that can be
the Wordpress site. What is the name of the file?
ANSWER: doorback.php
TCP 192.168.195.129:49714 52.85.83.193:443 ESTABLISHED
TCP 192.168.195.129:49715 108.177.122.100:443 ESTABLISHED
TCP 192.168.195.129:49716 151.101.26.2:443 ESTABLISHED
TCP 192.168.195.129:49717 108.177.122.102:80 ESTABLISHED
TCP 192.168.195.129:49718 35.167.0.194:443 TIME_WAIT
TCP 192.168.195.129:49719 72.21.91.29:80 ESTABLISHED
TCP 192.168.195.129:49720 108.177.122.95:443 ESTABLISHED
/C:/Users/akina/Desktop/README.
file:///C:/Users/akina/Desktop/README.html
Unique Identifier
In actual competition, don't forget to set your unique identifier at the beginning.
Local Disk (C:)
File Home Share View
This PC › Local Disk (C:)
Search Local Disk (C:)
Quick access
Desktop
Downloads
Documents
Pictures
This PC
Music
Videos
Local Disk (C:)
Network
Name
Date modified
Type
Size
$Recycle.Bin 1/24/2018 4:04 PM File folder
Boot 1/24/2018 3:54 PM File folder
CityFiles
19 items 1 item selected
CityFiles Properties
General Sharing Security Previous Versions Customize
Object name: C:\CityFiles
Group or user names:
tai (WIN-KL7O6UUUAT7\tai)
char (WIN-KL7O6UUUAT7\char)
Administrators (WIN-KL7O6UUUAT7\Administrators)
To change permissions, click Edit.
Edit...
Permissions for tai Allow Deny
Full control
Modify
Read & execute
List folder contents
Read
Write
For special permissions or advanced settings, click Advanced.
Advanced
OK Cancel Apply
Change admin pa
New Password
Retype new P
Minimum password le
A password is requir
OK
Cancel
ID Account IP Transfe
Ready
FileZilla Server FileZilla Project
Foxit Reader Foxit Corporation
IIS URL Rewrite Module 2 Microsoft Corporation
Malwarebytes version 3.5.1.2522 Malwarebytes
Microsoft Visual C++ 2008 Redistributable - x64 9.0.3... Microsoft Corporation
Microsoft Visual C++ 2008 Redistributable - x86 9.0.3... Microsoft Corporation
Microsoft Visual C++ 2012 Redistributable (x86) - 11.0... Microsoft Corporation
1:09 PM
7/12/2018

Ubuntu


Text Editor
3:31 PM
README
root@ubuntu: /etc
GNU nano 2.2.6 File: crontab Modified
/etc/crontab: system-wide crontab
Unlike any other crontab you don't have to run the `crontab'
command to install the new version when you edit this file
and files in /etc/cron.d. These files also have username fields,
that none of the other crontabs do.
SHELL=/bin/sh
PATH=/usr/local/sbin:/usr/local/bin:/sbin:/bin:/usr/sbin:/usr/bin
m h dom mon dow user command
17 * * * * root cd / && run-parts --report /etc/cron.hourly
25 6 * * * root test -x /usr/sbin/anacron || (cd / && run-parts --repo$
47 6 * * 7 root test -x /usr/sbin/anacron || (cd / && run-parts --repo$
52 6 1 * * root test -x /usr/sbin/anacron || (cd / && run-parts --repo$
#
[Read 15 lines]
^G Get Help ^O WriteOut ^R Read File ^Y Prev Page ^K Cut Text ^C Cur Pos
^X Exit ^J Justify ^W Where Is ^V Next Page ^U UnCut Text ^T To Spell
*hello (~/Desktop) - gedit
Open Save Undo
*hello
Logging started ...
2018-01-05 23:42:37-0800 > <LCtrl><LShft>z
Logging started ...
2018-01-05 23:45:40-0800 > wekk youre iv dor . aurpriae <LShft>L _
<LShft>)z,t ,sex,vukk <LShft>M
<LShft>'m,<BckSp><BckSp>,mc<Tab><LShft>_g<Tab>
2018-01-05 23:46:51-0800 > <LCtrl><LShft>z
2018-01-05 23:47:01-0800 > <Esc><LCtrl>z
2018-01-05 23:47:07-0800 > <LCtrl><LShft>X
2018-01-05 23:47:09-0800 > gggggggggz,ztua<BckSp><#+16>tgia ia . xery c,s
jeykoffer kok
2018-01-05 23:48:49-0800 >
2018-01-05 23:48:49-0800 > aobe od tgeae jeykoffer e<BckSp>jeya ,re
xery xery wrovf
rsnip
Logging stopped at 2018-01-05 23:51:12-0800
Plain Text Tab Width: 8 Ln 14, Col 6 INS
Apache2 with PHP to manage the LDAP server
The authorized users are:
administrators: Saguaro Cactus- username is saguaro, password is *******
Users:
peyote
echinopsis
mammillaria
rebutia
pachycereus
Plain Text Tab Width: 8 Ln 11, Col 6 INS
cron - Location of the crontab f
13 Apache Web Serv...
https://unix.stackexchange.com
StackExchange
Search on Unix & Li
Sign Up
Home
Questions
Tags
Users
Unanswered
2 Answers
active oldest votes
31
The location of cron files for individual users is /var/spool/cron/crontabs/ .
From man crontab :
Each user can have their own crontab, and though these are files in /var/spool/cron/crontabs , they are not intended to be edited directly.
share improve this answer
edited Feb 20 '16 at 13:12
7ochem
141 1 10
Senior Backend Software Engineer - Payments
Zwift Long Beach, CA
RELOCATION
rest design
Senior Software Engineer
Aparavi Software Corp Santa Monica, CA
REMOTE
node.js aws
Related
2 Crontab Change location
3 Can I use variables in crontab file?
This site uses cookies to deliver our services and to show you relevant ads and job listings. By using our site, you acknowledge that you have read and understand our Cookie Policy, Privacy Policy, and our Terms of Service. Your use of Stack Overflow's Products and Services, including the Stack Overflow Network, is subject to these policies and terms.

Cisco


File Edit Options View Tools Extensions Help
Logical
Back
[Root]
New Cluster
Move Object
Set Tiled Background
Viewport
Environment: 01:15:00
NetAdmin
Main
Switch0
NetAdmin
Physical
Config
Desktop
Programming
Attributes
GLOBAL
Settings
Algorithm Settings
INTERFACE
FastEthernet0
Bluetooth
FastEthernet0
Port Status
On
Bandwidth
100 Mbps
10 Mbps
Auto
Duplex
Half Duplex
Full Duplex
Auto
MAC Address
0004.9A64.227D
IP Configuration
DHCP
Static
IP Address
Subnet Mask
IPv6 Configuration
DHCP
Auto Config
Static
IPv6 Address
Link Local Address:
FE80::204:9AFF:FE64:227D
Top
PT Activity: 00:01:15
Packet Tracer – Configuring Secure Passwords and SSH
Addressing Table
Device
Interface
IP Address
Subnet Mask
Default Gateway
Main
G0/0
192.168.10.1
255.255.255.0
N/A
NetAdmin
NIC
192.168.10.2
255.255.255.0
192.168.10.1
Scenario
The network administrator has asked you to prepare Main for deployment. Before it can be connected to the network, security measures must be enabled.
Requirements
Configure IP addressing on NetAdmin according to the Addressing Table.
Console into Main from the Terminal on PC-A.
Configure IP addressing on Main and enable the interface.
Configure the hostname as Main.
Encrypt all plaintext passwords.
Main(config)# service password-encryption
Set a strong secret password of your choosing.
Set the domain name to Main.com (case-sensitive for scoring in PT).
Main(config)# ip domain-name Main.com
Create a user of your choosing with a strong password.
Main(config)# username any_user password any_password
Generate 1024-bit RSA keys.
Note: In Packet Tracer, enter the crypto key generate rsa command and press Enter to continue.
Main(config)# crypto key generate rsa
Block anyone for three minutes who fails to log in after four attempts within a two-minute period.
Time Elapsed: 00:01:15
Completion: 0%
Top
Check Results
Reset Activity
<
1/1
>
Time: 00:01:15
Power Cycle Devices
Fast Forward Time
1941
2901
2911
819IOX
819HGW
829
1240
4321
Generic
Generic
1841
2620XM
2621XM
2811
1941