

CS738: Advanced Compiler Optimizations

SSA Continued

Amey Karkare

karkare@cse.iitk.ac.in

<http://www.cse.iitk.ac.in/~karkare/cs738>

Department of CSE, IIT Kanpur



Agenda

- ▶ Properties of SSA
- ▶ SSA to Executable
- ▶ SSA for Optimizations


Complexity of Construction

- ▶ $R = \max(N, E, A, M)$
- ▶ N : nodes, E : edges in flow graph
- ▶ A : number of assignments
- ▶ M : number of uses of variables
- ▶ Computation of DF: $O(R^2)$
- ▶ Computation of SSA: $O(R^3)$
- ▶ In practice, worst case is rare.
- ▶ Practical complexity: $O(R)$


Linear Time Algorithm for ϕ -functions

- ▶ By Sreedhar and Gao, in POPL'95
- ▶ Uses a new data structure called DJ-graph
- ▶ Linear time is achieved by careful ordering of nodes in the DJ-graph
- ▶ DF for a node is computed only once and reused later if required.

Variants of SSA Form: Simple Example

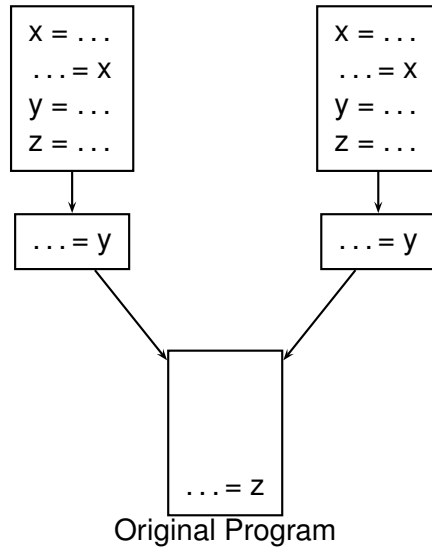

Variants of SSA Form: Simple Example

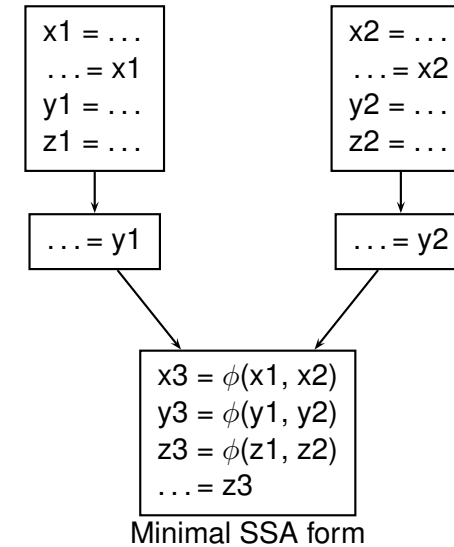


Variants of SSA Form

- ▶ Minimal SSA still contains extraneous ϕ -functions
 - ▶ Inserts some ϕ -functions where they are dead
 - ▶ Would like to avoid inserting them
- ▶ Pruned SSA
- ▶ Semi-Pruned SSA

Pruned SSA

- ▶ Only insert ϕ -functions where their value is live
- ▶ Inserts fewer ϕ -functions
- ▶ Costs more to do
- ▶ Requires global Live variable analysis


Variants of SSA Form: Pruned SSA Example

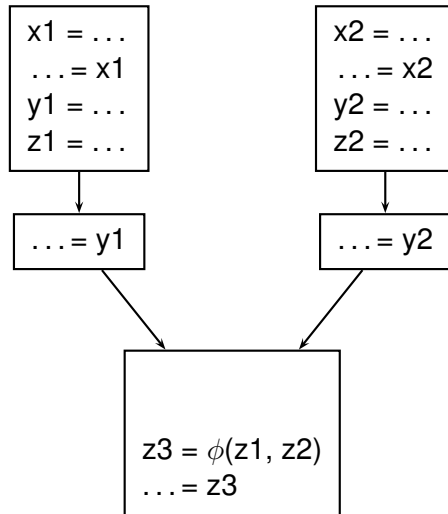

semi-pruned SSA Form

- ▶ Discard names used in only one block
- ▶ Total number of ϕ -functions between minimal and pruned SSA
- ▶ Needs only local Live information
- ▶ Non-locals can be computed without iteration or elimination

Variants of SSA Form: Semi-pruned SSA Example

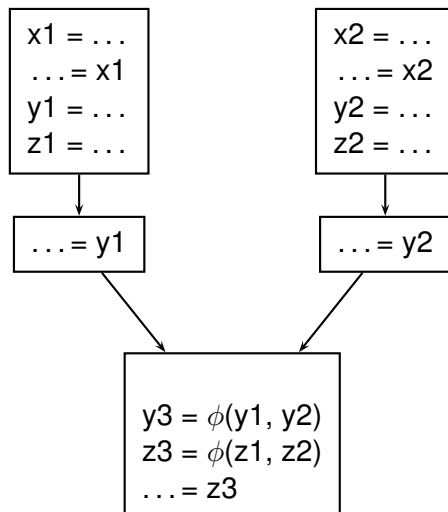

Computing Non-locals


```

foreach block B {
  defined = {}
  foreach instruction  $v = x \text{ op } y$  {
    if  $x$  not in defined
      non-locals = non-locals  $\cup \{x\}$ 
    if  $y$  not in defined
      non-locals = non-locals  $\cup \{y\}$ 
    defined = defined  $\cup \{v\}$ 
  }
}
  
```


SSA to Executable

- ▶ At some point, we need executable code
 - ▶ Need to fix up the ϕ -function
- ▶ Basic idea
 - ▶ Insert copies in predecessors to mimic ϕ -function
 - ▶ Simple algorithm
 - ▶ Works in most cases, but **not always**
 - ▶ Adds lots of copies
 - ▶ Many of them will be optimized by later passes


ϕ -removal: Example

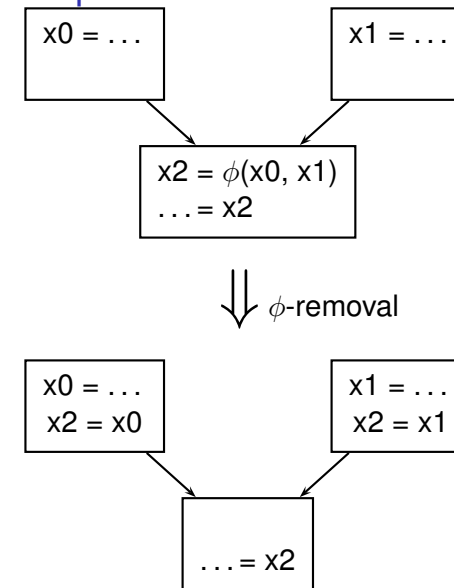


Lost Copy Problem

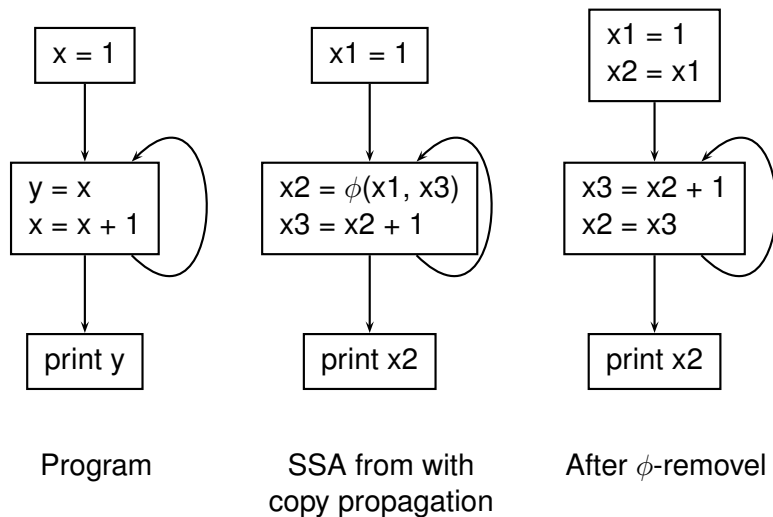

Lost Copy Problem: Solutions

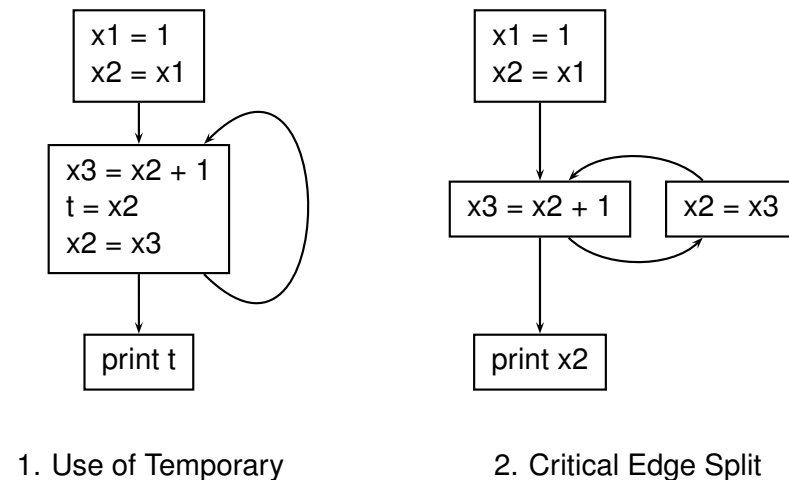

Swap Problem

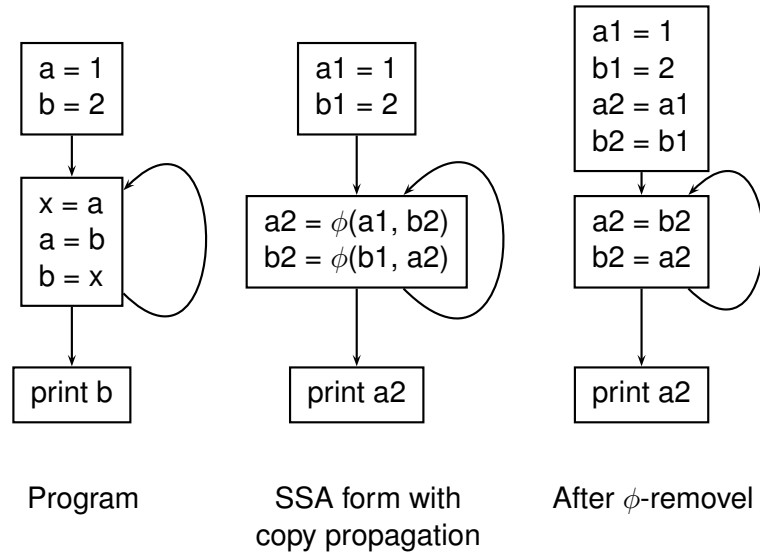

Swap Problem: Solution

- Fix requires compiler to detect and break dependency from output of one ϕ -function to input of another ϕ -function.
- May require temporary if cyclic dependency exists.

SSA Form for Optimizations

- SSA form can improve and/or speed up many analyses and optimizations
 - (Conditional) Constant propagation
 - Dead code elimination
 - Value numbering
 - PRE
 - Loop Invariant Code Motion
 - Strength Reduction