


1. Running the program

Using `g++ server.cpp -o server -lpthread` to build the server and then run the below command


```
./server -document-root ~/COEN317/P1/document_root -port 8003
```

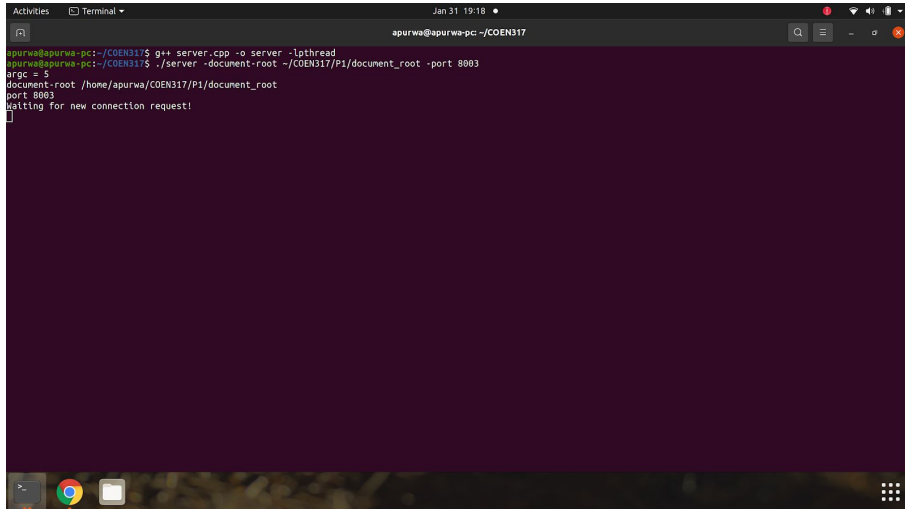


2. Accessing index.html

```
http://localhost:8003/index.html
```


```
http://localhost:8003
```

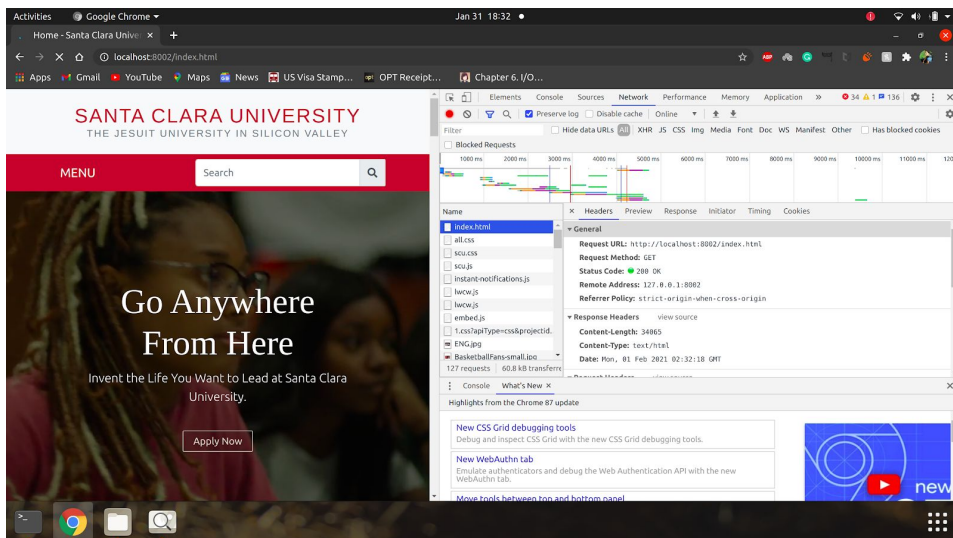

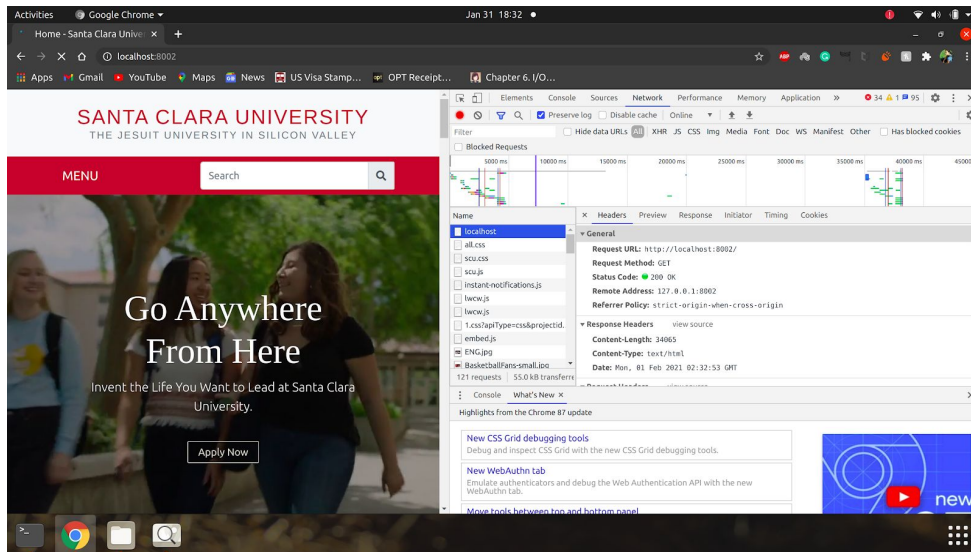


3. Accessing sample.html

<http://localhost:8003/sample.html>

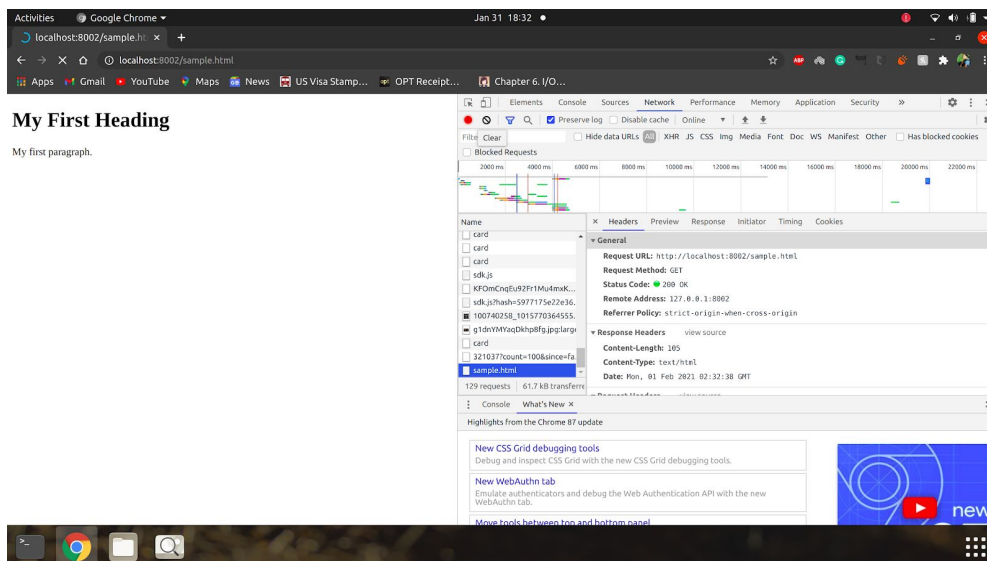


4. Accessing text file - sample.txt

<http://localhost:8003/sample.txt>

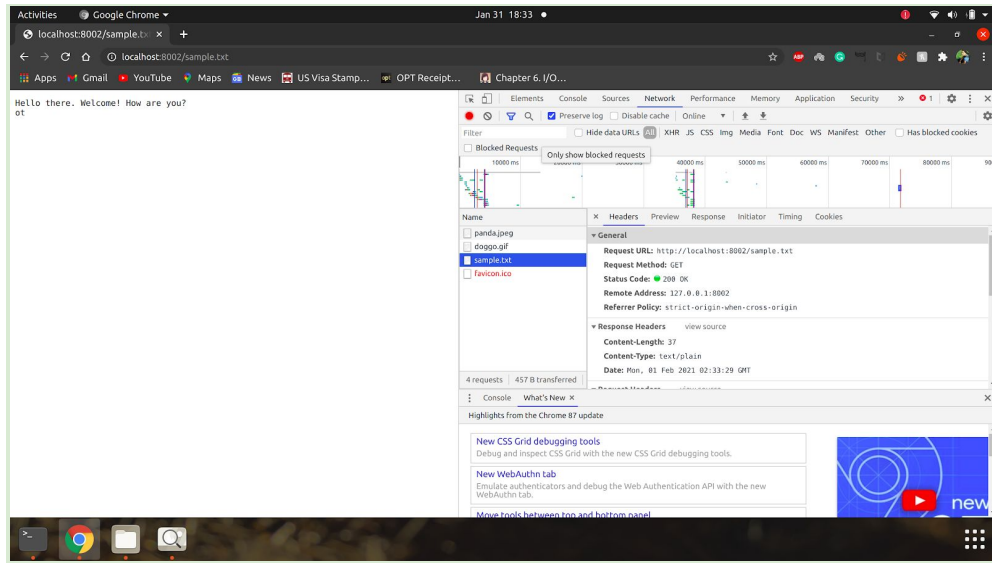


5. Accessing jpeg file - panda.jpeg

<http://localhost:8003/panda.jpeg>

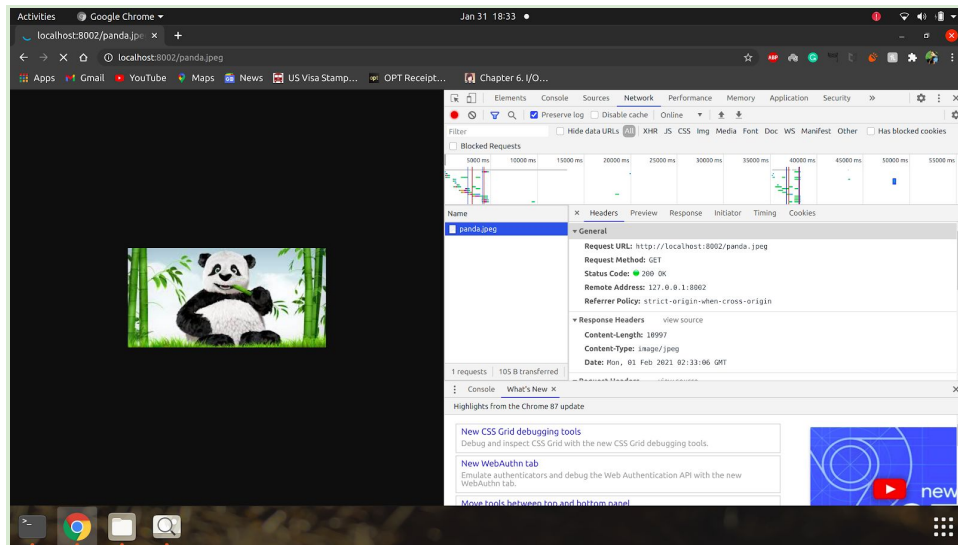


6. Accessing gif file - doggo.gif

<http://localhost:8003/doggo.gif>

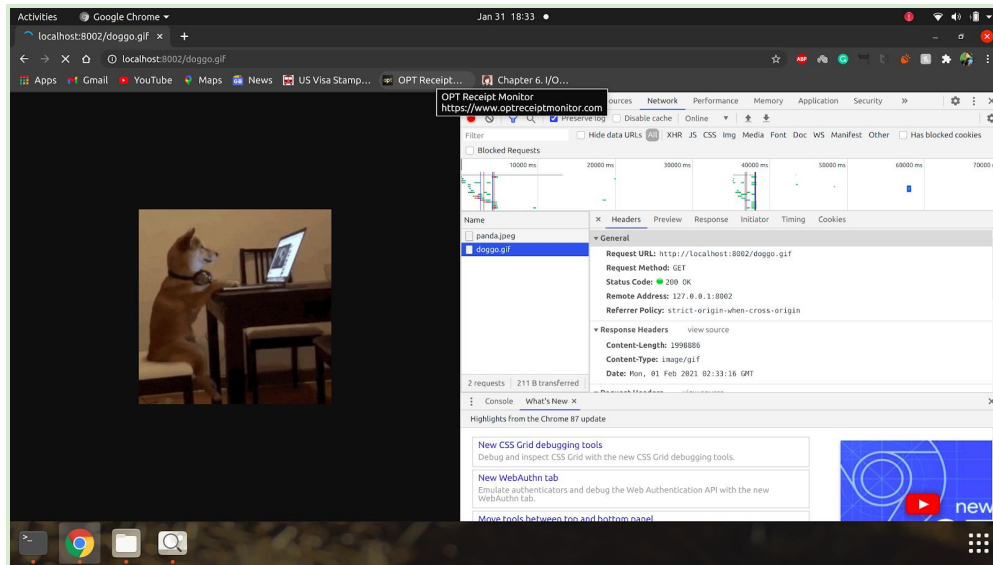


7. Accessing directory - dir

<http://localhost:8003/dir>

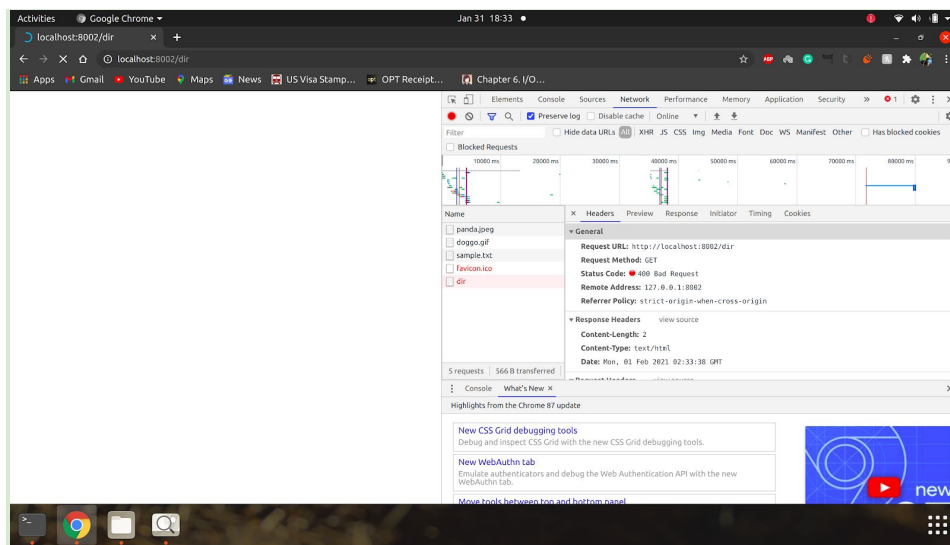

8. Accessing file without permission - mode.html

<http://localhost:8003/mode.html>

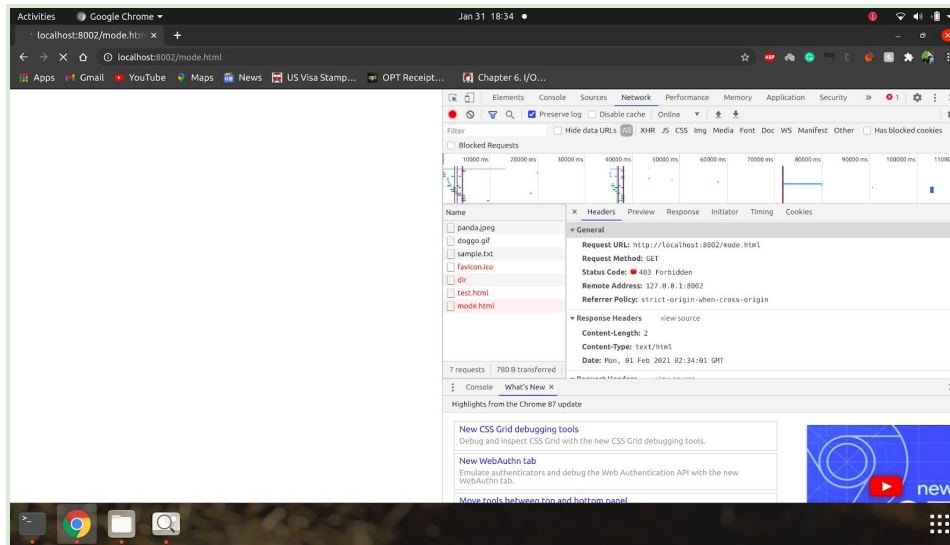

9. Accessing file not present - test.html

<http://localhost:8003/test.html>

