

"""

Write a program for creating GUI with python containing widgets such as labels, textbox, radio,

checkboxes, and custom dialog boxes etc.

QAYAM 231P038/ 02

"""

class Stack:

```

    def __init__(self):
        self.stack = []

    def push(self, item):
        self.stack.append(item)
        print(f"{item} pushed into stack.")

    def pop(self):
        if not self.is_empty():
            print(f"Popped item: {self.stack.pop()}")
        else:
            print("Stack is empty!")

    def display(self):
        if self.is_empty():
            print("Stack is empty!")
        else:
            print("Stack elements:", self.stack)

    def is_empty(self):
        return len(self.stack) == 0

```

class Queue:

```

    def __init__(self):
        self.queue = []

    def enqueue(self, item):

```

```

        self.queue.append(item)

        print(f"{item} enqueued into queue.")

def dequeue(self):
    if not self.is_empty():
        print(f"Dequeued item: {self.queue.pop(0)}")
    else:
        print("Queue is empty!")

def display(self):
    if self.is_empty():
        print("Queue is empty!")
    else:
        print("Queue elements:", self.queue)

def is_empty(self):
    return len(self.queue) == 0

class Node:
    def __init__(self, data):
        self.data = data
        self.next = None

class LinkedList:
    def __init__(self):
        self.head = None

    def insert(self, data):
        new_node = Node(data)

        if self.head is None:
            self.head = new_node
        else:
            temp = self.head
            while temp.next:
                temp = temp.next

```

```

        temp.next = new_node
    print(f"{data} inserted into linked list.")
def delete(self, key):
    if self.head is None:
        print("Linked List is empty!")
        return
    if self.head.data == key:
        self.head = self.head.next
        print(f"Deleted node with value {key}.")
        return
    temp = self.head
    prev = None
    while temp and temp.data != key:
        prev = temp
        temp = temp.next
    if temp is None:
        print("Element not found in linked list!")
        return
    prev.next = temp.next
    print(f"Deleted node with value {key}.")
def display(self):
    if self.head is None:
        print("Linked List is empty!")
        return
    temp = self.head
    print("Linked List elements:", end=" ")
    while temp:
        print(temp.data, end=" -> ")
        temp = temp.next

```

```

        print("None")
def menu():
    stack = Stack()
    queue = Queue()
    linked_list = LinkedList()
    while True:
        print("\nMenu:")
        print("1. Stack Operations")
        print("2. Queue Operations")
        print("3. Linked List Operations")
        print("4. Exit")
        choice = int(input("Enter your choice: "))
        if choice == 1:
            while True:
                print("\nStack Operations:")
                print("1. Push")
                print("2. Pop")
                print("3. Display")
                print("4. Back to Main Menu")
                op = int(input("Enter operation: "))
                if op == 1:
                    item = input("Enter element to push: ")
                    stack.push(item)
                elif op == 2:
                    stack.pop()
                elif op == 3:
                    stack.display()
                elif op == 4:
                    break

```

```

        else:
            print("Invalid choice! Try again.")
elif choice == 2:
    while True:
        print("\nQueue Operations:")
        print("1. Enqueue")
        print("2. Dequeue")
        print("3. Display")
        print("4. Back to Main Menu")
        op = int(input("Enter operation: "))
        if op == 1:
            item = input("Enter element to enqueue: ")
            queue.enqueue(item)
        elif op == 2:
            queue.dequeue()
        elif op == 3:
            queue.display()
        elif op == 4:
            break
        else:
            print("Invalid choice! Try again.")
elif choice == 3:
    while True:
        print("\nLinked List Operations:")
        print("1. Insert")
        print("2. Delete")
        print("3. Display")
        print("4. Back to Main Menu")
        op = int(input("Enter operation: "))

```

```

    if op == 1:
        item = input("Enter element to insert: ")
        linked_list.insert(item)
    elif op == 2:
        item = input("Enter element to delete: ")
        linked_list.delete(item)
    elif op == 3:
        linked_list.display()
    elif op == 4:
        break
    else:
        print("Invalid choice! Try again.")

elif choice == 4:
    print("Exiting program. Goodbye!")
    break
else:
    print("Invalid choice! Try again.")

# Run the menu
menu()

```

OUTPUT:

Menu:

1. Stack Operations
2. Queue Operations
3. Linked List Operations
4. Exit

Enter your choice: 1

Stack Operations:

1. Push
2. Pop
3. Display
4. Back to Main Menu

Enter operation: 1

Enter element to push: 10

10 pushed into stack.

Stack Operations:

1. Push
2. Pop
3. Display
4. Back to Main Menu

Enter operation: 1

Enter element to push: 20

20 pushed into stack.

Stack Operations:

1. Push
2. Pop
3. Display
4. Back to Main Menu

Enter operation: 3

Stack elements: ['10', '20']

Stack Operations:

1. Push
2. Pop
3. Display
4. Back to Main Menu

Enter operation: 2

Popped item: 20

Stack Operations:

1. Push
2. Pop
3. Display
4. Back to Main Menu

Enter operation: 4

Menu:

1. Stack Operations
2. Queue Operations
3. Linked List Operations
4. Exit

Enter your choice: 2

Queue Operations:

1. Enqueue
2. Dequeue
3. Display
4. Back to Main Menu

Enter operation: 1

Enter element to enqueue: 30

30 enqueued into queue.

Queue Operations:

1. Enqueue
2. Dequeue
3. Display
4. Back to Main Menu

Enter operation: 1

Enter element to enqueue: 40

40 enqueued into queue.

Queue Operations:

1. Enqueue
2. Dequeue
3. Display
4. Back to Main Menu

Enter operation: 3

Queue elements: ['30', '40']

Queue Operations:

1. Enqueue
2. Dequeue
3. Display
4. Back to Main Menu

Enter operation: 2

Dequeued item: 30

Queue Operations:

1. Enqueue
2. Dequeue
3. Display
4. Back to Main Menu

Enter operation: 4

Menu:

1. Stack Operations
2. Queue Operations
3. Linked List Operations
4. Exit

Enter your choice: 3

Linked List Operations:

1. Insert
2. Delete
3. Display
4. Back to Main Menu

Enter operation: 1

Enter element to insert: 50

50 inserted into linked list.

Linked List Operations:

1. Insert
2. Delete
3. Display
4. Back to Main Menu

Enter operation: 1

Enter element to insert: 60

60 inserted into linked list.

Linked List Operations:

1. Insert
2. Delete
3. Display
4. Back to Main Menu

Enter operation: 3

Linked List elements: 50 -> 60 -> None

Linked List Operations:

1. Insert
2. Delete
3. Display
4. Back to Main Menu

Enter operation: 2

Enter element to delete: 50

Deleted node with value 50.

Linked List Operations:

1. Insert
2. Delete
3. Display
4. Back to Main Menu

Enter operation: 3

Linked List elements: 60 -> None

Linked List Operations:

1. Insert

2. Delete
3. Display
4. Back to Main Menu

Enter operation: 4

Menu:

1. Stack Operations
2. Queue Operations
3. Linked List Operations
4. Exit

Enter your choice: 4

Exiting program. Goodbye!

9a.

"""

Write a Python Program to Reverse a Stack using Recursion

QAYAM 231P038/ 02

"""

```
def insert_at_bottom(stack, item):
```

```
    if not stack:
```

```
        stack.append(item)
```

```
    else:
```

```
        temp = stack.pop()
```

```
        insert_at_bottom(stack, item)
```


```
        stack.append(temp)
```

```
def reverse_stack(stack):
    if stack:
        temp = stack.pop()
        reverse_stack(stack)
        insert_at_bottom(stack, temp)
```

Example usage

```
stack = [1,5 ,12 ,14 ,72 ]
print("Original Stack:", stack)
reverse_stack(stack)
print("Reversed Stack:", stack)
```

OUTPUT:

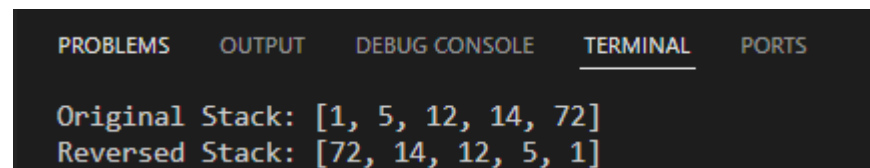

The screenshot shows a terminal window with a dark background. At the top, there are five tabs: 'PROBLEMS', 'OUTPUT', 'DEBUG CONSOLE', 'TERMINAL' (which is selected and underlined), and 'PORTS'. Below the tabs, the terminal displays the output of the program: 'Original Stack: [1, 5, 12, 14, 72]' followed by 'Reversed Stack: [72, 14, 12, 5, 1]'.

9b.

"""

Write a program to implement circular queue.

QAYAM 231P038/ 02

"""

```
class CircularQueue:
```

```
    def __init__(self, size):
        self.size = size
        self.queue = [None] * size
        self.front = self.rear = -1
```

```
    def enqueue(self, item):
        if (self.rear + 1) % self.size == self.front:
```

```

        print("Queue is Full!")
    else:
        if self.front == -1:
            self.front = 0

        self.rear = (self.rear + 1) % self.size
        self.queue[self.rear] = item
        print(f"Inserted {item}")

def dequeue(self):
    if self.front == -1:
        print("Queue is Empty!")
        return None
    else:
        removed_item = self.queue[self.front]
        if self.front == self.rear: # Only one element was present
            self.front = self.rear = -1
        else:
            self.front = (self.front + 1) % self.size
        print(f"Removed {removed_item}")
        return removed_item

def display(self):
    if self.front == -1:
        print("Queue is Empty!")
    else:
        print("Circular Queue elements:", end=" ")
        i = self.front
        while True:
            print(self.queue[i], end=" ")

```

```
        if i == self.rear:
            break
        i = (i + 1) % self.size
    print()
```

Example usage

```
cq = CircularQueue(5)
```

```
cq.enqueue(10)
```

```
cq.enqueue(20)
```

```
cq.enqueue(30)
```

```
cq.enqueue(40)
```

```
cq.enqueue(50) # Queue is full after this
```

```
cq.display()
```

```
cq.dequeue()
```

```
cq.dequeue()
```

```
cq.display()
```

```
cq.enqueue(60)
```

```
cq.enqueue(70)
```

```
cq.display()
```

Output:

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

PORTS

Inserted 10

Inserted 20

Inserted 30

Inserted 40

Inserted 50

Circular Queue elements: 10 20 30 40 50

Removed 10

Removed 20

Circular Queue elements: 30 40 50

Inserted 60

Inserted 70

Circular Queue elements: 30 40 50 60 70