
Wide Graph Neural Networks: Aggregation Provably Leads to Exponentially Trainability Loss

Wei Huang *

University of Technology Sydney, Australia
wei.huang-6@student.uts.edu.au

Yayong Li *

University of Technology Sydney, Australia
yayong.li@student.uts.edu.au

Weitao Du *

University of Technology Sydney, Australia
weitao.du@northwestern.edu

Richard Yi Da Xu

University of Technology Sydney, Australia
YiDa.Xu@uts.edu.au

Jie Yin

The University of Sydney, Australia
jie.yin@sydney.edu.au

Ling Chen

University of Technology Sydney, Australia
ling.chen@uts.edu.au

Abstract

Graph convolutional networks (GCNs) and their variants have achieved great success in dealing with graph-structured data. However, it is well known that deep GCNs will suffer from *over-smoothing* problem, where node representations tend to be indistinguishable as we stack up more layers. Although extensive research has confirmed this prevailing understanding, few theoretical analyses have been conducted to study the expressivity and trainability of deep GCNs. In this work, we demonstrate these characterizations by studying the Gaussian Process Kernel (GPK) and Graph Neural Tangent Kernel (GNTK) of an infinitely-wide GCN, corresponding to the analysis on expressivity and trainability, respectively. We first prove the expressivity of infinitely-wide GCNs decaying at an exponential rate by applying the mean-field theory on GPK. Besides, we formulate the asymptotic behaviors of GNTK in the large depth, which enables us to reveal the dropping trainability of wide and deep GCNs at an exponential rate. Additionally, we extend our theoretical framework to analyze residual connection-resemble techniques. We found that these techniques can mildly mitigate exponential decay, but they failed to overcome it fundamentally. Finally, all theoretical results in this work are corroborated experimentally on a variety of graph-structured datasets.

1 Introduction

Recently, Graph Convolutional Networks (GCN) have shown incredible abilities to learn node or graph representations and achieved superior performances for various downstream tasks, such as node classifications [22, 40, 13, 41], graph classifications [44, 10, 11, 27, 51, 52], link predictions [23], etc. However, most GCNs achieve their best at a shallow depth, e.g., 2 or 3 layers, and their performance on those tasks promptly degrade as the number of layers grow. Towards this phenomenon, some attempts have been made expecting to deepen understanding of current GNN architectures and their expressive power. Li et al. [30] showed that GCN was a special form of Laplacian smoothing, which mixed node representations with nearby neighbors. This mechanism potentially posed the risk of *over-smoothing* as more layers were stacked together, where node representations in an extensive range

*Equal contribution.

tended to be indistinguishable from each other. Alon et al. [2] analyzed the propagation mechanism of GCN and attribute performance deterioration to the over-squashing problem. As each node iteratively aggregates messages from its neighbors, exponentially-growing information is embedded into a fixed-length vector, which causes information loss and thus undermines the expressive power of generated representations. Oono et al. [35] investigated the expressive power of GNNs using the asymptotic behaviors as the layer goes to infinity. They proved that under certain conditions, the expressive power of GCN is determined by the topological information of the underlying graphs inherent in the graph spectra. More recently, a series of latest works [31, 53, 55, 29, 4] explored the underlying reasons for performance degrading and corresponding solutions, but rare of them theoretically investigated the expressivity and trainability of deep GNNs.

To fill this gap, we resort to the infinitely-wide multi-layer GCN. The research on infinitely-wide networks can be traced back to seminal work by [33], who showed the one hidden layer networks with random weights at initialization (without training) are Gaussian Processes (GPs) in the infinite width limit. Later, the connection between GPs and multi-layer infinitely-wide networks with Gaussian initialization [25, 32] and orthogonal weights [19] was reported. Meanwhile, from a “mean-field theory” perspective [37, 39], the GP Kernel (GPK) of a deep network at random initialization in the infinite width limit can be used to measure the expressivity. As a result of studying the GPK under mean-field theory, an order-to-chaos expressivity phase transition split by a critical line was found [37, 39]. It is also hypothesized that wide networks can be trained successfully when the expressivity is maintained as the network goes deeper. This ansatz was tested and verified by practical experiments with a wide range of architectures, including convolutions [42], recurrent networks [5], and residual networks [47], and more.

Despite the significant development from the mean-field theory, it is beyond the scope of this study to examine the optimization property of infinitely-wide networks. Recent trends in Neural Tangent Kernel (NTK) have led to a proliferation of studies on the optimization and generalization of infinitely-wide and ultra-wide networks. In particular, Jacot et al. [20] made a groundbreaking discovery that the evolution of neural networks by gradient descent training with a sufficient small learning rate or gradient flow in the infinite width limit can be captured by an NTK. Meanwhile, a considerable literature has grown up around the theme of NTK and gained a great deal of successes in deep learning theory for ultra-wide (over-parameterized) networks [26, 3, 48, 18, 1, 7, 57]. Recently, Du et al. [6] formulated Graph Neural Tangent Kernel (GNTK) for infinitely-wide GNNs and shed light on theoretical guarantees for GNN. Prior to the discovery of GNTK, people had been puzzled by the non-convexity of graph neural networks, which is analytically intractable. In the learning regime of GCN governed by GNTK, the optimization becomes an almost convex problem, making GNTK a promising method to study deep GCN’s trainability.

In this work, we leverage these techniques on infinitely-wide networks and investigate whether ultra-wide GCNs are trainable in the large depth. In particular, we formulate the large-depth asymptotics behavior of GPK inspired by recent advances on network’s expressivity through mean-field theory [37, 39]. Furthermore, we study the trainability of ultra-wide GCN by computing the GNTK in the large-depth limit illuminated by innovative works on the deep networks [14, 43]. Besides, we extend our theoretical framework to the residual connection-like techniques and show these techniques can mildly slow down the exponential decay instead of overcoming it thoroughly. Our contributions are as follows:

- We compute the large-depth asymptotics of GPK to measure the expressivity of deep GCNs. We prove that the infinitely-wide GCNs lose expressivity exponentially due to aggregation.
- As far as we know, we are the first to investigate the trainability of deep and wide GCN through GNTK. We prove that all elements of a GNTK matrix regarding a pair of graphs converge exponentially to the same value, making the GNTK matrix singular in the large depth. Based on this result, we make a corollary that ultra-wide GCNs’ trainability exponentially collapses on node classification tasks.
- We apply our theoretical analysis to the residual connection-resemble techniques for GCNs and show that residual connection can, to some extent, slow down the exponential decay rate. However, our theory shows that residual connection can not fundamentally solve the exponential decay problem. This result can be used to explain to what extent the recent residual connection-resemble method works.

- The experiments are conducted to validate our theoretical analysis quantitatively. Together with the above findings, we provide comprehensive guidance for the development of deep GCNs.

2 Related Work

Mean-Field Theory. In deep learning theory, there is a branch of study named mean-field theory working on the expressivity of infinitely-wide networks [37, 39, 36, 47, 42, 5, 50, 15]. It is worth noting that the mean-field theory used in our work belongs to this branch, and is different from the mean-field theory in [21]. In particular, they use dynamical mean field theory to analyze the graph partitioning problem while we study the performance of GCNs on node classification. Another work by Hu et al. [17] adopted the Gaussian process kernel of infinitely-wide GCN to improve the semi-supervised classification. The main difference is that we study the Gaussian process kernels in the large depth limit while they focus on limited depth.

Neural Tangent Kernel. While mean-field theory studies the Gaussian process kernels of infinitely-wide networks at initialization, NTKs are used to describe the dynamics of infinitely-wide networks during gradient descent training. In the infinite width limit, NTK converges to an explicit limiting kernel; besides, it stays constant during training, providing a convergence guarantee for over-parameterized networks [20, 26, 3, 48, 18, 1, 7, 57]. Besides, NTK has been applied to various architecture and brought a wealth of results, such as orthogonal initialization [19], convolutions [3], graph neural networks [6], attention [16], and see [49] for a summary. As for graph networks, GNTK helps us understand how GNN learn a class of smooth functions on graphs [6] and how GNN extrapolate differently from multi-layer perceptron [46].

Deep Graph Neural Networks. Since GNNs suffer from over-smoothing problem, a large and growing body of literature has made efforts deepening graph neural networks. There is a line of methods that resort to *residual connection* to keep their feature expressivity in deep layers. Xu et al. [45] used a skip connection method that combined with node representations from different neighborhood ranges to preserve the locality of the node representations. Klicpera et al. [24] derived a personalized propagation of neural predictions (PPNP) based on personalized Pagerank. Other similar works using residual connection method could also be seen in [28, 12, 4, 31]. These methods could extend GNNs to tens of layers, but their performance failed to grow in parallel. It is also a typical approach that applies some *regularisation techniques* to deepen GNNs. Rong et al. [38] randomly removed a certain number of edges from the input graph at each training epoch, which was theoretically proved to be able to relieve the information loss problem. Some other regularization methods could also be seen in Zhao et al. [54] and Zhou et al. [56].

3 Background

We briefly review the mean-field theory of Gaussian Process Kernel and Neural Tangent Kernel for infinitely-wide networks. Furthermore, we introduce Graph Convolutional Networks along with our setup and notation.

3.1 Mean Field Theory and Expressivity

We begin by considering a fully-connected network of depth L of widths m_l in each layer. The weight and bias in the l -th layer are denoted by $W^{(l)} \in \mathbb{R}^{m_l \times m_{l-1}}$ and $b^{(l)} \in \mathbb{R}^{m_l}$. Letting the pre-activations be given by $h_i^{(l)}$. Then the information propagation in this network is governed by,

$$h_i^{(l)} = \frac{\sigma_w}{\sqrt{m_l}} \sum_{j=1}^{m_l} W_{ij}^{(l)} \phi(h_j^{(l-1)}) + \sigma_b b_i^{(l)} \quad (1)$$

where $\phi : \mathbb{R} \rightarrow \mathbb{R}$ is the activation function, σ_w and σ_b define the variance scale of the weights and biases respectively. Given the parameterization that weights and biases are randomly generated by i.i.d. normal distribution, i.e. $W_{ij}^{(l)}, b_i^{(l)} \sim \mathcal{N}(0, 1)$, the pre-activations are Gaussian distributed in the infinite width limit as $m_1 \rightarrow \infty, m_2 \rightarrow \infty, \dots, m_{L-1} \rightarrow \infty$. This results from the central limit

theorem (CLT). Consider a dataset $X \in \mathbb{R}^{n \times m_0}$ of size $n = |X|$, the covariance matrix of Gaussian process kernel regarding infinitely-wide network is defined by $\Sigma^{(l)}(x, x') = \mathbb{E}[h_i^{(l)}(x)h_i^{(l)}(x')]$. According to the signal propagation Equation (1), the covariance matrix or GPK with respect to layer can be described by a recursion relation,

$$\Sigma^{(l)}(x, x') = \sigma_w^2 \mathbb{E}_{h \sim \mathcal{N}(0, \Sigma^{(l-1)})}[\phi(h(x))\phi(h(x'))] + \sigma_b^2 \quad (2)$$

The mean-field theory is a paradigm to study the limiting behavior of GPK, which is a measure of expressivity for networks [37, 39]. In particular, expressivity describes to what extent can two different inputs be distinguished. The property of evolution for expressivity $\Sigma^{(l)}(x, x')$ is determined by how fast it converges to its fixed point $\Sigma^*(x, x') \equiv \lim_{l \rightarrow \infty} \Sigma^{(l)}(x, x')$. It is shown that in almost the entire parameter space spanned by hyper-parameters σ_w and σ_b , the evolution exhibits a dramatical convergence rate formulated by an exponential function except for a critical line known as the *edge of chaos* [37, 39, 47]. Consequently, an infinitely-wide network loses its expressivity exponentially in most cases while retaining the expressivity at the edge of chaos.

3.2 Neural Tangent Kernel and Trainability

Most studies on infinitely-wide networks through mean-field theory have only focused on initialization without training. Jacot et al. [20] took a step further by considering the infinitely-wide network trained with gradient descent. Let η be the learning rate, and \mathcal{L} be the cost function. Then dynamics of gradient flow for parameters $\theta = \text{vec}(\{W_{ij}^{(l)}, b_i^{(l)}\}) \in \mathbb{R}^{(\sum_l m_l(m_{l-1}+1)) \times 1}$, the vector of all parameters, is given by,

$$\frac{\partial \theta}{\partial t} = -\eta \nabla_{\theta} \mathcal{L} = -\eta \nabla_{\theta} f_t(X)^T \nabla_{f_t(X)} \mathcal{L} \quad (3)$$

Then the dynamics of output functions $f(X) = \text{vec}(f(x)_{x \in X}) \in \mathbb{R}^{nm_L \times 1}$ follow,

$$\frac{\partial f_t(X)}{\partial t} = \nabla_{\theta} f_t(X) \frac{\partial \theta}{\partial t} = -\eta \Theta_t(X, X) \nabla_{f_t(X)} \mathcal{L} \quad (4)$$

where the NTK at time t is defined as,

$$\Theta_t(X, X) \equiv \nabla_{\theta} f_t(X) \nabla_{\theta} f_t(X)^T \in \mathbb{R}^{nm_L \times nm_L} \quad (5)$$

In the general case, the NTK varies with the training time, thus providing no substantial insight into the convergence property of neural networks. Interestingly, as shown by [20], the NTK converges to a limit kernel and does not change during training in the infinite width limit. This leads to a simple but profound result in the case of an MSE loss, $\mathcal{L} = \frac{1}{2} \|f_t(X) - Y\|_F^2$, where Y is the label regarding the input X ,

$$f_t(X) = (I - e^{-\eta \Theta_{\infty}(X, X)t})Y + e^{-\eta \Theta_{\infty}(X, X)t}f_0(X) \quad (6)$$

where Θ_{∞} is the limiting kernel. This is the solution of an ordinary differential equation. As the training time t tends to infinity, the output function fits the label very well, i.e., $f_{\infty}(X) = Y$. As proved by [14] (Lemma 1), the network is trainable only if $\Theta_{\infty}(X, X)$ is non-singular. Quantitatively, the condition number $\kappa \equiv \lambda_{\max}/\lambda_{\min}$ can be a measure of trainability as applied and confirmed by [43].

3.3 Graph Convolutional Networks

We define an undirected graph as $G = (V, E)$, where V is a collection of nodes while E is a set of edges. We denote the number of nodes in graph G by $n = |V|$. The node features are denoted as $h_v \in \mathbb{R}^d$ for each $v \in V$, with d being the dimension of node features. Node classification task is to predict labels of unseen nodes by learning from a set of graphs $\mathcal{G} = \{G_i\}_{i=1}^{N_G}$ and their labels $\mathcal{Y} = \{y_i\}_{i=1}^{N_G}$, where N_G is the number of graph in the dataset. In this work, we develop our theory towards understanding the expressivity and trainability of GCNs on the node classification task.

GCNs iteratively update node features through aggregating and transforming the representation of their neighbors. Figure 1 illustrates an overview of the information propagation in a general GCN. We define a propagation unit to be the combination of a R -layer MLP and one aggregation operation. We use subscript (r) to denote the layer index of MLP in each propagation unit and use superscript

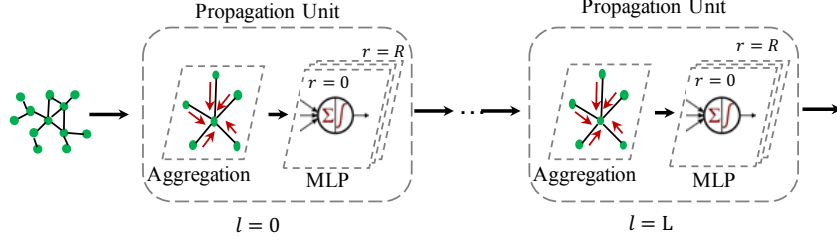


Figure 1: Overview of the information propagation in a general GCN

(l) to indicate the index of aggregation operation, which is also the index of the propagation unit. L is the total number of propagation units. Specifically, the node representation propagation in GCNs through a multi-layer perceptron (MLP) follows the expression,

$$h_{(0)}^{(l)}(u) = \frac{1}{|\mathcal{N}(u)| + 1} \sum_{v \in \mathcal{N}(u) \cup u} h_{(R)}^{(l-1)}(v) \quad (7)$$

$$h_{(r)}^{(l)}(u) = \frac{\sigma_w}{\sqrt{m}} W_{(r)}^{(l)} \phi(h_{(r-1)}^{(l)}(u)) + \sigma_b b_{(r)}^{(l)} \quad (8)$$

where $W_{(r)}^{(l)}$ and $b_{(r)}^{(l)}$ are the learnable weights and biases respectively, ϕ is the activation function, $\mathcal{N}(u)$ is the neighborhood of node u , and $\mathcal{N}(u) \cup u$ is the union of node u and its neighbors. Equation (7) describes the node feature aggregation operation among its neighborhood according to a GCN variant [13]. Equation (8) is a standard non-linear transformation with NTK-parameterization [20], where m is the width, i.e., number of neurons in each layer, σ_w and σ_b define the variance scale of the weights and biases. With regard to the activation function, we focus on both ReLU and tanh, which are denoted as $\phi(x) = \max\{0, x\}$ and $\phi(x) = \tanh(x)$ respectively. Without loss of generality, our theoretical framework can handle other common activations. By comparison, the GNTK work [6] only adopted ReLU activation.

4 Theoretical Results

4.1 Expressivity of Infinitely Wide GCNs

To investigate the expressivity property of infinitely-wide GCNs, we define the covariance matrix between two input graphs G, G' by measuring correlation between node features as,

$$\Sigma_{(r)}^{(l)}(G, G')_{uu'} \equiv \mathbb{E}[h_{(r)}^{(l)}(u)h_{(r)}^{(l)}(u')], \quad (9)$$

where $\Sigma_{(r)}^{(l)}(G, G') \in \mathbb{R}^{n \times n'}$, $|V| = n$ and $|V'| = n'$. According to the CLT, the node representation $h_{(r)}^{(l)}(u)$ is Gaussian distributed in the infinite width limit. Applying this result to Equation (7), we can obtain the recursive expression for covariance matrix as follows,

$$\Sigma_{(0)}^{(l)}(G, G')_{uu'} = c_u c_{u'} \sum_v \sum_{v'} \Sigma_{(R)}^{(l-1)}(G, G')_{vv'} \quad (10)$$

where $c_u = \frac{1}{|\mathcal{N}(u)|+1}$, $c_{u'} = \frac{1}{|\mathcal{N}(u')|+1}$, $v \in \mathcal{N}(u) \cup u$, and $v' \in \mathcal{N}(u') \cup u'$. This equation is resulting from the neighborhood aggregation operation.

Next, we apply the GP result of infinitely-wide GCN to Equation (8). The propagation of the covariance matrix corresponds to the R times non-linear transformations, which is expressed as,

$$\Sigma_{(r)}^{(l)}(G, G')_{uu'} = \sigma_w^2 \mathbb{E}_{z_1, z_2} [\phi(z_1)\phi(z_2)] + \sigma_b^2 \quad (11)$$

where z_1, z_2 are drawn from a 2-dimension Gaussian distribution in the previous MLP layer, i.e., $z_1, z_2 \sim \mathcal{N}(0, \tilde{\Sigma}_{(r-1)}^{(l)}(G, G')) \in \mathbb{R}^{2 \times 2}$, where the variance $\tilde{\Sigma}_{(r-1)}^{(l)}(G, G')$ is defined as,

$$\tilde{\Sigma}_{(r)}^{(l)}(G, G')_{uu'} = \begin{pmatrix} \Sigma_{(r)}^{(l)}(G, G)_{uu} & \Sigma_{(r)}^{(l)}(G, G')_{uu'} \\ \Sigma_{(r)}^{(l)}(G', G)_{u'u} & \Sigma_{(r)}^{(l)}(G', G')_{u'u'} \end{pmatrix} \quad (12)$$

We study the behavior of $\Sigma_{(r)}^{(l)}(G, G')$ as $l \rightarrow \infty$ following the diagram of mean-field theory. However, both aggregation (Equation 10) and transformation (Equation 23) contribute simultaneously to the limiting result. To make the analysis easy to understand, we first disassemble the two operations to study their limiting behaviors separately.

Consider a GCN without non-linear transformation, i.e. $R = 0$ and $\Sigma_{(r)}^{(l)}(G, G') = \Sigma^{(l)}(G, G')$. In order to facilitate calculation, we rewrite Equation (10) as the following format,

$$\vec{\Sigma}^{(l)}(G, G') = \mathcal{A}(G, G') \vec{\Sigma}^{(l-1)}(G, G') \quad (13)$$

where $\vec{\Sigma}^{(l)}(G, G') \in \mathbb{R}^{nn' \times 1}$ is the result of being vectorized, and $\mathcal{A}(G, G') = \mathcal{A}^{(1)}(G, G') = \dots = \mathcal{A}^{(l)}(G, G') \in \mathbb{R}^{nn' \times nn'}$ is a probability transition matrix, and the limiting behavior of $\Sigma^{(l)}(G, G')$ is shown by the following lemma,

Lemma 1 (Convergence of aggregation). *Assume $R=0$, then*

$$\lim_{l \rightarrow \infty} \Sigma^{(l)}(G, G')_{uu'} = \pi(G, G') \vec{\Sigma}^{(0)}(G, G')$$

where $\pi(G, G') \in \mathbb{R}^{1 \times nn'}$, satisfying,

$$\pi(G, G') \mathcal{A}^{(l)}(G, G') = \pi(G, G')$$

In Lemma 1, we demonstrate that the propagation of the transition matrix $\mathcal{A}(G, G')$ conforms to the transitions of the Markov chain [34, 9]. In the limiting case, i.e. $l \rightarrow \infty$, the transition of the $\mathcal{A}(G, G')$ evolves as a stationary state $\pi(G, G') \mathcal{A}(G, G') = \pi(G, G')$, where $\pi(G, G')$ does not change under application of the transition matrix. As a result, according to Equation (13), the covariance matrix $\Sigma^{(l)}(G, G')$ collapses exponentially to a constant matrix.

Then we consider a network with only non-linear transformation, which is known as a pure MLP. This leads to $\Sigma_{(r)}^{(l)}(G, G) = \Sigma_{(r)}(G, G)$, where we use subscript (r) to denote the layer index. The large depth behavior has been well studied in [15], and we introduce the result when the *edge of chaos* is realized. In particular, we set the value of hyper-parameters to satisfy,

$$\sigma_w^2 \int \mathcal{D}_z [\phi'(\sqrt{q^*} z)]^2 = 1 \quad (14)$$

where q^* is the fixed point of diagonal elements in the covariance matrix, and $\int \mathcal{D}z = \frac{1}{\sqrt{2\pi}} \int dz e^{-\frac{1}{2}z^2}$ is the measure for a normal distribution. For the ReLU activation, Equation (14) requires $\sigma_w^2 = 2$ and $\sigma_b^2 = 0$.

The key idea is to study the asymptotic behavior of the normalized correlation defined as,

$$C_r(G, G')_{uu'} \equiv \frac{\Sigma_{(r)}(G, G')_{uu'}}{\sqrt{\Sigma_{(r)}(G, G)_{uu} \Sigma_{(r)}(G', G')_{u'u'}}}. \quad (15)$$

Lemma 2 (Proposition 1 and 3 in [15]). *Consider an infinitely-wide fully-connected network with a Lipschitz nonlinearity ϕ , then,*

- $\phi(x) = \max\{0, x\}$, $1 - C_r(G, G')_{uu'} \sim \frac{9\pi^2}{2r^2}$ as $r \rightarrow \infty$
- $\phi(x) = \tanh(x)$, $1 - C_r(G, G')_{uu'} \sim \frac{\beta}{r}$ as $r \rightarrow \infty$ where $\beta = \frac{2 \int \mathcal{D}_z [\phi'(\sqrt{q^*} z)]^2}{q^* \mathcal{D}_z [\phi''(\sqrt{q^*} z)]^2}$.

Lemma 2 shows the covariance matrix converges to a constant matrix at a polynomial rate of $1/r^2$ for ReLU and of $1/r$ for tanh activation on the edge of chaos. This implies that a network without aggregation could retain its expressivity at a large depth.

Taking both aggregation and transformation into consideration, we derive our theorem on the asymptotic behavior of infinitely-wide GCN in the large depth limit, which is as follows:

Theorem 1 (Convergence rate for GPK). *If $\mathcal{A}(G, G')$ is irreducible and aperiodic, with a stationary distribution vector $\pi(G, G')$, then there exist constants $0 < \alpha < 1$ and $C > 0$, and constant vector $v \in \mathbb{R}^{nn' \times 1}$ depending on the number of MLP iterations R , such that*

$$|\Sigma_{(r)}^{(l)}(G, G')_{uu'} - \pi(G, G') v| \leq C \alpha^l$$

In Theorem 1, we rigorously characterize the convergence properties of GCNs' expressivity in the large depth limit. It reveals the covariance matrix $\Sigma_{(r)}^{(l)}(G, G')$ converges to a constant matrix at an exponential rate. Notably, the vector v depends on the number of non-linear transformations R , which implies that non-linear transformation may mildly slow down the convergence rate.

4.2 Trainability of Infinitely Wide GCNs

According to the definition of NTK (Equation 5), we can formulate the propagation of GNTK with respect to aggregation (Equation 7) and non-linear transformation (Equation 8) as follows,

$$\Theta_{(0)}^{(l)}(G, G')_{uu'} = c_u c_{u'} \sum_v \sum_{v'} \Theta_{(R)}^{(l-1)}(G, G')_{vv'} \quad (16)$$

where $v \in \mathcal{N}(u) \cup u$, and $v' \in \mathcal{N}(u') \cup u'$, and,

$$\Theta_{(r)}^{(l)}(G, G')_{uu'} = \Theta_{(r-1)}^{(l)}(G, G')_{uu'} \dot{\Sigma}_{(r)}^{(l)}(G, G')_{uu'} + \Sigma_{(r)}^{(l)}(G, G')_{uu'} \quad (17)$$

where $\Sigma_{(r)}^{(l)}(G, G')_{uu'}$ is defined by Equation (23) and $\dot{\Sigma}_{(r)}^{(l)}(G, G')_{uu'}$ is governed by,

$$\dot{\Sigma}_{(r)}^{(l)}(G, G')_{uu'} \equiv \sigma_w^2 \mathbb{E}_{z_1, z_2} [\dot{\phi}(z_1) \dot{\phi}(z_2)]. \quad (18)$$

Note that the propagation of the GNTK corresponding to aggregation (Equation 16) is the same as that of GPK (Equation 10). Meanwhile, the GNTK with regarding to non-linear transformation (Equation 17) can be computed in closed form in terms of GPK. The following theorem demonstrates that the aggregation leads to an exponential decay of GNTK as the depth becomes large.

Theorem 2 (Convergence rate for GNTK). *If $\mathcal{A}(G, G')$ is irreducible and aperiodic, with a stationary distribution $\pi(G, G')$, then there exist constants $0 < \alpha < 1$ and $C > 0$, and constant matrix v and v' depending on R , such that*

$$|\Theta_{(r)}^{(l)}(G, G')_{uu'} - \pi(G, G')(Rlv + v')| \leq C\alpha^l$$

As depth l goes to infinity, all elements in the GNTK converge to a unique quantity at an exponential rate. This result is a little different to the convergence result of the GPK in Theorem 1, in which the convergence limit of the GPK is a constant rather than a quantity that varies with depth. We thus have $\Theta_{(R)}^{(L)}(G, G') \approx \pi(G, G')(RLv)\mathbf{1}_{nn'}$ as $L \rightarrow \infty$, where $\mathbf{1}_{nn'}$ is the $(n \times n')$ -dimensional matrix whose elements are one. The exponential convergence rate of $\Theta_{(R)}^{(L)}(G, G')$ implies that the trainability of infinitely wide GCNs degenerate dramatically, as shown in following corollary.

Corollary 1 (Trainability of ultra-wide GCNs). *Consider a GCN of the form (7) and (8), with depth L , non-linear transformations number R , an MSE loss, and a Lipchitz activation $\phi(x)$, trained with gradient descent on a node classification task. Then the output function follows,*

$$f_t(\mathcal{G}) = e^{-\eta \Theta_{(R)}^{(L)}(\mathcal{G}, \mathcal{G})t} f_0(\mathcal{G}) + (I - e^{-\eta \Theta_{(R)}^{(L)}(\mathcal{G}, \mathcal{G})t} \mathcal{Y})$$

where $\Theta_{(R)}^{(L)}(\mathcal{G}, \mathcal{G}) \in \mathbb{R}^{\sum_{i=1}^{N_G} n_i \times \sum_{i=1}^{N_G} n_i}$ with the expression,

$$\Theta_{(R)}^{(L)}(\mathcal{G}, \mathcal{G}) = \begin{pmatrix} \Theta_{(R)}^{(L)}(G_1, G_1) & \cdots & \Theta_{(R)}^{(L)}(G_1, G_N) \\ \vdots & \ddots & \vdots \\ \Theta_{(R)}^{(L)}(G_N, G_1) & \cdots & \Theta_{(R)}^{(L)}(G_N, G_N) \end{pmatrix}$$

There exists a positive integer L_0 such that, $\Theta_{(R)}^{(L)}(\mathcal{G}, \mathcal{G})$ is singular when $L > L_0$. Moreover, there exist a constant $C > 0$ such that for all $t > 0$,

$$\|f_t(\mathcal{G}) - \mathcal{Y}\| > C$$

According to the above corollary, as $L \rightarrow \infty$, the GNTK matrix will become a singular matrix. This would lead to a discrepancy between outputs $f_t(\mathcal{G})$ and labels \mathcal{Y} , which means GNTK loses the ability to fit the label. Therefore, an ultra-wide GCN with a large depth cannot be trained successfully on node classification tasks.

4.3 Analysis on techniques to deepen GCNs

We have characterized the expressivity and trainability of deep GCNs through GPKs and GNTKs, respectively. We show that both expressivity and trainability of ultra-wide GCNs drop at an exponential rate. Recently, enormous efforts have been made to deepen GCNs, of which residual connection-resemble techniques are widely applied to resolve the overs-smoothing problem, including PPNP [24], DropEdge [38], and residual GCN [28]. In this section, we will apply our theoretical framework to analyze that to what extent these methods could alleviate over-smoothing problem.

4.3.1 Analysis on PPNP and DropEdge

We first consider techniques of PPNP and DropEdge. Although they are formed with different principles, the core idea is the same under the infinite-width limit. DropEdge drops out a certain rate of edges of the graph by random [38]. From the perspective of probability flow, it reduces the probability flow from neighboring nodes to itself, and correspondingly, increases the probability flow from the node to itself. PPNP increases the chance of teleporting back to the root node based on personalized PageRank, such that the network could keep balance the needs of staying close to the root node and leveraging the neighboring information [24]. Therefore, DropEdge and PPNP actually lead to the same consequence, which is to preserve node locality to make node representations discriminative. We formulate aggregation of PPNP and DropEdge as follows,

$$h_{(0)}^{(l)}(u) = (1 - \delta)c_u \sum_{v \in \mathcal{N}(u) \cup u} h_{(R)}^{(l-1)}(v) + \delta h_{(R)}^{(l-1)}(u) \quad (19)$$

where $c_u = \frac{1}{\mathcal{N}(u)+1}$, and $0 < \delta \leq 1$. Here δ is teleport (or restart) probability in PPNP [24], and drop rate in DropEdge [38]. Then the propagation of aggregation with Equation (19) can be reformulated as,

$$\vec{\Sigma}^{(l)}(G, G') = (1 - \tilde{\delta})\mathcal{A}(G, G')\vec{\Sigma}^{(l-1)}(G, G') + \tilde{\delta}\vec{\Sigma}^{(l-1)}(G, G'), \quad (20)$$

where $0 < \tilde{\delta} < 1$ is an effective drop rate or teleport probability after re-normalization. This is equivalent to the residual connection between aggregations. Thus we attribute these techniques as residual connection-resemble methods. We take Equation (20) as a new aggregation operation matrix, $\vec{\Sigma}^{(l)}(G, G') = \tilde{\mathcal{A}}(G, G')\vec{\Sigma}^{(l-1)}(G, G')$, where $\tilde{\mathcal{A}}(G, G') = (1 - \tilde{\delta})\mathcal{A}(G, G') + \tilde{\delta}I$. We prove that $\tilde{\mathcal{A}}(G, G')$ is also a transition matrix with a greater second largest eigenvalue compared to the original matrix $\mathcal{A}(G, G')$.

Theorem 3 (Convergence rate for residual connection-resemble aggregation). *Consider a covariance matrix of GPK with the form (20) without non-linear transformation, i.e., $R = 0$. Then with a stationary vector $\tilde{\pi}(G, G')$ for $\tilde{\mathcal{A}}(G, G')$, there exist constants $0 < \alpha < 1$ and $C > 0$, such that*

$$|\Sigma_{(r)}^{(l)}(G, G')_{uu'} - \tilde{\pi}(G, G')\vec{\Sigma}^{(0)}(G, G')| \leq C\alpha^l$$

Furthermore, we denote the second largest eigenvalue of $\mathcal{A}(G, G')$ and $\tilde{\mathcal{A}}(G, G')$ as λ_2 and $\tilde{\lambda}_2$, respectively. Then,

$$\tilde{\lambda}_2 > \lambda_2$$

Remark. In Theorem 3, we show that the second largest of the new transition matrix $\tilde{\mathcal{A}}(G, G')$ is greater than that of the original transition matrix $\mathcal{A}(G, G')$. This is consistent with what demonstrated in Theorem 1 of [38] that DropEdge alleviates the ϵ -smoothing issue.

Since the decay speed is determined by the second largest eigenvalue of the transition matrix [34, 9], the DropEdge, PPNP methods can slow down the decay rate.

4.3.2 Analysis on residual-connection GCN

We firstly consider residual connection that is only applied on non-linear transformations (MLP). In this case, the signal propagation change from Equation (8) to:

$$h_{(r)}^{(l)}(u) = h_{(r-1)}^{(l)}(u) + \frac{\sigma_w}{\sqrt{m}}W_{(r)}^{(l)}\phi(h_{(r-1)}^{(l)}(u)) \quad (21)$$

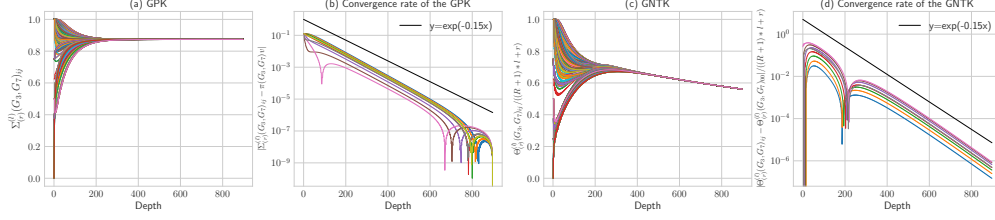


Figure 2: Convergence rate for the GPK and the GNKT. (a) Value changes of the GPK elements as the depth grows; although their initial values are different, they all tend to the same value as depth increases. (b) The distance changes between GPK elements and their limiting value as the depth grows; the converge rate can be bounded by an exponential function $y = \exp(-0.15x)$. (c) Value changes of re-normalized GNTK elements as the depth grows. (d) The distance changes between re-normalized GNTK elements and a random element from GNTK as the depth grows. The converge rate can be bounded by an exponential function $y = \exp(-0.15x)$.

As a result, the recursive equation for the corresponding GNTK can be expressed as,

$$\Theta_{(r)}^{(l)}(G, G')_{uu'} = \Theta_{(r-1)}^{(l)}(G, G')_{uu'} (\dot{\Sigma}_{(r)}^{(l)}(G, G')_{uu'} + 1) + \Sigma_{(r)}^{(l)}(G, G')_{uu'} \quad (22)$$

This formula is similar to the vanilla GNTK in the infinitely wide limit. Only an additional residual term appears according to the residual connection. It turns out that this term can help to slow down the convergence rate for non-linear transformation. We then consider the effect made by the residual connection on aggregation.

Theorem 4 (Convergence rate for GNTK with residual connection between transformations). *Consider a GCN of the form (7) and (26). If $\mathcal{A}(G, G')$ is irreducible and aperiodic, with a stationary distribution $\pi(G, G')$, then there exist constants $0 < \alpha < 1$ and $C > 0$, and constant matrix v and v' depending on R , such that,*

$$|\Theta_{(r)}^{(l)}(G, G')_{uu'} - \pi(G, G')(Rl(1 + \frac{\sigma_w^2}{2})^{Rl}v + v')| \leq C\alpha^l$$

Theorem 4 demonstrates that even though the residual connection can slow down the decay during non-linear transformation, it cannot stop the exponential decay rate resulting from aggregation.

Finally, we consider the residual connection applied to both aggregation and non-linear transformation simultaneously:

Corollary 2 (Convergence rate for GNTK with residual connection between aggregation and transformations). *Consider a GCN of the form (19) and (26). If $\tilde{\mathcal{A}}(G, G')$ is irreducible and aperiodic, with a stationary distribution $\tilde{\pi}(G, G')$, then there exist constants $0 < \alpha < 1$ and $C > 0$, and constant vector $v \in \mathbb{R}^{nn' \times 1}$ depending on R , such that*

$$|\Sigma_{(r)}^{(l)}(G, G')_{uu'} - \tilde{\pi}(G, G')(1 + \frac{\sigma_w^2}{2})^{Rl}v| \leq C\beta^l$$

$$|\Theta_{(r)}^{(l)}(G, G')_{uu'} - \tilde{\pi}(G, G')(Rl(1 + \frac{\sigma_w^2}{2})^{Rl}v)| \leq C\beta^l$$

According to Corollary 2, the residual connection-resemble techniques can slow down the decay speed to a certain extent, though they cannot solve exponential trainability loss for node classification.

5 Experiments

5.1 Experimental Setup

We illustrate empirically the theoretical results obtained in section 4. We use one bioinformatics dataset (i.e., MUTAG) and three citation network datasets (i.e., Cora, Citeseer, and Pubmed). Details of these datasets are summarized in Table 1. In order to verify Theorems 1, 2, and 4 in general, i.e., G, G' can be two different graphs, we use the MUTAG data set. At the same time, the dataset with

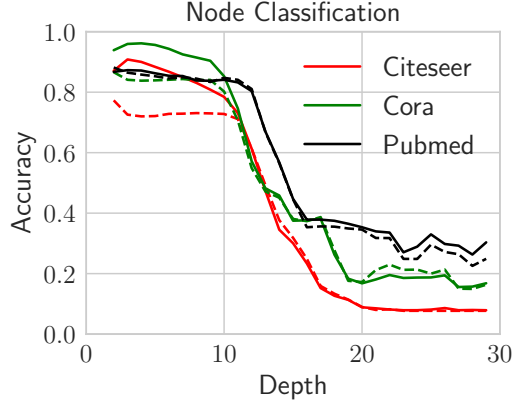


Figure 3: Train and test accuracy depending on the depth on different datasets. Solid lines are train accuracy and dashed lines are test accuracy.

only one graph, i.e., $G = G'$, is a special case and can be described by our theorems in this work. The remaining three data sets are used to verify the trainability of the network on node classification tasks.

Table 1: Details of Datasets

Dataset	Graphs	Nodes	Classes	Features	Avg. nodes
MUTAG	188	-	2	-	17.9
Citeseer	1	3327	6	3703	-
Cora	1	2708	7	1433	-
Pubmed	1	19717	3	500	-

5.2 Convergence Rate of GPKs and GNTKs

Theorems 1 and 2 provide theoretical convergence rates for the GPK $\Sigma(G, G')$ and the GNTK $\Theta(G, G')$, respectively. We demonstrate these results in Figure 2. We select two graphs denoted as G_3 and G_7 from the MUTAG dataset. The GPK and GNTK are generated from the infinitely-wide GCNs with ReLU activation², with $R = 3$, and $L = 300$. Figure 2(a) shows all elements of a covariance matrix kernel (GPK) converge to an identical value as the depth goes larger. Figure 2(b) further illustrates the convergence rate of the GPK is exponential, as predicted by Theorem 1. Then we demonstrate the exponential convergence rate of GNTK in Theorem 2 by comparing the distance between elements of the GNTK matrix, summarized in Figure 2(c,d). Additionally, we verify the convergence results of GCNs with residual connection demonstrated in Theorem 4 and leave the demonstration in the appendix.

5.3 Trainability of Ultra-Wide GCNs

We examine whether ultra-wide GCNs can be trained successfully on node classification. We conduct the experiment on a GCN [22], where we apply a width of 1000 at each hidden layer and the depth ranging from 2 to 29. Figure 4 displays the train and test accuracy on various datasets after 300 training epochs. These results show the dramatic drop on both train and test accuracy as the depth grows, confirming that wide GCNs lose trainability significantly in the large depth on node classification as predicted by Corollary 1.

6 Conclusion

In this work, we have characterized the asymptotic behavior of GPK and GNTK to respectively measure the expressivity and trainability of infinitely-wide GCNs in the large depth. We prove that

²We use the implementation of GNTK available at <https://github.com/KangchengHou/gntk> [6].

both expressivity and trainability of infinitely-wide GCNs drop at an exponential rate due to the aggregation operation. Furthermore, we apply our theoretical framework to investigate the extent to which residual connection-resemble techniques could alleviate over-smoothing problem on node classification tasks, including PPNP, DropEdge, and residual GCNs. We demonstrate that these techniques can only slow down the decay speed, but unable to solve the exponential decay problem in essence. Our theory is finally verified by the experimental results.

References

- [1] Zeyuan Allen-Zhu, Yuanzhi Li, and Zhao Song. A convergence theory for deep learning via over-parameterization. In *International Conference on Machine Learning*, pages 242–252. PMLR, 2019.
- [2] Uri Alon and Eran Yahav. On the bottleneck of graph neural networks and its practical implications. *arXiv preprint arXiv:2006.05205*, 2020.
- [3] Sanjeev Arora, Simon S Du, Wei Hu, Zhiyuan Li, Russ R Salakhutdinov, and Ruosong Wang. On exact computation with an infinitely wide neural net. In *Advances in Neural Information Processing Systems*, pages 8141–8150, 2019.
- [4] Ming Chen, Zhewei Wei, Zengfeng Huang, Bolin Ding, and Yaliang Li. Simple and deep graph convolutional networks. In *International Conference on Machine Learning*, pages 1725–1735. PMLR, 2020.
- [5] Minmin Chen, Jeffrey Pennington, and Samuel S Schoenholz. Dynamical isometry and a mean field theory of rnns: Gating enables signal propagation in recurrent neural networks. *arXiv preprint arXiv:1806.05394*, 2018.
- [6] Simon S Du, Kangcheng Hou, Russ R Salakhutdinov, Barnabas Poczos, Ruosong Wang, and Keyulu Xu. Graph neural tangent kernel: Fusing graph neural networks with graph kernels. In *Advances in Neural Information Processing Systems*, pages 5723–5733, 2019.
- [7] Simon S Du, Jason D Lee, Haochuan Li, Liwei Wang, and Xiyu Zhai. Gradient descent finds global minima of deep neural networks. *arXiv preprint arXiv:1811.03804*, 2018.
- [8] Ari Freedman. Convergence theorem for finite markov chains. *Proc. REU*, 2017.
- [9] Paul A Gagniuc. *Markov chains: from theory to implementation and experimentation*. John Wiley & Sons, 2017.
- [10] Hongyang Gao and Shuiwang Ji. Graph u-nets. *arXiv preprint arXiv:1905.05178*, 2019.
- [11] Justin Gilmer, Samuel S Schoenholz, Patrick F Riley, Oriol Vinyals, and George E Dahl. Neural message passing for quantum chemistry. *arXiv preprint arXiv:1704.01212*, 2017.
- [12] Shunwang Gong, Mehdi Bahri, Michael M Bronstein, and Stefanos Zafeiriou. Geometrically principled connections in graph neural networks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 11415–11424, 2020.
- [13] Will Hamilton, Zhitaoying Ying, and Jure Leskovec. Inductive representation learning on large graphs. In *Advances in neural information processing systems*, pages 1024–1034, 2017.
- [14] Soufiane Hayou, Arnaud Doucet, and Judith Rousseau. Mean-field behaviour of neural tangent kernel for deep neural networks. *arXiv preprint arXiv:1905.13654*, 2019.
- [15] Soufiane Hayou, Arnaud Doucet, and Judith Rousseau. On the impact of the activation function on deep neural networks training. *arXiv preprint arXiv:1902.06853*, 2019.
- [16] Jiri Hron, Yasaman Bahri, Jascha Sohl-Dickstein, and Roman Novak. Infinite attention: Nngp and ntk for deep attention networks. *arXiv preprint arXiv:2006.10540*, 2020.
- [17] Jilin Hu, Jianbing Shen, Bin Yang, and Ling Shao. Infinitely wide graph convolutional networks: semi-supervised learning via gaussian processes. *arXiv preprint arXiv:2002.12168*, 2020.

- [18] Jiaoyang Huang and Horng-Tzer Yau. Dynamics of deep neural networks and neural tangent hierarchy. *arXiv preprint arXiv:1909.08156*, 2019.
- [19] Wei Huang, Weitao Du, and Richard Yi Da Xu. On the neural tangent kernel of deep networks with orthogonal initialization. *arXiv preprint arXiv:2004.05867*, 2020.
- [20] Arthur Jacot, Franck Gabriel, and Clément Hongler. Neural tangent kernel: Convergence and generalization in neural networks. In *Advances in neural information processing systems*, pages 8571–8580, 2018.
- [21] Tatsuro Kawamoto, Masashi Tsubaki, and Tomoyuki Obuchi. Mean-field theory of graph neural networks in graph partitioning. *Journal of Statistical Mechanics: Theory and Experiment*, 2019(12):124007, 2019.
- [22] Thomas N Kipf and Max Welling. Semi-supervised classification with graph convolutional networks. *arXiv preprint arXiv:1609.02907*, 2016.
- [23] Thomas N Kipf and Max Welling. Variational graph auto-encoders. *arXiv preprint arXiv:1611.07308*, 2016.
- [24] Johannes Klicpera, Aleksandar Bojchevski, and Stephan Günnemann. Predict then propagate: Graph neural networks meet personalized pagerank. *arXiv preprint arXiv:1810.05997*, 2018.
- [25] Jaehoon Lee, Yasaman Bahri, Roman Novak, Samuel S Schoenholz, Jeffrey Pennington, and Jascha Sohl-Dickstein. Deep neural networks as Gaussian processes. *arXiv preprint arXiv:1711.00165*, 2017.
- [26] Jaehoon Lee, Lechao Xiao, Samuel Schoenholz, Yasaman Bahri, Roman Novak, Jascha Sohl-Dickstein, and Jeffrey Pennington. Wide neural networks of any depth evolve as linear models under gradient descent. In *Advances in neural information processing systems*, pages 8570–8581, 2019.
- [27] Junhyun Lee, Inyeop Lee, and Jaewoo Kang. Self-attention graph pooling. *arXiv preprint arXiv:1904.08082*, 2019.
- [28] Guohao Li, Matthias Muller, Ali Thabet, and Bernard Ghanem. Deepgcns: Can gcns go as deep as cnns? In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 9267–9276, 2019.
- [29] Guohao Li, Chenxin Xiong, Ali Thabet, and Bernard Ghanem. Deeppergcn: All you need to train deeper gcns. *arXiv preprint arXiv:2006.07739*, 2020.
- [30] Qimai Li, Zhichao Han, and Xiao-Ming Wu. Deeper insights into graph convolutional networks for semi-supervised learning. *arXiv preprint arXiv:1801.07606*, 2018.
- [31] Meng Liu, Hongyang Gao, and Shuiwang Ji. Towards deeper graph neural networks. In *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, pages 338–348, 2020.
- [32] Alexander G de G Matthews, Mark Rowland, Jiri Hron, Richard E Turner, and Zoubin Ghahramani. Gaussian process behaviour in wide deep neural networks. *arXiv preprint arXiv:1804.11271*, 2018.
- [33] Radford M Neal. Priors for infinite networks. In *Bayesian Learning for Neural Networks*, pages 29–53. Springer, 1996.
- [34] James R Norris and James Robert Norris. *Markov chains*. Number 2. Cambridge university press, 1998.
- [35] Kenta Oono and Taiji Suzuki. Graph neural networks exponentially lose expressive power for node classification. *arXiv preprint arXiv:1905.10947*, 2019.
- [36] Jeffrey Pennington, Samuel Schoenholz, and Surya Ganguli. Resurrecting the sigmoid in deep learning through dynamical isometry: theory and practice. In *Advances in neural information processing systems*, pages 4785–4795, 2017.

- [37] Ben Poole, Subhaneil Lahiri, Maithra Raghu, Jascha Sohl-Dickstein, and Surya Ganguli. Exponential expressivity in deep neural networks through transient chaos. In *Advances in neural information processing systems*, pages 3360–3368, 2016.
- [38] Yu Rong, Wenbing Huang, Tingyang Xu, and Junzhou Huang. Dropedge: Towards deep graph convolutional networks on node classification. In *International Conference on Learning Representations*, 2019.
- [39] Samuel S Schoenholz, Justin Gilmer, Surya Ganguli, and Jascha Sohl-Dickstein. Deep information propagation. *arXiv preprint arXiv:1611.01232*, 2016.
- [40] Petar Veličković, Guillem Cucurull, Arantxa Casanova, Adriana Romero, Pietro Lio, and Yoshua Bengio. Graph attention networks. *arXiv preprint arXiv:1710.10903*, 2017.
- [41] Felix Wu, Tianyi Zhang, Amauri Holanda de Souza Jr, Christopher Fifty, Tao Yu, and Kilian Q Weinberger. Simplifying graph convolutional networks. *arXiv preprint arXiv:1902.07153*, 2019.
- [42] Lechao Xiao, Yasaman Bahri, Jascha Sohl-Dickstein, Samuel S Schoenholz, and Jeffrey Pennington. Dynamical isometry and a mean field theory of cnns: How to train 10,000-layer vanilla convolutional neural networks. *arXiv preprint arXiv:1806.05393*, 2018.
- [43] Lechao Xiao, Jeffrey Pennington, and Samuel S Schoenholz. Disentangling trainability and generalization in deep learning. *arXiv preprint arXiv:1912.13053*, 2019.
- [44] Keyulu Xu, Weihua Hu, Jure Leskovec, and Stefanie Jegelka. How powerful are graph neural networks? *arXiv preprint arXiv:1810.00826*, 2018.
- [45] Keyulu Xu, Chengtao Li, Yonglong Tian, Tomohiro Sonobe, Ken-ichi Kawarabayashi, and Stefanie Jegelka. Representation learning on graphs with jumping knowledge networks. *arXiv preprint arXiv:1806.03536*, 2018.
- [46] Keyulu Xu, Jingling Li, Mozhi Zhang, Simon S Du, Ken-ichi Kawarabayashi, and Stefanie Jegelka. How neural networks extrapolate: From feedforward to graph neural networks. *arXiv preprint arXiv:2009.11848*, 2020.
- [47] Ge Yang and Samuel Schoenholz. Mean field residual networks: On the edge of chaos. In *Advances in neural information processing systems*, pages 7103–7114, 2017.
- [48] Greg Yang. Scaling limits of wide neural networks with weight sharing: Gaussian process behavior, gradient independence, and neural tangent kernel derivation. *arXiv preprint arXiv:1902.04760*, 2019.
- [49] Greg Yang. Tensor programs ii: Neural tangent kernel for any architecture. *arXiv preprint arXiv:2006.14548*, 2020.
- [50] Greg Yang, Jeffrey Pennington, Vinay Rao, Jascha Sohl-Dickstein, and Samuel S Schoenholz. A mean field theory of batch normalization. *arXiv preprint arXiv:1902.08129*, 2019.
- [51] Zhitao Ying, Jiaxuan You, Christopher Morris, Xiang Ren, Will Hamilton, and Jure Leskovec. Hierarchical graph representation learning with differentiable pooling. In *Advances in neural information processing systems*, pages 4800–4810, 2018.
- [52] Hao Yuan and S. Ji. Structpool: Structured graph pooling via conditional random fields. In *ICLR*, 2020.
- [53] Hanqing Zeng, Muhan Zhang, Yinglong Xia, Ajitesh Srivastava, Rajgopal Kannan, Viktor Prasanna, Long Jin, Andrey Malevich, and Ren Chen. Deep graph neural networks with shallow subgraph samplers. *ICLR*, 2020.
- [54] Lingxiao Zhao and Leman Akoglu. Pairnorm: Tackling oversmoothing in gnns. *ArXiv*, abs/1909.12223, 2020.

- [55] Kaixiong Zhou, Xiao Huang, Yuening Li, Daochen Zha, Rui Chen, and Xia Hu. Towards deeper graph neural networks with differentiable group normalization. *arXiv preprint arXiv:2006.06972*, 2020.
- [56] Kuangqi Zhou, Yanfei Dong, Wee Sun Lee, Bryan Hooi, Huan Xu, and Jiashi Feng. Effective training strategies for deep graph neural networks. *arXiv preprint arXiv:2006.07107*, 2020.
- [57] Difan Zou, Yuan Cao, Dongruo Zhou, and Quanquan Gu. Stochastic gradient descent optimizes over-parameterized deep relu networks. arxiv e-prints, art. *arXiv preprint arXiv:1811.08888*, 2018.

A Appendix

This appendix is dedicated to proving the key results of this paper.

GCNs iteratively update node features through aggregating and transforming the representation of their neighbors. We use subscript (r) to denote the layer index of MLP in each propagation unit and use superscript (l) to indicate the index of aggregation operation, which is also the index of the propagation unit. L is the total number of propagation units.

A.1 Expressivity of Infinitely Wide GCNs

We first construct the behavior of GCNs with only aggregation operations, i.e., $R = 0$ and $\Sigma_{(r)}^{(l)}(G, G') = \Sigma^{(l)}(G, G')$.

Lemma 1 (Convergence of aggregation). *Assume $R=0$, then*

$$\lim_{l \rightarrow \infty} \Sigma^{(l)}(G, G')_{uu'} = \pi(G, G') \vec{\Sigma}^{(0)}(G, G')$$

where $\pi(G, G') \in \mathbb{R}^{1 \times nn'}$, satisfying,

$$\pi(G, G') \mathcal{A}^{(l)}(G, G') = \pi(G, G')$$

Proof. In order to facilitate calculation, we present the aggregation equation in a vectorized form,

$$\vec{\Sigma}_{(0)}^{(l)}(G, G') = \mathcal{A}^{(l)} \vec{\Sigma}_{(0)}^{(l-1)}(G, G')$$

where $\vec{\Sigma}_{(0)}^{(l)}(G, G') \in \mathbb{R}^{nn' \times 1}$, is the result of being vectorized. Thus the matrix operation $\mathcal{A}^{(l)} \in \mathbb{R}^{nn' \times nn'}$. It is obvious that,

$$\mathcal{A}^{(L)} = \mathcal{A}^{(L-1)} = \dots = \mathcal{A}^{(l)} = \dots = \mathcal{A}^{(1)}$$

This implies that the aggregate operation is the same for each layer. The next step is to prove $\mathcal{A}^{(l)}$ is a transition matrix:

$$\sum_j \mathcal{A}^{(l)}(G, G')_{ij} = 1.$$

According to Equation 7, we know that $\mathcal{A}(G, G')$ is a Kronecker product of two matrix,

$$\mathcal{A}^{(l)}(G, G')_{uu'} = [\mathcal{B}(G)\mathcal{C}(G)] \otimes [\mathcal{B}(G')\mathcal{C}(G')]$$

where $\mathcal{B}(G), \mathcal{C}(G) \in \mathbb{R}^{n \times n}$ and $\mathcal{B}(G'), \mathcal{C}(G') \in \mathbb{R}^{n' \times n'}$.

(i) $\mathcal{B}(G)$ and $\mathcal{B}(G')$ are diagonal matrices, which correspond to the factor $\frac{1}{\mathcal{N}(u)+1}$ and $\frac{1}{\mathcal{N}(u')+1}$.

$$\mathcal{B}(G) = \begin{pmatrix} \frac{1}{\mathcal{N}(u_1)+1} & & \\ & \ddots & \\ & & \frac{1}{\mathcal{N}(u_n)+1} \end{pmatrix}$$

(ii) The elements of matrix $\mathcal{C}(G)$ and $\mathcal{C}(G')$ are determined by whether there is an edge between two vertexes:

$$\mathcal{C}(G)_{ij} = \tilde{\delta}_{ij}$$

where $\tilde{\delta}_{ij} = 1$ if $i = j$ or there is edge between vertex i and j , else $\tilde{\delta}_{ij} = 0$.

We first use the property of matrix \mathcal{B} and \mathcal{C} before Kronecker product, which is,

$$\sum_j [\mathcal{B}(G)\mathcal{C}(G)]_{ij} = \frac{1}{\mathcal{N}(u_i) + 1} \sum_j \tilde{\delta}_{ij} = \frac{1}{\mathcal{N}(u_i) + 1} (\mathcal{N}(u_i) + 1) = 1$$

According to the definition of Kronecker product, we have,

$$\sum_j \mathcal{A}^{(l)}(G, G')_{ij} = \sum_b \sum_d [\mathcal{B}(G)\mathcal{C}(G)]_{ab} [\mathcal{B}(G')\mathcal{C}(G')]_{cd} = 1$$

where $i = a + (c - 1)n$, and $j = b + (d - 1)n$.

So far, we have proved that $\mathcal{A}(G, G')$ is a transition matrix. According to the Perron-Frobenius Theory, a stationary probability vector π is defined as a distribution, written as a row vector, that does not change under application of the transition matrix, associated with eigenvalue 1:

$$\pi(G, G')\mathcal{A}(G, G') = \pi(G, G')$$

The right spectral radius of every right stochastic matrix is at most 1 by Gershgorin circle theorem. Thus the convergence rate is governed by the second largest eigenvalue.

Since $\lim_{l \rightarrow \infty} \mathcal{A}_{ij}^{(l)}(G, G') = \pi_j(G, G')$, we have,

$$\begin{aligned} \lim_{l \rightarrow \infty} \vec{\Sigma}^{(l)}(G, G') &= \lim_{l \rightarrow \infty} \mathcal{A}(G, G') \vec{\Sigma}^{(0)}(G, G') \\ &= \Pi(G, G') \vec{\Sigma}^{(0)}(G, G') \end{aligned}$$

where $\Pi(G, G') = \begin{pmatrix} \pi(G, G') \\ \pi(G, G') \\ \vdots \\ \pi(G, G') \end{pmatrix}$ is the $nn' \times nn'$ matrix all of whose rows are the stationary

distribution. Then, we can see that every element in $\vec{\Sigma}^{(l)}(G, G')$ converges exponentially to an identical value, depending on the stationary distribution and initial state,

$$\lim_{l \rightarrow \infty} \Sigma^{(l)}(G, G')_{uu'} = \pi(G, G') \vec{\Sigma}^{(0)}(G, G')$$

□

Then we consider a pure MLP without aggregation, i.e., $\Sigma_{(r)}^{(l)}(G, G') = \Sigma_{(r)}(G, G')$. The key idea is to study the asymptotic behavior of the normalized correlation.

Lemma 2 (Proposition 1 and 3 in [15]). *Consider an infinitely-wide fully-connected network with a Lipschitz nonlinearity ϕ , then,*

- $\phi(x) = \max\{0, x\}$, $1 - C_r(G, G')_{uu'} \sim \frac{9\pi^2}{2r^2}$ as $r \rightarrow \infty$
- $\phi(x) = \tanh(x)$, $1 - C_{(r)}(G, G')_{uu'} \sim \frac{\beta}{r}$ as $r \rightarrow \infty$ where $\beta = \frac{2 \int \mathcal{D}_z [\phi'(\sqrt{q^*}z)^2]}{q^* \mathcal{D}_z [\phi''(\sqrt{q^*}z)^2]}$.

Proof. We apply the GP result of infinitely-wide GCN to Equation (8). The propagation of the covariance matrix corresponds to the R times non-linear transformations, which is expressed as,

$$\Sigma_{(r)}^{(l)}(G, G')_{uu'} = \sigma_w^2 \mathbb{E}_{z_1, z_2} [\phi(z_1)\phi(z_2)] + \sigma_b^2 \quad (23)$$

where z_1, z_2 are drawn from a 2-dimension Gaussian distribution in the previous MLP layer, i.e., $z_1, z_2 \sim \mathcal{N}(0, \tilde{\Sigma}_{(r-1)}^{(l)}(G, G')) \in \mathbb{R}^{2 \times 2}$, where the variance $\tilde{\Sigma}_{(r-1)}^{(l)}(G, G')$ is defined as,

$$\tilde{\Sigma}_{(r)}^{(l)}(G, G')_{uu'} = \begin{pmatrix} \Sigma_{(r)}^{(l)}(G, G)_{uu} & \Sigma_{(r)}^{(l)}(G, G')_{uu'} \\ \Sigma_{(r)}^{(l)}(G', G)_{u'u} & \Sigma_{(r)}^{(l)}(G', G')_{u'u'} \end{pmatrix} \quad (24)$$

We first decompose the integral calculation in Equation 23 into two parts, one is diagonal element and the other is non-diagonal element:

$$\begin{aligned}\Sigma_{(r)}(G, G)_{uu} &= \sigma_w^2 \int_{\mathcal{D}z} \phi^2(\sqrt{\Sigma_{(r-1)}(G, G)_{uu}z}) + \sigma_b^2 \\ \Sigma_{(r)}(G, G')_{uu'} &= \sigma_w^2 \int_{\mathcal{D}z_1 \mathcal{D}z_2} \phi(u_1)\phi(u_2) + \sigma_b^2\end{aligned}$$

where $u_1 = \sqrt{\Sigma_{(r-1)}(G, G)_{uu}z_1}$, and $u_2 = \sqrt{\Sigma_{(r-1)}(G', G')_{u'u'}} \left(C_{(r-1)}(G, G')_{uu'}z_1 + \sqrt{1 - C_{(r-1)}^2(G, G')_{uu'}z_2} \right)$.

For simplicity, we define $q_r(G) = \Sigma_{(r)}(G, G)_{uu}$, $q_r(G') = \Sigma_{(r)}(G', G')_{u'u'}$, and $c_r(G, G') = C_{(r)}(G, G')_{uu'}$.

(i) When $\phi(x) = \max\{0, x\}$. The first integration for $q_r(G)$ reduces to,

$$q_r(G) = \frac{\sigma_w^2}{2} q_{r-1}(G) + \sigma_b^2$$

The Banach fixed-point theorem guarantees the existence of a unique fixed point such that,

$$\lim_{r \rightarrow \infty} q_r(G) = q(G)$$

For all G, G' there exists r_0 such that $|q_r(G) - q_r(G')| < \delta$ for all $r > r_0$. Then the second integration for $c_r(G, G')$ becomes,

$$c_r(G, G') = \frac{\sigma_w^2 \int_{\mathcal{D}z_1 \mathcal{D}z_2} \phi(\sqrt{q_{r-1}(G)}z_1) \phi(\sqrt{q_{r-1}(G)}(c_{r-1}(G, G')z_1 + \sqrt{1 - c_{r-1}^2(G, G')^2}z_2)) + \sigma_b^2}{q_{r-1}(G)}$$

To investigate the propagation of $c_r(G, G')$, we set $q(G) = q(G') = q$ for any $r > r_0$, and define,

$$f(x) = \frac{\sigma_w^2 \int_{\mathcal{D}z_1 \mathcal{D}z_2} \phi(\sqrt{q}z_1) \phi(\sqrt{q}(xz_1 + \sqrt{1 - x^2}z_2)) + \sigma_b^2}{q}$$

For $\sigma_w^2 = 2$ and $\sigma_b^2 = 0$, there is a unique fixed point $c_r(G, G') = 1$. Then we study how $c_r(G, G')$ approaches the fixed point.

Let $x \in [0, 1]$, the derivative of $f(x)$ satisfies,

$$f'(x) = 2 \int_{\mathcal{D}z_1 \mathcal{D}z_2} 1_{z_1 > 0} 1_{xz_1 + \sqrt{1 - x^2}z_2 > 0}$$

Then the second derivative of $f(x)$ becomes,

$$f''(x) = \frac{1}{\pi \sqrt{1 - x^2}}$$

So using the equation above and the condition $f'(0) = \frac{1}{2}$, we can get another formation of the derivative of $f(x)$,

$$f'(x) = \frac{1}{\pi} \arcsin(x) + \frac{1}{2}$$

Since $\int \arcsin = x \arcsin + \sqrt{1 - x^2}$ and $f(1) = 1$, then for $x \in [0, 1]$,

$$f(x) = \frac{2x \arcsin(x) + 2\sqrt{1 - x^2} + x\pi}{2\pi}$$

Substituting $f(x) = c_r(G, G')$ and $x = c_{r-1}(G, G')$, into expression up here, we have,

$$c_r(G, G') = \frac{2c_{r-1}(G, G') \arcsin(c_{r-1}(G, G')) + 2\sqrt{1 - c_{r-1}^2(G, G')} + c_{r-1}(G, G')\pi}{2\pi}$$

Now we study the behavior of $c_r(G, G')$ as r tends to infinity. Using Taylor expansion, we have,

$$f(x)|_{x \rightarrow 1-} = x + \frac{2\sqrt{2}}{3\pi}(1-x)^{3/2} + O((1-x)^{5/2})$$

By induction analysis, the sequence $c_r(G, G')$ is increasing to the fixed point 1. Besides, we can replace x with $c_r(G, G')$,

$$c_{r+1}(G, G') = c_r(G, G') + \frac{2\sqrt{2}}{3\pi}(1 - c_r(G, G'))^{3/2} + O((1 - c_r(G, G'))^{5/2})$$

Let $\gamma_r = 1 - c_r(G, G')$, then we have,

$$\gamma_{r+1} = \gamma_r - \frac{2\sqrt{2}}{3\pi}\gamma_r^{3/2} + O(\gamma_r^{5/2})$$

so that,

$$\gamma_{r+1}^{-1/2} = \gamma_r^{-1/2} \left(1 - \frac{2\sqrt{2}}{3\pi}\gamma_r^{1/2} + O(\gamma_r^{3/2})\right)^{-1/2} = \gamma_r^{-1/2} + \frac{\sqrt{2}}{3\pi} + O(\gamma_r)$$

As r tends to infinity, we have,

$$\gamma_{r+1}^{-1/2} - \gamma_r^{-1/2} \sim \frac{\sqrt{2}}{3\pi}$$

It means,

$$\gamma_r^{-1/2} \sim \frac{\sqrt{2}}{3\pi}r$$

Therefore, we have,

$$1 - c_r(G, G') \sim \frac{9\pi^2}{2r^2}$$

(ii) When $\phi(x) = \tanh(x)$, a Taylor expansion near 1 yields,

$$f(x) = 1 + (x-1)f'(1) + \frac{(x-1)^2}{2}f''(1) + O((x-1)^{5/2})$$

Denote $\gamma_r = 1 - c_r(G, G')$, then we have,

$$\gamma_{r+1} = \gamma_r - \frac{\gamma_r^2}{\beta} + O(\gamma_r^{5/2})$$

where $\beta = \chi_2$. Therefore,

$$\gamma_{r+1}^{-1} = \gamma_r^{-1} \left(1 - \frac{\gamma_r}{\beta} + O(\gamma_r^{3/2})\right) = \gamma_r^{-1} + \frac{1}{\beta} + O(\gamma_r^{1/2}).$$

Thus, we have,

$$1 - c_{(r)}(G, G') \sim \frac{\beta}{l} \text{ as } l \rightarrow \infty$$

□

Taking both aggregation and transformation into consideration, we derive our theorem on the asymptotic behavior of infinitely-wide GCN in the large depth limit, which is as follows:

Theorem 1 (Convergence rate for GPK). *If $\mathcal{A}(G, G')$ is irreducible and aperiodic, with a stationary distribution vector $\pi(G, G')$, then there exist constants $0 < \alpha < 1$ and $C > 0$, and constant vector $v \in \mathbb{R}^{nn' \times 1}$ depending on the number of MLP iterations R , such that*

$$|\Sigma_{(r)}^{(l)}(G, G')_{uu'} - \pi(G, G')v| \leq C\alpha^l$$

Proof. We prove the result by induction method. For $l = 0$, according to the Cauchy-Buniakowsky-Schwarz Inequality

$$\Sigma_{(0)}^{(0)}(G, G')_{uu'} = h_u^{(0)} h_{u'}^{(0)} \leq \|h_u^{(0)}\|_2 \|h_{u'}^{(0)}\|_2 = 1$$

Thus there is a constant C , depending on $G(V, E)$, $G'(V', E')$, and the number of MLP operation R , over feature initialization, such that,

$$|\Sigma_{(0)}^{(0)}(G, G')_{uu'} - \pi(G, G')v| < C$$

Assume the result is valid for $\Sigma_{(r)}^{(l)}(G, G')_{uu'}$, then we have,

$$|\Sigma_{(r)}^{(l)}(G, G')_{uu'} - \pi(G, G')v| \leq C\alpha^l$$

Now we consider the distance between $\Sigma_{(r)}^{(l+1)}(G, G')$ and $C\alpha^{l+1}$. To compute this, we need to divide the propagation from l layer to $l + 1$ layer into three parts:

- (i) $\Sigma_{(r)}^{(l)} \rightarrow \Sigma_{(r+1)}^{(l)} \rightarrow \dots \rightarrow \Sigma_{(R)}^{(l)}$
- (ii) $\Sigma_{(R)}^{(l)} \rightarrow \Sigma_{(0)}^{(l+1)}$
- (iii) $\Sigma_{(0)}^{(l+1)} \rightarrow \Sigma_{(1)}^{(l+1)} \rightarrow \dots \rightarrow \Sigma_{(r)}^{(l+1)}$.

For (i), we first prove that the correlation term $C_{(r)}(G, G')_{uu'}$ is close to 1 sufficiently. Recall that,

$$C_{(r)}(G, G')_{uu'} = \Sigma_{(r)}(G, G')_{uu'} / \sqrt{\Sigma_{(r)}(G, G)_{uu} \Sigma_{(r)}(G', G')_{u'u'}}$$

then we have,

$$1 - C_{(r)}(G, G')_{uu'} = \frac{\sqrt{\Sigma_{(r)}(G, G)_{uu} \Sigma_{(r)}(G', G')_{u'u'}} - \Sigma_{(r)}(G, G')_{uu'}}{\sqrt{\Sigma_{(r)}(G, G)_{uu} \Sigma_{(r)}(G', G')_{u'u'}}}(\alpha^l)$$

The last equation is due to the fact that every element is exponentially close to a bounded constant.

Recall the property of MLP propagation function $f(x)$ for $x = C_{(r)}(G, G')_{uu'}$, when $C_{(r)}(G, G')_{uu'}$ is close to 1:

$$f(x)|_{x \rightarrow 1-} = x + \frac{2\sqrt{2}}{3\pi}(1-x)^{3/2} + O((1-x)^{5/2})$$

This implies,

$$\begin{aligned} 1 - C_{(r+1)}(G, G')_{uu'} &= 1 - C_{(r)}(G, G')_{uu'} - \frac{2\sqrt{2}}{3\pi}(1 - C_{(r)}(G, G')_{uu'})^{\frac{3}{2}} + O(1 - C_{(r)}(G, G')_{uu'})^{\frac{5}{2}} \\ &\leq 1 - C_{(r)}(G, G')_{uu'} = O(\alpha^l) \end{aligned}$$

From this result, we have,

$$\begin{aligned} &|\Sigma_{(r+1)}^{(l)}(G, G')_{uu'} - \pi(G, G')v| \\ &= |\Sigma_{(r+1)}^{(l)}(G, G')_{uu'} - \Sigma_{(r)}^{(l)}(G, G')_{uu'} + \Sigma_{(r)}^{(l)}(G, G')_{uu'} - \pi(G, G')v| \\ &\leq |\Sigma_{(r)}^{(l)}(G, G')_{uu'} - \pi(G, G')v| \\ &\leq C\alpha^l. \end{aligned}$$

Repeat the proof process, we have a relation for $\Sigma_{(R)}^{(l)}(G, G')_{uu'}$ at the last step of (i),

$$|\Sigma_{(R)}^{(l)}(G, G')_{uu'} - \pi(G, G')v| \leq C\alpha^l.$$

Secondly, for (ii) we go through an aggregation operation $\mathcal{A}(G, G')$, then we have,

$$\vec{\Sigma}_{(0)}^{(l+1)}(G, G') = \mathcal{A}(G, G')\vec{\Sigma}_{(R)}^{(l)}(G, G') = \mathcal{A}(G, G')(\Pi(G, G')v + \vec{O}(\alpha^l))$$

where $\vec{O}(\alpha^l)$ denotes a vector in which every element is bounded by α^l .

Because $\Pi(G, G')v$ can be seen as a result of $\mathcal{A}(G, G')$, with a standard argument for convergence Theorem of stochastic matrix [8], we can obtain

$$\vec{\Sigma}_{(0)}^{(l+1)}(G, G') = \Pi(G, G')v + \vec{O}(\alpha^{l+1})$$

Therefore,

$$|\Sigma_{(0)}^{(l+1)}(G, G')_{uu'} - \pi(G, G')v| \leq C\alpha^{l+1}.$$

Finally, for (iii) we repeat the result in step (i) and obtain,

$$|\Sigma_{(r)}^{(l+1)}(G, G')_{uu'} - \pi(G, G')v| \leq C\alpha^{l+1}.$$

□

A.2 Trainability of Infinitely Wide GCNs

The following theorem demonstrates that the aggregation leads to an exponential decay of GNTK as the depth becomes large.

Theorem 2 (Convergence rate for GNTK). *If $\mathcal{A}(G, G')$ is irreducible and aperiodic, with a stationary distribution $\pi(G, G')$, then there exist constants $0 < \alpha < 1$ and $C > 0$, and constant matrix v and v' depending on R , such that*

$$|\Theta_{(r)}^{(l)}(G, G')_{uu'} - \pi(G, G')(Rlv + v')| \leq C\alpha^l$$

Proof. This proof has the same strategy to that of Theorem 1. The first step is to under following equation for GNTK in the large-depth limit.

$$\Theta_{(r)}^{(l)}(G, G')_{uu'} = \Theta_{(r-1)}^{(l)}(G, G')_{uu'} \dot{\Sigma}_{(r)}^{(l)}(G, G')_{uu'} + \Sigma_{(r)}^{(l)}(G, G')_{uu'}$$

According to the result of Theorem 1, we have already known,

$$\Sigma_{(r)}^{(l)}(G, G')_{uu'} = \pi(G, G')v + O(\alpha^l)$$

To proceed the proof, we need to work out the behavior of $\dot{\Sigma}_{(r)}^{(l)}(G, G')_{uu'}$ in the large depth.

(i) when $\phi(x) = \max\{0, x\}$

Recall that we define $c_{(r+1)} = f(c_{(r)})$, and we have,

$$f'(x) = \frac{1}{\pi} \arcsin(x) + \frac{1}{2}$$

Then, at the critical line,

$$\begin{aligned} \dot{\Sigma}_{(r)}^{(l)}(G, G')_{uu'} &= f'(c_r(G, G')) = \frac{1}{\pi} \arcsin(c_r(G, G')) + \frac{1}{2} \\ &= 1 - \frac{2}{\pi}(1 - c_r(G, G'))^{1/2} + O(1 - c_r(G, G'))^{3/2} \\ &= 1 + O(\alpha^{l/2}) \end{aligned}$$

(ii) when $\phi(x) = \tanh(x)$, we have

$$f'(x) = 1 - (x - 1)f''(1) + O((x - 1)^2)$$

At the critical line,

$$\dot{\Sigma}_{(r)}^{(l)}(G, G')_{uu'} = 1 + O(\alpha^l)$$

Now we prove the result by induction method. For $l = 0$, according to the definition and the result in Theorem 1,

$$\Theta_{(0)}^{(0)}(G, G')_{uu'} = \Sigma_{(0)}^{(0)}(G, G')_{uu'} \leq \|h_u^{(0)}\|_2 \|h_{u'}^{(0)}\|_2 = 1$$

Thus there is a constant C , depending on $G(V, E)$, $G'(V', E')$, and the number of MLP operation R , over feature initialization,

$$|\Theta_{(0)}^{(0)}(G, G')_{uu'} - \pi(G, G')v'| < C$$

Assume the result is valid for $\Theta_{(r)}^{(l)}(G, G')_{uu'}$, then we have,

$$|\Theta_{(r)}^{(l)}(G, G')_{uu'} - \pi(G, G')(Rlv + v')| \leq C\alpha^l$$

Now we consider the distance between $\Theta_{(r)}^{(l+1)}(G, G')_{uu'}$ and $\pi(G, G')(R(l+1)v + v')$. To prove this, we need to divide the propagation from l layer to $l+1$ layer into three parts:

- (i) $\Theta_{(r)}^{(l)} \rightarrow \Theta_{(r+1)}^{(l)} \rightarrow \dots \rightarrow \Theta_{(R)}^{(l)}$
- (ii) $\Theta_{(R)}^{(l)} \rightarrow \Theta_{(0)}^{(l+1)}$
- (iii) $\Theta_{(0)}^{(l+1)} \rightarrow \Theta_{(1)}^{(l+1)} \rightarrow \dots \rightarrow \Theta_{(r)}^{(l+1)}$.

For (i),

$$\begin{aligned} & |\Theta_{(r+1)}^{(l)}(G, G')_{uu'} - \pi(G, G')((lR+1)v + v')| \\ &= |\Sigma_{(r+1)}^{(l)}(G, G')_{uu'} + \dot{\Sigma}_{(r+1)}^{(l)}(G, G')_{uu'} \Theta_{(r)}^{(l)}(G, G')_{uu'} - \pi(G, G')((lR+1)v + v')| \\ &= |\pi(G, G')v(1 + O(\alpha^l)) + (1 + O(\alpha^{l/2}))\Theta_{(r)}^{(l)}(G, G')_{uu'} - \pi(G, G')((lR+1)v + v')| \\ &\leq C\alpha^l \end{aligned}$$

Repeat the process, we have a relation for $\Theta_{(R)}^{(l)}(G, G')_{uu'}$ at the last step in (i),

$$|\Theta_{(R)}^{(l)}(G, G')_{uu'} - \pi(G, G')((lR+R-r)v + v')| \leq C\alpha^l.$$

Secondly, for (ii) we go through an aggregation operation. Since it is can seen as a Markov chain step, we can obtain,

$$|\Theta_{(0)}^{(l+1)}(G, G')_{uu'} - \pi(G, G')((Rl+R-r)v + v')| \leq C\alpha^{l+1}.$$

(iii) Repeat the result in step (i), we have,

$$\begin{aligned} & |\Theta_{(R)}^{(l)}(G, G')_{uu'} - \pi(G, G')((Rl+R)v + v')| \\ &= |\Theta_{(R)}^{(l)}(G, G')_{uu'} - \pi(G, G')(R(l+1)v + v')| \leq C\alpha^{l+1}. \end{aligned}$$

□

The exponential convergence rate of $\Theta_{(R)}^{(L)}(G, G')$ implies that the trainability of infinitely wide GCNs degenerate dramatically, as shown in following corollary.

Corollary 1 (Trainability of ultra-wide GCNs). *Consider a GCN of the form (7) and (8), with depth L , non-linear transformations number R , an MSE loss, and a Lipchitz activation $\phi(x)$, trained with gradient descent on a node classification task. Then the output function follows,*

$$f_t(\mathcal{G}) = e^{-\eta\Theta_{(R)}^{(L)}(\mathcal{G}, \mathcal{G})t} f_0(\mathcal{G}) + (I - e^{-\eta\Theta_{(R)}^{(L)}(\mathcal{G}, \mathcal{G})t}) \mathcal{Y}$$

where $\Theta_{(R)}^{(L)}(\mathcal{G}, \mathcal{G}) \in \mathbb{R}^{\sum_{i=1}^N n_i \times \sum_{i=1}^N n_i}$ with the expression,

$$\Theta_{(R)}^{(L)}(\mathcal{G}, \mathcal{G}) = \begin{pmatrix} \Theta_{(R)}^{(L)}(G_1, G_1) & \dots & \Theta_{(R)}^{(L)}(G_1, G_N) \\ \vdots & \ddots & \vdots \\ \Theta_{(R)}^{(L)}(G_N, G_1) & \dots & \Theta_{(R)}^{(L)}(G_N, G_N) \end{pmatrix}$$

There exists a positive integer L_0 such that, $\Theta_{(R)}^{(L)}(\mathcal{G}, \mathcal{G})$ is singular when $L > L_0$. Moreover, there exist a constant $C > 0$ such that for all $t > 0$,

$$\|f_t(\mathcal{G}) - \mathcal{Y}\| > C$$

Proof. According to the result from [20], GNTK $\Theta_{(r)}^{(l)}(\mathcal{G}, \mathcal{G})$ converges to a deterministic kernel and remains constant during gradient descent in the infinite width limit. We omit proof procedure for this result, since it is now a standard conclusion in the NTK study.

Based on the conclusion above, Lee et al. [26] proved that the infinitely-wide neural network is equivalent to its linearized mode,

$$f_t^{\text{lin}}(G) = f_0(G) + \nabla_{\theta} f_0(G)|_{\theta=\theta_0} \omega_t$$

where $\omega_t = \theta_t - \theta_0$. We call it linearized model because only zero and first order term of Taylor expansion are kept. Since we know dynamics of gradient flow using this linearized function are governed by,

$$\dot{\omega}_t = -\eta \nabla_{\theta} f_0(\mathcal{G})^T \nabla_{f_t^{\text{lin}}(\mathcal{G})} \mathcal{L}$$

$$\dot{f}_t^{\text{lin}}(\mathcal{G}) = -\eta \Theta_{(r)}^{(l)}(\mathcal{G}, \mathcal{G}) \nabla_{f_t^{\text{lin}}(\mathcal{G})} \mathcal{L}$$

where \mathcal{L} is an MSE loss, then the above equations have closed form solutions

$$f_t^{\text{lin}}(\mathcal{G}) = e^{-\eta \Theta_{(R)}^{(L)}(\mathcal{G}, \mathcal{G}) t} f_0(\mathcal{G}) + (I - e^{-\eta \Theta_{(R)}^{(L)}(\mathcal{G}, \mathcal{G}) t} \mathcal{Y})$$

Since Lee et al. [26] showed that $f_t^{\text{lin}}(\mathcal{G}) = f_t$ in the infinite width limit, thus we have,

$$f_t(\mathcal{G}) = e^{-\eta \Theta_{(R)}^{(L)}(\mathcal{G}, \mathcal{G}) t} f_0(\mathcal{G}) + (I - e^{-\eta \Theta_{(R)}^{(L)}(\mathcal{G}, \mathcal{G}) t} \mathcal{Y}) \quad (25)$$

In theorem 2, we have shown $\Theta_{(R)}^{(L)}(G, G')$ converges a constant matrix at an exponential rate. The GNTK $\Theta_{(R)}^{(L)}(\mathcal{G}, \mathcal{G})$ can be written as,

$$\Theta_{(R)}^{(L)}(\mathcal{G}, \mathcal{G}) = \begin{pmatrix} \Theta_{(R)}^{(L)}(G_1, G_1) & \cdots & \Theta_{(R)}^{(L)}(G_1, G_N) \\ \vdots & \ddots & \vdots \\ \Theta_{(R)}^{(L)}(G_N, G_1) & \cdots & \Theta_{(R)}^{(L)}(G_N, G_N) \end{pmatrix}$$

According to Equation 25, we know that,

$$\|f_t(\mathcal{G}) - \mathcal{Y}\| = \|e^{-\eta \Theta_{(r)}^{(l)}(\mathcal{G}, \mathcal{G}) t} (f_0(\mathcal{G}) - \mathcal{Y})\|$$

According to Theorem 2, there exists a L_0 such that, for any $L > l_0$, GNTK between any two graphs converges to a constant matrix,

Then the whole GNTK $\Theta_{(R)}^{(L)}(\mathcal{G}, \mathcal{G})$ is singular. Let $\Theta_{(R)}^{(L)}(\mathcal{G}, \mathcal{G}) = Q^T D Q$ be the decomposition of the GNTK, where Q is an orthogonal matrix and D is a diagonal matrix. Because $\Theta_{(R)}^{(L)}(\mathcal{G}, \mathcal{G})$ is singular, D has at least one zero value $d_j = 0$, then

$$\|f_t(\mathcal{G}) - \mathcal{Y}\| = \|Q^T (f_t(\mathcal{G}) - \mathcal{Y}) Q\| \geq \| [Q^T (f_0(\mathcal{G}) - \mathcal{Y}) Q]_j \|$$

□

A.3 Analysis on techniques to deepen GCNs

Theorem 3 (Convergence rate for residual connection-resemble aggregation). *Consider a covariance matrix of GPK with the form (20) without non-linear transformation, i.e., $R = 0$. Then with a stationary vector $\tilde{\pi}(G, G')$ for $\tilde{\mathcal{A}}(G, G')$, there exist constants $0 < \alpha < 1$ and $C > 0$, such that*

$$|\Sigma_{(r)}^{(l)}(G, G')_{uu'} - \tilde{\pi}(G, G') \tilde{\Sigma}^{(0)}(G, G')| \leq C \alpha^l$$

Furthermore, we denote the second largest eigenvalue of $\mathcal{A}(G, G')$ and $\tilde{\mathcal{A}}(G, G')$ as λ_2 and $\tilde{\lambda}_2$, respectively. Then,

$$\tilde{\lambda}_2 > \lambda_2$$

Proof. According to the aggregation function for covariance matrix, we have

$$\begin{aligned}\vec{\Sigma}^{(l)}(G, G') &= (1 - \delta)\mathcal{A}(G, G')\vec{\Sigma}^{(l-1)}(G, G') + \delta\vec{\Sigma}^{(l-1)}(G, G') \\ &= ((1 - \delta)\mathcal{A} + \delta I)\vec{\Sigma}^{(l-1)}(G, G') \\ &:= \tilde{\mathcal{A}}(G, G')\end{aligned}$$

Since new aggregation matrix $\tilde{\mathcal{A}}(G, G')$ is a stochastic matrix, which can be seen from,

$$\sum_j \tilde{\mathcal{A}}(G, G')_{ij} = (1 - \delta) \sum_j \mathcal{A}(G, G')_{ij} + \delta \sum_j I_{ij} = 1$$

The new aggregation can slow down the convergence rate can be seen from considering their eigenvalues. Suppose the eigenvalues of original matrix $\mathcal{A}(G, G')$ are $\{\lambda_1 > \lambda_2 > \dots > \lambda_{nn'}\}$. We already know that the maximum eigenvalue is $\lambda_1 = 1$, and the converge speed is governed by the second largest eigenvalue λ_2 . Now we consider the second largest eigenvalue $\tilde{\lambda}_2$ of matrix $\tilde{\mathcal{A}}$:

$$\tilde{\lambda}_2 = (1 - \delta)\lambda_2 + \delta = \lambda_2 + \delta(1 - \lambda_2) > \lambda_2$$

Since $\lambda_2 < \tilde{\lambda}_2 < 1$, the convergence speed will be slow down, though it is still exponential convergent.

For the limit behavior of $\Sigma_{(r)}^{(l)}(G, G')_{uu'}$ as l tends to infinity, we can directly use the proof strategy from Theorems 1 and 2. \square

We then consider residual connection that is only applied on non-linear transformations (MLP). In this case, the signal propagation change from Equation (8) to:

$$h_{(r)}^{(l)}(u) = h_{(r-1)}^{(l)}(u) + \frac{\sigma_w}{\sqrt{m}} W_{(r)}^{(l)} \phi(h_{(r-1)}^{(l)}(u)) \quad (26)$$

As a result, the recursive equation for the corresponding GNTK can be expressed as,

$$\Theta_{(r)}^{(l)}(G, G')_{uu'} = \Theta_{(r-1)}^{(l)}(G, G')_{uu'} (\dot{\Sigma}_{(r)}^{(l)}(G, G')_{uu'} + 1) + \Sigma_{(r)}^{(l)}(G, G')_{uu'} \quad (27)$$

This formula is similar to the vanilla GNTK in the infinitely wide limit. Only an additional residual term appears according to the residual connection. It turns out that this term can help to slow down the convergence rate for non-linear transformation. We then consider the effect made by the residual connection on aggregation.

Theorem 4 (Convergence rate for GNTK with residual connection between transformations). *Consider a GCN of the form (7) and (26). If $\mathcal{A}(G, G')$ is irreducible and aperiodic, with a stationary distribution $\pi(G, G')$, then there exist constants $0 < \alpha < 1$ and $C > 0$, and constant matrix v and v' depending on R , such that,*

$$|\Theta_{(r)}^{(l)}(G, G')_{uu'} - \pi(G, G')(Rl(1 + \frac{\sigma_w^2}{2})^{Rl}v + v')| \leq C\alpha^l$$

Proof. According to the signal propagation Equation (26), we have,

$$q_r(G) = q_{r-1}(G) + \frac{\sigma_w^2}{2} q_{r-1}(G) = (1 + \frac{\sigma_w^2}{2}) q_{r-1}(G)$$

Since $\sigma_w^2 > 0$, $q_r(G)$ grows at an exponential rate.

Now, we turn to compute the correlation term $c_r(G, G')$. For convenience, we suppose $q_r(G) = q_r(G')$. Then,

$$\begin{aligned}c_{r+1}(G, G') &= \frac{\Sigma_{r+1}(G, G')}{q_{r+1}(G)} \\ &= \frac{1}{1 + \frac{\sigma_w^2}{2}} \frac{\Sigma_r(G, G')}{q_r(G)} + \frac{1}{1 + \frac{\sigma_w^2}{2}} \frac{\sigma_w^2}{2} f(c_r(G, G')) \\ &= \frac{1}{1 + \frac{\sigma_w^2}{2}} c_r(G, G') + \frac{\frac{\sigma_w^2}{2}}{1 + \frac{\sigma_w^2}{2}} f(c_r(G, G'))\end{aligned}$$

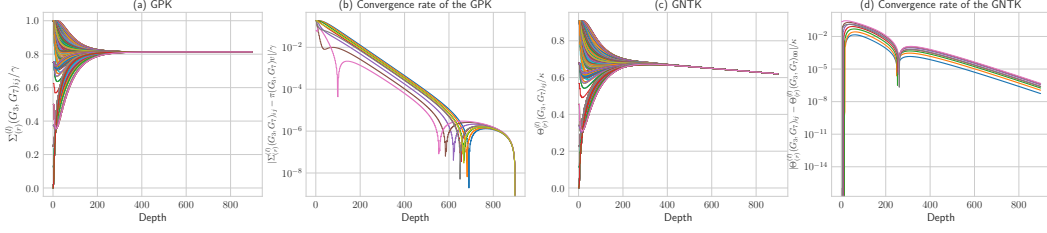


Figure 4: Convergence rate for the GPK and the GNKT. (a) Value changes of the re-normalized GPK by $\gamma = (1 + \frac{\sigma_w^2}{2})^{Rl}$ elements as the depth grows; although their initial values are different, they all tend to the same value as depth increases. (b) The distance changes between re-normalized GPK elements by $\kappa = Rl(1 + \frac{\sigma_w^2}{2})^{Rl}$ and their limiting value as the depth grows. (c) Value changes of re-normalized GNTK elements as the depth grows. (d) The distance changes between re-normalized GNTK elements and a random element from GNTK as the depth grows.

Using Taylor expansion of f near 1, as have been done in the proof of Lemma 2,

$$f(x)|_{x \rightarrow 1-} = x + \frac{2\sqrt{2}}{3\pi}(1-x)^{3/2} + O((1-x)^{5/2})$$

we have,

$$c_{r+1}(G, G') = c_r(G, G') + \frac{2\sqrt{2}}{3\pi} \frac{\frac{\sigma_w^2}{2}}{1 + \frac{\sigma_w^2}{2}} [(1 - c_r(G, G'))^{3/2} + O((1 - c_r(G, G'))^{5/2})]$$

Note that it is similar to the case of MLP without residual connection:

$$c_{r+1}(G, G') = c_r(G, G') + \frac{2\sqrt{2}}{3\pi} [(1 - c_r(G, G'))^{3/2} + O((1 - c_r(G, G'))^{5/2})]$$

Following the proof diagram in Theorem 1 and 2, we can obtain the behavior of $\Sigma_{(r)}^{(l)}(G, G')_{uu'}$ and $\Theta_{(r)}^{(l)}(G, G')_{uu'}$ in the large depth limit,

$$|\Sigma_{(r)}^{(l)}(G, G')_{uu'} - \pi(G, G')((1 + \frac{\sigma_w^2}{2})^{Rl}v)| \leq C\alpha^l$$

$$|\Theta_{(r)}^{(l)}(G, G')_{uu'} - \pi(G, G')(Rl(1 + \frac{\sigma_w^2}{2})^{Rl}v)| \leq C\alpha^l$$

□

A.4 Experiment

Theorems 4 provide theoretical convergence rates for the GPK $\Sigma(G, G')$ and the GNTK $\Theta(G, G')$ on the residual GCNs, respectively. We demonstrate these results in Figure 4. We select two graphs denoted as G_3 and G_7 from the MUTAG dataset. The GPK and GNTK are generated from the infinitely-wide GCNs with ReLU activation, with $R = 3$, $L = 300$, and $\sigma_w^2 = 0.1$. Figure 4(a) shows all elements of a covariance matrix kernel (GPK) converge to an identical value as the depth goes larger. Figure 4(b) further illustrates the convergence rate of the GPK is exponential, as predicted by Theorem 4. Then we demonstrate the exponential convergence rate of GNTK in Theorem 4 by comparing the distance between elements of the GNKT matrix, summarized in Figure 4(c,d).