

Improving Robustness of Deep Reinforcement Learning Agents: Environment Attacks based on Critic Networks [★]

Lucas Schott¹, Manon Césaire^{1,2}, Hatem Hajri¹, and Sylvain Lamprier²

¹ Institute of Research and Technology SystemX, Palaiseau, France

<https://www.irt-systemx.fr/>

{lucas.schott,manon.cesaire,hatem.hajri}@irt-systemx.fr

² Sorbonne University, Paris, France

<https://www.sorbonne-universite.fr/>

sylvain.lamprier@lip6.fr

Abstract. To improve policy robustness of deep reinforcement learning agents, a line of recent works focus on producing disturbances of the environment. Existing approaches of the literature to generate meaningful disturbances of the environment are adversarial reinforcement learning methods. These methods set the problem as a two-player game between the protagonist agent, which learns to perform a task in an environment, and the adversary agent, which learns to disturb the protagonist via modifications of the considered environment. Both protagonist and adversary are trained with deep reinforcement learning algorithms. Alternatively, we propose in this paper to build on gradient-based adversarial attacks, usually used for classification tasks for instance, that we apply on the critic network of the protagonist to identify efficient disturbances of the environment. Rather than learning an attacker policy, which usually reveals as very complex and unstable, we leverage the knowledge of the critic network of the protagonist, to dynamically complexify the task at each step of the learning process. We show that our method, while being faster and lighter, leads to significantly better improvements in policy robustness than existing methods of the literature.

Keywords: Adversarial Attacks · Policy Robustness · Deep Reinforcement Learning.

1 Introduction

Deep Reinforcement Learning (**DRL**) is widely used to train autonomous agents in many different contexts. Autonomous agents trained with these methods can be very efficient and reach super-human level for the targeted task they were trained for [14,5]. However, when the environment conditions change, even slightly, the agent performances can drop dramatically. These issues can be observed, for instance, when going from the simulation to the real world. One of

[★] Supported by Institute of Research and Technology SystemX

the main challenges in autonomous systems is to obtain policies that are robust to disturbances and changes in the environment, in particular to resolve problem of the gap between the simulation and real world.

To improve robustness of autonomous agent policies, a line of approaches focus on Adversarial Reinforcement Learning methods (**AdvRL**), in particular on methods formulated as two-player games between a protagonist agent, which learns to perform a task, and an adversary, which learns to generate efficient disturbances in the environment to defeat the protagonist. The goal is to train the protagonist agent to become more resistant to the disturbances generated by the adversary agent, assuming that this can generalize in slightly different, possibly more complex, environments in which it can be deployed. In this paper, we propose a new approach which is to rely on Adversarial Attacks of Neural Networks, and in particular based on the Critic Network of the protagonist agent, to generate meaningful disturbances in the environment, without having to train an adversary agent.

Our contribution is :

- Applying adversarial attacks of neural networks to generate disturbances in the environment.
- Using the gradient of the Critic Network to generate meaningful disturbances.
- Showing the efficiency of our approach in comparison to existing methods of the literature which generates disturbances in the environment.
- Showing the benefits of attacking the environment rather than attacking observations with adversarial attacks of neural networks, to improve the robustness of the policy.

2 Backgrounds and Task

2.1 Reinforcement Learning

Reinforcement learning [19] consists of an agent which sequentially chooses actions from observations over a sequence of time steps and learns to perform a task by trying to maximize cumulative discounted rewards.

The problem is modeled as a Markovian Decision Process (**MDP**) [2] which can be expressed by the tuple (S, A, P, R) , where S is the observation space, A is the action space, $P : S \times A \times S \rightarrow [0; 1]$ is the transition probability $P(s_{t+1}|s_t, a_t)$. $R : S \times A \times S \rightarrow \mathbb{R}$ is the reward function $R(s_t, a_t, s_{t+1})$. In general, agents only get a partial observation $x_t \in X$ of the state $s_t \in S$ at time step t , X being the set of partial observations. In this paper we assume the environment is fully-observed $x_t = s_t \forall t$.

RL algorithms attempt to learn a policy $\pi_\theta : X \times A \rightarrow [0; 1]$ which calculates the probability $\pi_\theta(a_t|x_t)$ to select the action a_t given the observation x_t , θ denotes the parameters for the policy π . The goal is to maximize the expected cumulative discounted reward $\mathbb{E}_{\tau \sim \pi_\theta} \sum_{t=1}^{\infty} \gamma^t r_t$ with r_t the reward obtained at

step t in episode τ , $\gamma \in]0, 1[$ being the discount factor. The policy π_θ is learned from sequential experiences in the form of transition tuples $(s_t, a_t, r_{t+1}, s_{t+1})$.

In this paper we work with the Proximal Policy Optimization algorithm (**PPO**) [18], while any other RL approach could be considered provided that it is composed of a Critic network $V(s_t)$ in addition to the Actor network $\pi_\theta(s_t)$. The Critic Network outputs an estimation of the value function $V_\phi(s_t)$ of any state s_t , which corresponds to the expected future cumulative discounted reward starting from s_t , following the current policy π_θ , defined by the Actor network. In the following, we rely on the knowledge carried by this Critic network to build our attacks.

2.2 Task: Anticipate Environment Evolution

To learn robust policies with reinforcement learning, several approaches have been explored. The robust algorithm approach is to use an algorithm which due to its structure, will learn policies by minimizing the risks. An example is Robust Student Deep Q Network (**RS-DQN**) [4], this algorithm uses two distinct neural networks, the first to learn a policy for the exploration and the second to learn the optimal policy. The robust algorithms approach is efficient to learn safe policies which avoid the danger areas. Another approach are robust training methods. Some of the robust training methods aim to robustify the policy of an agent by interfering with the rewards during the training, for instance the methods: Reinforcement Learning with perturbed Rewards (**RLPR**) [20] and Adversarial Manipulations on Cost Signals (**AMCS**) [10]. One of the limits of these approaches is that the agent only learns safe policy if the environment stay unchanged, but it does not allows to learn a policy which would be robust to changes in the environment.

As mentioned in introduction, an important problem when deploying in real-world environments RL agents trained on simulation is that the gap, even small, between the corresponding MDPs can make the policies very inefficient. This can also occur when the environment conditions periodically slightly evolve through time, with chaotic dynamics, and that we want a policy learned with some given conditions at a given step still be accurate in next steps. More formally, consider that the targeted environment is an MDP $\Omega^* = (S^*, A, P^*, R^*)$, and assume that the only environment we have access during learning is defined by the MDP $\Omega = (S, A, P, R)$. We assume that the simulator is able to represent every target state (i.e., $S^* \subset S$), but some of the states in S^* are not reachable following P in Ω given the distribution of initial states. Our aim is to learn an agent from Ω which is robust to different conditions from Ω^* . We assume that we have no knowledge about the changes that will be applied on Ω , but that P^* follows dynamics similar to those of P (e.g., same physical equations). Thus, to anticipate possible evolution of the environment conditions, we need to consider slight changes around situations reached during learning. This is the purpose of adversarial reinforcement learning approaches, that we focus on in this paper. In the following, we assume that we have access to features of the simulator that

allow us to manipulate states $s \in S$, by applying slight modifications to obtain new states s' respecting constraints from the environment (i.e., $s' \in S$).

3 Related Work

3.1 Adversarial Reinforcement Learning

Adversarial Reinforcement Learning methods seek at improving robustness of neural network policies by formulating the learning problem as a two-player game. While the protagonist agent seeks at solving the task, an adversarial agent learns to generate disturbances to perturb the protagonist. These approaches can be divided in two groups. The first ones generate perturbations in the observation space of the agent, in order to make the protagonist more robust w.r.t corrupted observations. For autonomous vehicle tasks for instance, this concerns corruptions due to sensor failures or hacking. The second approach is to generate disturbances directly in the environment. While generating disturbances on the observations only changes each x to a given x' with no implications for future steps of the episodes, applying adversarial attacks to the environment changes any current state from s to s' , leading the agent to a new situation to solve. A given disturbed state s' remains a valid state of the environment, but may be a state impossible to reach following its dynamics and initial conditions. Since the set of such possible modifications may be very large, there is a need for strategies to generate useful situations, which lead to difficult cases for the agent.

In the following, we present state of the art Adversarial Reinforcement Learning methods that generate disturbances in the environment.

Robust Adversarial Reinforcement Learning (RARL) [17] follows the scheme of a zero-sum two-player game by co-training the protagonist and the adversary by reinforcement learning. The protagonist learns to perform the task, while the adversary learns to disturb the protagonist by applying modifications to the environment. The game can be expressed as a two-player zero-sum Markov Game [12]. The MDP of this game can be expressed as the tuple $(S, A_p, A_a, P, R_p,)$, where S is the state space, A_a and A_p are the action spaces of the adversary and the protagonist. $P : S \times A_a \times A_p \times S \rightarrow [0; 1]$ is the transition probability and $R_p : S \times A_a \times A_p \times S \rightarrow \mathbb{R}$ is the reward function of the protagonist agent. In a zero-sum two-player game, the reward get by the protagonist is R_p , while the adversary gets the reward $R_a = -R_p$.

Semi Competitive Robust Adversarial Reinforcement Learning (SC-RARL) [13] is the same as RARL but in a semi-competitive setting. The difference with RARL is that it is not a zero-sum game, $R_a \neq -R_p$. The SC-RARL game MDP can be expressed as the tuple $(S, A_p, A_a, P, R_p, R_a)$. In this game, while the protagonist gets the reward R_p , the adversary gets a reward which is a linear combination of R_p the reward of the protagonist and R_c a cooperative

reward to reduce the amplitude of the disturbances. The reward of the adversary is $R_a = \alpha R_c - (1 - \alpha)R_p$, where α is the cooperation coefficient, which is used to regulate the proportion of cooperative rewards compared to competitive rewards. The goal of using SC-RARL instead of RARL is to generate more realistic disturbances which can be better captured by the protagonist agent to improve its robustness.

Fictitious Self Play (FSP) [7,8] and its Semi Competitive setting (**SC-FSP**) [13] follow the same principle as RARL and SC-RARL, except that the adversary is not just an RL agent, but is an agent which uses two models. The adversary agent uses an RL Model which learns to produce the most efficient disturbances against the protagonist agent, and a Supervised Learning Model which learns to produce the average historical strategy of the RL model. During the training time of the protagonist agent, the adversary produces halftime an attack based on its RL model and halftime an attack based on its SL model. The goal of this method is to prevent the protagonist agent from over-fitting its defense strategy on the best strategy of the adversary agent, and then better generalize to other type of disturbances and keep good performances in situations without disturbances.

3.2 Gradient-based Adversarial Attacks of Neural Network Policies

Other approaches related to our work rely on gradient-based adversarial attacks, classically applied on neural networks classifiers (**NNC**). Gradient-based adversarial attacks of NNC arise from [6], which showed that NNC are vulnerable to adversarial inputs: Small perturbations of the images, even imperceptible for human sight can fool an NNC and make it misclassify adversarial examples. Several methods have been proposed, various adversarial attacks of NNC depending on different metrics L_0 , L_2 or L_∞ such as (see for instance the survey [3]). In this paper, we are inspired by prior gradient-based approaches like the Jacobian Saliency Map Attack (**JSMA**) [16].

Applying adversarial attacks of neural networks on RL agents consists of crafting adversarial observations x' to replace the original observations x for the agent, and then let the agent choose the action $a = \pi(x')$. For agents with discrete action spaces, an attack is successful if the agent changes its decision $\pi(x) \neq \pi(x')$. By having its observations attacked, the agent is led to make bad decisions, and then it can fail to achieve its goal. Any adversarial attack method developed to fool NNC is usable to fool neural network policies trained by reinforcement learning with discrete action space. It has been shown that neural networks policies are vulnerable to adversarial attacks which perturb the observations of the agent for RL agents that uses images as observations, even with small perturbations invisible for human sight [9]. It has also been shown that introducing perturbed observations during the training of an agent helps the agent to become more robust to such perturbations in its inputs [1]. We notice that, to the best of our knowledge, adversarial attacks have never been

used to generate disturbances in the environment, which we propose to consider in the next section.

4 Contributions

4.1 Adversarial Attacks of Neural Network Policies applied to the environment

To improve the robustness of an agent to unknown situations and uncertainty in the environment, we propose a new approach which uses adversarial attacks of Neural networks to disturb the environment, by modifying the state s of environment rather than the observation x as done by existing approaches. The goal is to perform an adversarial training of the protagonist agent against focused disturbances in the environment, hence improving the robustness of the agent’s policy to changes in the environment. A scheme of the adversarial training process of an RL agent against adversarial attacks of neural network is shown in Figure 1.

The principle of our method is to use an adversarial attack of neural networks method Att , which generates an adversarial observation $x' = Att(x, \pi(x))$. Then instead of giving x' to the agent, use an environment modifier function M which uses the adversarial observation x' to modify the environment in a manner that the state of the environment s actually changes to a state $s' = M(x')$, with $s' \simeq x'$. The function M that does the modification of the environment shall modify the environment in a realistic manner, such as the perturbed state s' is still a valid state of the environment $s' \in S$.

The method we propose thus allows to use any existing adversarial attack methods of neural networks to define disturbances in the environment. To do so, we need to focus on environments with observation spaces which are mapped to features spaces that one can manipulate from disturbances crafted from observations. This thus requires to know the mapping function from observations to features from the environment. In the following, for simplicity purposes, we discuss about environments with direct one to one connections between observations and features of the environment but this could be easily extended to more complicated mapping functions to include in M .

4.2 Meaningful Adversarial Attacks applied to the environment

Applying adversarial attack method on neural network policies are used to change agents decisions by perturbing its inputs, these methods are designed to fool classifiers, which is the same thing as fooling an RL agents by perturbing its observations. In our case of adversarial attacks applied to the environment, our goal is not to make the decision of the agent change by providing an adversarial observation. Rather, our goal is to create disturbance in the environment via adversarial attack methods to generate meaningful disturbance in the environment. In the following, we first discuss of an approach based on the Actor

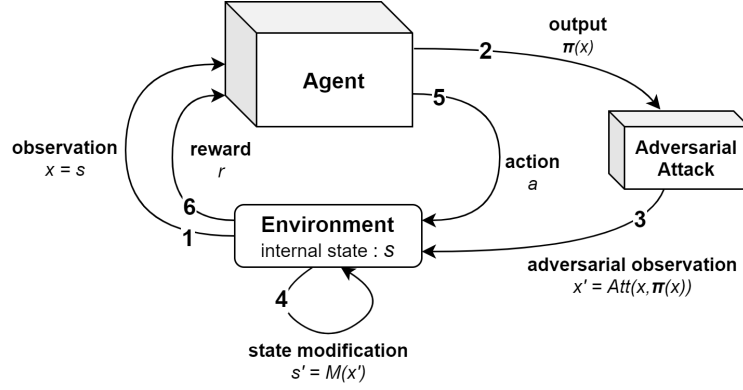


Fig. 1. Scheme of the adversarial training of an agent against adversarial attacks of neural networks applied to the environment

network, which presents limitations, that we overcome with the second approach based on the Critic network of the protagonist, that corresponds our main contribution.

Attacking the Actor Neural Network The first method we propose is to generate adversarial examples by attacking the Actor Neural Network of an agent with discrete action space. As done in works crafting attacks on observations given an actor policy π , we seek at crafting a perturbation δx of x that minimizes the probability of the dominant action. The principle is to leverage the Jacobian matrix of the function learned by the actor network.

Consider the Actor Network π_θ , and denote by $\Pi(x)$ its logit outputs. $\Pi_{a_j}(x)$ is the value of the action a_j in the output given the input x and $a_j \in A$ the different possible actions. To craft an adversarial example x' from a given input x at a distance of $\|x' - x\| = \varepsilon$, we first define a perturbation map H , based on the jacobian $\nabla_x \Pi(x)$, as:

$$H[i] = \left(\sum_{\substack{a_j \neq a_d \\ a_j \in A}} \frac{\partial \Pi_{a_j}(x)}{\partial x_i} \right) - \left(\frac{\partial \Pi_{a_d}(x)}{\partial x_i} \right) \quad (1)$$

where $a_d = \underset{a \in A}{\operatorname{argmax}} \pi_\theta(a|x)$ is the preferred action for π_θ in x .

Assuming local smoothness of the actor function, this allows to generate the normalized perturbation η as:

$$\eta = \frac{\varepsilon}{\|H\|} H \quad (2)$$

Then, η is used to create the adversarial observation x' :

$$x' = x + \eta \quad (3)$$

Finally, the idea is to modify the environment to set the current state to $s' = M(x')$. Given this process, x' is an observation which reduces the probability of the chosen action a and increases the probability of all other actions. s' is thus a state in which the agent is less confident in the dominant action. During the adversarial learning procedure, this lean the sampling process toward less known situations, possibly outside the original space of reachable states $\tilde{S} \subset S$, with greater uncertainty of the agent. However, attacking the actor does not allow to choose the state modification with a long term disturbance feedback. It only looks at punctual decision modifications, while an attack that would consider the expected cumulative reward could be more efficient. For this purpose, we propose a second approach below.

Attacking the Critic Neural Network The second method we propose is to produce the attack on the base of the Critic Neural Network, used for example in the PPO algorithm, which carries more long term knowledge than the actor. The output of this neural network is a single scalar, which is an approximation of the discounted sum of the future expected rewards starting from this observation, $V(x_t) = \mathbb{E}[\sum_{t=0}^{\infty} \gamma^t r(s_t, a_t)]$. The method relies on the Jacobian matrix of this output with respect to inputs to generate perturbations. The goal of this attack is to decrease the value of the output of the neural network given an observation, by adding perturbations which are to the opposite of the normalized Jacobian matrix.

Consider the Critic Neural Network and denote by $V(x)$ the output of the neural network. To craft an adversarial example x' from a given input x at a distance of $\|x' - x\| = \varepsilon$, our method first computes the gradient $\nabla V(x)$ which is the Jacobian matrix of the neural network with respect to the input, and then generates the perturbation η

$$\eta = \frac{\varepsilon}{\|\nabla V(x)\|} \nabla V(x) \quad (4)$$

Then, to decrease the value of the output of the critic network, we generate the adversarial example x' as :

$$x' = x - \eta \quad (5)$$

Assuming local smoothness of the critic function, this method creates an adversarial example x' for which the $V(x')$ is worse, thus being likely to allow for a lower expected cumulative reward according to the current actor policy. For instance in autonomous driving systems, where the goal of the agent is to survive as long as possible without having an accident, a lower critic value is likely to correspond to a dangerous situation, while a higher value is safer. So by modifying the environment current state to $s' = M(x')$, it creates unwanted and dangerous situations for the agent.

5 Experimental Evaluations

5.1 Experimental Setup

The aim is to assess the efficiency of our method in terms of robustness against environment changes, as defined in the task definition in section 2.2. For this purpose, we train different agents with reinforcement learning by using different learning methods, including RARL, FSP, SC-RARL, SC-FSP and our method of adversarial attack applied to the environment, in environments in a base/easy configuration, which we test in a harder configuration of the same environment. We consider two different environments, as described below.

FlappyBird-v0 [15] is an Open source environment in 2 dimensions where the agent is a bird which tries to fly and avoid pipe obstacles as long as possible. The MDP in this environment can be represented by the tuple (S, A, P, R) . The states $s \in S$ are (see Fig. 2):

$$s = (y, h_1, v_{u1}, v_{l1}, h_2, v_{u2}, v_{l2}) \quad (6)$$

where y is the altitude of the bird from the ground, h_1 is the horizontal distance between the bird and the first next couple of pipes, v_{u1} and v_{l1} are the vertical signed distances between the agent and the upper and lower pipes. h_2 , v_{u2} and v_{l2} are the same for second couple of pipes behind.

The action of the agent $a_t \in A$ is a discrete choice between 2 possibilities:

- 0: do nothing (let the gravity pull down the bird)
- 1: flap the bird's wings (add an instantaneous upward velocity)

The reward function of the agent is at each time step $R = 1$. The episodes end when the bird has a collision with a pipe or with the ground, or if the agent reaches 1000 time steps. The goal of the agent is to survive to keep collecting this reward at each time step.

Highway-v0 [11] is a 2D open-source autonomous car driving simulation environment. In this environment the agent drives a car on an infinite 4 lanes unidirectional highway. The vehicle piloted by the agent (the ego-vehicle) is inserted in a traffic flow of other vehicles (the exo-vehicles). All exo-vehicles follows a basic driving algorithm. The goal of the agent is to drive as fast as possible without having an accident.

The MDP in this environment and our configuration in the following can be represented by the tuple (S, A, P, R) , where states $s \in S$ are (see Fig. 3):

$$s = [y_{ego}, v_{ego}, x_{bl}, v_{bl}, x_{fl}, v_{fl}, x_b, v_b, x_f, v_f, x_{br}, v_{br}, x_{fr}, v_{fr}] \quad (7)$$

Where y_{ego} is the transverse position of the agent in the width of the road, v_{ego} is the velocity of the agent, the x_s are the positions of the exo-vehicles relative to the agent in the longitudinal direction of the road. v_s are the velocities of the exo-vehicles relative to the agent velocity. bl , fl , b , f , br , and fr represents respectively closest exo-vehicles to the agents, in the back-left, front-left, back, front, back-right, and front-right positions. At each time step the agent observes only 3 lanes, the one it is on, the two adjacent lanes, left and right, and observes 2 exo-vehicles on each lanes.

The action of the agent $a_t \in A$ is a discrete choice between 5 possibilities:

- 0: change lane to the left
- 1: nothing (stay on the same lane, at the same velocity)
- 2: change lane to the right
- 3: accelerate ($+5m \cdot s^{-1}$)
- 4: decelerate ($-5m \cdot s^{-1}$)

The reward function of the agent is at each time step

$$R = \begin{cases} 0 & \text{if } v_{ego} < 20m \cdot s^{-1} \\ -1 & \text{if collision} \\ \frac{1}{15} \times (v_{ego} - 20) & \text{otherwise} \end{cases} \quad (8)$$

The episode ends when the agent has a collision with another vehicle, or when it reaches 60 time steps. The goal of the agent is to drive as long as possible without having a collision, and the faster as possible to get the maximum reward at each time step.

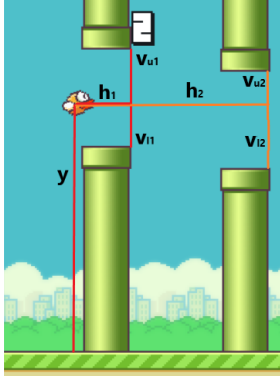


Fig. 2. State representation in FlappyBird-v0

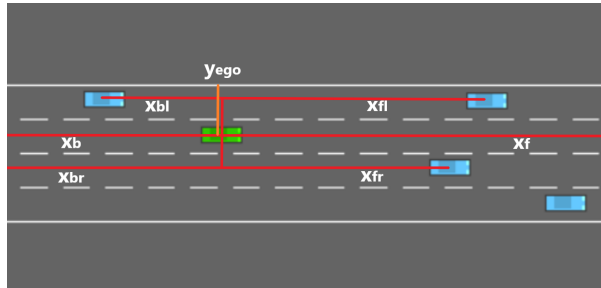


Fig. 3. State representation (without velocities) in Highway-v0

Environment Configurations For this experiment we use two different configuration of the two environments, a base configuration and a complexified one. For FlappyBird-v0, the base configuration is the environment with the size of the gap between the two pipes between 140 and 180px, and in the complexified configuration the size of the gap is between 100 and 120px. For Highway-v0 the base configuration is the highway with a standard density of exo-vehicles around the agent. The complexified configuration is the highway with a higher density of exo-vehicles around the agent, set to 1.75 times the density of the base configuration.

Disturbances In FlappyBird-v0 the disturbances we apply in the environment are on v_{u1} and v_{u2} , the vertical positions of the upper pipes. The disturbances we apply on Highway-v0 are modifications of v_{exo} and x_{exo} , the velocities and the positions of the exo-vehicles.

Training For both environments we first pre-train a protagonist agent in the base configuration. Then starting from this pre-trained agent we finish the training of a Base_Agent in the base environment and a Complex_Agent in the complexified environment. Starting from the pre-trained agent we also finish the training by adversarial training of an agent using different attacks, where environment based settings correspond to the approaches we proposed in previous section: environment attack based on actor network (**EAAN**), observations attack based on actor network (**OAAN**), environment attack based on critic network (**EACN**), observations attack based on critic network (**OACN**), for different amount of perturbation ε .

For comparison purposes, we also co-train an agent starting from the pre-trained agent for both methods RARL and FSP methods, by first training the adversary until convergence, and then alternating training the protagonist and adversary until convergence of both policies. We perform these co-training for different amount of perturbation ε . And then we take the ε which gives the better performances for the protagonist agent in the complexified environment. Finally, we co-train a protagonist and the adversary for methods SC-RARL and SC-FSP with the selected value of ε , for different cooperation_coefficient α .

5.2 Results

Attacking the agent with the different methods, for different amount of disturbances ε . We compared the effect of the different attack methods on the performance of the agents on the environment FlappyBird-v0 and Highway-v0 (see Fig. 4 and 5). For all graphs presented in this paper, the shaded areas correspond to 95% confidence intervals. We see that RARL and FSP are better than EACN to perturb the agent in FlappyBird-v0 but not in Highway-v0, this is because FlappyBird is a very basic environment, and we only attack 2 variables so it is very easy for the adversary agents to learn the optimal disturbance policy. This is not the case in Highway-v0 which is much more complex, and in which we

attack 12 variables, so it is much more complicated for adversary agents to learn the optimal disturbance policy. EACN keeps its efficiency in Highway-v0 because it leverages the knowledge of the critic network to produce disturbances. We also see that applying adversarial attacks of neural networks on the environment is more efficient than applying these attacks on the observations.

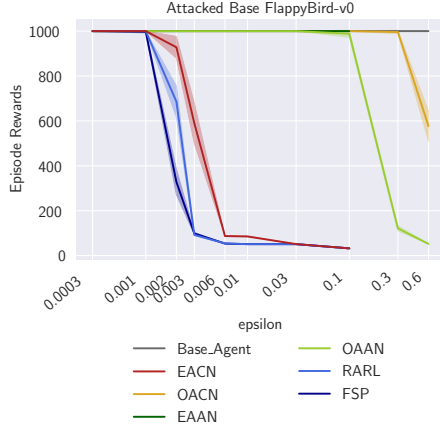


Fig. 4. Agent’s performances while being attacked by the different attack methods according to the amount of disturbance ε , in FlappyBird-v0

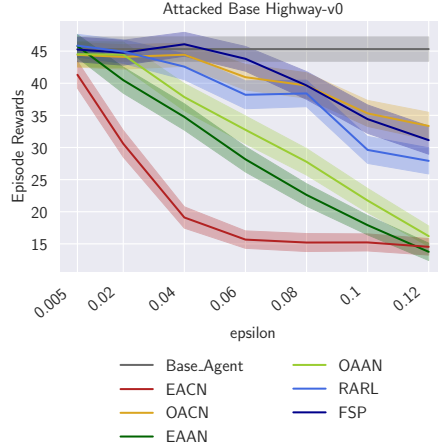


Fig. 5. Agent’s performances being attacked by the methods according to the amount of disturbance ε , in Highway-v0

Evaluating the adversarial trained agents for the different attack methods, on the base environments. We learned different agents by adversarial training against each of the attack methods, for different ε , in both environments. All adversarial trained agents against the different methods keep being efficient in the base environments for low amount of disturbances ε during the adversarial training. And then their performances drop for too high ε because the amounts of disturbances are no more realistic (see Fig. 6 and 7).

Evaluating the adversarial trained agents for the different attack methods, on the complex environments. In the complexified configuration of the environments FlappyBird-v0 and Highway-v0 we can see that RARL, FSP and EACN allow to greatly increase the performances of the agents by adversarial training for some amount of disturbances ε . The attack on the observations also allows to increase the performances of the agents but much less than the attacks on the environment (see Fig. 8 and 9). First, OACN obtains pretty bad results. This is due to the fact that this approach only creates observations that appear

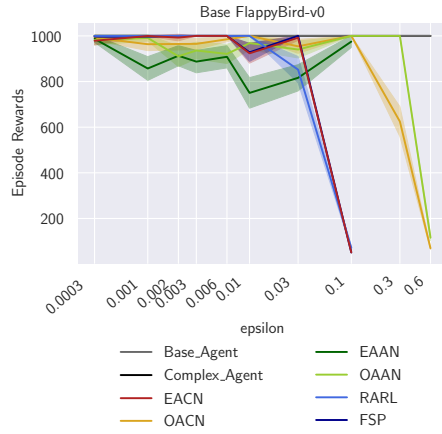


Fig. 6. Performances of the agents trained by adversarial training against the different attack methods according to ε the amount of disturbance during the adversarial training, in the base configuration of FlappyBird-v0

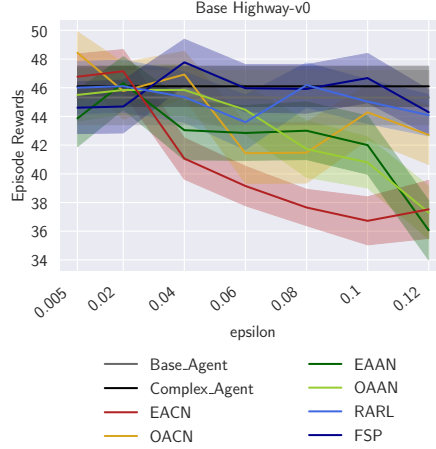


Fig. 7. Performances of the agents trained by adversarial training against the different attack methods according to ε the amount of disturbance during the adversarial training, in the base configuration of Highway-v0

dangerous to the agent, while the situation is not in the underlying environment (since the state did not change, only the observations did). Then, the agent only learns to associate observations for dangerous states as safe states, which is counterproductive. On the contrary, OAAN improves more the performances of the agent than EAAN. This is due to the fact that OAAN creates observations that maximize the change in the policy of the agent, which leads the agent to take bad decisions that can lead to dangerous situations, which the agent has to learn to deal with. Finally, EACN produces states that are bad for the critic, according to the estimation of the long term feedback, which can either place the agent in immediately difficult situations, or situations that will tend to be difficult to manage in future steps. This enables EACN to obtain the best results on both environments, with a significant improvement of the performances of the agent in complex settings, while being greatly lighter than its adversarial RL counterparts such as RARL or FSP. As for other methods, its performances are greatly dependent on the intensity of the attacks, which need to be carefully tuned via grid-search (but grid-search for this agent is greatly less costly than for RARL or FSP which require millions of co-evolution training episodes for each tested value).

Evaluating the adversarial trained agents for SC-RARL and SC-FSP, on the complex environments. After finding the best amount of disturbance ε for RARL and FSP strictly competitive settings, we then trained the agents

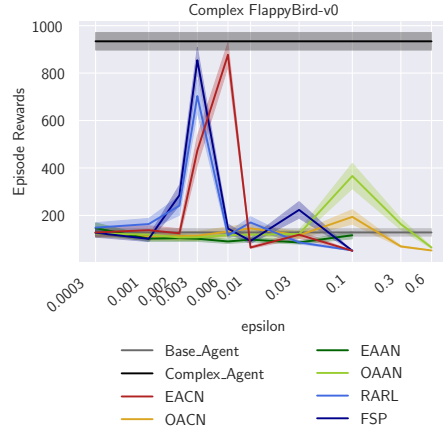


Fig. 8. Performances of the agents trained by adversarial training against the different attack methods according to ε the amount of disturbance during the adversarial training, in the complexified configuration of FlappyBird-v0

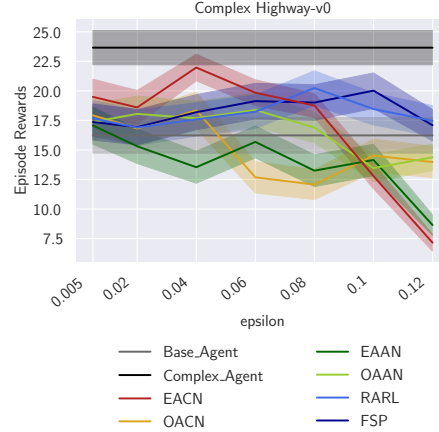


Fig. 9. Performances of the agents trained by adversarial training against the different attack methods according to ε the amount of disturbance during the adversarial training, in the complexified configuration of Highway-v0

by adversarial training with the semi-competitive setting for comparison purposes. We use the best ε given in Fig. 8 and 9 and tested for various values of cooperation coefficients. We see that for RARL, using semi-competitive rewards during the training allows better improvements in the performances of the agents than with strictly competitive rewards (cooperation coefficient = 0) in the complex configuration of both Flappybird-v0 and Highway-v0. However for FSP, using semi-competitive rewards only improves performances of the agent in Highway-v0 but not in FlappyBird-v0 (see Fig. 10 and 11)

Evaluating the best agents learned by adversarial training with the different attack methods, by varying complexity of the environment.

To evaluate the different adversarial training methods two know which method best improves the robustness of the agent. We keep the best agents which have better performances obtained by adversarial training against the different attack methods, and tested their performances on a range of complexification levels. For FlappyBird-v0 we tested each agent in the environment with the gap size between obstacles from 100px to 150px. For Highway-v0 we tested each agent in the environment with exo-vehicles density between 1 and 2. We can observe that in Highway-v0 and FlappyBird-v0 the best method to improve the robustness of the agents is EACN (see Fig. 12 and 13), while being greatly lighter than adversarial reinforcement methods FSP and RARL.

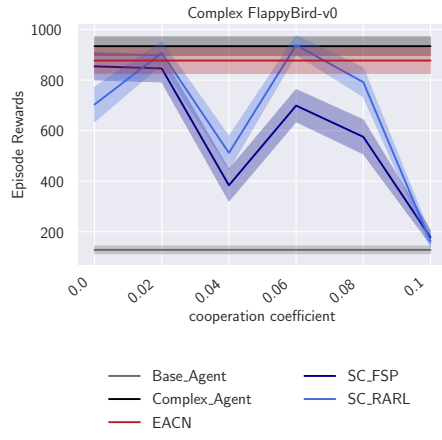


Fig. 10. Performances of the agents trained by adversarial training against the different attack methods according to α , the cooperative coefficient, during the adversarial training, in the complexified configuration of FlappyBird-v0

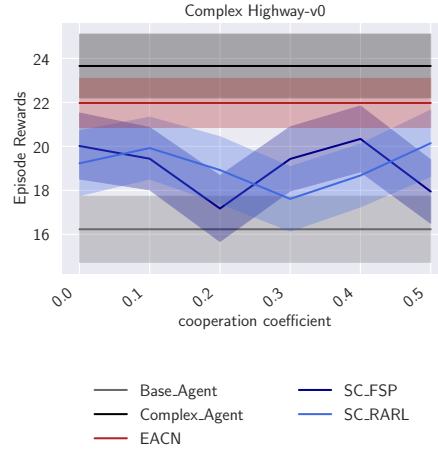


Fig. 11. Performances of the agents trained by adversarial training against the different attack methods according to α , the cooperative coefficient, during the adversarial training, in the complexified configuration of Highway-v0

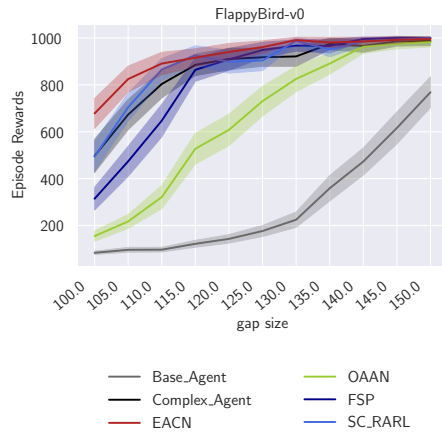


Fig. 12. Performances of the best agents trained by adversarial training against the different attack methods according to the complexity of the environment in FlappyBird-v0

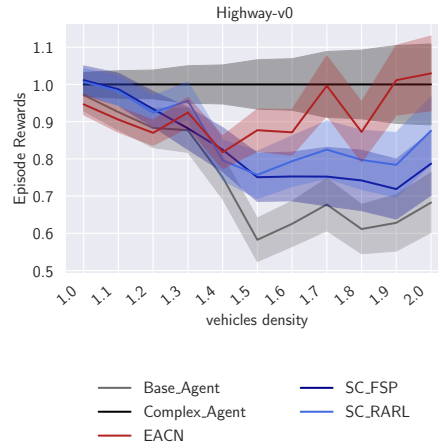


Fig. 13. Performances of the best agents according to the environment complexity in Highway-v0. Rewards are normalized w.r.t. to the score of the agent trained in the complex environment

6 Conclusion

In this paper, we proposed a method for improving robustness of RL agents based on adversarial attacks of the environment. In particular, we proposed to craft an environment attack based on the critic network (EACN), which gives insights on the long term impact of candidate attacks, without having to learn an adversarial agent as required in greatly more costly methods such as RARL or FSP. Our experiments showed the efficiency of the approach for learning robust agents, even significantly exceeding performances of the costly methods RARL, FSP, SC_RARL and SC_FSP in the two considered environments. Future works concern the application of the method when the environment features are not directly linked to observations as it is the case in this work, for more complicated functions M that we can learn from experience.

References

1. Behzadan, V., Munir, A.: Vulnerability of deep reinforcement learning to policy induction attacks. In: International Conference on Machine Learning and Data Mining in Pattern Recognition. pp. 262–275. Springer (2017)
2. Bellman, R.: A markovian decision process. *Journal of mathematics and mechanics* **6**(5), 679–684 (1957)
3. Chakraborty, A., Alam, M., Dey, V., Chattopadhyay, A., Mukhopadhyay, D.: Adversarial Attacks and Defences: A Survey. arXiv e-prints arXiv:1810.00069 (Sep 2018)
4. Fischer, M., Mirman, M., Stalder, S., Vechev, M.: Online robustness training for deep reinforcement learning. arXiv preprint arXiv:1911.00887 (2019)
5. Fuchs, F., Song, Y., Kaufmann, E., Scaramuzza, D., Duerr, P.: Super-human performance in gran turismo sport using deep reinforcement learning. arXiv preprint arXiv:2008.07971 (2020)
6. Goodfellow, I.J., Shlens, J., Szegedy, C.: Explaining and harnessing adversarial examples. arXiv preprint arXiv:1412.6572 (2014)
7. Heinrich, J., Lanctot, M., Silver, D.: Fictitious self-play in extensive-form games. In: International conference on machine learning. pp. 805–813. PMLR (2015)
8. Heinrich, J., Silver, D.: Deep reinforcement learning from self-play in imperfect-information games. arXiv preprint arXiv:1603.01121 (2016)
9. Huang, S., Papernot, N., Goodfellow, I., Duan, Y., Abbeel, P.: Adversarial attacks on neural network policies. arXiv preprint arXiv:1702.02284 (2017)
10. Huang, Y., Zhu, Q.: Deceptive reinforcement learning under adversarial manipulations on cost signals. In: International Conference on Decision and Game Theory for Security. pp. 217–237. Springer (2019)
11. Leurent, E.: An Environment for Autonomous Driving Decision-Making (2018), <https://github.com/eleurent/highway-env>
12. Littman, M.L.: Markov games as a framework for multi-agent reinforcement learning. In: Machine learning proceedings 1994, pp. 157–163. Elsevier (1994)
13. Ma, X., Driggs-Campbell, K., Kochenderfer, M.J.: Improved robustness and safety for autonomous vehicle control with adversarial reinforcement learning. In: 2018 IEEE Intelligent Vehicles Symposium (IV). pp. 1665–1671. IEEE (2018)

14. Mnih, V., Kavukcuoglu, K., Silver, D., Graves, A., Antonoglou, I., Wierstra, D., Riedmiller, M.: Playing atari with deep reinforcement learning. arXiv preprint arXiv:1312.5602 (2013)
15. Nogueira, G.: flappy-bird-gym (2021), <https://github.com/Talendar/flappy-bird-gym>
16. Papernot, N., McDaniel, P., Jha, S., Fredrikson, M., Celik, Z.B., Swami, A.: The limitations of deep learning in adversarial settings. In: 2016 IEEE European symposium on security and privacy (EuroS&P). pp. 372–387. IEEE (2016)
17. Pinto, L., Davidson, J., Sukthankar, R., Gupta, A.: Robust adversarial reinforcement learning. In: International Conference on Machine Learning. pp. 2817–2826. PMLR (2017)
18. Schulman, J., Wolski, F., Dhariwal, P., Radford, A., Klimov, O.: Proximal policy optimization algorithms. arXiv preprint arXiv:1707.06347 (2017)
19. Sutton, R.S., Barto, A.G., et al.: Introduction to reinforcement learning, vol. 135. MIT press Cambridge (1998)
20. Wang, J., Liu, Y., Li, B.: Reinforcement learning with perturbed rewards. In: Proceedings of the AAAI Conference on Artificial Intelligence. vol. 34, pp. 6202–6209 (2020)