

StyleML: Stylometry with Structure and Multitask Learning for Darknet Markets

Pranav Maneriker Yuntian He Srinivasan Parthasarathy

The Ohio State University

{maneriker.1@, he.1773, parthasarathy.2}@osu.edu

Abstract

Darknet market forums are frequently used to exchange illegal goods and services between parties who use encryption to conceal their identities. The Tor network is used to host these markets, which guarantees additional anonymization from IP and location tracking, making it challenging to link across malicious users using multiple accounts (sybils). Additionally, users migrate to new forums when one is closed, making it difficult to link users across multiple forums. We develop a novel stylometry-based multitask learning approach for natural language and interaction modeling using graph embeddings to construct low-dimensional representations of short episodes of user activity for authorship attribution. We provide a comprehensive evaluation of our methods across four different darknet forums demonstrating its efficacy over the state-of-the-art, with a lift of up to 2.5X on Mean Retrieval Rank and 2X on Recall@10.

1 Introduction

Crypto markets are “*online forums where goods and services are exchanged between parties who use digital encryption to conceal their identities*” (Martin, 2014). They are typically hosted on the Tor network, which guarantees additional anonymization in terms of IP and location tracking. The identity of individuals on a crypto-market is associated only with a username; therefore, building trust on these networks does not follow conventional models prevalent in eCommerce. Interactions on these forums are facilitated by means of text posted by their users. This makes the analysis of textual style on these forums a compelling problem.

Stylometry is the branch of linguistics concerned with the analysis of authors’ style. Text stylometry was initially popularized in the area of forensic linguistics, specifically to the problems of author profiling and author attribution (Juola, 2006; Rangel

et al., 2013). Traditional techniques for authorship analysis relied upon the existence of long textual documents and large corpora, which enables characterizing features such as the frequency of words, capitalization, word and character n-grams, function word usage, etc. These features can then be fed into any statistical or machine learning classification framework, acting as an author’s ‘signature’. However, these techniques do not work commensurately on shorter texts typically found in social media and forums today. Additionally, the feature-based learning techniques are more suited to the monolingual, well-formed text setting.

Advancements in using neural networks for character and word-level modeling for authorship attribution aim to deal with the scarcity of easily identifiable ‘signature’ features and have shown promising results on shorter text (Shrestha et al., 2017). Andrews and Witteveen (2019) drew upon these advances in stylometry to propose a model for building representations of social media users on Reddit and Twitter. Motivated by the success of such approaches, we develop a novel methodology for building authorship representations for posters on various darknet markets. Specifically, our key contributions include:

- We develop a representation learning approach that couples temporal content stylometry with access identity (by leveraging forum interactions via *meta-path graph context information*) to model and enhance user (author) representation.
- Using a small dataset of labeled migrations, we build a novel framework for training the proposed models in a *multitask setting* across multiple darknet markets to further refine the representations of users within each individual market, while also providing a method to correlate users across markets.

- We demonstrate the efficacy of both the single-task and multitask learning methodology on forums associated with four darknet marketplaces: *Black Market Reloaded*, *Agora Marketplace*, *Silk Road*, and *Silk Road 2.0* when compared to the state-of-the-art (Shrestha et al., 2017; Andrews and Witteveen, 2019). We also present a detailed drill-down ablation study discussing the impact of various optimizations and highlighting the benefits of graph context and multitask learning.

2 Related Work

We describe related work in the domain of darknet market analysis, authorship attribution, and multitask learning for text.

2.1 Darknet Market Analysis

Broadly, content on the dark web includes resources devoted to illicit drug trade, adult content, counterfeit goods and information, leaked data, fraud, and other illicit services (Lapata et al., 2017; Biryukov et al., 2014). It also includes pages discussing politics, anonymization, and cryptocurrency. Biryukov et al. (2014) found that while a vast majority of these services were in English (about 84%), a total of about 17 different languages were detected, including Indo-European, Slavic, Sino-Tibetan, and Afro-Asiatic languages. Analysis of the volume of transactions on darknet markets indicates that they are resilient to closures; rapid migrations to newer markets occur when one market shuts down (ElBahrawy et al., 2019), and the total number of users remains relatively unaffected.

To better model the relationships between different types of objects in the associated graph, recent work such as that by Fan et al. (2018) and Hou et al. (2017) has levered the notion of a heterogeneous information network (HIN) embedding, where different types of nodes, relationships (edges) and paths can be effectively represented (Fu et al., 2017; Dong et al., 2017). Zhang et al. (2019) levered a HIN to model marketplace vendor sybil¹ accounts on the darknet, where each node representing an object is associated with some attributes of its type. They extracted various features based on textual content, photography styles, user profiles, and drug information and adopted an attribute-aware sampling method, which enabled two objects of

the same type with similar attributes to appear together more frequently in the sampled paths. Similarly, Kumar et al. (2020) proposed a multi-view unsupervised approach which incorporated features of text content, drug substances, and locations to generate vendor embeddings. We note that while such efforts (Zhang et al., 2019; Kumar et al., 2020) are related to our work, there are key distinctions. First, such efforts focus only on vendor sybil accounts. Second, in both cases, they rely on a host of multi-modal information (photographs, substance descriptions, listings, and location information) sources that are not readily available in our setting - which is just limited to forum posts. Third, neither exploit multitask learning.

2.2 Authorship Attribution of Short Text

Kim (2014) introduced convolutional neural networks (CNNs) for text classification. Follow-up work on authorship attribution (Ruder et al., 2016; Shrestha et al., 2017) leveraged these ideas to demonstrate that CNNs outperformed other models, particularly for shorter texts. The models proposed in these works aimed at balancing the trade-off between vocabulary size and sequence length budgets based on tokenization at either the character or word level. Further work on subword tokenization (Sennrich et al., 2016), especially byte-level tokenization, have made it feasible to share vocabularies across data in multiple languages. Models built using subword tokenizers have achieved good performance on authorship attribution tasks for specific languages (e.g., Polish (Grzybowski et al., 2019)) and also across multilingual social media data (Andrews and Bishop, 2019). Non-English as well as multilingual darknet markets have been increasing in number since 2013 (Ebrahimi et al., 2018). Our work builds upon all these ideas by using CNN models and experimenting with both character and subword level tokens.

2.3 Multitask learning

Multitask learning (MTL) (Caruana, 1997), aims to improve machine learning models’ performance on the original task by jointly training related tasks. MTL enables deep neural network-based models to better generalize by sharing some of the hidden layers among the related tasks. Different approaches to MTL can be contrasted based on the sharing of parameters across tasks - strictly equal across tasks (hard sharing) or constrained to be close (soft-sharing) (Ruder, 2017). These approaches have

¹a single author can have multiple users accounts which are considered as *sybils*

been applied in various NLP tasks, including language modeling (Howard and Ruder, 2018), Machine Translation (Dong et al., 2015), and dialog understanding (Rastogi et al., 2018). To the best of our knowledge, we are the first to propose the use of multitask learning for stylometry on the dark web.

3 StyleML Framework

Motivated by the success of social media user modeling using combinations of multiple posts by each user (Andrews and Bishop, 2019; Noorshams et al., 2020), we model posts on darknet forums using *episodes*. Each *episode* consists of the textual content, time, and contextual information from multiple posts. A neural network architecture f_θ maps each episode to combined representation $e \in \mathbb{R}^E$. The model used to generate this representation is trained on different metric learning tasks characterized by a second set of parameters $g_\phi : \mathbb{R}^E \rightarrow \mathbb{R}$. We design the metric learning task to ensure that episodes having the same author have *similar* embeddings. Figure 1 describes the architecture of this workflow and the following sections describe the individual components and corresponding tasks. Note that our base modeling framework is inspired by the social media user representations built by Andrews and Bishop (2019) for a single task. We add meta-path embeddings and multi-task objectives to enhance the capabilities of this base model within StyleML.




Figure 1: Overall StyleML Workflow

3.1 Component Embeddings

Each episode e of length L consists of multiple tuples of texts, times, and contexts $e = \{(t_i, \tau_i, c_i) | 1 \leq i \leq L\}$. Component embeddings map these individual components to some vector space.

Text Embedding First, we tokenize every input text post using either a character-level or byte-level tokenizer. A one-hot encoding layer followed by an embedding matrix E_t of dimensions $|V| \times d_t$ where V is the token vocabulary, and d_t is the token embedding dimension embeds an input sequence of tokens T_0, T_1, \dots, T_{n-1} . We get a sequence

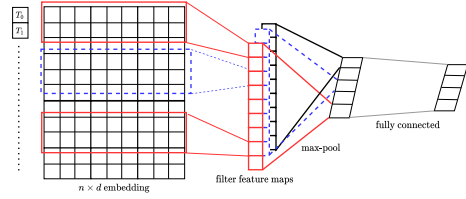


Figure 2: Text Embedding CNN (Kim, 2014)

embedding of dimension $n \times d_t$. Following this, we use f sliding window filters, with filters sized $F = \{2, 3, 4, 5\}$ to generate feature-maps which are then fed to a max-over-time pooling layer, leading to a $|F|f$ dimensional output (one per filter). Finally, a fully connected layer generates the embedding for the text sequence, with the output dimension d_t . A dropout layer prior to the final fully connected layer prevents overfitting. Figure 2 illustrates this architecture.

Time Embedding The time information for each post corresponds to the time when the post was created and is available at different granularities across darknet market forums. To have a consistent time embedding across different granularities, we only consider the most granular available date information (date) available on all markets. We use the day of the week for each post to compute the time embedding by selecting the corresponding embedding vector from a $7 \times d_\tau$ dimensional embedding matrix E_w , to generate a final embedding of dimension d_τ .

Structural Context Embedding The context of a post refers to the threads that it may be associated with. Past work (Andrews and Bishop, 2019) used the subreddit as the context for a Reddit post. In a similar fashion, we encode the subforum of a post as a one-hot vector and use it to generate a d_c dimensional context embedding. In the previously mentioned work, this embedding is initialized randomly. We deviate from this setup and use an alternative approach based on a *heterogeneous graph* constructed from forum posts to initialize this embedding.

Specifically, we build a graph in which there are four types of nodes: user (U), subforum (S), thread (T), and post (P), and each edge indicates either a post (U-T, U-P) or an inclusion (T-P, S-T) relationship. To learn the node embeddings in such heterogeneous graphs, we leverage the metapath2vec (Dong et al., 2017) framework with specific meta-path schemes designed for darknet forums. Each meta-path scheme can incorporate

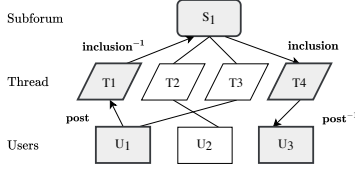


Figure 3: An instance of meta-path ‘UTSTU’

specific semantic relationships into node embeddings. For example, Figure 3 shows an instance of a meta-path ‘UTSTU’, which connects two users posting on threads in the same subforum and goes through the relevant threads and subforum. To fully capture the semantic relationships in the heterogeneous graph, we use seven meta-path schemes: UPTSTPU, UTSTPU, UPTSTU, UTSTU, UPTU, UTPU, and UTU. As a result, the learned embeddings will preserve the semantic relationships between each subforum, included posts as well as relevant users (authors).

3.2 Episode Embedding

The embeddings of each component of a post are combined into a $d_e = d_t + d_w + d_c$ dimensional embedding. An episode with L posts, therefore, had a $L \times d_e$ embeddings. We generated a final embedding for each episode, given the post embeddings with two different models. **Mean Pooling** The episode embedding is the mean of L post embeddings, resulting in a d_e dimensional episode embedding. **Transformer** The episode embeddings are fed as the inputs to a transformer model (Devlin et al., 2019; Vaswani et al., 2017), with each post embedding acting as one element in a sequence for a total sequence length L . We follow the architecture proposed by Andrews and Bishop (2019) and omit a detailed description of the transformer architecture for brevity. Figure 4 shows the architecture of the transformer approach.

The parameters of the component-wise models and episode embedding models comprise the episode embedding $f_\theta : \{(t, \tau, c)\}^L \rightarrow \mathbb{R}^E$

3.3 Metric Learning

An important element of our methodology is the ability to learn a distance function over user representations. We use the username as a label for the episode e within the market M and denote each username as a unique label $u \in U_M$. Let $W = |U_M| \times d_E$ represent a matrix denoting the weights corresponding to a specific metric learning method, and let $x^* = \frac{x}{\|x\|}$. An example of a

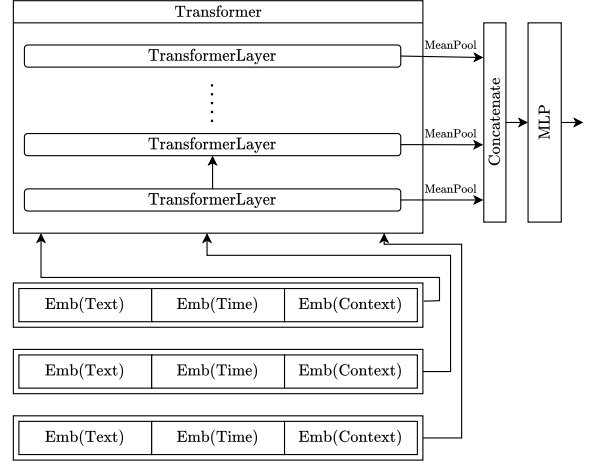


Figure 4: Architecture for Transformer Pooling. In mean pooling. The outputs from different layers are concatenated and then passed through an MLP to generate the final embedding for each episode

metric learning loss would be Softmax Margin, i.e., cross-entropy based softmax loss.

$$P(u|e) = \frac{e^{W_u d_e}}{\sum_{j=1}^{|U_M|} e^{W_j d_e}}$$

We also explore alternative metric learning approaches such as Cosface (CF) (Wang et al., 2018), ArcFace (AF) (Deng et al., 2019), and MultiSimilarity (MS) (Wang et al., 2019).

3.4 Single-Task Learning

The components discussed in the previous sections are combined together to generate an embedding, and the aforementioned tasks are used to train these models. Given an episode $e = \{(t_i, \tau_i, c_i) | 1 \leq i \leq L\}$, the componentwise embedding modules generate embedding for the text, time, and context, respectively. The pooling module combines these embeddings into a single embedding $e \in \mathbb{R}^E$. We define f_θ as the combination of the transformations that generate an embedding from an episode. Using a final metric learning loss corresponding to the task-specific g_ϕ , we can train the parameters θ and ϕ . The framework, as defined in Figure 1, results in a model that can be trained for a single market M_i . Note that the first half of the framework (i.e., f_θ) is sufficient to generate embeddings for episodes, making the module invariant to the choice of g_ϕ . However, the embedding modules learned from these embeddings may not be compatible for comparisons across different markets, which motivates our multi-task setup.

3.5 Multi-Task Learning

We use authorship attribution as the metric learning task for each market. Further, a majority of the embedding modules are shared across the different markets. Thus, in a multi-task setup, the model can share episode embedding weights (except context, which is market dependent) across markets. A shared BPE vocabulary allows weight sharing for text embedding on the different markets. However, the task-specific layers are not shared (different authors per dataset), and sharing f_θ does not guarantee alignment of embeddings across datasets (to reflect migrant authors). To remedy this, we construct a small, manually annotated set of labeled samples of authors known to have migrated from one market to another. Additionally, we add pairs of authors known to be distinct across datasets. The *cross-dataset* consists of all episodes of authors that were manually annotated in this fashion. The first step in the multi-task approach is to choose a market or cross-market metric learning task $\mathcal{T}_i \sim \mathcal{T} = \{\mathcal{T}_M, \mathcal{T}_{cr}\}$. Following this, a batch of N episodes $\mathcal{E} \sim \mathcal{T}_i$ is sampled from the corresponding task. The embedding module generates the embedding for each episode $f_\theta^N : \mathcal{E} \rightarrow \mathbb{R}^{N \times E}$. Finally, the task-specific metric learning layer $g_\phi^{\mathcal{T}_i}$ is selected, and a task-specific loss is backpropagated through the network. Note that in the *cross-dataset*, new labels are defined based on whether different usernames correspond to the same author, and episodes are sampled from the corresponding markets. Figure 5 demonstrates the shared layers and the use of *cross-dataset* samples. The overall loss function is the sum of the losses across the markets. $\mathcal{L} = \mathbb{E}_{\mathcal{T}_i \sim \mathcal{T}, \mathcal{E} \sim \mathcal{T}_i} [\mathcal{L}_i(\mathcal{E})]$

4 Dataset

Munksgaard and Demant (2016) studied the politics of darknet markets using structured topic models on the forum posts across six large markets. We start from this dataset and perform basic pre-processing to clean up the text for our purposes. We focus on four of the six markets - *Silk Road*, *Silk Road 2.0*, *Agora Marketplace*, *Black Market Reloaded*. These markets are henceforth abbreviated SR, SR2, Agora, and BMR, respectively.

Pre-processing We add simple regex and rule based filters to replace quoted posts (i.e., posts that are begin replied to), PGP keys, PGP signatures, hashed message, links, and images

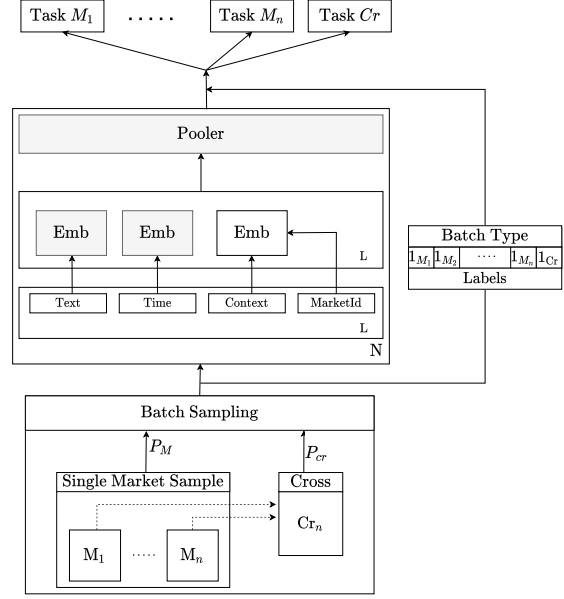


Figure 5: Multi-task setup. Shaded nodes are shared

each with different special tokens ([QUOTE], [PGP PUBKEY], [PGP SIGNATURE], [PGP ENCMMSG], [LINK], [IMAGE]). We retain the subset of users with sufficient posts to create at least two episodes worth of posts. In our experiments, we focus on episodes of up to 5 posts (i.e., threshold: users with ≥ 10 posts).

To avoid leaking information across time, we split the dataset into approximately equal-sized train and test sets with a chronologically midway splitting point such that half the posts on the forum are before that time point. Statistics for the datasets following the pre-processing steps are provided in Table 1. Note that the test data can contain authors not seen during training.

Market	Train Posts	Test Posts	#Users train	#Users test
SR	379382	381959	6585	8865
SR2	373905	380779	5346	6580
BMR	30083	30474	855	931
Agora	175978	179482	3115	4209

Table 1: Dataset Statistics for Darkweb Markets

Cross-dataset Samples Past work has established PGP keys as strong indicators of shared authorship on darkweb markets (Tai et al., 2019). To identify different user accounts across markets that correspond to the same author, we follow a two-step process. First, we select the posts containing a PGP key, and then pair together users who have posts containing the same PGP key. Following this, we still have a large number of potentially incorrect matches (including information sharing

posts by users sharing the PGP key of known vendors from a previous market). We manually check each pair to identify matches that clearly indicate whether the same author or different authors posted them, leading to approximately 100 reliable labels, with 33 pairs matched as migrants across markets.

5 Evaluation

While ground truth labels for a single author having multiple accounts are not available, the individual models can still be compared by measuring their performance on authorship attribution as a proxy. We compare these approaches using a retrieval based setup over the generated output embeddings which reflects the clustering of episodes for each author. Specifically, embeddings corresponding to each approach are generated, and a random subset of the episode embeddings is sampled. Denote the set of all episode embeddings as $E = \{e_1, \dots, e_n\}$, and let $Q = \{q_1, q_2, \dots, q_\kappa\} \subset E$ be the sampled subset. We compute the cosine similarity of the query episode embeddings with all episodes. Let $R_i = \{r_{i1}, r_{i2}, \dots, r_{in}\}$ denote the list of episodes in E ordered by their cosine similarity with episode q_i not including the episode itself, and let $A(\cdot)$ map an episode to its author. The following metrics are computed:

Mean Reciprocal Rank: (MRR) The RR for an episode is the reciprocal rank of the first element (by similarity) with the same author. The MRR is the mean of reciprocal ranks for a sample of episodes.

$$MRR(Q) = \frac{1}{\kappa} \sum_{i=1}^{\kappa} \frac{1}{\tau_i}$$

where $\tau_i = \min_j (A(r_{ij}) = A(e_i))$ is the rank of the nearest episode by the same author.

Recall@k: (R@k) Following [Andrews and Bishop \(2019\)](#), we define the recall@k for an episode e_i to be an indicator denoting whether an episode by the same author occurs within the subset $\{r_{i1}, \dots, r_{ik}\}$. R@k denotes the mean of these recall values over all the query samples.

$$R@k = \frac{1}{\kappa} \sum_{i=1}^{\kappa} \mathbb{1}_{\{\exists j | 1 \leq j \leq k, A(r_{ij}) = A(e_i)\}}$$

Baselines We compare our best model against two baselines. First, we consider a popular short text authorship attribution model ([Shrestha et al., 2017](#))

based on embedding each post using character CNNs. While the method has no support for additional attributes (time, context) and only considers a single post at a time, we compared variants that incorporate these features as well. The second method for comparison is invariant representation of users ([Andrews and Bishop, 2019](#)). This method considers only one dataset at a time and does not account for graph-based context information. Results for episodes of length 5 are shown in Table 2

6 Analysis

6.1 Model and Task Variations

To compare the variants using statistical tests, we compute the MRR of the data grouped by market, episode length, tokenizer, and a graph embedding indicator. This leaves a small number of samples for paired comparison between groups, which precludes making normality assumptions for a t-test. Instead, we applied the paired two-samples Wilcoxon-Mann-Whitney (WMW) test ([Mann and Whitney, 1947](#)). The first key contribution of our model is the use of meta-graph embeddings for context. The WMW test demonstrates that using pre-trained graph embeddings was significantly better than using random embeddings ($p < 0.01$). Table 2 shows a summary of these results using ablations. For completeness of the analysis, we also compare the character and BPE tokenizers. WMW failed to find any significant differences between the BPE and character models for embedding (table omitted for brevity). Many darkweb markets tend to have more than one language (e.g., BMR had a large German community), and BPE allows a shared vocabulary to be used across multiple datasets with very few out-of-vocab tokens. Thus, we use BPE tokens for the forthcoming multitask models.

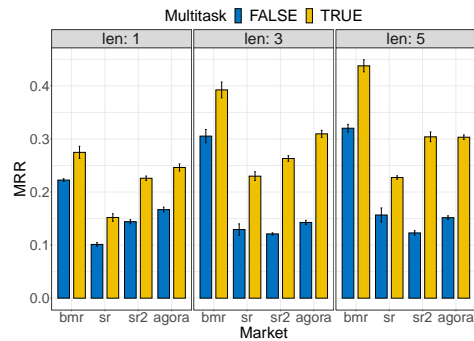


Figure 6: Drill-down: one-at-a-time vs. multitask

Multitask Our second key contribution is the mul-

Method	BMR		Agora		SR2		SR	
	MRR	R@10	MRR	R@10	MRR	R@10	MRR	R@10
Shrestha et al. (2017) (CNN)	0.07	0.165	0.126	0.214	0.082	0.131	0.036	0.073
+ time + context	0.235	0.413	0.152	0.263	0.118	0.21	0.094	0.178
+ time + context + transformer pooling	0.219	0.409	0.146	0.266	0.117	0.207	0.113	0.205
Andrews and Bishop (2019) (IUR)								
mean pooling	0.223	0.408	0.114	0.218	0.126	0.223	0.109	0.19
transformer pooling	0.283	0.477	0.127	0.234	<i>0.13</i>	<i>0.229</i>	0.118	0.204
StyleML (single)	<i>0.32</i>	<i>0.533</i>	<i>0.152</i>	<i>0.279</i>	0.123	0.21	<i>0.157</i>	<i>0.266</i>
- graph context	0.265	0.454	0.144	0.251	0.089	0.15	0.049	0.094
- graph context - time	0.277	0.477	0.123	0.198	0.079	0.131	0.04	0.08
StyleML (multitask)	0.438	0.642	0.303	0.466	0.304	0.464	0.227	0.363
- graph context	0.396	0.602	0.308	0.469	0.293	0.442	0.214	0.347
- graph context - time	0.366	0.575	0.251	0.364	0.236	0.358	0.167	0.28

Table 2: Best performing results in **bold**. Best performing single-task results in *italics*. All $\sigma_{MRR} < 0.02$, $\sigma_{R@10} < 0.03$. For all metrics, higher is better. Results suggest single-task performance largely outperforms the state-of-the-art (Shrestha et al., 2017; Andrews and Bishop, 2019), while our novel multi-task cross-market setup offers a substantive lift (**up to 2.5X on MRR and 2X on R@10**) over single-task performance.

titask setup. Table 2 demonstrates that StyleML (multitask) outperforms all baselines on episodes of length 5. We further drill-down and compare runs of the best single task model for each market against a multitask model. Figure 6 demonstrates that using multitask learning consistently and significantly (WMW: $p < 1e - 8$) improves performance across all markets and all episode lengths.

Metric Learning Recent benchmark evaluations have demonstrated that different metric learning methods provide only marginal improvements over classification (Musgrave et al., 2020; Zhai and Wu, 2019). We experimented with various state-of-the-art metric learning methods (Figure 7) in the multi task setup and found that softmax-based classification (SM) was the best performing method in 3 of 4 cases for episodes of length 5. Across all lengths, SM is significantly better (WMW: $p < 1e - 8$) and therefore we use SM in StyleML.

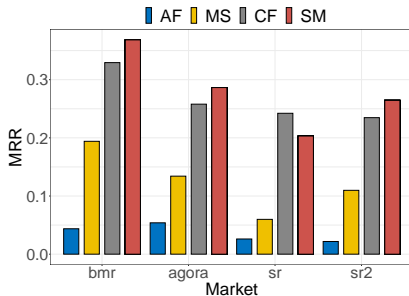


Figure 7: Task comparison: SM and CF are better performing two methods, with SM better in 3 of 4 cases

Episode Length Figure 8 shows a comparison of the mean performance of each model across various episode lengths. We see that compared to the

baselines, StyleML can combine contextual and stylistic information across multiple posts more effectively.

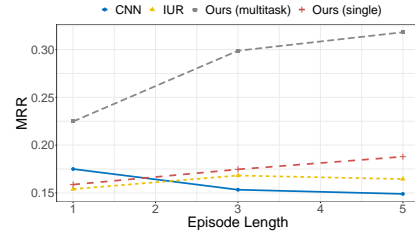


Figure 8: StyleML is more effective at utilizing multi post stylometric information

6.2 Novel Users

The dataset statistics (Table 1) indicate that there are users in each dataset who have no posts in the time period corresponding to the training data. To understand the distribution of performance across these two configurations, we computed the test metrics over two samples. For one sample, we constrain the sampled episodes to those by users who have at least one episode in the training period (Seen Users). For the second sample, we sample episodes from the complement of the episodes that satisfy the previous constraint (Novel Users). Figure 9 shows the comparison of MRR on these two samples against the best single task model for episodes of length 5. Unsurprisingly, the first sample (Seen Users) have better query metrics than the second (Novel Users). However, importantly both of these groups outperformed the best single task model results on the first group (Seen Users), which demonstrates that the *lift offered by the multitask*

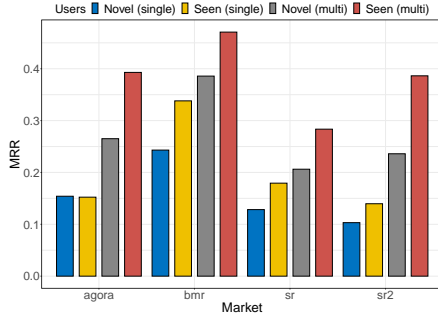


Figure 9: Lift on the multitask setup across users

setup is spread across all users.

6.3 Case Study: Migrant Analysis

Cross-market alignment is achieved using a small sample of users matched by a high-precision heuristic (PGP key match). Other heuristics (eg. shared username) can also be used as indicators of an author migrating between two markets. To understand the quality of alignment from the episode embeddings generated by our method, we use a simple top-k heuristic: for each episode of a user, find the top-k nearest neighboring episodes from other markets, and count the most frequently occurring user among these (candidate sybil account). Figure 10 shows a UMAP projection for the top 200 most frequently posting users (across markets). Users of each market are colored by sequential values of a single hue (i.e., all reds - SR2, blues - SR, etc.). We select pairs of users such that for each pair (u, v) , u is the most frequent neighbor of v , and v is the most frequent of u in the top-k neighbors ($k = 10$). The circles in the figure highlight the top four such pairs of users (top candidate sybils) - each containing a large percentage of the posts by such pairs of users. We find that each of these pairs can be verified as sybil accounts, either by a shared username (A, C, D) or by manual inspection of posted information (B). Note that none of these pairs were pre-matched using PGP (or user names) and therefore, none were present in the high-precision matches. Thus, our method is able to identify high ranking sybil matches reflecting users that migrate from one market to another.

7 Conclusion

We develop a novel stylometry-based multitask learning approach that leverages graph context to construct low-dimensional representations of short episodes of user activity for authorship and identity

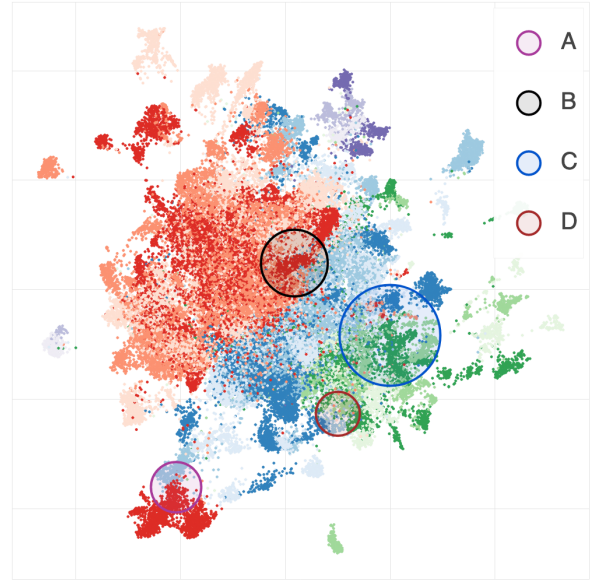


Figure 10: UMAP visualization of cross dataset embeddings for the top 200 authors. Authors from one market follow a single hue (red, blue, green, purple). Circles denote the same user in two different markets.

attribution in four dark network drug marketplace forums. Our results on four different darknet forums suggest that both graph context and multitask learning provides a significant lift over the state-of-the-art. In the future, we hope to evaluate how such methods can be levered to analyze how users maintain trust while retaining anonymous identities as they migrate across markets. Further, they can help characterize the evolution of textual style and language use on darknet markets and as a key part of the digital forensics toolkit for studying such markets. Characterizing users from a small number of episodes has important applications in limiting the propagation of bot and troll accounts, which would be another direction of future work.

References

- Martin Andrews and Sam Witteveen. 2019. [Unsupervised natural question answering with a small model](#). In *Proceedings of the Second Workshop on Fact Extraction and VERification (FEVER)*, pages 34–38, Hong Kong, China. Association for Computational Linguistics.
- Nicholas Andrews and Marcus Bishop. 2019. [Learning invariant representations of social media users](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 1684–1695, Hong Kong, China. Association for Computational Linguistics.

- Alex Biryukov, Ivan Pustogarov, Fabrice Thill, and Ralf-Philipp Weinmann. 2014. Content and popularity analysis of tor hidden services. In *2014 IEEE 34th International Conference on Distributed Computing Systems Workshops (ICDCSW)*, pages 188–193. IEEE.
- Rich Caruana. 1997. Multitask learning. *Machine learning*, 28(1):41–75.
- Jiankang Deng, Jia Guo, Niannan Xue, and Stefanos Zafeiriou. 2019. Arcface: Additive angular margin loss for deep face recognition. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 4690–4699.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: Pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.
- Daxiang Dong, Hua Wu, Wei He, Dianhai Yu, and Haifeng Wang. 2015. [Multi-task learning for multiple language translation](#). In *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 1723–1732, Beijing, China. Association for Computational Linguistics.
- Yuxiao Dong, Nitesh V Chawla, and Ananthram Swami. 2017. metapath2vec: Scalable representation learning for heterogeneous networks. In *Proceedings of the 23rd ACM SIGKDD international conference on knowledge discovery and data mining*, pages 135–144.
- Mohammadreza Ebrahimi, Mihai Surdeanu, Sagar Samtani, and Hsinchun Chen. 2018. Detecting cyber threats in non-english dark net markets: A cross-lingual transfer learning approach. In *2018 IEEE International Conference on Intelligence and Security Informatics (ISI)*, pages 85–90. IEEE.
- Abeer ElBahrawy, Laura Alessandretti, Leonid Rusnac, Daniel Goldsmith, Alexander Teytelboym, and Andrea Baronchelli. 2019. Collective dynamics of dark web marketplaces. *arXiv preprint arXiv:1911.09536*.
- Yujie Fan, Yiming Zhang, Yanfang Ye, and Xin Li. 2018. Automatic opioid user detection from twitter: Transductive ensemble built on different meta-graph based similarities over heterogeneous information network. In *IJCAI*, pages 3357–3363.
- Tao-yang Fu, Wang-Chien Lee, and Zhen Lei. 2017. Hin2vec: Explore meta-paths in heterogeneous information networks for representation learning. In *Proceedings of the 2017 ACM on Conference on Information and Knowledge Management*, pages 1797–1806.
- Piotr Grzybowski, Ewa Juralewicz, and Maciej Piasecki. 2019. [Sparse coding in authorship attribution for Polish tweets](#). In *Proceedings of the International Conference on Recent Advances in Natural Language Processing (RANLP 2019)*, pages 409–417, Varna, Bulgaria. INCOMA Ltd.
- Shifu Hou, Yanfang Ye, Yangqiu Song, and Melih Abdulhayoglu. 2017. Hindroid: An intelligent android malware detection system based on structured heterogeneous information network. In *Proceedings of the 23rd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, pages 1507–1515.
- Jeremy Howard and Sebastian Ruder. 2018. [Universal language model fine-tuning for text classification](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 328–339, Melbourne, Australia. Association for Computational Linguistics.
- Patrick Juola. 2006. [Authorship attribution](#). *Found. Trends Inf. Retr.*, 1(3):233–334.
- Yoon Kim. 2014. [Convolutional neural networks for sentence classification](#). In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 1746–1751, Doha, Qatar. Association for Computational Linguistics.
- Ramnath Kumar, Shweta Yadav, Raminta Daniulaityte, Francois Lamy, Krishnaprasad Thirunarayan, Usha Lokala, and Amit Sheth. 2020. edarkfind: Unsupervised multi-view learning for sybil account detection. In *Proceedings of The Web Conference 2020*, pages 1955–1965.
- Mirella Lapata, Phil Blunsom, and Alexander Koller. 2017. Proceedings of the 15th conference of the european chapter of the association for computational linguistics: Volume 1, long papers. In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics: Volume 1, Long Papers*.
- Henry B Mann and Donald R Whitney. 1947. On a test of whether one of two random variables is stochastically larger than the other. *The annals of mathematical statistics*, pages 50–60.
- James Martin. 2014. *Drugs on the dark net: How cryptomarkets are transforming the global trade in illicit drugs*. Springer.
- Rasmus Munksgaard and Jakob Demant. 2016. Mixing politics and crime—the prevalence and decline of political discourse on the cryptomarket. *International Journal of Drug Policy*, 35:77–83.
- Kevin Musgrave, Serge Belongie, and Ser-Nam Lim. 2020. [A metric learning reality check](#).

- Nima Noorshams, Saurabh Verma, and Aude Hoefflinger. 2020. Ties: Temporal interaction embeddings for enhancing social media integrity at facebook. *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*.
- Francisco Rangel, Paolo Rosso, Moshe Koppel, Efsthios Stamatatos, and Giacomo Inches. 2013. Overview of the author profiling task at pan 2013. In *CLEF Conference on Multilingual and Multimodal Information Access Evaluation*, pages 352–365. CELCT.
- Abhinav Rastogi, Raghav Gupta, and Dilek Hakkani-Tur. 2018. [Multi-task learning for joint language understanding and dialogue state tracking](#). In *Proceedings of the 19th Annual SIGdial Meeting on Discourse and Dialogue*, pages 376–384, Melbourne, Australia. Association for Computational Linguistics.
- Sebastian Ruder. 2017. An overview of multi-task learning in deep neural networks. *ArXiv*, abs/1706.05098.
- Sebastian Ruder, Parsa Ghaffari, and John G Breslin. 2016. Character-level and multi-channel convolutional neural networks for large-scale authorship attribution. *arXiv preprint arXiv:1609.06686*.
- Rico Sennrich, Barry Haddow, and Alexandra Birch. 2016. [Neural machine translation of rare words with subword units](#). In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1715–1725, Berlin, Germany. Association for Computational Linguistics.
- Prasha Shrestha, Sebastian Sierra, Fabio González, Manuel Montes, Paolo Rosso, and Tamar Solorio. 2017. [Convolutional neural networks for authorship attribution of short texts](#). In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics: Volume 2, Short Papers*, pages 669–674, Valencia, Spain. Association for Computational Linguistics.
- Xiao Hui Tai, Kyle Soska, and Nicolas Christin. 2019. Adversarial matching of dark net market vendor accounts. In *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, pages 1871–1880.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. In *Advances in neural information processing systems*, pages 5998–6008.
- Hao Wang, Yitong Wang, Zheng Zhou, Xing Ji, Dihong Gong, Jingchao Zhou, Zhifeng Li, and Wei Liu. 2018. Cosface: Large margin cosine loss for deep face recognition. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 5265–5274.
- Xun Wang, Xintong Han, Weilin Huang, Dengke Dong, and Matthew R Scott. 2019. Multi-similarity loss with general pair weighting for deep metric learning. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 5022–5030.
- Andrew Zhai and Hao-Yu Wu. 2019. Classification is a strong baseline for deep metric learning. In *BMVC*.
- Yiming Zhang, Yujie Fan, Wei Song, Shifu Hou, Yanfang Ye, Xin Li, Liang Zhao, Chuan Shi, Jiabin Wang, and Qi Xiong. 2019. [Your style your identity: Leveraging writing and photography styles for drug trafficker identification in darknet markets over attributed heterogeneous information network](#). In *The World Wide Web Conference, WWW '19*, page 3448–3454, New York, NY, USA. Association for Computing Machinery.