



Universität Hamburg

DER FORSCHUNG | DER LEHRE | DER BILDUNG

## Master's Thesis

# Performance-optimized A/B-Testing for E-Commerce-Websites

**Aram Yesildeniz**

---

aram.yesildeniz@studium.uni-hamburg.de

M. Sc. Informatics

Matr.-No. 6890370

1st supervisor: Dr. Wolfram Wingerath

2nd supervisor: Benjamin Wollmer

Hamburg, 1st of September 2021

A distributed system is one where the failure of some  
computer I've never heard of can keep me from getting my work done.  
– *Leslie Lamport*

# Contents

|          |                                               |           |
|----------|-----------------------------------------------|-----------|
| <b>1</b> | <b>Introduction</b>                           | <b>1</b>  |
| 1.1      | E-Commerce . . . . .                          | 1         |
| 1.1.1    | The Internet . . . . .                        | 1         |
| 1.1.2    | E-Commerce . . . . .                          | 2         |
| 1.1.3    | User Satisfaction and Performance . . . . .   | 4         |
| 1.2      | Web Analytics . . . . .                       | 6         |
| 1.2.1    | Introduction . . . . .                        | 7         |
| 1.2.2    | Brief History . . . . .                       | 8         |
| 1.2.3    | Web Analytics Process . . . . .               | 9         |
| 1.2.4    | Log File Analysis and Page Tagging . . . . .  | 10        |
| 1.2.5    | Web Performance . . . . .                     | 13        |
| 1.3      | Research Question . . . . .                   | 14        |
| 1.3.1    | Goal . . . . .                                | 15        |
| 1.3.2    | Chapter Outline . . . . .                     | 15        |
| <b>2</b> | <b>Terms and Definitions</b>                  | <b>17</b> |
| 2.1      | Measuring Methods . . . . .                   | 17        |
| 2.1.1    | Synthetic Monitoring . . . . .                | 18        |
| 2.1.2    | Real-User Monitoring . . . . .                | 18        |
| 2.1.3    | Other methods . . . . .                       | 18        |
| 2.2      | Metrics . . . . .                             | 18        |
| 2.2.1    | Introduction . . . . .                        | 18        |
| 2.2.2    | "Non-Performance" metrics . . . . .           | 19        |
| 2.2.3    | Performance Metrics . . . . .                 | 22        |
| 2.2.4    | WebPageTest Metrics . . . . .                 | 24        |
| 2.2.5    | Google Analytics Site Speed Metrics . . . . . | 27        |
| 2.2.6    | Comparison . . . . .                          | 28        |
| <b>3</b> | <b>Related Work</b>                           | <b>31</b> |
| 3.1      | WebPageTest . . . . .                         | 31        |
| 3.1.1    | Overview . . . . .                            | 31        |
| 3.1.2    | Configuration . . . . .                       | 31        |
| 3.1.3    | Private Instances . . . . .                   | 32        |

## Contents

|          |                                                                                         |           |
|----------|-----------------------------------------------------------------------------------------|-----------|
| 3.2      | Google Analytics . . . . .                                                              | 32        |
| 3.2.1    | The Tracking Script . . . . .                                                           | 32        |
| 3.3      | Research . . . . .                                                                      | 32        |
| 3.3.1    | some title for first category . . . . .                                                 | 32        |
| 3.3.2    | Research about Tools . . . . .                                                          | 33        |
| 3.3.3    | Research about Metrics . . . . .                                                        | 33        |
| <b>4</b> | <b>Approach</b>                                                                         | <b>35</b> |
| 4.1      | Empirical Research Methods . . . . .                                                    | 35        |
| 4.1.1    | Controlled Experiment . . . . .                                                         | 35        |
| 4.1.2    | Test Setup . . . . .                                                                    | 35        |
| 4.1.3    | Independent Variables within template . . . . .                                         | 36        |
| 4.2      | Test Object: HTML Template / Test website ideas . . . . .                               | 40        |
| 4.2.1    | WordPress . . . . .                                                                     | 40        |
| 4.2.2    | Plain / Skeletal Website . . . . .                                                      | 40        |
| 4.2.3    | HTTP Archive inspired website . . . . .                                                 | 40        |
| 4.2.4    | Mirroring a complete e-commerce website . . . . .                                       | 40        |
| 4.3      | Test Runs . . . . .                                                                     | 42        |
| 4.3.1    | WPT Configurations . . . . .                                                            | 42        |
| 4.3.2    | Test Object (Website) Variations . . . . .                                              | 43        |
| 4.3.3    | Test Plan. Generate the data . . . . .                                                  | 44        |
| 4.3.4    | Test Protocol . . . . .                                                                 | 45        |
| 4.3.5    | Tool support for diagrams and data analysis . . . . .                                   | 45        |
| <b>5</b> | <b>Evaluation</b>                                                                       | <b>47</b> |
| 5.1      | Test Results . . . . .                                                                  | 47        |
| 5.1.1    | Metrics for Evaluation . . . . .                                                        | 47        |
| 5.1.2    | Original vs Mock Plain . . . . .                                                        | 48        |
| 5.1.3    | Mock Plain vs Position 1 (which is default position of GA: Check this again!) . . . . . | 48        |
| 5.1.4    | Position 1 vs 2 vs 3 . . . . .                                                          | 48        |
| 5.1.5    | Attribute 1 vs 2 vs 3 . . . . .                                                         | 48        |
| 5.1.6    | Other script True vs False . . . . .                                                    | 48        |
| 5.2      | General . . . . .                                                                       | 48        |
| 5.3      | Plain / Skeletal Website . . . . .                                                      | 48        |
| 5.4      | Mirroring . . . . .                                                                     | 48        |
| 5.5      | HTTP Archive inspired website . . . . .                                                 | 48        |
| 5.6      | WebPageTest Bulk Tests . . . . .                                                        | 49        |
| 5.6.1    | Bulk Test Overview: Description of test result page . . . . .                           | 49        |
| 5.6.2    | Summary File for one Test . . . . .                                                     | 49        |
| 5.6.3    | Aggregate Statistics File . . . . .                                                     | 49        |

|          |                                                          |           |
|----------|----------------------------------------------------------|-----------|
| 5.6.4    | Compare Section . . . . .                                | 50        |
| 5.7      | Internal, external validity . . . . .                    | 52        |
| <b>6</b> | <b>Future Work</b>                                       | <b>53</b> |
| 6.1      | Limitations of this thesis . . . . .                     | 53        |
| 6.2      | Other measurement tools and metrics . . . . .            | 53        |
| 6.2.1    | Google Analytics 4 . . . . .                             | 53        |
| 6.3      | Speed Kit . . . . .                                      | 53        |
| 6.4      | PWAs, AMPs, Service Workers, Caching, HTTP2 etc. . . . . | 53        |
| <b>7</b> | <b>Conclusion</b>                                        | <b>55</b> |
| <b>8</b> | <b>Appendix</b>                                          | <b>57</b> |
| 8.1      | WebPageTest Bulk Tests . . . . .                         | 57        |
| 8.1.1    | Single Test Raw page data . . . . .                      | 57        |
| 8.1.2    | Single Test Raw object data . . . . .                    | 61        |
| 8.1.3    | Single Test Http archive (.har) . . . . .                | 61        |
| 8.1.4    | Combined Test Raw page data . . . . .                    | 61        |
| 8.1.5    | Combined Test Raw object data . . . . .                  | 61        |
| 8.1.6    | Combined Test Aggregate data . . . . .                   | 61        |
|          | <b>Bibliography</b>                                      | <b>63</b> |
|          | <b>Eidesstattliche Versicherung</b>                      | <b>65</b> |



# 1 Introduction

[tbd]

- Explain structure and main goal of this thesis
- Describe shortly all sections from this chapter and what the reader can expect
- Give short outlook to following chapter

## 1.1 E-Commerce

[tbd] What the reader can expect in this chapter 1.1

### 1.1.1 The Internet

In the last 50 years, a new technology emerged, spread over the entire world and influenced many aspects of most peoples life. Within the turmoil of the cold war, the United State's *Advanced Research Projects Agency* (ARPA) established in 1957 a communication network to bring together universities and their researches all around the country in order to be able compete against the USSR [CA11]. What started as a tool for scientific collaboration evolved half a century later into the *Internet*, a global network and phenomenon, to which every user with a dedicated device has access and can contribute to. The internet is an integral part, if not the backbone of today's everyday life. Users of the internet use it for almost everything, from sending emails, watching television, chatting with friends, order lunch, checking the weather for the next day or renting motorized scooters.

In 2021, the internet has 4.66 billion users, which is around 60% of the world population.<sup>1</sup> Compared to 2020, the number of internet users increased by 7.3%. In Europe, more than 90% of the population are internet users. For a developed country like Germany, the numbers are even more impressive: 94% of the German population are using the internet with an average daily time of over five hours.

Those numbers demonstrate impressive that the internet is an integral part of our daily life. Along the rise of the internet, transactions and processes falling under the term of e-commerce are climbing as well. Before discussing the term "e-commerce" and take a

---

<sup>1</sup>Following statistics are taken from <https://datareportal.com/reports/digital-2021-germany> [14.05.2021]

## 1 Introduction

grasp at its history and types, some statistics are presented to demonstrate the importance of e-commerce.

### 1.1.2 E-Commerce

#### Introduction

From the global data report<sup>2</sup>, one can read out that over 90% of the world population visited an online retail site and over 76% of the world population purchased a product online. As usual, for or a western country like Germany, the figures are higher: 92.5% of the German population visited an online retail site and over 80% purchased a product online. And the usage is expanding: the growth of the amount spent within the category food and personal care is 28.6%, and 17.6% for the category fashion and beauty.

E-commerce sales have grown steadily over the past 20 years, topping to 57.8 billion in 2019.<sup>3</sup>

The COVID-19 pandemic with its implications had and still has an not negligible impact on the growth of e-commerce. Several measures were taken to stop the spread of the virus and the number of deaths, one of which was to minimize physical interaction between people. This leads consequently to a shift of human interactions to the internet. Along this, e-commerce benefits. Bhatti et al. [BAB<sup>+</sup>20] conclude that "e-commerce enhanced by COVID-19".

#### Brief History

E-Commerce, or electronic commerce, is according to the *Encyclopædia Britannica* about "maintaining relationships and conducting business transactions that include selling information, services, and goods by means of computer telecommunications networks."<sup>4</sup> In short, e-commerce is about buying and selling products and services via the internet.

The success of e-commerce is closely linked to the tremendous advances in Internet technology in recent years: The development of the *Electronic Data Interchange* (EDI) starting in the 1960s standardised the communication between two machines. Personal computers were introduced in the 1980s, and one of the first examples of an online shop is the *Electronic Mall* opened by CompuServe in 1984. Another crucial milestone is the launch of the *World Wide Web* (WWW) in 1990, which made the internet accessible to everyone. With social media visible on the horizon from the 2000s, new possibilities for businesses and consumers alike to participate in e-commerce arise, for example, by enabling new marketing strategies or providing new sales channels. New devices such as smart phones and tablets lowered the barrier to participate in e-commerce. While e-

---

<sup>2</sup><https://datareportal.com/reports/digital-2021-germany> [14.05.2021]

<sup>3</sup><https://einzelhandel.de/presse/zahlenfaktengrafiken/861-online-handel/1889-e-commerce-umsaetze> [14.05.2021]

<sup>4</sup><https://www.britannica.com/technology/e-commerce> [19.05.2021]



commerce was available at any time, the new devices brought flexibility and mobility , making e-commerce available everywhere [Her19].

With the continued advancement in technology, e-commerce can expect a bright future with trends such as AI recommendation systems, outstanding UX thanks to virtual reality, or even more simpler payment methods through cryptocurrencies.<sup>5</sup>

## Types

There are several types in e-commerce and they emerge from the possible combinations between the actors *business*, *consumer* and *government* [SSMG17].

|            | Business | Consumer | Government |
|------------|----------|----------|------------|
| Business   | B2B      | B2C      | B2G        |
| Consumer   |          | C2C      | C2G        |
| Government |          |          | G2G        |

Table 1.1: Types of e-commerce.

**B2C** Business to Consumer in e-commerce describes basically online shopping, by means of a business offering its services and products to the consumer over the WWW. The consumer can browse through the products and services presented within an online shop and order them directly via the website. A variety of payment and delivery options conclude the B2C type [Hei20].

For an aspiring business, there are several ready-made software solutions for setting up an online store, as for example. *Shopify*, *ePages*, *Magento* or *WooCommerce* [SBR<sup>+</sup>19].

A famous example of a B2C company is *Amazon*. On the 16th of July in 1995, Amazon launched as a website and entered the stock market on the 15th of May 1997 [SB19]. Amazon has been successful, with the stock starting at \$1.5, which is at around \$3200 as of this writing.<sup>6</sup> Today, Amazon employs over 1 million people<sup>7</sup> and serves the desires of 200 million paying prime members.<sup>8</sup>

By taking a quick look at the pros and cons of an online store, it becomes clear that some of the advantages are that: there is no need of a real, physical store to showcase and sell the products; the virtual shop is available to the consumer at any time and has no closing hours; there is a high potential for the online shop as it is part of growing market; online business is scalable; due to tracking algorithms, precise targeting as well as data analysis is possible; to start an online business, there is not so much floating required and there are generally lower costs; it is possible to provide a personalized customer experience.

<sup>5</sup><https://www.spiralytics.com/blog/past-present-future-ecommerce/> [19.05.2021]

<sup>6</sup><https://finance.yahoo.com/quote/AMZN?p=AMZN> [19.05.2021]

<sup>7</sup><https://www.statista.com/statistics/234488/number-of-amazon-employees/> [19.05.2021]

<sup>8</sup><https://www.statista.com/statistics/829113/number-of-paying-amazon-prime-members/> [20.05.2021]

## 1 Introduction

Some disadvantages are that the speed of market is rapid, competitors arise everywhere and technology evolves quickly while consumers expectations go high [Her19], [LO20].

Another disadvantage is that there is no direct or physical connection with the consumer. As described above, online shopping takes place on the virtual WWW, i.e. personal interaction between buyer and seller is not possible and the shopping experience takes place on a website, from which it follows that the overall virtual user experience must be excellent in order to compete.

In the next section, I will describe the findings between the correlation between user satisfaction and the performance of the retailers web presence.

### 1.1.3 User Satisfaction and Performance

The aim of this thesis is not to deep dive into terms and concepts or the non-trivial problem of defining user satisfaction, usability or the like. Therefore the term user satisfaction is in this context loosely defined as how happy the user is with the website he or she interacts with.<sup>9</sup>

Performance can be understood as the speed of an online shop, e.g. how long it takes the page to load, how quickly the user can interact with the page, and how the user perceives the performance of the website. Later I will discuss that measuring performance is not so trivial and there are a lot of ideas and metrics to measure it.

### SpeedHub

A plethora of information and studies about the phenomenon of user satisfaction and web site performance is collected at *SpeedHub.org*, a portal by *Baqend* in cooperation with *Google* which provides "the largest systematic study of Mobile Site Speed and the Impact on E-Commerce."<sup>10</sup> Not only are studies and reports available on the hub, but also collections of videos and blog posts.

In his talk at code.talks 2019, Felix Gessert summarizes the results and provides insights into the most important aspects and questions of the study so far:

The first observation when asking for a correlation between the performance of a system and user satisfaction is that users need to be differentiated, which leads to the concept of a *User Profile*: In terms of gender, young women are the most demanding consumers and are less likely to buy from slow sites. In general, people between the ages of 18 and 24 have higher expectations of a site's speed than their older counterparts.

There are also differences between nations and regions, for example people from Japan have the highest expectations, which is almost certainly related to technological advancements in that country. Not only the expectations themselves differ geographically, but

<sup>9</sup>For a discussion cf. "User satisfaction measurement" in X

<sup>10</sup><https://www.speedhub.org/> [21.05.2021]

also how speed influences the users, for example "speed influences New Yorkers more than Californians."

What all users have in common is their human psychology. In terms of performance, researchers generally suggest keeping wait times below one second to keep users' attention. (cf. also Performance perception in chapter X).

After considering the user himself, the next step is to examine the influence of the device used: Studies show that mobile users are more likely to buy products and services than their colleagues using a desktop computer, where iOS users have generally more expectations regarding site speed.

Last but not least, the context and state of the user is important, with naturally relaxed and calm users perceiving pages faster than stressed or hurried users. Also users experience websites more slowly while on the go.

There are many real world examples and studies that prove and demonstrate the importance of website speed in terms of user satisfaction and ultimately sales: *Amazon* found out that a decrease of 100 ms in page loading leads to -1% conversion rates. If the site loads 100 ms faster, *Walmart* observed that the revenue increases by 1%. For *Zalando*, increasing site speed by 100 ms has led to an uplift of 0.7% revenue per session.

Search engine optimization is heavily impacted by load speed: For *Google*, 500 ms slower sites led to a decrease of 20% in traffic. *GQs* traffic increased by 80% after the page load went down from 7 s to 2 s. And for *Pinterest*, 40% faster loads led to 15% more SEO traffic.

User engagement and satisfaction also depend heavily on loading times: *Forrester* noted an increase of 60% for the session length while bringing down the load time by 80%. *Akamai* monitored that the bounce rate climbed up incredible 103% when the load time increased by 2 seconds. And for the *AberdeedGroup*, the customer satisfaction dropped by 16% at one more second delay in response times.

In summary, it can be said that many studies and practical examples prove and demonstrate that faster websites and online stores lead to a better user experience and usually to happier customers. In commercial terms, one can conclude that page speed equals money.

In order to properly test the effects of performance on users, a scientific method is required. A/B testing as a controlled experiment is one of them and will be explained in the next section. After discussing A/B testing, I'll move on to examining *Web Analytics*, a term that encompasses methods, tools, and instruments for companies to better understand their business and customers.

### A/B Testing

Controlled experiments like A/B testing are not a new tool for scientists and researchers and were used as early as the 1920s. With the advent of the Internet in the 1990s, the concept was adopted into the online domain and is now used by large companies such as Amazon, Facebook or Google to test ideas and hypotheses directly on a live system. Controlled experiments such as A/B testing are used to aid decision making and provide a "causal relationship with high probability". They enable a data-driven and quantitative validation of the hypothesis.

Controlled experiments help to test hypothesis and questions of form: "If I change feature X, will it help to improve the key performance indicator Y?"

To answer this question, two systems are needed: *Version A*, the control variant or default version, and a slightly different *Version B*, called the treatment. If more than two versions or one treatment should be evaluated at the same time, an A/B/n split test has to be implemented. With a univariable setup, only one variable differs between the systems; with a multivariable structure, several variables are changed at the same time.

Usually, the users of the system are randomly split into two groups and testing is directly performed with real users on a production system. It is advantageous, also compared to other experimental set-ups, that the users and participants are not aware that they are part of an experiment, which leads to fewer biases and side effects. In order to measure the differences and the user behaviour, web analytics has to be integrated within the system.

A brief and general discussion of controlled experiments in computer science can be found in chapter X.

To continue with the question of performance and user satisfaction, A/B testing allows two different versions of the same site to be served to two groups at the same time, one site being slow and the other being fast, without users knowing.

An implemented web analytics system makes it possible to measure how the various systems and user groups behave. What web analytics exactly is, what tools are available and what a web analytics process looks like, is discussed in the next section.

## 1.2 Web Analytics

This chapter is about web analytics. I will first discuss definitions and give a short introduction to web analytics. Then, a brief history of web analytics will be given to help contextualize. After characterizing two web analytics process descriptions, data collection methods will be discussed. Finally, web performance will be explained, which leads the way to the research questions.

### 1.2.1 Introduction

What is *Web Analytics*? Reviewing the literature, it is clear that there are several definitions:

Nakatani et al. state that "Web analytics is used to understand online customers and their behaviors, design actions influential to them, and ultimately foster behaviors beneficial to the business and achieve the organization's goal." According to this definition, web analytics is about getting insights of the users using the system, not only who or what they are, but also how they interact with the system. Additionally, the definition emphasizes that the underlying motivation of web analytics is to achieve business goals.

Singal et al. provide a more technical definition by pointing out that "Web Analytics is the objective tracking, collection, measurement, reporting and analysis of quantitative internet data to optimize websites and web marketing initiatives." Again, the ultimate goal is to drive business, but supported by data science methods and tools such as tracking, collecting and analysing massive amounts of data.

Bekavac et al. provide a similar definition by pointing out that web analytics is "the analysis of qualitative and quantitative data on the website in order to continuously improve the online experience of visitors, which leads to more efficient and effective realization of the company's planned goals."

Summarizing the above definitions, it is noticeable that web analytics consists of two important elements: a data-driven, information-oriented and technical element of collecting and analyzing data about users and a commercial and business-driven element that provides the main motivation for collecting the data primarily by setting business goals.

Moving from definitions to the practical realm, Zheng et al. describe four main use cases for web analytics:

- Improving the overall design and usability, for example of the navigation or layout of the website.
- Optimize for your business goals: Whatever goals the business is trying to achieve, generating conversions is the goal.
- Monitor campaigns: Understand and measure the success of advertising campaigns.
- Improve performance by examining metrics such as page load time. This is discussed further in chapter 1.2.5.

Web analytics is also difficult and there are some obstacles and challenges to overcome. Kumar et al. describe some of the hurdles as follows: The analysis and interpretation of the data and the goals and measures derived from it are reactive rather than anticipatory, since "predictive modelling applications" for web analytics are not yet on the market.

## 1 Introduction

Big data, that is the volume, variety and velocity of data collected, can be challenging to manage, for example, important insights can be lost or overlooked.

Privacy and the information collected from visitors and customers can be another challenge in terms of inappropriate use of data and GDPR compliance.

### 1.2.2 Brief History

The history of web analytics can be described as a transformation from an IT domain and a technical log file analysis tool to a sophisticated, polymorphic tool for marketers.

Each time a user requests an HTML file or other resource from a web server, the server makes an entry in a special log file. The first log entries followed the *Common Log Format* (CLF) which provides rudimentary information such as the date, the HTTP status code or the number of bytes transmitted. In 1996, the *Extended Log Format* (ELF) was introduced with more flexibility and information in mind. Thanks to the standardized format of the log files, it was possible to create software that evaluates the log files and presents them to users in a readable form. *GetStats* was one of the first tools which generated statistics and user friendly output for analysts. In 1995, Dr. Stephen Turner developed *Analog*, the first free software for analyzing log files. Log file analysis will be further discussed in chapter 1.2.4.

What was initially mainly interesting for maintenance and IT staff, who for example answered the question of how many 404s occurred on the server, developed into an interesting website information pool for marketers.

As the available information increased, it became clear that the data could be used for more than just analyzing server behavior. But log file analysis was not enough to provide details about how users interact with the site. Web analytics underwent a transformation from log analysis to user data tracking, analysis, and reporting.

Croll describes the move of analytics from IT to marketing with three steps:

1. JavaScript eliminated the need for log files and enabled marketers to maintain and deploy their analytics solutions themselves, making them less dependent on IT.
2. The introduced advertising economy of search engines like Google led to a new focus of analysts on user attraction and conversion rates.
3. New cost models allowed marketers to pay for the analytics service based on website traffic, rather than paying upfront for hardware and software. Analytics spend was thus linked to website traffic and, ideally, revenue.

In 1990 the WWW started and in 1993 one of the first widely used browsers *Mosaic* was launched. At the same time *WebTrends* developed and released one of the first analytics software. A lot more services followed, such as *WebSideStory* in 1996 or *Quantified* by Urchin in the same year.

Page tagging made it possible to collect not only technical data, but also business-relevant information. Visitors and their behaviour were the focus, shaping questions like: How is this user behaviour related to a purchase? If a user buys shoes, will he also buy socks? The development and implementation of cookies enabled the identification of unique users. Not only business-relevant questions were asked and answered, but also studies on performance and usability. More details about page tagging can be found in chapter 1.2.4.

In 2003, Edwards, Eisenberg and Sterne founded the *Web Analytics Association* (WAA). The WAA brings together and supports all the players in web analytics such as users, marketers and IT specialists on an international stage. Due to digitalization and its all-encompassing effects, the WAA has renamed itself *Digital Analytics Association* (DAA) because the web is not the only area where users leave their digital footprint.

As described in the section above, participant and user numbers on the Internet continue to rise and now all Fortune 500 companies operate websites, with web analytics a key marketing tool.

Some of the most established tools today are *Google Analytics*, *Adobe SiteCatalyst*, *Webtrekk* and *Piwik*. Google Analytics will be further discussed in chapter ??.

Looking ahead, Zheng et al. identify several trends for web analytics, such as mobile web and application-specific analytics like video, search, learning, or social media analytics.

### 1.2.3 Web Analytics Process

Web Analytics can be described as a process, where as a rule the main goal is to increase revenue. In literature, two main ideas and process flows are indicated, the first one being from the Web Analytics Association, and the second one derived from industries best practices. They will be concisely described in this section.

What both processes have in common is that they aim for improving the website and consequently increase the business revenue.

*Key Performance Indicators* (KPIs) are the ideal tool to instrument web analytics and they help to determine areas and room for improving. They are an integral part and play a major role in any web analytics process as they provide an "in-depth picture of visitor behavior on a site".

KPIs can differ according to the business they operate it. For commercial domains, common KPIs are conversion rates, average order or visit value, customer loyalty, bounce rate, and so on. Defining the right KPIs and align them with the business goals is a crucial step in any web analytics process.

#### WAA Process Guide

Web Analytics Association provides a nine step guide:

## 1 Introduction

1. Identify key stake holders
2. define primary goals of website and prioritize them
3. identify most important site visitors
4. determine key performance indicators
5. Identify and Implement the Right Solution
6. Use Multiple Technologies and Methods
7. Make Improvements Iteratively
8. Hire and Empower a Full-Time Analyst
9. Establish a Process of Continuous Improvement

### Industries Best Practices

Waisberg and Kaushik derive from industries best practices a five step process with the main goal, improve website, increase revenue, in mind:

- Define Goals
- Build KPIs
- Collect Data
- Analyze Data
- Implement Changes
- Repeat last two steps

Comparing both proposed processes, it is evident that both put the identification and awareness of the main business goals upfront. WAAs process is are more fine grained and practical approach, where as Waisberg and Kaushiks flow abstracts the principal activities.

#### 1.2.4 Log File Analysis and Page Tagging

There are four main ways to collect data for web analytics: Logs, JavaScript Tagging (or page tagging), web beacons and packet sniffing.

As already mentioned in chapter X, the two main data collection methods are Log file analysis and Page Tagging. In this section, I will briefly describe both mechanisms and compare them to each other.



## Log File Analysis

As already described in the above section X, log file analysis is about getting insights from the web servers log files records. Log file analysis is considered to be the traditional and original approach to web analytics. Once the users enters a URL in the browser and hits enter, the request arrives at some web server. The server then creates an entry in a log file and sends back the requested page or resource as a response to the client.

The information within the log entry can vary depending on the log format, mostly provided are the IP, browser, timestamp, time taken, bytes transferred, whether a cache hit occurred and the referrer. The standardized Common Log Format provides host, ident, authuser, date, request, status, bytes, as seen in example X.<sup>11</sup>

Listing 1.1: Position 1

```
127.0.0.1 user-identifier frank [10/Oct/2000:13:55:36 -0700] "GET_/apache_pb.gif_HTTP/1.0" 200 2326
```

Standard formats of log files and entries allow log file analysis software to process, evaluate and report valuable statistics to users, such as *Analog*, *Webalizer* or *AWStats*.

Following are some points describing the advantages and disadvantages of log file analysis. Advantages of log file analysis are:

- JavaScript and Cookies are not required on the client side
- Maintainer of the website and server owns the data
- Bots and web crawler requests are also logged
- History of data is available
- Log entries are reliable
- The standard format of log files enables easy switching of analysis tools
- The web server also logs failed requests
- No modification on the web page needed
- Does not demand more bandwidth

Some disadvantages are:

- Log entries provide mainly technical information, which may not be very useful for user behaviour analysis. Business related metrics such as bounce rates are not available.

<sup>11</sup><https://www.w3.org/Daemon/User/Config/Logging.html#common-logfile-format>  
[03.06.2021]


## 1 Introduction

- Only direct requests from the client to the web server are logged: Any user interaction in the web browser, which does not fire a request, is not getting logged. Also responses from caches and proxies are not visible in the web servers log file. Only interactions with the web server are logged.

### Page Tagging

In a nutshell, page tagging describes the analytics method of including JavaScript on the web page, which collects data and sends it to an analytics server. For this, JavaScript has to be included on every page which should be analysed. Page tagging is the main method used in web analytics today.

Croll provides a vivid graphic about the page tagging process which will be discussed here (fig. X).

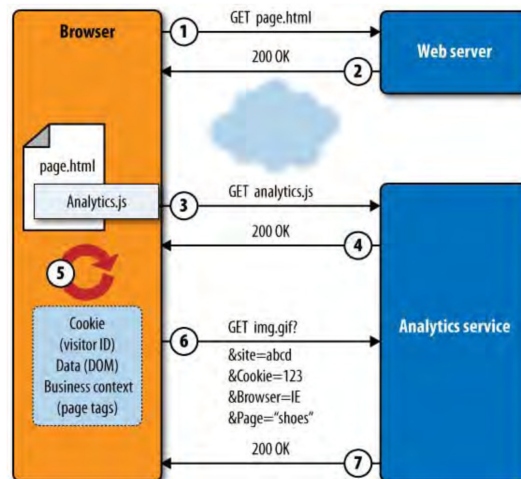

The client (browser) requests a page from the web server (1, 2). Within the HTML file an external JavaScript resource, the analytics code, is linked and received from the analytics server (3, 4). The analytics script tracks and measures the user behaviour and eventually sends the data back to the analytics server (5, 6, 7).

The collected data can also be stored in cookies, which persist data beyond one session and enable user identification, e.g. on his next page visit.

The advantages and disadvantages of page tagging are as follows:

- Every page visit is counted
- The analytics service is outsourced, which includes the storage of the data, but also data analysis and reporting
- Page tagging is rather easy to implement and favourable when the analyst does not have access to the web server

- Highly customizable: anything that JavaScript allows to measure, collect and track is obtainable. This also includes information about the client such as screen size, device used or color depth.
- Possibility to track events and actions such as mouse clicks that do not send requests to the web server. This is especially important for single-page or progressive web applications which do not fire requests that often.
- Mechanics of cookies provide identification of unique and repeat visitors
- Real time reporting

Some disadvantages are mainly privacy concerns, the analytics process relies on the usage of JavaScript and cookies which can be deactivated by the user, every page which should collect data needs to include the analytics script, and due to the use of a third party analytics service it is rather difficult to switch tools.

### 1.2.5 Web Performance

As already described in chapter X, web performance plays a non negligible role regarding user satisfaction and business success. The above referenced studies demonstrate that increasing the websites performance also increases the revenue, or as Google states it: "Performance plays a major role in the success of any online venture".<sup>12</sup>

The MDN Web Docs identify multiple areas of web performance:<sup>13</sup>

- Reducing overall load time
- Making the site usable as soon as possible
- Smoothness and interactivity
- Perceived performance
- Performance measurements

**Reducing load time** The question what makes websites slow is discussed in chapter X.

**Usability and interactivity** As I will describe in chapter X, several metrics are available which try to reflect and approximate performance areas such as load time, smoothness and interactivity, and as well as for the distinction between technical- and user perceived performance, specific metrics are available.

---

<sup>12</sup><https://web.dev/why-speed-matters/> [03.06.2021]

<sup>13</sup>[https://developer.mozilla.org/en-US/docs/Learn/Performance/What\\_is\\_web\\_performance](https://developer.mozilla.org/en-US/docs/Learn/Performance/What_is_web_performance) [03.06.2021]

## 1 Introduction

**Performance perception** The perception of performance is in general subjective. As already seen in chapter X, there are some quantifiable time intervals which correlate to the human psychology regarding received performance. Table X provides "unofficial rule of thumb" thresholds of delay.

| Delay       | User Perception              |
|-------------|------------------------------|
| 0-100 ms    | Instant                      |
| 100-300 ms  | Small perceptible delay      |
| 300-1000 ms | Machine is working           |
| > 1 s       | Likely mental context switch |
| > 10 s      | Task is abandoned            |

Interpreting the numbers from the table, the statement can be made that keeping load times under one second is desirable. Thresholds for specific performance metrics and the psychological rationale of setting them will be discussed in chapter X.

Performance measurement methods are described in chapter X.

**Measuring Methods and Metrics** Multiple methods for measuring performance exist. Synthetic monitoring is covered in chapter X. RUM will be discussed in chapter X.

The aspect that performance can not only be measured with a technical number but is much more meaningful and significant when the user perceived performance is captured, is also reflected in the available performance metrics. The performance metrics are discussed in detail in chapter X.

### 1.3 Research Question

The e-commerce industry is booming and there are no signs that this trend will turn around; on the contrary. Performance plays a major role in this matter regarding customer satisfaction and how this directly impacts business revenue. To better understand visitors of e-commerce websites, page tagging is widely used and implemented.

Within this field and context, multiple questions and issues may arise: Has page tagging an impact on the websites performance? Intuitively one may say that loading additional JavaScript will decrease the websites performance, depending on parameters such as the scripts size and the network condition. But are there more unforeseeable side effects? Do the different techniques of embedding a tracking script affect the collected and measured data? Will various included tracking scripts interfere with each other?

One hypothesis of this thesis is, that tracking tools slow down the monitored websites, that they decrease speed and performance of the website, and therefore affect user experience unfavourable.

Those questions should be addressed within this thesis.

### 1.3.1 Goal

This thesis has several goals:

The internet and web sites are in general of complicated, complex, and convoluted nature. Although basic HTML structures are standardized, each website follows its own shape and is unique and sui generis. In order to conduct a controlled experiment and test hypotheses, one goal is to approximate real websites with an artificial, in the lab generated website, which is completely under control of the researcher and manipulable.

The goal is to establish a test environment which is reliable but also convincing in the objective to model and reproduce real life behaviour.

Once the test environment is up and running, questions of how to measure performance need to be addressed. The goal is to measure, collect, visualize and analyse performance data.

As we will see in chapter X, many metrics for capturing performance exists. Another goal of this thesis is to establish something like a taxonomy of performance metrics.

### 1.3.2 Chapter Outline

[tbd]

Chapter 1 was about... In Chapter 2 we see, Chapter 3...



## 2 Terms and Definitions

- Last chapter...
- This chapter: Describe shortly all sections from this chapter
- In the next chapter...
- This chapter should cover all relevant terms and definitions within web performance measurement
- How terms can be structured / taxonomy
- Ambiguity of definitions

### Why are websites slow?

In his code talk 2016, Witt identifies three main areas or bottlenecks where bad performance is being produced: In the Frontend, the Backend, and on the network layer.

- the three bottlenecks: Frontend, network, backend
- FE: - crp - render and parser blocking - tools available
- network: - dns lookup - initial connection - time to first byte - content downloaded - latency -> caching and CDNs
- BE: - load balancer, server and DB -
- Latency as a Performance Bottleneck

### 2.1 Measuring Methods

- Explanation and comparison of synthetic and real-user monitoring with concrete examples
- Short overview of other measuring methods such as log analysis or surveys

synthetic: - lab environment: geography, network, device, browser, etc. - control variables to identify performance issues. this does not reflect real world and real user experience - automated - simulate user paths - traffic is generated artificial and is not by real users - can also be used for live system monitoring - fairly easy to implement, inexpensive

RUM: - measure from real users machine - part of page tagging (same technique with including some JS) - measures actual use cases

## 2 Terms and Definitions

- Synthetic and Real-User Performance Measurement
- Log file - Synthetic: will be discussed in chapter X - RUM which will be covered in chapter X - CrUX - Surveys
- Pingdom - GTMetrix - Website Grader - Site Speed checker

### 2.1.1 Synthetic Monitoring

- What is it
- How does it work
- Application, real life scenario
- Examples:
  - WebPageTest
  - Google Lighthouse
  - Other solutions

### 2.1.2 Real-User Monitoring

- What is it
- How does it work
- Application, real life scenario
- Examples:
  - Google Analytics
  - CrUX
  - SpeedKit
  - Other solutions

### 2.1.3 Other methods

Reports such as CrUX or http archive surveys log files

## 2.2 Metrics

### 2.2.1 Introduction

- Metrics jungle, difficulty of taxonomy
- Performance vs UX



### 2.2.2 "Non-Performance" metrics

- User engagement: session length, bounce rate, etc.
- Business KPIs: Cart size, conversion rate, etc.
- QA metadata: Page views, JS errors, etc.
- Hit
- Click-Through
- Page View
- Visit
- Visitor / Unique Visitor
- Referrer
- Conversion Rate
- Abandonment Rate
- Attrition
- Loyalty, Frequency and Recency
- Measuring Reach: ...
- Measuring Acquisition: ...
- Measuring Conversion: ...
- Measuring Retention: ...
- Basic metrics (see table): basic metrics are meaningless
- Advanced metrics: Customer lifecycle analysis, customer behaviour analysis
- Types: Counts, Ratios, KPIs
- Definitions for all terms, like Page view, unique visitor, etc.
- Importance of setting goals
- Conversion Rate
- Kennzahlen für Websites nach Typ: ROI-Ebene, Online-Shop, ...
- Conversion Rates, pages that visitors abandon most

## 2 Terms and Definitions

- Click throughs
- UGC (User generated content)
- Subscriptions, Signups
- Referring URL
- Visitor Motivation, VOC: Voice of the Customer
- Ad and campaign effectiveness
- Findability and Search Effectiveness
- Trouble Ticketing and Escalation
- Loyalty: Ratio of new to returning visitors; average time between visits; time since last login; rate of attrition or disengagement

p.15 "whether your business benefited in some way from their visits."

The percentage of visitors that your site converts to contributors, buyers, or users is the most important metric you can track -> Conversion Rate

p. 74 Page View, first useful web analytics metric

- 4 categories: site usage, referrers, site content analysis, quality assurance
- 8 fundamental metrics
- Site usage:
  - Demographics and System Statistics
  - Internal Search Information
  - Visit Length
  - Visitor Type
- Referrers:
  - Referring URL and Keyword Analysis
- Site content analysis:
  - Top Pages
  - Visitor Path
- Quality assurance:
  - Errors

- GA basic metrics: Visits, Bounce Rate, Page views, pages per visit, avg time on site, percentage new visits

- Erfolg messen und bewerten
- Traffic:
  - Page Impression / Page View
  - Visit
  - Visitor / Unique visitor
- Bounce rate
- Conversion rate
- CTR: Click-through-rate
- Session length
- Good metrics should be: Uncomplex, Relevant, Timely, Instantly Useful
- Basic metrics: Visits, bounce rate, page views, pages/visits, avg time, % new visits
- Guidance Performance Indicator (GPI) metric
- Visit count: page view, visit, unique visitor
- Visit duration: time on page, time on site.
- Bounce rate and exit rate.
- Besucheranalyse: Wie viele Besucher?, Anzahl Besucher mit Mobilgerät, Demographische Daten (Geschlecht, Altersgruppe)
- Seitenanalyse: Was machen die Besucher im Shop?, Zielseite / Startseite: Erste Seite, die ein Besucher angeschaut hat, Ausstiegseite
- E-Commerce-Analyse: Transaktions-daten aus Shop, Funnel-Analyse
- Types: Anzahl, Relations, Werte
- Content: Where, Who, How, What
- Hits
- Page Views
- Visits / Sessions
- Visitor / Unique Visitor

## 2 Terms and Definitions

### 2.2.3 Performance Metrics

- Introduction to the Web Performance Working Group
- Overview of Browser APIs and the data they expose: High Resolution Time API, Navigation Timing API, etc.
- If possible make one deep dive into one API: What exactly gets measured? Maybe check out html standard, v8 or chromium implementation, etc.

#### Standards and APIs, Browser metrics, standards

- Web Performance Working Group
- User Timing API
- Navigation Timing API: Level 1 (performance.timing), Level 2 (PerformanceNavigationTiming) ?
- Network Information API
- Resource Timing API
- Paint Timing API
- High Resolution Time API
- Performance Timeline API
- Performance Observer API
- Long Tasks API
- Element Timing API
- Event Timing API
- Server Timing API

#### Navigation Timing API

- Show image of navigation timings
- Explain one or two events directly with specification: navigationStart, domInteractive, etc.

## Google metrics? User-centric / UX / visual

### Web Vitals

- Key questions: Is it usable, is it delightful, ...
- Types of metrics
- important metrics
- custom metrics
- Core Web Vitals: First Input Delay, Cumulative Layout Shift, Largest Contentful Paint
- First Paint, First Contentful Paint: Is it happening? PerformanceObserver
- First Meaningful Paint, Hero Element: Is it useful?
- Time To Interactive: Is it usable? Use Polyfill
- Long Tasks: Is it delightful? PerformanceObserver
- Total Blocking Time
- Time To First Byte

### Core Web Vitals

- Most important metrics, Apply to all websites, Measures real user experience, Measurement support for Lab and Field, Concise and clear
- LCP: Progressive loading. FCP may become a core web vital
- FID: Interactivity during load
- CLS: Visual stability
- Future goals: Better support for Single Page Apps, Input responsiveness, Scrolling and animations
- Areas of user experience beyond performance: Security, Privacy, Accessibility
- Introduction, what is it
- How to measure
- How to improve
- Introduction, what is it

## 2 Terms and Definitions

- How to measure
- How to improve
- Introduction, what is it
- How to measure
- How to improve

### Others

- Visually complete ?

### Speed Index

#### 2.2.4 WebPageTest Metrics

- Metrics Categories:
  - High Level Metrics:
    - \* Document Complete
    - \* Fully Loaded
    - \* Load Time
    - \* First Byte
    - \* Start Render
    - \* Requests
    - \* Bytes In (Page Size)
  - Page-level Metrics:
    - \* Technical Page Metrics:
      - -> APIs, GA Site Speed Metrics
      - TTFB
      - loadTime
      - docTime
      - ...
    - \* Visual Metrics:
      - SpeedIndex
      - firstPaint
      - firstContentfulPaint

- firstMeaningfulPaint
- ...
- \* Javascript and CPU timings
- \* Page Information
- \* Browser State
- \* Lighthouse Summary Metrics
- \* Optimization Checks/Grades
- \* Instrumented Metrics
- \* Test Information
- \* Misc
- Request-level metrics:
  - \* Request Details
  - \* Request Timings
  - \* Request Stats
  - \* Headers
  - \* Protocol Information
  - \* Javascript/CPU details
  - \* Optimization Checks
  - \* Misc
- Optimization Grades:
  - Keep-alive Enabled
  - Compress Text
  - Compress Images
  - Cache Static Content
  - Use of CDN
- First View and Repeat View

| Name             | Description                                |
|------------------|--------------------------------------------|
| Successful Tests | Amount of tests who completed successfully |

## 2 Terms and Definitions

### Document Complete

The time from the initial request until the browser fires load event. Also known as the document complete time. This is the time at which the Document Object Model (DOM) has been created and all images have been downloaded and displayed. For most traditional web pages, the load time is a suitable metric for representing how long a user must wait until the page becomes usable. This is the default performance metric on WebPageTest. Also known as Load Time (?). Around this time, the page's script is hard at work in the load-event handler firing off more requests for secondary content. The incomplete nature of this metric is why Fully Loaded was added to the table of metrics from the previous section. `window.onload` (?). The point where the browser `onLoad` event fires. The equivalent Navigation Timing event is `loadEventStart`. Document Complete Time: Amount of time that has elapsed from the initial page request until the browser fires the load event. This is the time at which the Document Object Model (DOM) has been created and all images have been downloaded and displayed.

### Fully Loaded

The time from the initial request until WebPageTest determines that the page has finished loading content. The page might have waited for the load event to defer loading secondary content. The time it takes to load the secondary content is accounted for in the Fully Loaded Time. The time (in ms) the page took to be fully loaded — e.g., 2 seconds of no network activity after Document Complete. This will usually include any activity that is triggered by javascript after the main page loads. The point after `onLoad` where network activity has stopped for 2 seconds. Specific to WebPageTest and not provided by Performance API. Fully loaded waits for 2 seconds of no network activity (and no outstanding requests) after `onLoad` and then calls it done (only measures to the last activity, doesn't include the 2 seconds of silence in the measurement). Fully Loaded is a measure based on the network activity and is the point after `onload` when there was no activity for 2 seconds.

### First Byte

Time until the server responds with the first byte of the response.

### Start Render

Time until the browser paints content to the screen. The time for the browser to display the first pixel of content (paint) on the screen. Time until the browser paints content to the screen. WebPageTest's own metric, determined by programmatically watching for visual changes to the page. Same as First Render?



|                    |                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bytes In (Doc)     | Total size of the Document Complete Requests' response bodies in bytes.                                                                                                                                                                                                                                                                                                                                                         |
| Requests (Doc)     | Number of HTTP requests before the load event, not including the initial request.                                                                                                                                                                                                                                                                                                                                               |
| Load Event Start   | Time in ms since navigation started until window.onload event was triggered (from W3C Navigation Timing).                                                                                                                                                                                                                                                                                                                       |
| Speed Index        | See Speed Index                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Last Visual Change | Time in ms until the last visual change occurred. Last change is a completely visual measurement and is the last point in the test when something visually changed on the screen. It could be something as simple as an animated gif or ad even that didn't really cause much CPU work but changed some pixels on the screen. It is only captured when video is recorded because it depends on the video capture to measure it. |
| Visually Complete  | Time in ms when page was visually completed. Is measured from a video capture of the viewport loading and is the point when the visible part of the page first reached 100% "completeness" compared to the end state of the test.                                                                                                                                                                                               |

Table 2.1: Your caption here

### 2.2.5 Google Analytics Site Speed Metrics

Show with analytics.js that it is indeed those navigation timing api calculations.

Ec = function (a)...

GA does not really provide any UX metrics! The site speed metrics are all from navigation timing api which are measurements from the browser.

GA Site Speed Metrics (description from [https://support.google.com/analytics/answer/2383341?hl=en&ref\\_topic=1282106](https://support.google.com/analytics/answer/2383341?hl=en&ref_topic=1282106))

<https://stackoverflow.com/questions/18972615/how-do-the-metrics-of-google-a>

## 2 Terms and Definitions

| Name                               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Page Load Sample                   | The number of pageviews that were sampled to calculate the average page-load time.                                                                                                                                                                                                                                                                                                                                                                                                              |
| Speed Metrics Sample               | The sample set (or count) of pageviews used to calculate the averages of site speed metrics. This metric is used in all site speed average calculations, including avgDomainLookupTime, avgPageDownloadTime, avgRedirectionTime, avgServerConnectionTime, and avgServerResponseTime.                                                                                                                                                                                                            |
| DOM Latency Metrics Sample         | Sample set (or count) of pageviews used to calculate the averages for site speed DOM metrics. This metric is used to calculate ga:avgDomContentLoadedTime and ga:avgDomInteractiveTime.                                                                                                                                                                                                                                                                                                         |
| Page Load Time (sec)               | The average amount of time (in seconds) it takes that page to load, from initiation of the pageview (e.g., click on a page link) to load completion in the browser.                                                                                                                                                                                                                                                                                                                             |
| Domain Lookup Time (sec)           | The average amount of time spent in DNS lookup for the page.                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Page Download Time (sec)           | The time to download your page.                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Redirection Time (sec)             | The time spent in redirection before fetching the page. If there are no redirects, the value for this metric is expected to be 0.                                                                                                                                                                                                                                                                                                                                                               |
| Server Connection Time (sec)       | The time needed for the user to connect to your server.                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Server Response Time (sec)         | The time for your server to respond to a user request, including the network time from the user's location to your server.                                                                                                                                                                                                                                                                                                                                                                      |
| Document Interactive Time (sec)    | The average time (in seconds) that the browser takes to parse the document (DOMInteractive), including the network time from the user's location to your server. At this time, the user can interact with the Document Object Model even though it is not fully loaded.                                                                                                                                                                                                                         |
| Document Content Loaded Time (sec) | The average time (in seconds) that the browser takes to parse the document and execute deferred and parser-inserted scripts (DOMContentLoaded), including the network time from the user's location to your server. Parsing of the document is finished, the Document Object Model is ready, but referenced style sheets, images, and subframes may not be finished loading. This event is often the starting point for javascript framework execution, e.g., JQuery's onready() callback, etc. |

### 2.2.6 Comparison

- We can show this with experiments
- Load test page on a specific day only once and save timings exposed by perfor-

| Navigation Timing API                        | WPT                                 | GA                   |
|----------------------------------------------|-------------------------------------|----------------------|
| loadEventStart - navigationStart             | Document Complete, Load Event Start | pageLoadTime         |
| domainLookupEnd - domainLookupStart          | DNS lookup, dns_ms                  | domainLookupTime     |
| connectEnd - connectStart                    | connect_ms                          | serverConnectionTime |
| responseStart - requestStart                 | ..                                  | serverResponseTime   |
| responseEnd - responseStart                  | ..                                  | pageDownloadTime     |
| fetchStart - navigationStart                 | ..                                  | redirectionTime      |
| domInteractive - navigationStart             | ..                                  | domInteractiveTime   |
| domContentLoadedEventStart - navigationStart | domContentLoadedEventStart          | domContentLoadedTime |

## 2 *Terms and Definitions*

mance.timing object (from console)

- Calculate differences corresponding to the table
- Get GA data for that day and save it
-

## 3 Related Work

- Last chapter...
- This chapter: Describe shortly all sections from this chapter
- In the next chapter...
- This chapter should list research which covers and explores questions relevant for this thesis, such as:
  - Metrics: New metrics, meaning of metrics, difficulties of defining metrics, etc.
  - Overview, evaluation and comparison of measurement tools and methods
  - If available: Impact of RUM on performance

### 3.1 WebPageTest

- Overview
- Configuration
- Private Instances

#### 3.1.1 Overview

- What is it
- Why to use it, Who uses it, how to use it
- Waterfall and Grades
- See in performance tab for details about grades and optimization techniques

#### 3.1.2 Configuration

- Caching, repeat view
- Traffic shaping
- e.g. capture devtools timeline

### 3 Related Work

#### 3.1.3 Private Instances

- Architecture
- AWS
- Docker localhost
- Bulk tests

### 3.2 Google Analytics

- Custom metrics with Google Web Vitals as example
- Show how to include GA script (analytics.js, gtag, Tag Manager, etc.)
- Show some real life examples how script code is included into page, e.g. from Amazon, Otto etc

#### 3.2.1 The Tracking Script

- Show code example
- Explain whats going on: script tag, create script element etc.
- Maybe also show Hotjar example to see that they are similar

### 3.3 Research

- Research exists about topics like: ....
- Here i will provide a list of in my eyes relevant papers, summaries them and discuss why this is important for my research

#### 3.3.1 some title for first category

**2014 Singal** I. - Describes history of web analytics and tools - Provides definitions and taxonomy for metrics - Describes log file vs page tagging - Describes KPIs

II. - Lit. overview for KPIs and Web Metrics - Lit. overview for "Trust" - Lit. overview for "Fuzzy" -> What are does categories?

III. - Some other literature worth mentioning

IV. - Describes 8 open challenges for researchers

**2015 Bekavac** - Two parts: - 1: Some general overview of web analytics, tools and metrics, KPIs etc - 2: Empirical study about employees satisfaction of used web analytics tools

1: - 9 web business models and 5 common goals - Hypothesis: Web analytics tools track and improve a user's satisfaction with web-based business models. - Web analytics definition. Log files vs Site Tagging - Web Analytics process - Tools: 5 categories, Process of selecting tool, Table with features of different tools - Web metrics categories, Table with business models and their KPIs

2: - Which tools are used for which purpose / Activity - Users satisfaction

#### 3.3.2 Research about Tools

**Kaushik 2007** - Provides 3 questions which help to choose web analytics tools

**2011 Nakatani** - Gives some arguments why web analytics is important for business - Provides different categorizations for web analytics tools - Gives pros and cons of log file analysis and page tagging - Provides tool selection method based on AHP (Analytic Hierarchy Process)

"Web analytics tools collect click-stream data, track users navigation paths, process and present the data as meaningful information. - Categorizations: 1: By 4 different data collection methods 2: SaaS vs in-house 3: mobile vs non-mobile 4: Time lag

**2016 Kaur** - free vs paid - real time vs long term - hosted vs in-house - data portability - free / open source tools - proprietary tools - Service Hosted Software - GA most popular one

#### 3.3.3 Research about Metrics

- Dont know:





## 4 Approach

- Last chapter...
- This chapter: Describe shortly all sections from this chapter
- In the next chapter...
- In this chapter the practical work should be documented and explained
- Elaboration of how the practical work could help answer the research question
- Discussion of real-life setup and how experiments approach it

### 4.1 Empirical Research Methods

- Overview of methods
- reproduceability etc.
- validity
- Justification why following approaches are conducted as controlled experiments
- Change something: Delete this item again

#### 4.1.1 Controlled Experiment

- Short overview about controlled experiments in computer science
- Design: Show test setup image: Independent and dependent variables
- Hypothesis testing

#### 4.1.2 Test Setup

- What is test object (website)
- What are dependent variables: Performance metrics
- What are independent variables: Specific changes in test object (see next chapter)
- Kohavi 2016: Sample size, collect right metrics, track right users, randomization unit

## 4 Approach

| Variable     | Values                             |
|--------------|------------------------------------|
| Position     | top-head, bottom-head, bottom-body |
| Attribute    | no attribute, async, defer         |
| Other Script | false, true                        |

### Measure effects: Dependent Variables

- Performance metrics from Lab and Field, see terms and definitions
- But also quality of RUM data. Because we could have a nice performance but RUM will be of bad quality.

### Test object / HTML Template

- Depending on different approaches / Ideas (see next chapter), template looks different
- But general structure stays the same and independent variables can be defined
- Here we show different independent variables and variants

### Lab and Field

- I want to collect Lab and field data for dependent variables for comparison
- This setup is a special case because lab bots (e.g. WPT) simulate at the same time real users for RUM data

#### 4.1.3 Independent Variables within template

- IV 1 POSITION: Position of included analytics script. Values: top-head, bottom-head, bottom-body
- IV 2 ATTRIBUTE: Attribute of included analytics script: no-attribute, async, defer
- IV 3 OTHER SCRIPT: Other tracking script included
- Other IVs not included but worth mentioning

I will compare the values from one independent variable only. Therefore, when comparing the values of one independent variable, I need to set a default value for the other independent variables. The default values are:

Position: top-head Attribute: no attribute Other Script: false

#### Other IVs not included but worth mentioning

- More or less infinite number of independent variables
- Again the big and important fact that each website is different

Listing 4.1: Position 1

```

<!DOCTYPE html>
<html>
  <head>
    <!-- Google Analytics -->
    <script></script>
    <!-- End Google Analytics -->

    <title>
    <meta>
    <link>
    <script>
  </head>

  <body>
    ...
  </body>
</html>

```

Listing 4.2: Position 2

```

<!DOCTYPE html>
<html>
  <head>
    <title>
    <meta>
    <link>
    <script>

    <!-- Google Analytics -->
    <script></script>
    <!-- End Google Analytics -->
  </head>

  <body>
    ...
  </body>
</html>

```

Listing 4.3: Position 3

```

<!DOCTYPE html>
<html>
  <head>
    <title>
    <meta>
    <link>
    <script>

  </head>

  <body>
    ...
    <!-- Google Analytics -->
    <script></script>
    <!-- End Google Analytics -->
  </body>
</html>

```

Listing 4.4: Attribute 1

```
<!DOCTYPE html>
<html>
  <head>
    <!-- Google Analytics -->
    <script></script>
    <!-- End Google Analytics -->
    <title>
    <meta>
    <link>
    <script>
  </head>
  <body>
    ...
  </body>
</html>
```

Listing 4.5: Attribute 2

```
<!DOCTYPE html>
<html>
  <head>
    <!-- Google Analytics -->
    <script async></script>
    <!-- End Google Analytics -->
    <title>
    <meta>
    <link>
    <script>
  </head>
  <body>
    ...
  </body>
</html>
```

Listing 4.6: Attribute 3

```
<!DOCTYPE html>
<html>
  <head>
    <!-- Google Analytics -->
    <script defer></script>
    <!-- End Google Analytics -->
    <title>
    <meta>
    <link>
    <script>
  </head>
  <body>
    ...
  </body>
</html>
```

Listing 4.7: Other Script 1

```

<!DOCTYPE html>
<html>
  <head>
    <!-- Google Analytics -->
    <script></script>
    <!-- End Google Analytics -->

    <title>
    <meta>
    <link>
    <script>
  </head>

  <body>
    ...
  </body>
</html>

```

Listing 4.8: Other Script 2

```

<!DOCTYPE html>
<html>
  <head>
    <!-- Google Analytics -->
    <script></script>
    <!-- End Google Analytics -->

    <!-- Other Script -->
    <script></script>
    <!-- End Other Script -->

    <title>
    <meta>
    <link>
    <script>
  </head>

  <body>
    ...
  </body>
</html>

```

### 4.2 Test Object: HTML Template / Test website ideas

- Several ideas are proposed
- Each idea has pro and contra: each idea should be discussed of its usefulness, advantages and disadvantages

#### 4.2.1 WordPress

- Show usage of WordPress with some statistics: Why is it so verbreitet
- Explain Plugin system
- Explain Setup on localhost with wocommerce and GA plugin
- Elaborate why this idea was not used

#### 4.2.2 Plain / Skeletal Website

- Idea: Lab environment to have control over all and see effects of changing independent variables
- Problem: Too far away from reality
- Use this as the simplest test possible, not even POC (POC is http archive site)

#### 4.2.3 HTTP Archive inspired website

- Idea: Get correct page weight
- POC: Show that changing independent variables X affect result

#### 4.2.4 Mirroring a complete e-commerce website

- Which website / shop to clone? Show some statistics about biggest e-commerce websites in germany

**Otto** Re-write this to otto start page clone chapter

Manual adjustments: - Move everything to test folder because top domain is /otto

What did not work (mostly 404s): - user-set-consent-id-cookie: Cookie with name consentId is not set, user-set-consent-id-cookie returns therefore 404 - subscribeToNewsletterSnippetContent: Change path did not work... - amount.json: Not found, also wl\_miniWishlistAmount in local storage does not created - a\_info: Mock a\_info response json does not work... - footer - userTiming

WPT RV is returning empty csv when 404s are encountered. Therefore i mock the missing ressources so that WPT can run bulk tests successfully.

- mock image sprite\_all\_1ba408b2.png
- create empty file called user-set-consent-id-cookie
- change path for subscribeToNewsletterSnippetContent: This will remove the cookie banner... but then WPT works

- Idea: Close to reality as possible
- Problems when mirroring a website
- Elaborate why this idea of mirroring complete website was not used
- I used mock of start page of otto, which works fine
- Compare original otto website with mock

### Comparison to original webpage

- Remove GA again from mock, so that mock and original are as similar as possible
  - Run the same lab test on both pages: WPT and maybe lighthouse
  - Compare both results and explain differences
- Setup: Run WPT on mock and on original website - WPT config: - Browser: Chrome
- Number of test runs: 3 - FV and RV - Capture Video - Capture DevTools Timeline - Bulk testing: 100x
- Diagrams with FV and RV for both cases:
- Technical: - First Byte - Bytes In (Doc) - Requests (Doc)
- Visual: - Document Complete - Speed Index

**Problem with Repeat View** - Problem with RV, Caching: Otto sets request headers to cache-control: no-cache which means that RV basically downloads all resources again. The mock is hosted on Github, where the cache-control header is set to ... It is not possible to change the github request headers. We can modify the http request headers via html, but this is not a clean solution. Therefore I use a different e-commerce website which does not shut down caching so that the RV results are more similar.

Ideally I would host the mock website on a similar infrastructure as the original site with the same webserver configuration. This is for a masters thesis not feasible.

**Zalando** Idea: It looks like zalando page does not have that many cache-control headers, therefore it may be easier to clone so that RVs are more similar.

Comparison Diagrams with fixed traffic shaping:

### 4.3 Test Runs

- This section covers all conducted test runs
- Explain test configuration: how many runs, dependent and independent variables, etc.

#### 4.3.1 WPT Configurations

##### General Settings


Table 4.1: Test Runs [Sch99]

| Configuration Setting                  | Options                                     | GA  |
|----------------------------------------|---------------------------------------------|-----|
| Test Location                          | Test Location                               | .   |
| Browser                                | Firefox, Chrome                             | .   |
| Connection                             | LAN                                         | .   |
| Number of Tests to Run                 | 1 to 9                                      | ..  |
| Repeat View                            | First View and Repeat View, First View Only | .   |
| Capture Video                          | True or False                               | ..  |
| Keep Test Private                      | True or False                               | ... |
| Label                                  | Any String                                  | ... |
| Advanced Tab                           | ...                                         | ... |
| Chromium Tab                           | ...                                         | ... |
| Auth, Script, Block, SPOF, Custom Tabs | ...                                         | ... |
| Bulk Testing Tab                       | List of URLs                                | ... |

**Explanations** First View: "First View refers to the cold cache setup in which nothing is served locally" Repeat View: "Repeat View refers to the warm cache containing everything instantiated by the first view" (2016 Using WPT p. 62)

Capture Video: ...

Figure 4.1: Number of tests to run: 3, First View and Repeat View



For one test, we have actually six times that the website gets loaded and tested. For e.g. 500 URLs in the bulk test list, we have a total of  $500 \times 6 = 3000$  page hits.

##### Configuration 1



Table 4.2: Configuration 1

| Configuration Setting                  | Option                                  |
|----------------------------------------|-----------------------------------------|
| Test Location                          | Test Location                           |
| Browser                                | Chrome                                  |
| Connection                             | LAN                                     |
| Desktop Browser Dimensions             | default (1366x768)                      |
| Number of Tests to Run                 | 1                                       |
| Repeat View                            | First View and Repeat View              |
| Capture Video                          | True                                    |
| Keep Test Private                      | False                                   |
| Label                                  | none                                    |
| Advanced Tab                           | Nothing selected                        |
| Chromium Tab                           | Capture Dev Tools Timeline selected     |
| Auth, Script, Block, SPOF, Custom Tabs | Nothing                                 |
| Bulk Testing Tab                       | Test URL x times according to test plan |

## Configuration 2 Emulate Mobile Browser

### Traffic Shaping

- Important to have stable and realistic network condition
- Chromes tool is not the best for this
- Private WPT Instance docker on mac does not allow traffic shaping functionality from WPT
- I use Network Link Conditioner from Apple to slow down the whole machine. See in same blogpost that Patrick highly recommends this
- WPT also slows down their whole machines
- IN general internet connection is very unstable. If i run network link conditioner with e.g. DSL each speedtest gives different results. And other test platforms such as fast.com gives also different result.
- as long as internet connection is stable along all tests, it should not make a big difference because i compare the different variants. Therefore internet connection will fall out of the equation
- i will use the durchschnitt in germany which seems to be 40 mbit per second. or actually i use LTE profile from network conditioner which is 50 mbit per second

### 4.3.2 Test Object (Website) Variations

as described before, i will compare the values within one independent variable. This is needed in order to compare the impact of the different values within one IV. For example,

## 4 Approach

i want to measure if there is a difference in performance between the different script attributes. To measure this, i set the default values for the other IVs and vary the values for the IV attribute

Positions: 1: Top of head element 2: just before closing head element 3: just before closing body element

### Variants

| Variant     | Position    | Attribute | Other Scripts |
|-------------|-------------|-----------|---------------|
| Variant P1  | top-head    | none      | no            |
| Variant P2  | bottom-head | none      | no            |
| Variant P3  | bottom-body | none      | no            |
| Variant A1  | top-head    | none      | no            |
| Variant A2  | top-head    | async     | no            |
| Variant A3  | top-head    | defer     | no            |
| Variant OS1 | top-head    | none      | no            |
| Variant OS2 | top-head    | none      | yes           |

Table 4.3: Your caption here

I will not compare variants which are not from the same subgroup, e.g. Variant A2 will not be compared to Variant OS2. Because the first row of the variants table also includes the default values for Attribute and Other Scripts, VP1 is equal to VA1 and VO1.

With the defined IVs and variants, I can create the test objects, that is the index.html files with the corresponding setup. Because its easier to differentiate i will create for the three equal variants nevertheless own index files.

For each test variant, I will create a concrete test artefact, which is a modified index.html. This index.html needs to be uploaded to the webserver before starting with the tests.

All variants will have the same name which is index.html. This is the default file which will be delivered by the webserver when accessing root path of webpage.

Variants to measure: \_\_\_\_\_

- Original website - Mock without GA - Position 1 - Position 2 - Position 3 - Attribute 1  
- Attribute 2 - Attribute 3 - Other Script True - Other Script False

### 4.3.3 Test Plan. Generate the data

The Google Analytics code is more or less fixed and there are no configurations. It would be possible to change config of script, e.g. change sample rate, track other metrics etc. But it is not possible to change default tracking behaviour (?)

How the script is included into the file should be reflected with Website Variations

I will use only one WPT Configuration for all tests. Other WPT config can be used in future work, e.g. emulate mobile device.

Table 4.4: Test Runs [Sch99]

| Variant | Traffic Shaping | Runs | Date       |
|---------|-----------------|------|------------|
| V-P1    | DSL             | 500  | 2021-05-07 |
| V-P2    | DSL             | 500  | 2021-05-07 |
| V-P3    | DSL             | 500  | 2021-05-07 |
| V-A1    | DSL             | 500  | 2021-05-07 |
| V-A2    | DSL             | 500  | 2021-05-07 |
| V-A3    | DSL             | 500  | 2021-05-07 |
| V-OS1   | DSL             | 500  | 2021-05-07 |
| V-OS1   | DSL             | 500  | 2021-05-07 |

Pre-step: Compare Mock website with and without GA included The comparison between mock and original is part of chapter Test Object

#### 4.3.4 Test Protocol

- Deploy variant of index.html by pushing to GitHub
- Start Network Link Conditioner with specified config on local machine
- Test internet speed with speedtest-cli
- Start local WPT server and agent
- Configure WPT according to specified setup and add list of urls to bulk test interface
- Run test
- When finished, download summary csv file
- On GA helper site, fetch and download data for the current day

#### 4.3.5 Tool support for diagrams and data analysis

- python
- Matplotlib
- seaborn library



## 5 Evaluation



- Last chapter...
- This chapter: Describe shortly all sections from this chapter
- In the next chapter...

### 5.1 Test Results

#### 5.1.1 Metrics for Evaluation

Page Weight: Measured by WPT: - bytes - bytes uncompressed - Requests

Technical Timings / API: Measured by WPT and GA: - page load time - domain lookup time - page download time - redirection time - server connection time - server response time - Dom interactive time - Dom content loaded time

Visual Metrics / Web Vitals: Measured by WPT TODO Measure also with GA / own script ??: - CLS - FCP - FMP - LCP - SI

## 5 Evaluation

- Visually complete ? - Time to Interactive ? Is this the same as DOM interactive time ?  
Core Web Vital FID ?? -> Can not be measured without real users...
- From WPT bulk section. Also include this somewhere for comparison ? : - Filmstrips ?
- Waterfall ? - Visual Progress ? - Layout Shifts ?

### 5.1.2 Original vs Mock Plain

### 5.1.3 Mock Plain vs Position 1 (which is default position of GA: Check this again!)

TODO rename this like with GA true false ?

### 5.1.4 Position 1 vs 2 vs 3

### 5.1.5 Attribute 1 vs 2 vs 3

### 5.1.6 Other script True vs False

## 5.2 General

- For each attempt, describe: Threats to validity, generalizability

generalizability: meine Daten zeige nur für Chrome, MacBook, diese Geschwindigkeit etc. Und auch nur für diese Test-Website Die Schwierigkeit der Generalisierbarkeit ist eines der grössten Probleme bei dieser Fragestellung

## 5.3 Plain / Skeletal Website

- Information gained from this experiment
- Limitations and questions which can not be answered with this approach

## 5.4 Mirroring

## 5.5 HTTP Archive inspired website

- Information gained from this experiment
- Meaning and interpretation of the collected data
- Limitations and questions which can not be answered with this approach

## 5.6 WebPageTest Bulk Tests

- Bulk testing is a feature for private instances only
- Misuse this feature to test the same website X times

### 5.6.1 Bulk Test Overview: Description of test result page

- Each test has Test ID: YYMMDD\_random\_random
- Test results after bulk test available under `http://localhost:4000/result/{testID}/`
- For each test run, following data is available:
  - Link to test results: Test result page as same as for single test run
  - Median load time (First view)
  - Median load time (Repeat view)
  - Median Speed Index (First View)
  - Raw page data (file: [TestID\_summary.csv])
  - Raw object data (file: [TestID\_details.csv])
  - Http archive (.har) (file: json)
- Average First View Load Time
- Average Repeat View Load Time
- Combined Raw: Page Data (file: [TestID\_summary.csv])
- Combined Raw: Object Data (file: [TestID\_details.csv]). For 100 test runs, this file is appr. 20 MB, 24432 rows, 76 columns.
- Aggregate Statistics (file: [TestID\_aggregate.csv])

### 5.6.2 Summary File for one Test

- Contains 6 rows: 3 test runs: for each test runs 1x first view and 1x repeat view
- Rows 1, 3, 5 contain FV, rows 2, 4, 6 contain data for RV

### 5.6.3 Aggregate Statistics File

- Contains aggregated data from bulk test
- One row for each test run: For 100 URLs in bulk test will be 100 rows in csv
- Each metric is available with Median, Average, Standard Deviation, Min, Max

## 5 Evaluation

- Metrics are available once from FV and once for Repeat View
- Metrics:
  - Successful Tests
  - Document Complete
  - Fully Loaded
  - First Byte
  - Start Render
  - Bytes In (Doc)
  - Requests (Doc)
  - Load Event Start
  - Speed Index
  - Last Visual Change
  - Visually Complete
- => For metric details, see Terms and Definitions

### 5.6.4 Compare Section

WPT has a feature to compare multiple tests. Accessible under compare URL: `http://localhost:4000/video/compare.php?tests={TestID},{TestID},...`

The compare page contains:

- Film strip
- Waterfall diagram
- Visual Progress diagram
- Timings diagram:
  - Visually Complete (First View Visually Complete Median)
  - Last Visual Change
  - Load Time (onload)
  - ...
- Cumulative Layout Shift diagram
- Requests diagram
- Bytes diagram
- Visually complete



- Last Visual Change
- Load Time (onload)
- Load Time (Fully Loaded)
- DOM Content Loaded
- Speed Index
- Time to First Byte
- Time to Title
- Time to Start Render
- CPU Busy Time
- 85% Visually Complete
- 90% Visually Complete
- 95% Visually Complete
- 99% Visually Complete
- First Contentful Paint
- First Meaningful Paint
- Largest Contentful Paint
- Cumulative Layout Shift
- html Requests
- html Bytes
- js Requests
- js Bytes
- css Requests
- css Bytes
- image Requests
- image Bytes
- flash Requests
- flash Bytes

## 5 Evaluation

- font Requests
- font Bytes
- video Requests
- video Bytes
- other Requests
- other Bytes

### 5.7 Internal, external validity

- At this point, i have the data collected and can analyse it
- The quality and quantity of the data needs to be discussed
- Quality: There are chances that some data are malformed, e.g. because internet connection was bad, etc.
- Quantity: Is the amount of data sufficient to make the evaluation generalisable

## **6 Future Work**

- Last chapter...
- This chapter: Describe shortly all sections from this chapter
- In the next chapter...

### **6.1 Limitations of this thesis**

- Discussion of unobserved topics
- Discussion of possible next steps

### **6.2 Other measurement tools and metrics**

- List of tools and metrics worth investigating

#### **6.2.1 Google Analytics 4**

### **6.3 Speed Kit**

### **6.4 PWAs, AMPs, Service Workers, Caching, HTTP2 etc.**

- Overview of other web technologies and how they could be relevant for further research



## 7 Conclusion

- Last chapter...
  - This chapter: Describe shortly all sections from this chapter
  - Scope and contribution of this thesis
  - Short summary of each chapter:
    - Problem statement and why it is worth to examine research question
    - Terms and definitions
    - (Related work)
    - Approach and evaluation of practical work
    - Future work
- Several topics wurden bearbeitet in this thesis, such like mocking a website for testing purposes, literature review, metrics taxonomy, and the main part which is an experiment



## 8 Appendix

### 8.1 WebPageTest Bulk Tests

#### 8.1.1 Single Test Raw page data

WPT Metrics from summary file

| Name                       | Description                                                                                                                                                 |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| minify_total               | Total bytes of minifiable text static assets.                                                                                                               |
| responses_200              | The number of responses with HTTP status code of 200, OK.                                                                                                   |
| testStartOffset            | ...                                                                                                                                                         |
| bytesOut                   | The total bytes sent from the browser to other servers.                                                                                                     |
| gzip_savings               | Total bytes of compressed responses.                                                                                                                        |
| requestsFull               | ...                                                                                                                                                         |
| start_epoch                | ...                                                                                                                                                         |
| connections                | The number of connections used.                                                                                                                             |
| base_page_cdn              | The CDN provider for the base page.                                                                                                                         |
| bytesOutDoc                | Same as bytesOut but only includes bytes until the Document Complete event. Usually when all the page content has loaded (window.onload).                   |
| result                     | Test result code.                                                                                                                                           |
| final_base_page_request_id | ...                                                                                                                                                         |
| basePageSSLTime            | ...                                                                                                                                                         |
| docTime                    | Same as loadTime.                                                                                                                                           |
| domContentLoadedEventEnd   | Time in ms since navigation started until document DOMContentLoaded event finished.                                                                         |
| image_savings              | Total bytes of compressed images.                                                                                                                           |
| requestsDoc                | The number of requests until Document Complete event.                                                                                                       |
| firstMeaningfulPaint       | ...                                                                                                                                                         |
| score_cookies              | WebPageTest performance review score for not using cookies on static assets.                                                                                |
| firstPaint                 | RUM First Paint Time, the time in ms when browser first painted something on screen. It's calculated on the client for browsers that implement this method. |
| score_cdn                  | WebPageTest performance review score for using CDN for all static assets.                                                                                   |
| optimization_checked       | Whether or not optimizations were checked.                                                                                                                  |

## 8 Appendix

|                            |                                                                                                                                                                                                                       |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| score_minify               | WebPageTest performance review score for minifying text static assets.                                                                                                                                                |
| gzip_total                 | Total bytes of compressible responses.                                                                                                                                                                                |
| responses_404              | The number of responses with HTTP status code of 404, not found.                                                                                                                                                      |
| loadTime                   | The total time taken to load the page (window.onload) in ms.                                                                                                                                                          |
| URL                        | The tested page URL.                                                                                                                                                                                                  |
| score_combine              | WebPageTest performance review score for bundling JavaScript and/or CSS assets.                                                                                                                                       |
| firstContentfulPaint       | ...                                                                                                                                                                                                                   |
| image_total                | Total bytes of images.                                                                                                                                                                                                |
| score_etags                | WebPageTest performance review score for disabling *ETag*s.                                                                                                                                                           |
| loadEventStart             | Time in ms since navigation started until window.onload event was triggered (from W3C Navigation Timing).                                                                                                             |
| minify_savings             | Total bytes of minified text static assets.                                                                                                                                                                           |
| score_progressive_jpeg     | WebPageTest performance review score for using progressive JPEG.                                                                                                                                                      |
| domInteractive             | ...                                                                                                                                                                                                                   |
| score_gzip                 | WebPageTest performance review score for using gzip compression for transferring compressable responses.                                                                                                              |
| score_compress             | WebPageTest performance review score for compressing images.                                                                                                                                                          |
| domContentLoadedEventStart | Time in ms since navigation started until document DOMContentLoaded event was triggered (from W3C Navigation Timing).                                                                                                 |
| final_url                  | ...                                                                                                                                                                                                                   |
| bytesInDoc                 | Same as byteIn but only includes bytes until Document Complete event.                                                                                                                                                 |
| firstImagePaint            | ...                                                                                                                                                                                                                   |
| score_keep-alive           | WebPageTest performance review score for using persistent connections.                                                                                                                                                |
| loadEventEnd               | Time in ms since navigation started until window.onload event finished.                                                                                                                                               |
| cached                     | 0 for first view or 1 for repeat view.                                                                                                                                                                                |
| score_cache                | WebPageTest performance review score for leveraging browser caching of static assets.                                                                                                                                 |
| responses_other            | The number of responses with HTTPS status code different from 200 or 404.                                                                                                                                             |
| main_frame                 | ...                                                                                                                                                                                                                   |
| fullyLoaded                | The time (in ms) the page took to be fully loaded — e.g., 2 seconds of no network activity after Document Complete. This will usually include any activity that is triggered by javascript after the main page loads. |
| requests                   | List of details of all requests on tested page.                                                                                                                                                                       |



|                                               |                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| final_base_page_request                       | ...                                                                                                                                                                                                                                                                                                                       |
| TTFB                                          | Time to first byte, which is the duration in ms from when the user first made the HTTP request to the very first byte of the page being received by the browser.                                                                                                                                                          |
| bytesIn                                       | The amount of data that browser had to download in order to load the page. It is also commonly referred to as the page size.                                                                                                                                                                                              |
| osPlatform                                    | ...                                                                                                                                                                                                                                                                                                                       |
| test_run_time_ms                              | ...                                                                                                                                                                                                                                                                                                                       |
| tester                                        | The ID of tester that performed the page test.                                                                                                                                                                                                                                                                            |
| browser_version                               | The browser version.                                                                                                                                                                                                                                                                                                      |
| document_origin                               | ...                                                                                                                                                                                                                                                                                                                       |
| document_URL                                  | ...                                                                                                                                                                                                                                                                                                                       |
| date                                          | Time and date (number of seconds since Epoch) when test was complete.                                                                                                                                                                                                                                                     |
| PerformancePaintTiming.first-paint            | ...                                                                                                                                                                                                                                                                                                                       |
| osVersion                                     | ...                                                                                                                                                                                                                                                                                                                       |
| domElements                                   | The total number of DOM elements.                                                                                                                                                                                                                                                                                         |
| browserVersion                                | The browser version.                                                                                                                                                                                                                                                                                                      |
| fullyLoadedCPUms                              | CPU busy time in ms until page was fully loaded.                                                                                                                                                                                                                                                                          |
| browser_name                                  | The browser name.                                                                                                                                                                                                                                                                                                         |
| PerformancePaintTiming.first-contentful-paint | ...                                                                                                                                                                                                                                                                                                                       |
| base_page_cname                               | ...                                                                                                                                                                                                                                                                                                                       |
| eventName                                     | ...                                                                                                                                                                                                                                                                                                                       |
| os_version                                    | ...                                                                                                                                                                                                                                                                                                                       |
| base_page_dns_server                          | ...                                                                                                                                                                                                                                                                                                                       |
| fullyLoadedCPUpct                             | Average CPU utilization up until page is fully loaded.                                                                                                                                                                                                                                                                    |
| domComplete                                   | ...                                                                                                                                                                                                                                                                                                                       |
| base_page_ip_ptr                              | ...                                                                                                                                                                                                                                                                                                                       |
| document_hostname                             | ...                                                                                                                                                                                                                                                                                                                       |
| lastVisualChange                              | Time in ms until the last visual changed occurred.                                                                                                                                                                                                                                                                        |
| visualComplete                                | Time in ms when page was visually completed.                                                                                                                                                                                                                                                                              |
| render                                        | The first point in time (in ms) that something was displayed to the screen. Before that user was staring at a blank page. This does not necessarily mean the user saw the page content — it could just be something as simple as a background color — but it is the first indication of something happening for the user. |
| SpeedIndex                                    | The SpeedIndex score.                                                                                                                                                                                                                                                                                                     |
| visualComplete85                              | Time in ms when page was visually completed 85%.                                                                                                                                                                                                                                                                          |
| visualComplete90                              | Time in ms when page was visually completed 90%.                                                                                                                                                                                                                                                                          |
| visualComplete95                              | Time in ms when page was visually completed 95%.                                                                                                                                                                                                                                                                          |
| visualComplete99                              | Time in ms when page was visually completed 99%.                                                                                                                                                                                                                                                                          |
| LargestContentfulPaintType                    | ...                                                                                                                                                                                                                                                                                                                       |
| LargestContentfulPaintNodeType                | ...                                                                                                                                                                                                                                                                                                                       |

## 8 Appendix

|                                                |                                                                                                                                |
|------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| chromeUserTiming.navigationStart               | ...                                                                                                                            |
| chromeUserTiming.fetchStart                    | ...                                                                                                                            |
| chromeUserTiming.responseEnd                   | ...                                                                                                                            |
| chromeUserTiming.domLoading                    | ...                                                                                                                            |
| chromeUserTiming.markAsMainFrame               | ...                                                                                                                            |
| chromeUserTiming.domInteractive                | ...                                                                                                                            |
| chromeUserTiming.domContentLoadedEventStart    | ...                                                                                                                            |
| chromeUserTiming.domContentLoadedEventEnd      | ...                                                                                                                            |
| chromeUserTiming.firstPaint                    | ...                                                                                                                            |
| chromeUserTiming.firstContentfulPaint          | ...                                                                                                                            |
| chromeUserTiming.firstImagePaint               | ...                                                                                                                            |
| chromeUserTiming.firstMeaningfulPaint          | ...                                                                                                                            |
| chromeUserTiming.firstMeaningfulPaintCandidate | ...                                                                                                                            |
| chromeUserTiming.domComplete                   | ...                                                                                                                            |
| chromeUserTiming.loadEventStart                | ...                                                                                                                            |
| chromeUserTiming.loadEventEnd                  | ...                                                                                                                            |
| chromeUserTiming.LargestContentfulPaint        | ...                                                                                                                            |
| chromeUserTiming.LargestTextPaint              | ...                                                                                                                            |
| chromeUserTiming.CumulativeLayoutShift         | ...                                                                                                                            |
| run                                            | The run number.                                                                                                                |
| step                                           | ...                                                                                                                            |
| effectiveBps                                   | Bytes per seconds, i.e.: total of bytes in / total time to load the page.                                                      |
| effectiveBpsDoc                                | Same as effectiveBps but until Document Complete event.                                                                        |
| domTime                                        | The total time in ms until a given DOM element (specified via domelement parameter when running a test) was found on the page. |
| aft                                            | Above the Fold Time (no longer supported). The time taken to load everything in the viewport above the fold.                   |
| titleTime                                      | Total time in ms until page title was set on browser.                                                                          |
| domLoading                                     | ...                                                                                                                            |
| server_rtt                                     | ...                                                                                                                            |
| smallImageCount                                | ...                                                                                                                            |
| bigImageCount                                  | ...                                                                                                                            |
| maybeCaptcha                                   | ...                                                                                                                            |
| bytes.html                                     | ...                                                                                                                            |
| requests.html                                  | ...                                                                                                                            |
| bytesUncompressed.html                         | ...                                                                                                                            |
| bytes.js                                       | ...                                                                                                                            |
| requests.js                                    | ...                                                                                                                            |
| bytesUncompressed.js                           | ...                                                                                                                            |
| bytes.css                                      | ...                                                                                                                            |
| requests.css                                   | ...                                                                                                                            |
| bytesUncompressed.css                          | ...                                                                                                                            |
| bytes.image                                    | ...                                                                                                                            |
| requests.image                                 | ...                                                                                                                            |

|                                  |     |
|----------------------------------|-----|
| bytesUncompressed.image          | ... |
| bytes.flash                      | ... |
| requests.flash                   | ... |
| bytesUncompressed.flash          | ... |
| bytes.font                       | ... |
| requests.font                    | ... |
| bytesUncompressed.font           | ... |
| bytes.video                      | ... |
| requests.video                   | ... |
| bytesUncompressed.video          | ... |
| bytes.other                      | ... |
| requests.other                   | ... |
| bytesUncompressed.other          | ... |
| id                               | ... |
| chromeUserTiming.InteractiveTime | ... |

Table 8.1: Your caption here

- 8.1.2 Single Test Raw object data
- 8.1.3 Single Test Http archive (.har)
- 8.1.4 Combined Test Raw page data
- 8.1.5 Combined Test Raw object data
- 8.1.6 Combined Test Aggregate data



# Bibliography

- [BAB<sup>+</sup>20] BHATTI, Anam ; AKRAM, Hamza ; BASIT, Hafiz M. ; KHAN, Ahmed U. ; NAQVI, Syeda Mahwish R. ; BILAL, Muhammad: E-commerce trends during COVID-19 Pandemic. In: *International Journal of Future Generation Communication and Networking* 13 (2020), Nr. 2, S. 1449–1452. – ISSN 2233–7857 IJFGCN
- [CA11] COHEN-ALMAGOR, Raphael: Internet History. In: *International Journal of Technoethics* 2 (2011), April, Nr. 2, 45–64. <http://dx.doi.org/10.4018/jte.2011040104>. – DOI 10.4018/jte.2011040104. – ISSN 1947–3451, 1947–346X
- [Hei20] HEINEMANN, Gerrit: *Der neue Online-Handel: Geschäftsmodelle, Geschäftssysteme und Benchmarks im E-Commerce*. Wiesbaden : Springer Fachmedien Wiesbaden, 2020
- [Her19] HERMOGENO, Darwin L.: E-Commerce: History and Impact on the Business and Consumers. In: *International Journal of Engineering Science* 9 (2019), Nr. 3
- [LO20] LANG, Gil ; OTTEN, Steffen: *Erfolgreicher Online-Handel für Dummies*. Weinheim : Wiley-VCH, 2020
- [SB19] STONE, Brad ; BEZOS, Jeffrey: *Der Allesverkäufer: Jeff Bezos und das Imperium von Amazon*. 2. erweiterte Neuauflage. Frankfurt : Campus Verlag, 2019
- [SBR<sup>+</sup>19] STEIREIF, Alexander ; BÜCKLE, Markus ; RIEKER, Rouven ; ERTLER, Bernhard ; SKIBBA, Janina: *Handbuch Online-Shop: Strategien, Erfolgsrezepte, Lösungen*. 2., aktualisierte und erweiterte Auflage. Bonn : Rheinwerk Verlag, 2019 (Rheinwerk Computing)
- [Sch99] SCHWARZ, Kerstin: *DISDBIS*. Bd. 64: *Das Konzept der Transaktionshülle zur konsistenten Spezifikation von Abhängigkeiten in komplexen Anwendungen*. Infix Verlag, St. Augustin, Germany, 1999
- [SSMG17] SANTOS, Valdeci Ferreira d. ; SABINO, Leandro R. ; MORAIS, Greiciele M. ; GONCALVES, Carlos A.: E-Commerce: A Short History Follow-up on Possible Trends. In: *International Journal of Business Administration* 8 (2017), Oktober, Nr. 7, 130. <http://dx.doi.org/10.5430/ijba.v8n7p130>. – DOI 10.5430/ijba.v8n7p130. – ISSN 1923–4015, 1923–4007

## *Bibliography*

- [Wik16] WIKIPEDIA: *Wissenschaftliche Arbeit*. [https://de.wikipedia.org/w/index.php?title=Wissenschaftliche\\_Arbeit&oldid=156007167](https://de.wikipedia.org/w/index.php?title=Wissenschaftliche_Arbeit&oldid=156007167).  
Version: 2016, Abruf: 2016-07-21

# Eidesstattliche Versicherung

Hiermit versichere ich an Eides statt, dass ich die vorliegende Arbeit selbstständig und ohne fremde Hilfe angefertigt und mich anderer als der im beigefügten Verzeichnis angegebenen Hilfsmittel nicht bedient habe. Alle Stellen, die wörtlich oder sinngemäß aus Veröffentlichungen entnommen wurden, sind als solche kenntlich gemacht. Ich versichere weiterhin, dass ich die Arbeit vorher nicht in einem anderen Prüfungsverfahren eingereicht habe und die eingereichte schriftliche Fassung der auf dem elektronischen Speichermedium entspricht.

Ich bin mit einer Einstellung in den Bestand der Bibliothek des Fachbereiches einverstanden.

Hamburg, den \_\_\_\_\_ Unterschrift: \_\_\_\_\_