IPS-2

-ARANYAK BANERJEE(22BRS1034)

1. (a). Develop the following web page to understand and explore the basic elements in **HTML.**

Note:

(1) Do not use any properties from other technologies such as CSS, javascript etc.,Use only HTML.
(2) Provide a hyperlink to the image mentioned in the figure.
(3) The text "Line Breaks" is a flying text from right to left
(4) Font style of the paragraph 1 is the courier
(5) The starting and ending point of the first paragraph must be the same vertical orientation
(6) Use 3 blank spaces in the paragraph starting with the words "**If you want to put multiple spaces**"
(7) Use super-script, sub-script, highlight and emphasize features at the appropriate place as used in the below figure.
(8) The starting and ending point of the first paragraph must be the same vertical orientation
(9) Use appropriate entities or the character references in the paragraph message and wherever it is mentioned.
(10) Use pre-formatting tag to create the paragraph which starts with the words "Most HTML commands"

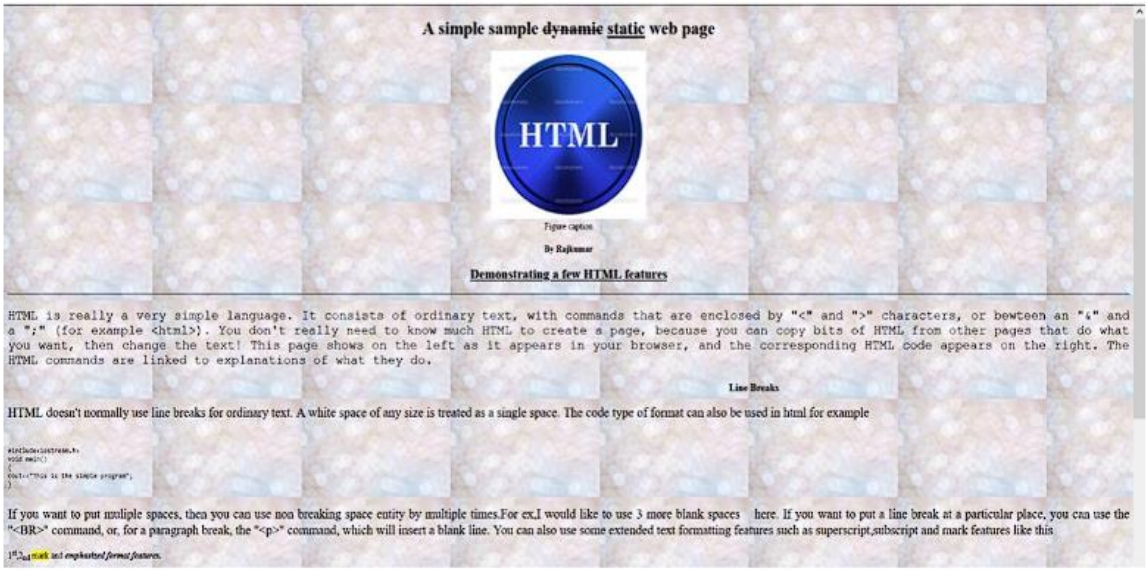

```
<!DOCTYPE html>
<html>

<head>
    <meta http-equiv="refresh" content="5">
    <title>My Website</title>
</head>

<body background="bg.jpg">
    <h1 align="center">A simple sample <s> dynamic</s> <u>static</u> web
page></h1>
    <center><a
            href="https://encrypted-
tbn0.gstatic.com/images?q=tbn:ANd9GcS1HVNHQmF6XqXS0xqpvfcJFY3cQIAQEB3XmJ_edOZd
MQ&s"><img
                src="image.png" title="Figure option"></center></a>
    <figcaption align="center"> Figure Caption</figcaption>
    <h5 align="center"> By Aranyak</h6>
        <h3 align="center"><u>Demonstrating a few HTML features</u></h3>
        <hr>
        <p>
            <font face="Courier New">HTML is a very simple language. It
consists of ordinary texts, with commands that
                are enclosed by "&lt;" and "&gt;". The HTML commands are
linked with their explanation.</font>
        </p>

        <marquee direction="right"><b>Line Breaks</b></marquee>
        <br>
        <p>HTML doesn't normally use line breaks for ordinary text. A white
space is treated as single space.The code is
            as follows:</p>
        <br>
        <pre align="left">#include <stdio.h></pre>
        <pre align="left">void main() {</pre>
        <pre align="left">cout<<"This is the simple program.";</pre>
        <pre align="left">}</pre>
        <br>
        <br>
```

```
        <br>
        <p>If you want to put multiple spaces, then you can use non breaking
space entity by multiple times. If you want
            to put a line break at a particular place, you can use
"&lt;BR&gt;" command. You can also use some extended
            text formatting features such as supescript and mark features like
this.</p>
        <br>
        <p>1<sup>st</sup>,2<sub>nd</sub> <mark>mark</mark> and
<em><strong>emphasized format features.</strong></em></p>

        <h5 align="left">Starting and stopping commands</h4>
            <pre>
            Most HTML commands come in pairs.The closing command is always the
same as the opening command, except for the addition of "/". "&lt;H4&gt;"
marks the beginning and "&lt;/H4&gt;" marks the end of it.

            </pre>

            <p>
                <font face="Courier New">Modifiers are sometimes included
along with the basic command. The modifier
                    does not need to be repeated in the closing
command.</font>
            </p>
            <h1 align="center">This is a size "1" heading</h1>
            <br>
            <h2 align="left">This is size "2" heading</h2>
            <br>
            <h3 align="right">This is a size "3" heading</h3>
            <p align="center"><b>Copyright&copy; 2024, by <em><u>
                            <font color="Blue">Aranyak
                        </u></em></font> <sup>TM</sup></p></b>
            <p align="center">The objective of the equation is to use one
&alpha; two &beta; three &gamma;</p>
            <p align="center">If you would like to make a link or bookmark to
this page, the URL is:</p>
            <a href="https://www.oracle.com">
                <center>www.oracle.com</center>
            </a>
            <video controls>
                <source src="video.mp4" type="video/mp4">
                Your browser does not support the video tag.
              </video>
</body>

</html>
```

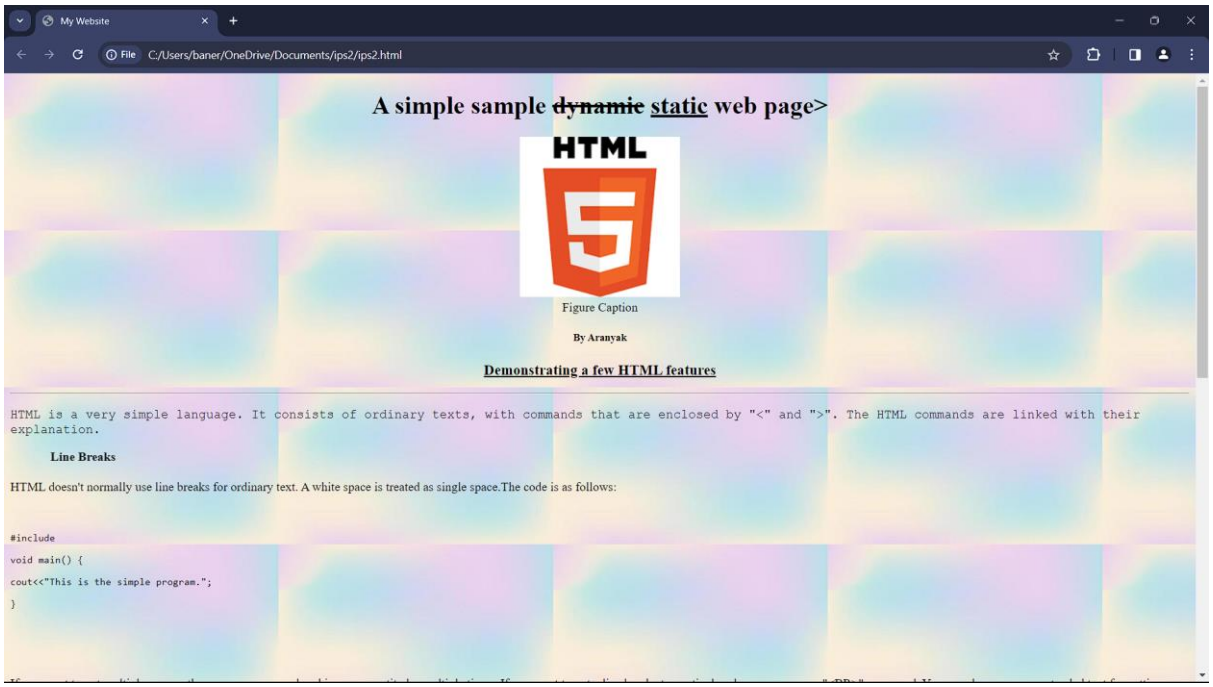
My Website
File C:/Users/baner/OneDrive/Documents/ips2/ips2.html
A simple sample dynamic static web page>
HTML
Figure Caption
By Aranyak
Demonstrating a few HTML features
HTML is a very simple language. It consists of ordinary texts, with commands that are enclosed by "<" and ">". The HTML commands are linked with their explanation.
Line Breaks
HTML doesn't normally use line breaks for ordinary text. A white space is treated as single space.The code is as follows:
#include
void main() {
cout<<"This is the simple program.";
}

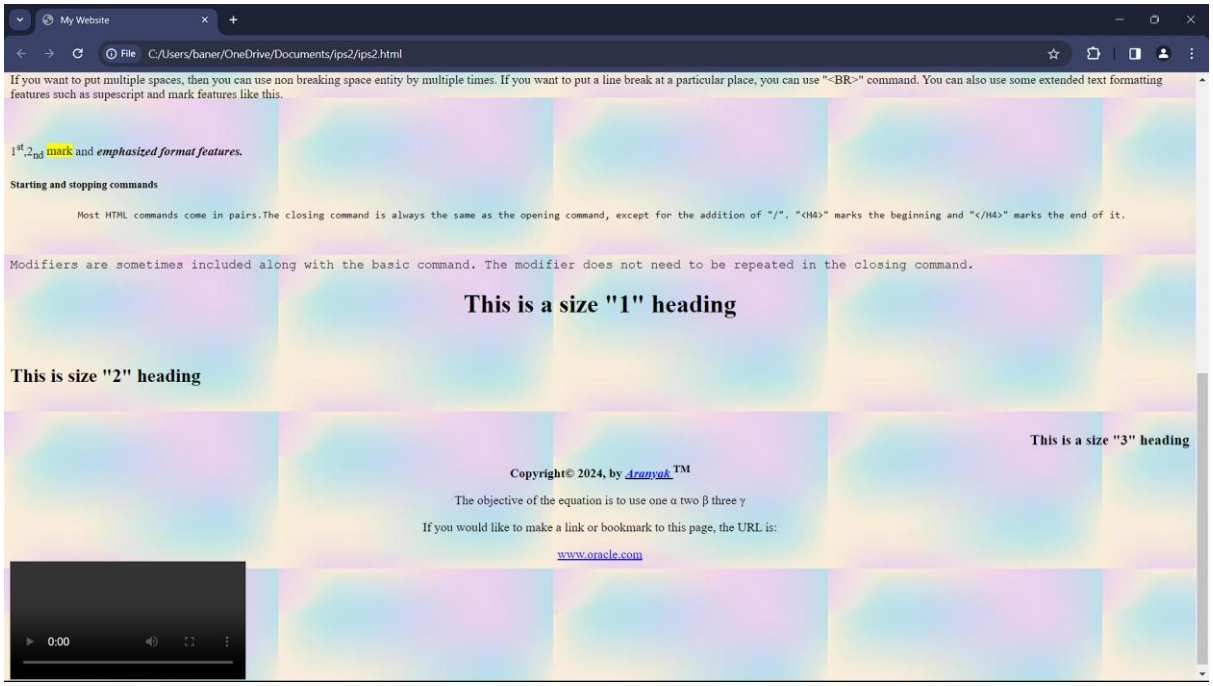
My Website
File C:/Users/baner/OneDrive/Documents/ips2/ips2.html
If you want to put multiple spaces, then you can use non breaking space entity by multiple times. If you want to put a line break at a particular place, you can use "<BR>" command. You can also use some extended text formatting features such as supescript and mark features like this.
1st.2nd mark and emphasized format features.
Starting and stopping commands
Most HTML commands come in pairs.The closing command is always the same as the opening command, except for the addition of "/". "<H4>" marks the beginning and "</H4>" marks the end of it.
Modifiers are sometimes included along with the basic command. The modifier does not need to be repeated in the closing command.
This is a size "1" heading
This is size "2" heading
This is a size "3" heading
Copyright© 2024, by Aranyak TM
The objective of the equation is to use one α two β three γ
If you would like to make a link or bookmark to this page, the URL is:
www.oracle.com
0:00

(2) Design the below table using HTML:

Here is the table caption

	XML **Approximation**			
	# of languages	**Regions**	**what?**	**How are you?**
First Country	2	india	Nothing	Fine
Second Country	1	United states of America		

```
<!DOCTYPE HTML>
<html>
<body>
<title>My Table</title>
<table border="2">
  <caption>Here is the table caption</caption>

  <td rowspan="2"><img
          src="https://encrypted-
tbn0.gstatic.com/images?q=tbn:ANd9GcRctGmLoK2MDMDZpQSUmXPi6GH_vpF3vEJ_IA&usqp=
CAU"
          width="250" height="200"></td>
  <th colspan="4">
      <h1>XML</h1> <br><br><br>Approximation<br><br>
  </th>
  <tr>
      <th># of languages</th>
      <th>Regions</th>
      <th>What?</th>
      <th>How are you?</th>
  </tr>
  <tr>
      <td><b>First Country</b></td>
      <td>2</td>
      <td>india</td>
      <td rowspan="2">Nothing</td>
      <td rowspan="2">Fine</td>
  </tr>
  <tr>
      <td><b>Second Country</b></td>
      <td>1</td>
      <td>United states of America</td>
  </tr>
</table>
```

```
</body>
</html>
```

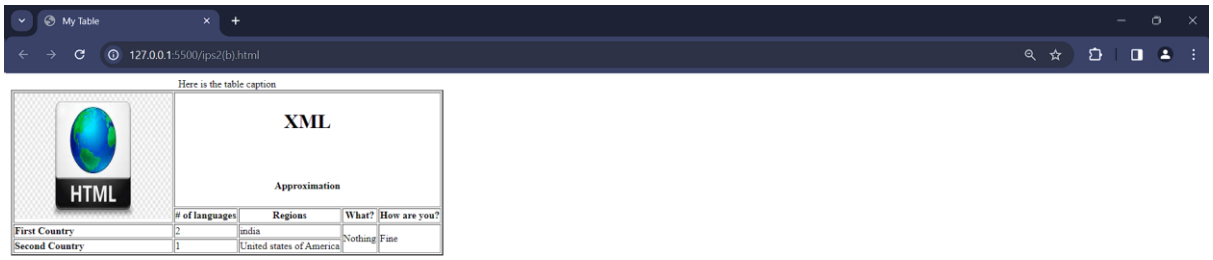
My Table
127.0.0.1:5500/ips2(b).html
Here is the table caption
HTML
XML
Approximation
# of languages
Regions
What?
How are you?
First Country
2
india
Nothing
Fine
Second Country
1
United states of America