
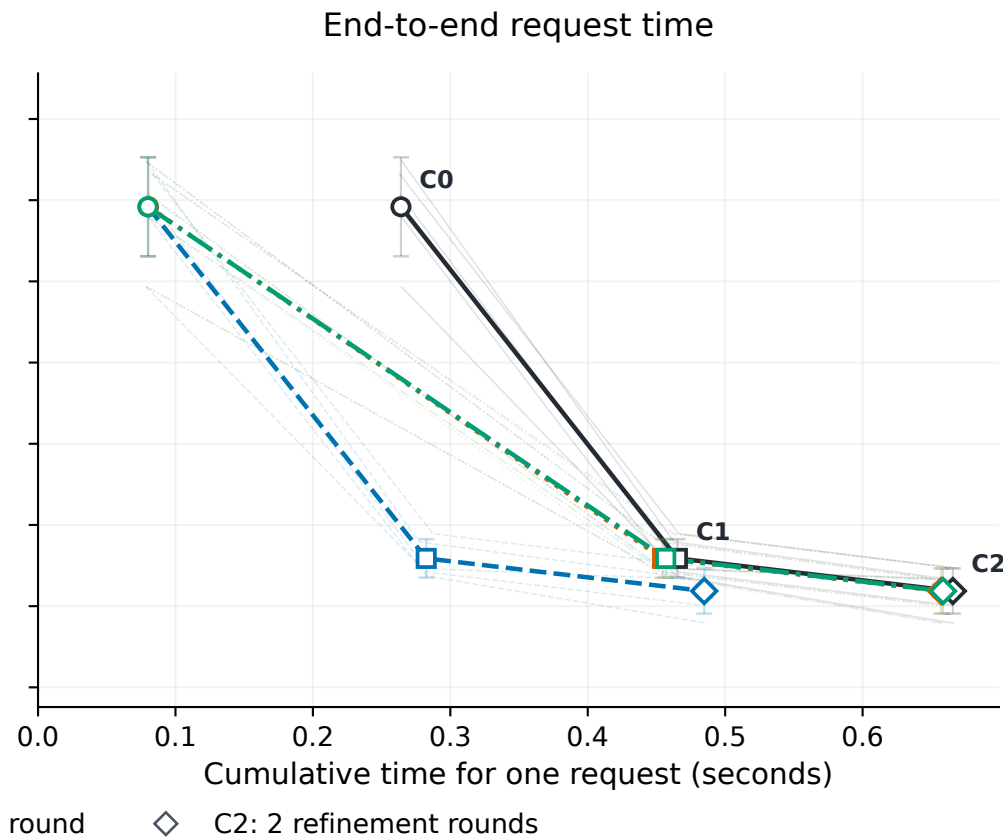


Adult | fairness versus refinement budget

k = 10 | 5 original P2 seeds | independent record-deletion batches | exact matched-budget replay

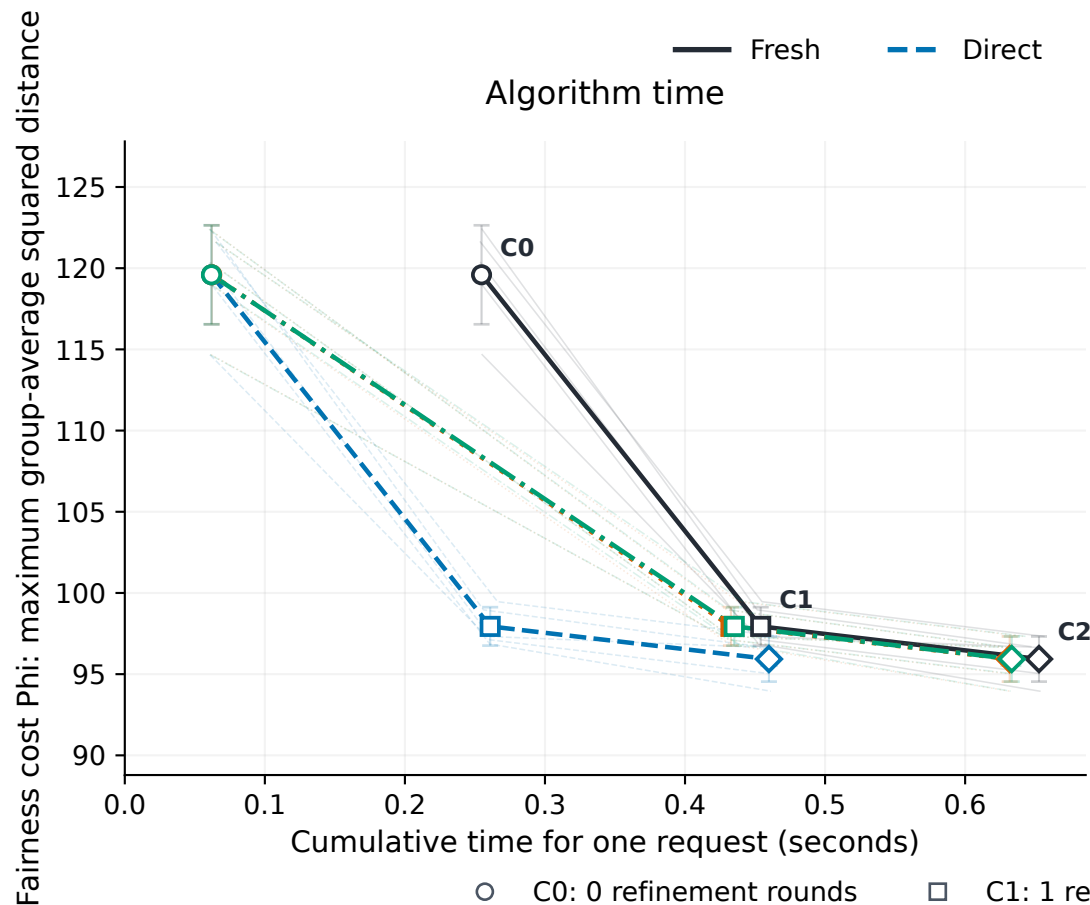

Markers: mean across seeds of each key's four-repeat median time; bars: ± 1 seed SD. Faint lines: individual seeds.

All methods have identical quality at each matched seed/budget. C0 still communicates summaries; network time is unmeasured.

Budgets are independently rerun cumulative calls, not a Pareto-frontier proof or a sequence of deletion requests.