


16

a.) accessible inside the same class

a.ii) method that returns the value of a private attribute (getter)

a.iii)

b.)

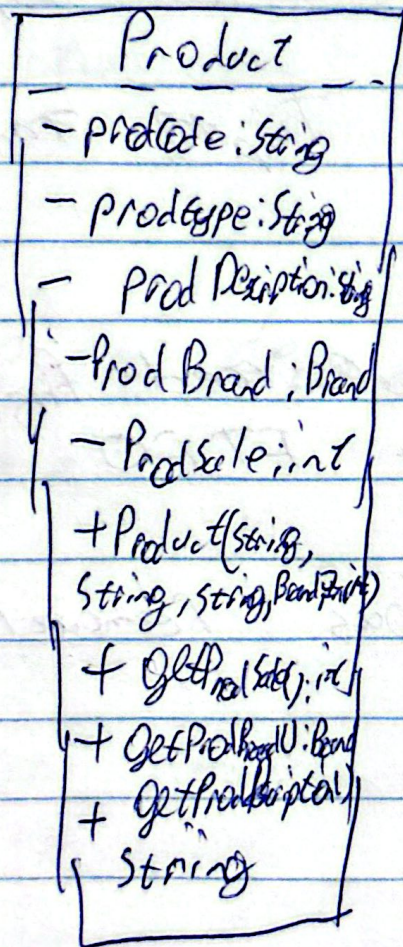

c.) Brand b = new Brand("Safex", 2.17H);

iii) Class = Blueprint

Instance = actual object from the class

- c) 1) Automatic Garbage collection
- 2) Runs On any platform

15

a.) Basic data types that store the value in memory

a.ii) Uses less memory

16

a.) ~~are method~~ are Reusable and flexible code

a.ii) Hides internal data and protects it

b) All attributes are private and can only be accessed or changed through public methods

c) 17

c_{vi}) A method calls itself to solve smaller versions of same problems until base case is reached

c_{viii}) 1) Can be too many calls
2) Slower and uses more memory

d) Code easier to read and maintain