


14a

has a aggregation

14b

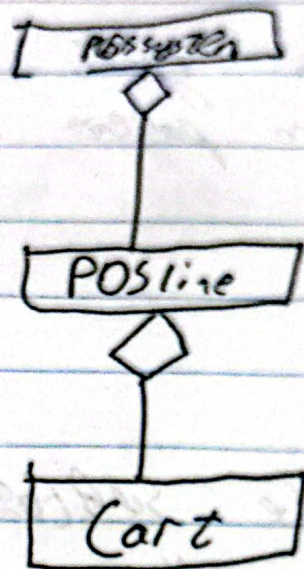

14c

a name given to a variable or method (for example id or active)

14d

class is the blueprint
instantiation is when you create

an object from that Cheprint

15a

when a subclass gets methods and attributes from parent class

15B

You can create subclasses of POSLine and they have all methods of POSLine without rewriting them

15c

1) Saves time

2) more reliable

75d

PO: line could store multiple counter IDs

76a

Because the counter is either open or closed

76b

77a

a variable that stores the memory address of an object rather than the object itself

77c

art4 art5 art6 null

77d

With queue you can only remove from the front

77f

It makes code easier to read and understand