

Q 24a

Because the score offers exactly 246

24b

method name and return type

24c

Because variable, the tripNumbers
are private, so we use getters

to access then used

24+1 trips with less than 20
Students won't run.


15a

Add new variable to store
Friends's ID

15b

Check if the friend has already
been assigned to the same trip before assigning state
if ^{preferred} no, skip that trip and try next
preference

16a.ii)

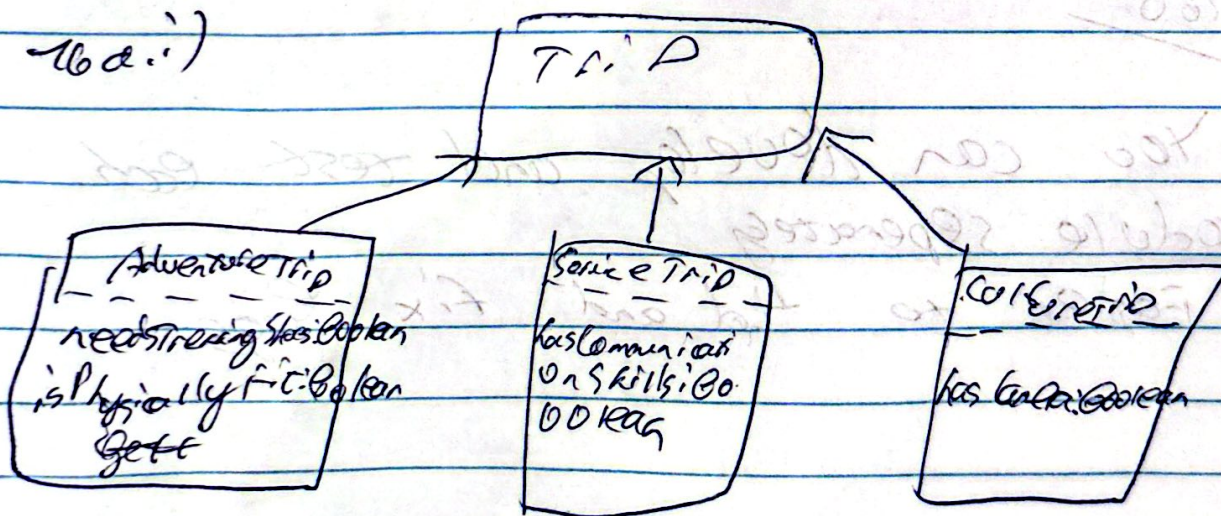

Getters and setters for each
also

16a.ii) public class AdventureTrip
extends Trip {}

16a.iii

Subclasses reuse code from parents so
you don't rewrite
"Easy to add new Trip types"

16a.iv

If objects depend too much, design
can break

16b

You can develop and test each
module separately
Easier to find and fix bugs

77c

Trip 3 Trip 11 Trip 2 Trip 5

Trip 3 pointer to Trip 2

Trip 2 pointer to Trip 11

Trip 11 pointer to Trip 5

Trip 3 Trip 2 Trip 11 Trip 5

78a

Students who submitted first would
be processed first FTFO

Queue allows removal only
from front