

Interactive System Productivity Facility (ISPF)



Messages and Codes

OS/390 Version 2 Release 8.0

Interactive System Productivity Facility (ISPF)



Messages and Codes

OS/390 Version 2 Release 8.0

Note

Before using this document, read the general information under "Notices" on page v.

Fourth Edition (September 1999)

This edition applies to ISPF for Version 2 Release 8 of the licensed program OS/390 (program number 5647-A01) and to all subsequent releases and modifications until otherwise indicated in new editions. Make sure you are using the correct edition for the level of the product.

Order publications by phone or fax. IBM Software Manufacturing Solutions takes publication orders between 8:30 a.m. and 7:00 p.m. eastern standard time (EST). The phone number is (800) 879-2755. The fax number is (800) 284-4721.

You can also order publications through your IBM representative or the IBM branch office serving your locality. Publications are not stocked at the address below.

A form for comments appears at the back of this publication. If the form has been removed, and you have ISPF-specific comments, address your comments to:

International Business Machines Corporation
Attn: Information Development
Department T99 / Building 062
P.O. Box 12195
Research Triangle Park, NC 27709-2195

FAX (United States & Canada): 1+919+254-0206
FAX (Other Countries): Your International Access Code +1+919+254-0206

If you have OS/390 - specific comments, address them to:

International Business Machines Corporation
Department 55JA, Mail Station P384
522 South Road
Poughkeepsie, NY 12601-5400
United States of America

FAX (United States & Canada): 1+914+432-9405
FAX (Other Countries): Your International Access Code +1+914+432-9405

IBMLink (United States customers only): KGNVMC(MHVRCFS)
IBM Mail Exchange: USIB6TC9 at IBMMAIL
Internet: mhvrcfs@vnet.ibm.com

If you would like a reply, be sure to include your name, address, telephone number, or FAX number.

Make sure to include the following in your comment or note:

Title and order number of this book
Page number or topic related to your comment

The ISPF development team maintains a site on the World-Wide Web, as does the OS/390 development team. The URLs for the sites are:

<http://www.software.ibm.com/ad/ispf>
<http://www.ibm.com/s390/os390>

When you send information to IBM, you grant IBM a nonexclusive right to use or distribute the information in any way it believes appropriate without incurring any obligation to you.

© Copyright International Business Machines Corporation 1980, 1998. All rights reserved.

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

Notices	v
Trademarks	v

What's in the OS/390 V2R8.0 ISPF library?	vii
OS/390 V2R8.0 ISPF	vii

Elements and Features in OS/390	ix
--	-----------

Preface	xiii
About This Book	xiii
Who Should Use This Book	xiii
How to Use This Book	xiii

Chapter 1. ISPF Messages	1
---	----------

Chapter 2. PDF Messages	195
--	------------

Chapter 3. SCLM Messages	423
---	------------

Chapter 4. Macro Messages (MNOTEs)	521
---	------------

Chapter 5. Library Management Facility (LMF) Messages	535
--	------------

Chapter 6. SuperC Messages	555
---	------------

Chapter 7. TCP/IP Error Codes	565
--	------------

Chapter 8. Return Codes from Terminating Dialogs	569
---	------------

Return Codes from Terminating Dialogs	569
Return Codes from Termination Dialogs	569

Chapter 9. Diagnostic Tools and Information	571
--	------------

ISPF Debug Tools	571
Diagnostic Information	571
Using the ENVIRON System Command	572
ENVIRON Command Syntax and Parameter Descriptions	572
Abend Panels Provide Diagnostic Information	578
ISPF Statistics Entry in a PDS Directory	581
Common Problems Using ISPF	581
Messages	582
Unexpected Output	583
Abend Codes and Information	583
Terminal I/O Error Codes	585
Register Linkage Conventions	586
Obtaining Message IDs	587
Installation, Maintenance, and Migration	
Diagnostics	588
Common Installation and Maintenance Problems	588
Migration from Version 2 and Version 3 to Version 4.1	589

Readers' Comments — We'd Like to Hear from You	591
---	------------

Notices

References in this publication to IBM products, programs, or services do not imply that IBM intends to make these available in all countries in which IBM operates. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any of the intellectual property rights of IBM may be used instead of the IBM product, program, or service. The evaluation and verification of operation in conjunction with other products, except those expressly designated by IBM, are the responsibility of the user.

IBM may have patents or pending patent applications covering subject matter in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to the IBM Director of Licensing, IBM Corporation, 208 Harbor Drive, Stamford, CT, USA 06904-2501.

IBM may change this publication, the product described herein, or both. A change in this publication is indicated by a vertical line to the left of the change.

Trademarks

The following terms, denoted by an asterisk (*) on their first occurrences in this publication, are trademarks of the IBM Corporation in the United States or other countries:

ACF/VTAM	MVS/ESA
AD/Cycle	MVS/XA
APL2	MVS/SP
Application Development	Operating System/2
AS/400	OS/2
BookMaster	OS/400
CICS	Personal System/2
CICS OS/2	PS/2
CUA	Presentation Manager
Common User Access	RACF
CSP/AD	Repository Manager
CSP/AE	Repository Manager/MVS
CSP/2AD	Resource Access Control Facility
CSP/370AD	SAA
CSP/370RS	Series/1
DATABASE 2	System Application Architecture
DB2	System/370
GDDM	System/390
IBM	VM/XA
IMS/ESA	VTAM
MVS/DFP	

The following terms, denoted by a double asterisk (**) on their first occurrences in this publication, are trademarks of other companies:

Windows
Java
Microsoft
Novell
WordPerfect

Microsoft Corporation
Sun Microsystems, Inc.
Microsoft Corporation
Novell, Inc.
WordPerfect Corporation

What's in the OS/390 V2R8.0 ISPF library?

You can order the ISPF books using the numbers provided below.

OS/390 V2R8.0 ISPF

Title	Order Number
<i>OS/390 V2R8.0 ISPF Dialog Tag Language Guide and Reference</i>	SC28-1219-03
<i>OS/390 V2R8.0 ISPF Planning and Customizing</i>	SC28-1298-03
<i>OS/390 V2R8.0 ISPF User's Guide</i>	SC28-1239-03
<i>OS/390 V2R8.0 ISPF Services Guide</i>	SC28-1272-03
<i>OS/390 V2R8.0 ISPF Dialog Developer's Guide and Reference</i>	SC28-1273-03
<i>OS/390 V2R8.0 ISPF Reference Summary</i>	SC28-1308-03
<i>OS/390 V2R8.0 ISPF Edit and Edit Macros</i>	SC28-1312-03
<i>OS/390 V2R8.0 ISPF Library Management Facility</i>	SC28-1317-03
<i>OS/390 V2R8.0 ISPF Messages and Codes</i>	GC28-1326-03
<i>OS/390 V2R8.0 ISPF Software Configuration and Library Manager Project Manager's and Developer's Guide</i>	SC34-4750-01
<i>OS/390 V2R8.0 ISPF Software Configuration and Library Manager Reference</i>	SC28-1320-03
<i>OS/390 V2R8.0 ISPF Application Server User's Guide and Reference</i>	SC34-4752-01
Entire library Bill of Forms	SBOF-8567

The licensed books that were declassified in OS/390 Version 2 Release 4 appear on the OS/390 Online Library Collection, SK2T-6700.

The remaining licensed books for OS/390 Version 2 appear on the OS/390 Licensed Product Library, LK2T-2499, in unencrypted form.

Elements and Features in OS/390

You can use the following table to see the relationship of a product you are familiar with and how it is referred to in OS/390 Version 2 Release 8.0. OS/390 V2R8.0 is made up of elements and features that contain function at or beyond the release level of the products listed in the following table. The table gives the name and level of each product on which an OS/390 element or feature is based, identifies the OS/390 name of the element or feature, and indicates whether it is part of the base or optional. For more compatibility information about OS/390 elements see *OS/390 Planning for Installation, GC28-1726*

Product Name and Level	Name in OS/390	Base or Optional
BookManager BUILD/MVS V1R3	BookManager BUILD	optional
BookManager READ/MVS V1R3	BookManager READ	base
MVS/Bulk Data Transfer V2	Bulk Data Transfer (BDT)	base
MVS/Bulk Data Transfer File-to-File V2	Bulk Data Transfer (BDT) File-to-File	optional
MVS/Bulk Data Transfer SNA NJE V2	Bulk Data Transfer (BDT) SNA NJE	optional
IBM OS/390 C/C++ V1R2	C/C++	optional
DFSMSdftp V1R3	DFSMSdftp	base
DFSMSdss	DFSMSdss	optional
DFSMSShsm	DFSMSShsm	optional
DFSMSrmm	DFSMSrmm	optional
DFSMS/MVS Network File System V1R3	DFSMS/MVS Network File System	base
DFSORT R13	DFSORT	optional
EREP MVS V3R5	EREP	base
FFST/MVS V1R2	FFST/MVS	base
GDDM/MVS V3R2 <ul style="list-style-type: none">• GDDM-OS/2 LINK• GDDM-PCLK	GDDM	base
GDDM-PGF V2R1.3	GDDM-PGF	optional
GDDM-REXX/MVS V3R2	GDDM-REXX	optional
IBM High Level Assembler for MVS & VM & VSE V1R2	High Level Assembler	base
IBM High Level Assembler Toolkit	High Level Assembler Toolkit	optional
ICKDSF R16	ICKDSF	base
ISPF V4R2M1	ISPF	base
Language Environment for MVS & VM V1R5	Language Environment	base
Language Environment V1R5 Data Decryption	Language Environment Data Decryption	optional

Product Name and Level	Name in OS/390	Base or Optional
MVS/ESA SP V5R2.2		
BCP	BCP or MVS	base
ESCON Director Support	ESCON Director Support	base
Hardware Configuration Definition (HCD)	Hardware Configuration Definition (HCD)	base
JES2 V5R2.0	JES2	optional
JES3 V5R2.1	JES3	base
LANRES/MVS V1R3.1	LANRES	base
IBM LAN Server for MVS V1R1	LAN Server	base
MICR/OCR Support	MICR/OCR Support	base
OS/390 UNIX System Services	OS/390 UNIX System Services	base
OS/390 UNIX Application Services	OS/390 UNIX Application Services	base
OS/390 UNIX DCE Base Services (OSF DCE level 1.1)	OS/390 UNIX DCE Base Services	base
OS/390 UNIX DCE Distributed File Services (DFS) (OSF DCE level 1.1)	OS/390 UNIX DCE Distributed File Services (DFS)	optional
OS/390 UNIX DCE User Data Privacy	OS/390 UNIX DCE User Data Privacy	optional
SOMobjects Application Development Environment (ADE) V1R1	SOMobjects Application Development Environment (ADE)	base
SOMobjects Runtime Library (RTL)	SOMobjects Runtime Library (RTL)	base
SOMobjects service classes	SOMobjects service classes	base
Open Systems Adapter Support Facility (OSA/SF) R1	Open Systems Adapter Support Facility (OSA/SF)	base
MVS/ESA RMF V5R2	RMF	optional
OS/390 Security Server	Resource Access Control Facility (RACF) <ul style="list-style-type: none"> • DCE Security Server • OS/390 Firewall Technologies • Lightweight Directory Access Protocol (LDAP) Client and Server • Open Cryptographic Enhanced Plug-ins (OCEP) 	optional
SDSF V1R6	SDSF	optional
SMP/E	SMP/E	base
	Softcopy Print	base
SystemView for MVS Base	SystemView for MVS Base	base
IBM TCP/IP V3R1 <ul style="list-style-type: none"> • TCP/IP CICS Sockets • TCP/IP IMS Sockets • TCP/IP Kerberos • TCP/IP Network Print Facility (NPF) • TCP/IP OS/390 Communications Service IP Applications • TCP/IP OS/2 Offload 	TCP/IP <ul style="list-style-type: none"> • TCP/IP CICS Sockets • TCP/IP IMS Sockets • TCP/IP Kerberos • TCP/IP Network Print Facility (NPF) • TCP/IP OS/390 Communications Service IP Applications • TCP/IP OS/2 Offload 	<ul style="list-style-type: none"> • optional • optional • optional • optional • optional • optional
TIOC R1	TIOC	base
Time Sharing Option Extensions (TSO/E) V2R5	TSO/E	base

Product Name and Level	Name in OS/390	Base or Optional
VisualLift for MVS V1R1.1	<ul style="list-style-type: none"> • VisualLift Run-Time Environment (RTE) • VisualLift Application Development Environment (ADE) 	<ul style="list-style-type: none"> • base • optional
VTAM V4R3 with the AnyNet feature	VTAM	base
3270 PC File Transfer Program V1R1.1	3270 PC File Transfer Program	base

Preface

This book contains messages and codes generated by ISPF. Some of the messages are produced by errors that have occurred for one reason or another, some are warning messages, and some are merely generated to inform the user about tasks ISPF is performing.

About This Book

This book contains separate chapters for ISPF messages, PDF messages, SCLM messages, macro messages generated by SCLM, and LMF messages. Also included is a diagnostic tools and information chapter. Information in this chapter formerly appeared in *ISPF Dialog Management Guide and Reference* Information that has changed is designated by a vertical line in the left margin.

Who Should Use This Book

This book is designed to help anyone who uses ISPF and receives error messages.

How to Use This Book

First, determine what is the message number of the message you to find in this book. On the command line, type **MSGID**. This command causes the message ID of the last message displayed to appear on your screen. Then you simply look for the message ID listed in this book.

For more information about the **MSGID** command, refer to *ISPF User's Guide*

The message descriptions are composed of the following:

- **A unique alphanumeric identifier** in the form *CCCannna*, where
 - CCC* Is a character string standing for ISP (for ISPF messages), ISR (for PDF and LMF messages), or FLM (for SCLM messages).
 - nnn* Is a 3-digit number.
 - a* Is an alphabetic character.

Within each chapter, the messages are organized first alphabetically and then numerically.

- **A message explanation** that states the reason for the message. Error message explanations describe probable causes of the errors; warning message explanations give an explanation of the warnings given; information message explanations give information about tasks ISPF is performing.
- **A user response**, which gives return codes, describes possible causes of problems, and discusses how to correct the problems. No user action is necessary for information messages and so no response is given.
- **A second-level response** that a programmer, system programmer, or project administrator (in SCLM only) can use to correct the problems discussed in the message explanation. When no second-level action is necessary, no response is given.

Messages can contain one or more variables identifying specific components that cause ISPF to generate a message. For example, a variable can be the name of a member, a group, or a type. When a message is displayed, the actual value of the variable is substituted into the message text to help you identify the source of the problem. In the message descriptions that follow, variables with a length greater than 8 are truncated.

Chapter 1. ISPF Messages

ISPA001 **Allocation error message – ISPF system data set allocation error - press Enter to continue.**

Explanation: This is an informational message. This message precedes further messages for which ISPF system data received the allocation error.

User Response: Press Enter.

ISPA002 **List allocate err msg – List file allocation error - ISPF will operate without a list data set.**

Explanation: A list data set allocation error occurred; ISPF will operate without a list data set.

User Response: Continue to use ISPF. Contact your system programmer if message recurs.

System Programmer Response: Diagnose the allocation error. Contact IBM support.

ISPA003 **Log allocate err msg – Log file allocation error - ISPF will operate without a log data set.**

Explanation: A log data set allocation error occurred; ISPF will operate without a log data set.

User Response: Continue to use ISPF. Contact your system programmer if message recurs.

System Programmer Response: Diagnose the allocation error. Contact IBM support.

ISPA004 **LISTX allocate err msg – Temporary listing data set cannot be allocated.**

Explanation: The ISPF temporary listing data set cannot be allocated.

User Response: Note the error message and text. Contact your system programmer.

System Programmer Response: Diagnose the allocation error using the appropriate IBM documentation. Contact IBM support.

ISPA005 **CNTLX allocate err msg – Temporary control card data set cannot be allocated.**

Explanation: The ISPF temporary ISPCTLx or ISPWRKx data set cannot be allocated.

User Response: Note the error message and text. Contact your system programmer.

System Programmer Response: Diagnose the

allocation error using the appropriate IBM documentation. Contact IBM support.

ISPA007 **Open error message - Error trying to open 'aaaaaaaa'.**

Explanation: An error occurred while trying to open aaaaaaaa.

User Response: Note the message and text. Contact your system programmer.

System Programmer Response: Diagnose the open error for aaaaaaaa using the appropriate IBM documentation. Contact IBM support.

ISPA107 **Open error message - Error trying to open data set.**

Explanation: An error occurred while trying to open the ISPF system data set.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPA108 **Error from DAIR routine - An error was encountered while running the TSO IKJDAIR routine.**

Explanation: An error was encountered while running the TSO IKJDAIR routine.

User Response: Note the error message. Contact your system programmer.

System Programmer Response: Diagnose the DAIR error codes. Contact IBM support.

ISPA111 **Invalid prefix length - Data set prefix length specified in exit must be greater than or equal to 1 and less than or equal to 27.**

Explanation: An invalid prefix length has been specified by EXIT 16: Log, List, and Temporary Data Set Allocation Exit.

User Response: The data set prefix length specified in EXIT 16 must be greater than or equal to 1 and less than or equal to 26. Refer to EXITS in the *ISPF Planning and Customizing* for information on EXIT 16.

ISPF Messages

ISPA300 **APL2 interface error- Invalid APL2 interface chain manager request:**
aaaaaaaa.

Explanation: An invalid request was made to the storage chain manager.

User Response: Contact the responsible programmer.

Programmer Response: A request other than GET, FREE, or FREEALL was made to the storage chain manager. This could also be an ISPF internal error. If you feel that your program is not at fault, contact the system programmer.

System Programmer Response: This could be either a system error or an ISPF internal error. If you do not have mixed levels of ISPF code, contact IBM support.

ISPA301 **APL2 interface error - Unable to free APL2 environment chain.**

Explanation: There was an error while ISPF was attempting to free storage.

User Response: Contact your system programmer.

System Programmer Response: This is a possible system or ISPF internal error. If you do not have mixed levels of ISPF code, contact IBM support.

ISPA302 **APL2 interface error - Unable to get block for APL2 environment chain.**

Explanation: ISPF was unable to obtain additional storage.

User Response: Contact your system programmer.

Programmer Response: Verify that the user's region size is adequate for running the program that failed. If the region size is adequate, contact IBM support.

ISPA310 **APL2 interface error - Invalid APL2 driver request: aaaaaaaa.**

Explanation: The APL2 driver request was not a valid function.

User Response: Contact the responsible programmer.

Programmer Response: If the program function was valid, this may be a system error or an ISPF internal error. Contact your system programmer.

System Programmer Response: This is a possible system error or ISPF internal error. If you do not have mixed levels of ISPF code, contact IBM support.

ISPA311 **APL2 interface error - APL2 driver is unable to aaaaaaaa storage.**

Explanation: There was an error in either obtaining or freeing storage.

User Response: Contact the system programmer.

Programmer Response: This is a possible system error or an ISPF internal error. If the error occurred during a GET command, verify that the user region size is adequate for running the program. If the region size is adequate or the error occurred during a FREE command, contact IBM support.

ISPA320 **APL2 interface error - Invalid APL2 environment manager request: aaaaaaaa, direction: bbbbbbbb.**

Explanation: The program request is not a valid ISPF APL2 request.

User Response: Contact the responsible programmer.

Programmer Response: If the request is a valid program request, should contact the system programmer.

System Programmer Response: This is a possible system or internal ISPF error. If you do not have mixed levels of ISPF code, contact IBM support.

ISPA321 **APL2 interface error - APL2 environment manager is unable to aaaaaaaa storage.**

Explanation: There was an error in an ISPF storage GET or FREE command.

User Response: Contact your system programmer.

System Programmer Response: This is a possible system error or ISPF internal error. If the error is a GET command, verify that the user region size is adequate for running the program. If the region size is adequate or the error is a FREE, contact IBM support.

ISPA322 **ISPF/APL2 link error - The SELECT service request to initiate APL2 requires keyword: lang(APL).**

Explanation: There was an invalid SELECT service request; lang(APL) was omitted.

User Response: Contact the responsible programmer.

Programmer Response: Correct the SELECT statement so that it includes lang(APL).

ISPA323 **ISPF/APL2 link ended - The APL2 side has ended, but there are ISPF service requests outstanding.**

Explanation: APL has ended prematurely.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that APL does not end until the ISPF service requests have completed. For additional information, read "Interface between ISPF and APL2" in *ISPF Dialog Developer's Guide and Reference*

ISPA324 Invalid APL2 selection - Outstanding APL2 workspace requests for ISPF services must be terminated.

Explanation: The APL program has failed.

User Response: Contact the responsible programmer.

Programmer Response: Cleanup mode was active when an APL select was initiated. For more information, read "Interface between ISPF and APL2" in *ISPF Dialog Developer's Guide and Reference*

ISPA325 aaaaaaaa variable request - Outstanding APL2 workspace requests for ISPF services must be terminated.

Explanation: The APL program failed.

User Response: Contact the responsible programmer.

Programmer Response: Cleanup mode was active when an APL variable service was initiated. For more information, read "Interface between ISPF and APL2" in *ISPF Dialog Developer's Guide and Reference*

ISPA326 ISPF/APL2 link damaged - APL2 request has ended, but there are ISPF service requests outstanding.

Explanation: The APL program failed.

User Response: Contact the responsible programmer.

Programmer Response: The APL request was ended prematurely. For more information read, "Interface between ISPF and APL2" in *ISPF Dialog Developer's Guide and Reference*

ISPA330 APL2 workspace error - Function: aaaaaaaa, variable: bbbbbbbb, return code: cccccccc.

Explanation: The variable service shown above was unsuccessful.

User Response: Contact the responsible programmer.

Programmer Response: Verify that the program is coded correctly for use of the variable shown in the message above.

ISPA331 APL2 workspace error - Function: list all variables, return code: aaaaaaaa.

Explanation: An error in the list all variables function caused a program failure.

User Response: Contact the responsible programmer.

Programmer Response: Verify that the APL program is coded correctly for this function. If the list all variables function is coded correctly, contact the system programmer.

System Programmer Response: This is a possible

system or ISPF internal error. If you do not have mixed levels of ISPF code, contact IBM support.

ISPA332 APL2 interface error - APL2 variable services exit routine is unable to aaaaaaaa storage.

Explanation: The program was unsuccessful because of a storage management problem.

User Response: Contact your system programmer.

System Programmer Response: This is a possible system or ISPF internal error. If you do not have mixed levels of ISPF code, contact IBM support.

ISPA333 Data truncation occurred - Data for APL2 variable list is too long.

Explanation: The program was unsuccessful because of variable list truncation.

User Response: Contact the responsible programmer.

ISPA334 APL2 variable error - The value for variable aaaaaaaa is not a character scalar or vector.

Explanation: The program was unsuccessful because of an incorrect variable value.

User Response: Contact the responsible programmer.

Programmer Response: Correct the variable value.

ISPA335 APL2 interface error - Invalid auxiliary processor variable services request: aaaaaaaa.

Explanation: The request name listed above was not recognized.

User Response: Contact the responsible programmer.

Programmer Response: Correct the request. If the request is valid, this could be an internal error; contact the system programmer.

System Programmer Response: This is a possible system or internal error. If you do not have mixed levels of ISPF code, contact IBM support.

ISPA336 Invalid variable name - aaaaaaaa is not a valid variable name for both ISPF and APL2.

Explanation: The variable name is invalid.

User Response: Contact the responsible programmer.

Programmer Response: Correct the variable name.

ISPF Messages

ISPA337 **APL2 function limit - An ISPF service may retrieve up to 64k bytes of APL2 workspace data.**

Explanation: Storage for the program has been exhausted.

User Response: Contact the responsible programmer.

Programmer Response: Correct the program to prevent the storage error.

ISPA400 **ISPAPTT dialog error - No parameter input was passed.**

Explanation: The parameter did not include all of the necessary inputs.

User Response: Contact the responsible programmer.

Programmer Response: Correct the parameters for the terminal type.

ISPA401 **ISPAPTT dialog error - Unexpected return code aaaaaaaa from service bbbbbbbb.**

Explanation: The APL program was unsuccessful.

User Response: Contact the responsible programmer.

Programmer Response: The service shown above failed with the return code shown above. Verify that the above service is coded correctly. If it is correct, contact the system programmer.

System Programmer Response: This is a possible system or internal error. If you do not have mixed levels of ISPF code, contact IBM support.

ISPC001 **ISPCNT error: RC =aaaaaaa - Open failure, member does not exist in data set.**

Explanation: The SPF PARMS member specified does not exist in the SPF PARMS data set

User Response: Verify that the spelling of the SPF PARMS member is correct. Ensure that the member exists in the SPF PARMS data set allocated to ddname ISPPARM. Refer to *ISPF Planning and Customizing* for more information on the ISPCNT program.

ISPC002 **ISPCNT error: RC =aaaaaaa - The input data set is a partitioned data set. Specify a member name.**

Explanation: An existing member of the SPF PARMS partitioned data set must be specified.

User Response: Verify that the name of the SPF PARMS data set is correct and that an existing member is specified. Refer to *ISPF Planning and Customizing* for more information on the ISPCNT program.

ISPC003 **ISPCNT error: RC =aaaaaaa - SPF parm data must have the keyword TKV in the 3-5 or 4-6 position.**

Explanation: The specified member is not a valid PARMS data set if the keyword TKV is missing or not in the correct location.

User Response: Verify that the specified member exists in the SPF PARMS data set. Browse the specified member to see if the TKV keyword is missing or in the wrong position. Refer to *ISPF Planning and Customizing* for more information on the ISPCNT program.

ISPC004 **ISPCNT error: RC =aaaaaaa - Open failure, allocate ISPPARM ddname to a SPF parms member.**

Explanation: The OPEN FAILURE is issued for not having allocated the SPF PARMS data set to the ddname ISPPARM prior to invoking ISPCNT.

User Response: Allocate the fully-qualified SPF PARMS data set to the ddname ISPPARM. Refer to *ISPF Planning and Customizing* for more information on the ISPCNT program.

ISPC010 **ISPC010W: Warning. Line aaaaaaaa of file "bbbbbbb". The "ccccccc=ddddddd" attribute specification is not valid when the "eeeeeee" conversion option has been specified. "ccccccc=ddddddd" will not be used.**

Explanation: The eeeeeee conversion option is in conflict with the use of attribute ccccccc specified for value ddddddd. The ccccccc attribute specification is ignored.

User Response: Change the attribute value or change the conversion utility option.

ISPC011 **ISPC011W: Warning. Line aaaaaaaa of file "bbbbbbb". Previous "ccccccc" tag attribute was missing or not valid. "ddddddd" tag will be ignored.**

Explanation: The previous tag ccccccc has a missing or invalid attribute. The current ddddddd tag cannot be processed and will be ignored.

User Response: Review the ISPD TLC log to determine the problem with the ccccccc tag. Correct the problem and rerun the conversion utility.

ISPC012 **ISPC012W: Warning.** Line *aaaaaaaa* of file "*bbbbbbbbb*". *cccccccc* attribute has already been defined for the *dddddddd* tag. *cccccccc* = "*eeeeeee*" will be ignored and the first setting will be used.

Explanation: The *cccccccc* attribute has been previously defined on the current *dddddddd* tag. Duplicate attribute specifications are ignored.

User Response: Provide only 1 specification for attribute *cccccccc*.

ISPC013 **ISPC013W: Warning.** Line *aaaaaaaa* of file "*bbbbbbbbb*". The "*cccccccc=dddddddd*" attribute is not defined for the "*eeeeeee*" tag and will be ignored.

Explanation: The *cccccccc* attribute is not valid for the *eeeeeee* tag.

User Response: Remove the *cccccccc* attribute specification from the DTL source file.

ISPC013A **ISPC013AW: Warning.** Line *aaaaaaaa* of file "*bbbbbbbbb*". The "*cccccccc*" attribute is not defined for the "*dddddddd*" tag and will be ignored.

Explanation: The *cccccccc* attribute is not valid for the *dddddddd* tag.

User Response: Remove the *cccccccc* attribute specification from the DTL source file.

ISPC014 **ISPC014W: Warning.** Line *aaaaaaaa* of file "*bbbbbbbbb*". *cccccccc* attribute has already been defined for the *dddddddd* tag. This duplicate attribute specification will be ignored.

Explanation: The *cccccccc* attribute has been previously defined on the current *dddddddd* tag. Duplicate attribute specifications are ignored.

User Response: Provide only 1 specification for attribute *cccccccc*.

ISPC015 **ISPC015W: Warning.** Line *aaaaaaaa* of file "*bbbbbbbbb*". The *cccccccc* attribute is not valid when the *dddddddd* attribute is also specified. *cccccccc=eeeeeee* will not be used.

Explanation: There is a conflict in the specification of attributes *cccccccc* and *dddddddd*. The *dddddddd* attribute will be used. The *cccccccc* attribute is ignored.

User Response: Remove the *cccccccc* attribute specification from the DTL source file.

ISPC015A **ISPC015AW: Warning.** Line *aaaaaaaa* of file "*bbbbbbbbb*". The *cccccccc* attribute is not valid when the *dddddddd* attribute is also specified. *cccccccc* will not be used.

Explanation: There is a conflict in the specification of attributes *cccccccc* and *dddddddd*. The *dddddddd* attribute will be used. The *cccccccc* attribute is ignored.

User Response: Remove the *cccccccc* attribute specification from the DTL source file.

ISPC016 **ISPC016E: Error.** Line *aaaaaaaa* of file "*bbbbbbbbb*". The *cccccccc* tag can only be coded within a text string. The previous tag has not been properly closed.

Explanation: The *cccccccc* tag can be used only within the text part of the tag syntax following the '>' close tag delimiter.

User Response: Make sure that the previous tag has been closed with the ">" tag delimiter. Correct the DTL source and rerun the conversion utility.

ISPC017 **ISPC017W: Warning.** Line *aaaaaaaa* of file "*bbbbbbbbb*". The *cccccccc=dddddddd* attribute value is not supported in the conversion process. The default value "*eeeeeee*" will be used.

Explanation: The invalid value *dddddddd* has been specified for the *cccccccc* attribute. The conversion utility will use the default value *eeeeeee*.

User Response: Correct the DTL source and rerun the conversion utility.

ISPC018 **ISPC018E: Error.** Line *aaaaaaaa* of file "*bbbbbbbbb*". A required tag was not coded under the *cccccccc* tag. One of the following tags is required to be coded under the *cccccccc* tag: "*dddddddd*".

Explanation: The *cccccccc* tag requires the use of at least one of the nested tags *dddddddd*.

User Response: Correct the DTL source and rerun the conversion utility.

ISPC019 **ISPC019E: Error.** Line *aaaaaaaa* of file "*bbbbbbbbb*". Required *cccccccc* attribute was not specified or was not valid on the *dddddddd* tag.

Explanation: The *dddddddd* tag requires the specification of attribute *cccccccc* tags *dddddddd*.

User Response: Correct the DTL source and rerun the conversion utility.

ISPF Messages

ISPC020 **ISPC020W: Warning.** ISPD TLC Release *aaaaaaaa* for *bbbbbbbb* is being run on ISPF Release *cccccccc* for *dddddddd*. Results are not predictable.

Explanation: This message is self-explanatory.

User Response: Review the file allocations to make sure that the ISPD TLC is being run from the SYSEXEC or SYSPROC data set for the correct ISPF release.

ISPC021 **ISPC021I: aaaaaaaa** ISPF Dialog Tag Language Conversion Utility

Explanation: This is an informational message. This is first log record.

ISPC022 **ISPC022I: Converting source file** *aaaaaaaa*...

Explanation: This is an informational message.

ISPC023 **ISPC023W: Warning.** Line *aaaaaaaa* of file *bbbbbbbb*. Duplicate source file name *cccccccc* ignored during DTLST processing.

Explanation: This is an informational message.

ISPC024 **ISPC024I: Duplicate source file name** *aaaaaaaa* ignored during member selection processing.

Explanation: This is an informational message.

ISPC025 **ISPC025I: Profile processing has been changed.** The entries for 'DTLMIN' will be ignored. Conversion Utility messages are now part of the standard ISPF message library. Please remove all 'DTLMIN' entries from your profile.

Explanation: This is an informational message.

ISPC026 **ISPC026I: Profile processing has been changed.** The entries for 'DTLNLS' will be ignored. The NLS literals are now provided through an ISPF facility. Please remove all 'DTLNLS' entries from your profile.

Explanation: This is an informational message.

ISPC027 **ISPC027I: Source file name** *aaaaaaaa* ignored (not found) during member selection processing.

Explanation: This is an informational message.

ISPC028 **ISPC028I: aaaaaaaa** message(s) have been suppressed.

Explanation: This is an informational message.

ISPC028A **ISPC028AI: Total of aaaaaaaa** message(s) have been suppressed.

Explanation: This is an informational message.

ISPC029 *aaaaaaaa* warning(s) and *bbbbbbbb* error(s) found.

Explanation: This is an informational message.

ISPC029A **ISPC029AI: Total of aaaaaaaa** warning(s) and *bbbbbbbb* error(s) found.

Explanation: This is an informational message.

ISPC030 **ISPC030W: Warning.** Line *aaaaaaaa* of file *bbbbbbbb*. *cccccccc* end-tag does not end any open tag and is ignored. The current open-tag is *dddddddd*.

Explanation: The end tag *cccccccc* is not matched to any open tag.

User Response: Check tag syntax, especially from tag *dddddddd* through the error line containing *cccccccc*. Correct the DTL source and rerun the conversion utility.

ISPC031 **ISPC031E: Error.** Line *aaaaaaaa* of file *bbbbbbbb*. *cccccccc* has missing end-tag and was ended by *dddddddd* tag.

Explanation: The *cccccccc* tag requires an end tag. The *dddddddd* tag has been found in the DTL source before the required end-tag for *cccccccc*.

User Response: Check tag nesting, especially from tag *cccccccc* through the error line containing *dddddddd*. Correct the DTL source and rerun the conversion utility.

ISPC032 **ISPC032E: Error.** Line *aaaaaaaa* of file *bbbbbbbb*. *cccccccc* tag ended prematurely by the end of the file.

Explanation: The DTL source file does not have an end-tag for *cccccccc*.

User Response: Make sure the DTL source file includes an end-tag for *cccccccc*. Review the source file for an open quoted string. Correct the DTL source file and rerun the conversion utility.

ISPC035 **ISPC035W: Warning. Line aaaaaaaa of file "bbbbbbbb". No declaration found for ENTITY "ccccccc". The variable cannot be substituted. (ENTITY definitions are case sensitive. Verify that the entity-name definition matches the entity reference.)**

Explanation: Variable substitution cannot be completed for variable ccccccc.

User Response: If the entity is defined, make sure that the entity-name reference is the same case as the entity declaration. If the variable ccccccc is a run-time substitution variable, the coding can be specified as "&S3." to avoid this message. Correct the DTL source file and rerun the conversion utility.

ISPC036 **ISPC036W: Warning. Line aaaaaaaa of file "bbbbbbbb". During SOURCE tag processing, no ENTITY declaration found for "ccccccc". The variable cannot be substituted. If "ccccccc" is a TSO command or other panel logic value, this message may be removed by coding "%amp;ddddddd". If "ccccccc" is a variable to be substituted, review the DTL source file. (ENTITY definitions are case sensitive. Verify that the entity-name definition matches the entity reference.)**

Explanation: Variable substitution cannot be completed for variable ccccccc.

User Response: If the entity is defined, make sure that the entity-name reference is the same case as the entity declaration. If the variable ccccccc is a TSO command, the coding can be specified as "%amp;S3." to avoid this message. Correct the DTL source file and rerun the conversion utility.

ISPC039 **ISPC039E: Error. Line aaaaaaaa of file "bbbbbbbb". ccccccc ended prematurely by ddddddd start-tag.**

Explanation: A tag nesting error has caused the ddddddd tag to end processing of the open ccccccc tag.

User Response: Correct the DTL source file and rerun the conversion utility.

ISPC040 **ISPC040E: Error. Line aaaaaaaa of file "bbbbbbbb". ccccccc tag cannot be coded after previously coded dddddddd tag.**

Explanation: A tag was found that is not allowed after the previously coded tag.

Programmer Response: Verify the valid nesting conditions and update the DTL source file.

ISPC041 **ISPC041W: Warning. Line aaaaaaaa of file "bbbbbbbb". ccccccc tag cannot be coded after previously coded dddddddd tag. ccccccc and its nested tags will be ignored.**

Explanation: A tag was found that is not allowed after the previously coded tag. The tag, and any tags nested within, are ignored during the continuation of the conversion.

Programmer Response: Verify the valid nesting conditions and update the DTL source file.

ISPC042 **ISPC042E: Error. Line aaaaaaaa of file "bbbbbbbb". Document type is unknown.**

Explanation: The document-type declaration (DOCTYPE) was not found in the file to be converted.

Programmer Response: Update the DTL source file to include the !DOCTYPE DM SYSTEM document-type declaration and reconvert the file.

ISPC043 **ISPC043E: Error. Line aaaaaaaa of file "bbbbbbbb". Multiple DOCTYPE records.**

Explanation: More than one DOCTYPE record was found within a single GML source file.

Programmer Response: Update the DTL source file so it contains a single DOCTYPE record.

ISPC044 **ISPC044W: Warning. Line aaaaaaaa of file "bbbbbbbb". ccccccc and its nested tags will be ignored in the conversion process.**

Explanation: The ccccccc tag coded is not supported by ISPF. The tag and all tags nested within will be ignored by the conversion utility.

Programmer Response: No response is required.

ISPC047 **ISPC047W: Warning. Line aaaaaaaa of file "bbbbbbbb". The use of the DEPTH attribute to create a scrollable area on the ccccccc tag is not valid because DEPTH has been specified on an enclosing tag. The DEPTH attribute is ignored. ISPF does not support nested scrollable areas.**

Explanation: This message is self-explanatory.

User Response: Remove the DEPTH attribute from the ccccccc tag.

ISPF Messages

ISPC050F Fixed length output panel libraries must have a record length of 80, 132, or 160 bytes.

Explanation: The record length of the specified panel library is not supported by ISPF.

User Response: Use a panel library that has one of the specified record lengths.

ISPC050V Variable length output panel libraries should have a record length of 84, 136, or 164 bytes. The minimum record length is 84 and the maximum is 164.

Explanation: The record length of the specified panel library is not supported by ISPF.

User Response: Use a panel library that has one of the specified record lengths.

ISPC051F Fixed length output message libraries must have a minimum record length of 80 bytes.

Explanation: The record length of the specified message library is not supported by ISPF.

User Response: Use a message library with a record length of 80.

ISPC051V Variable length output message libraries must have a minimum record length of 84 bytes.

Explanation: The record length of the specified message library is not supported by ISPF.

User Response: Use a message library with a record length of 84.

ISPC052F Fixed length output log files must have a minimum record length of 80 bytes.

Explanation: The record length of the specified log file is not supported by ISPF.

User Response: Use a log file with a record length of 80.

ISPC052V Variable length output log files must have a minimum record length of 84 bytes.

Explanation: The record length of the specified log file is not supported by ISPF.

User Response: Use a log file with a record length of 84.

ISPC053F Fixed length output list files must have a minimum record length of 80 bytes.

Explanation: The record length of the specified list file is not supported by ISPF.

User Response: Use a list file with a record length of 80.

ISPC053V Variable length output list files must have a minimum record length of 84 bytes.

Explanation: The record length of the specified list file is not supported by ISPF.

User Response: Use a list file with a record length of 84.

ISPC054F Fixed length output script files must have a minimum record length of 80 bytes.

Explanation: The record length of the specified script file is not supported by ISPF.

User Response: Use a script library with a record length of 80.

ISPC054V Variable length output script files must have a minimum record length of 84 bytes.

Explanation: The record length of the specified script file is not supported by ISPF.

User Response: Use a script library with a record length of 84.

ISPC055 Tables files must have a record length of 80 bytes.

Explanation: The record length of the specified tables file is not supported by ISPF.

User Response: Use a tables library with a record length of 80.

ISPC059 Record format "aaaaaaaa" is not valid for file "bbbbbbbb".

Explanation: The record format of the specified file is not supported by ISPF.

User Response: Table file format must be Fixed. DTL source, panels, messages, and script file format may be either Fixed or Variable. Log file and List file format may be either Fixed or Variable, with or without print control.

ISPC060 **Press Enter to start conversion.**

Explanation: This message is self-explanatory.

User Response: Press Enter to continue the conversion process.

ISPC061 **Verify panel settings and press Enter to start conversion.**

Explanation: This message is self-explanatory.

User Response: Press Enter to continue the conversion process.

ISPC062 **Verify panel settings and press Enter to submit conversion job.**

Explanation: This message is self-explanatory.

User Response: Press Enter to continue the conversion process.

ISPC067 **Invalid select code – Use "S" or "/" to select, "D" or "-" to deselect, "E" to Edit, "V" to View, "B" to Browse, or primary command DESELECT to deselect all entries and erase all line command notation entries.**

Explanation: An invalid line command was entered on a member list.

User Response: Enter a valid line command for the member, or enter RENEW to clear all line commands.

ISPC068A **Select members to be converted. (Enter "S *" to select all members.)**

Explanation: Select members from the ISPF member selection list by placing an asterisk (*) in front of each member to convert. If all the members are to be converted, enter "S *" on the command line and press the Enter key.

User Response: Make appropriate selection of members to be converted.

ISPC068B **Select members to be converted or END to start conversion processing.**

Explanation: Select members to be converted by placing an "S" in front of the member or members to convert. When all members to convert have been selected, enter END and press the Enter key, or press the F3 key to start the conversion process.

User Response: Make additional selections, cancel conversion process, or enter END to start the conversion process.

ISPC068C **Only members from the first four data sets are included in this list. Select members to be converted. (Enter "S *" to select all members.)**

Explanation: Select members from the ISPF member selection list by placing an asterisk (*) in front of each member to convert. If all the members are to be converted, enter "S *" on the command line and press the Enter key.

User Response: Make appropriate selection of members to be converted.

ISPC069A **No members match the specified pattern or the input data set(s) are empty.**

Explanation: The input DTL Source GML data set(s) were empty, or no members in the data set(s) match the pattern specified.

User Response: Check the data sets or the member pattern or both.

ISPC069B **No members have been selected.**

Explanation: No members have been selected for conversion.

User Response: To convert a DTL source file, enter the member name and invocation options and press the Enter key.

ISPC069C **DTL conversion in process for "aaaaaaa".**

Explanation: This is an informational message. Conversion of the member is currently in progress.

ISPC073 **Select option for KANA or NOKANA, but not both.**

Explanation: KANA and NOKANA are mutually exclusive options, only one can be chosen.

User Response: Select only one of the KANA or NOKANA options and restart the conversion process.

ISPC074 **Select option for Generate List file or Generate List file with substitution, but not both.**

Explanation: Generate List file and Generate List file with substitution are mutually exclusive options, only one can be chosen.

User Response: Select option for Generate List file or Generate List file with substitution, and restart the conversion process.

ISPF Messages

ISPC075 **The *aaaaaaaa* language requires that the DBCS option be selected. Either select the DBCS option or specify a non-DBCS language.**

Explanation: The DBCS option is not selected but the current language is a DBCS language. The language and DBCS option selection are in conflict.

User Response: Either select the DBCS option or specify a non-DBCS language.

ISPC076 **Enter up to 4 positions for application id. First position must be alpha.**

Explanation: The value entered for the Keylist Application ID was invalid. Valid values are 0-4 positions; the first position, if used, must be alphabetic.

User Response: Enter a valid Keylist Application ID.

ISPC077 **The KANA option is valid only with the JAPANESE language selection.**

Explanation: KANA is only valid when the JAPANESE language is used for the conversion.

User Response: Select the JAPANESE language, or deselect the KANA option, and restart the conversion process.

ISPC078 **The DBCS option is valid only for JAPANESE, CHINESES, CHINESET or KOREAN language selection.**

Explanation: DBCS is only valid when the selected language used for the conversion is JAPANESE, CHINESES, CHINESET, or KOREAN.

User Response: Select one of the valid languages if the DBCS option is needed, or deselect the DBCS option and restart the conversion process.

ISPC079 **Choose a language from the ISPF supported languages. Use the Help option for a list of languages.**

Explanation: The language specified is not one of the valid ISPF supported languages. Valid languages are:

- English
- German
- Swiss German
- Danish
- Spanish
- Portuguese
- French
- Italian
- Japanese
- Korean
- Chinese (Simplified)
- Chinese (Traditional)

User Response: Specify a valid ISPF language and

restart the conversion process.

ISPC081 **Enter a valid DTL source library name.**

Explanation: The DTL source library name specified was invalid. For example, the library name may not conform to valid naming conventions, or unmatched quotes were detected.

User Response: Enter a valid DTL source library name and restart the conversion process.

ISPC082 **Enter a valid output panel library name.**

Explanation: The output panel library name specified was invalid. For example, a library name may not conform to valid naming conventions, or unmatched quotes were detected.

User Response: Enter a valid output panel library name and restart the conversion process.

ISPC083 **Enter a valid output message library name.**

Explanation: The output message library name specified was invalid. For example, a library name may not conform to valid naming conventions, or unmatched quotes were detected.

User Response: Enter a valid output message library name and restart the conversion process.

ISPC084 **Enter a valid output log file name.**

Explanation: The output log file name specified was invalid. For example, a log file name may not conform to valid naming conventions, or unmatched quotes were detected.

User Response: Enter a valid output log file name and restart the conversion process.

ISPC086 **Enter a valid DTL source filename.**

Explanation: The DTL source member list can not be displayed. This may occur when LMINIT or LMOPEN has not completed successfully.

User Response: Exit from the conversion utility. Enter ISPD TLC and restart the conversion process.

ISPC091 **Enter a valid log file member name.**

Explanation: The log file member name entered contains invalid characters, or does not conform to valid TSO member naming conventions.

User Response: Enter a valid member name for the log file.

ISPC092 Enter a valid output list file name.

Explanation: The output list file name specified was invalid. For example, a list file name may not conform to valid naming conventions, or unmatched quotes were detected.

User Response: Enter a valid output list file name and restart the conversion process.

ISPC093 Enter a valid list file member name.

Explanation: The list file member name entered contains invalid characters, or does not conform to valid TSO member naming conventions.

User Response: Enter a valid member name for the list file.

ISPC094 Enter a valid output SCRIPT library name.

Explanation: The SCRIPT library name specified was invalid. For example, a library name may not conform to valid naming conventions, or unmatched quotes were detected.

User Response: Enter a valid output SCRIPT library name and restart the conversion process.

ISPC095 Enter a valid TABLES library name.

Explanation: The TABLES library name specified was invalid. For example, a library name may not conform to valid naming conventions, or unmatched quotes were detected.

User Response: Enter a valid TABLES library name and restart the conversion process.

ISPC100 ISPC100E: Error. Line *aaaaaaaa* of file *"bbbbbbbb"*. The DBCS control byte "SO" has been detected in your source file, but the DBCS option has not been specified. The conversion results are unpredictable. The conversion utility has automatically enabled the DBCS option to allow formatting of your source file to continue. Reconvert your source file specifying the DBCS option.

Explanation: The conversion utility encountered a DBCS control shift-out byte when the DBCS option was not specified for the conversion. The DBCS option has been enabled at this point, but text formatting may be unpredictable.

User Response: Restart the conversion process with the DBCS option specified.

ISPC101 ISPC101E: Error. Line *aaaaaaaa* of file *"bbbbbbbb"*. DBCS SO byte encountered before required DBCS SI byte.

Explanation: A DBCS shift-out byte was encountered in the GML source file prior to a DBCS shift-in byte.

Programmer Response: Correct the GML source file to contain matched shift-in and shift-out bytes and restart the conversion process.

ISPC102 ISPC102W: Warning. Line *aaaaaaaa* of file *"bbbbbbbb"*. At least 4 byte field widths are required to format DBCS strings. There is not enough room to format the *"ccccccc"* on the *ddddddd* tag.

Explanation: The field width for the DBCS field must be 4 bytes or greater to accommodate the shift-in/shift-out bytes along with the double-byte character.

Programmer Response: Update the GML source file to allow at least 4 bytes for the field width and restart the conversion process.

ISPC103 ISPC103E: Error. Line *aaaaaaaa* of file *"bbbbbbbb"*. Cannot end string without DBCS SI byte.

Explanation: A string containing a DBCS shift-out byte ended before the matching DBCS shift-in byte was found.

User Response: Check the GML source file and match DBCS shift-in and shift-out bytes, then restart the conversion process.

ISPC104 ISPC104E: Error. Line *aaaaaaaa* of file *"bbbbbbbb"*. Cannot end DBCS string on odd byte boundary.

Explanation: A DBCS string was encountered with an odd number of bytes, which is not acceptable for a pure DBCS string.

User Response: Update the GML source file for the correct DBCS data and restart the conversion process.

ISPC105 ISPC105E: Error. Line *aaaaaaaa* of file *"bbbbbbbb"*. DBCS SI byte encountered without matching beginning DBCS SO byte.

Explanation: A DBCS shift-in byte was encountered in the GML source file without a matching DBCS shift-out byte.

Programmer Response: Correct the GML source file to contain matched shift-in and shift-out bytes and restart the conversion process.

ISPF Messages

ISPC106 **ISPC106W: Warning.** Line *aaaaaaaa* of file *bbbbbbbb*. No room to format data.

Explanation: No room was left on the panel to format the given data.

User Response: Check the GML source file for spacing requirements for depth and width, then restart the conversion process.

ISPC107 **ISPC107W: Warning.** Line *aaaaaaaa* of file *bbbbbbbb*. The VARCLASS type *cccccccc* has no meaning for *ddddddd* entry fields and is ignored by the conversion utility.

Explanation: A VARCLASS tag was specified with a TYPE that does not have meaning when specified for the entry field.

User Response: Update the GML source file and restart the conversion process.

ISPC108 **ISPC108E: Error.** The specified or default language *aaaaaaaa* has been changed to *bbbbbbbb* to allow formatting of your source file to continue. Reconvert your source file specifying a DBCS supported language.

Explanation: The language specified for the conversion does not support DBCS. The formatting of the source file requires DBCS, and the language has been changed to a DBCS-supported language.

User Response: Check that your GML source file is correct and restart the conversion process specifying a DBCS-supported language.

ISPC109 **ISPC109W: Warning.** The use of the *aaaaaaaa* language requires that the DBCS option be specified for the conversion. The conversion utility has automatically enabled the DBCS option.

Explanation: This is an informational message. The language specified for the conversion requires the DBCS option. The DBCS option has been automatically enabled for the conversion.

ISPC110 **ISPC110W: Warning.** Line *aaaaaaaa* of file *bbbbbbbb*. String constant exceeds 253 characters and will be truncated.

Explanation: This message is self-explanatory.

ISPC111 **ISPC111W: Warning.** Line *aaaaaaaa* of file *bbbbbbbb*. String constant that exceeds 253 characters has been accepted for *ccccccc*. This is an ISPF extension and will not be portable to the OS/2 Dialog Manager.

Explanation: This is an informational message. The text on an ENTITY declaration or on a CHECKI tag exceeded 253 characters. The text will be accepted for the conversion, but will not be portable to the OS/2 Dialog Manager.

ISPC112 **ISPC112W: Warning.** Line *aaaaaaaa* of file *bbbbbbbb*. The key value *cccccccc* is not valid. Valid values are F1-F24 only.

Explanation: The KEY= value on the KEYI tag was coded incorrectly. Valid values are F1-F24.

Programmer Response: Update the GML to reflect a valid KEY value on the KEYI tag, and restart the conversion process.

ISPC114 **ISPC114W: Warning.** Line *aaaaaaaa* of file *bbbbbbbb*. Odd length DBCS substring encountered. Beginning of string padded with a single-byte blank.

Explanation: DBCS substring must contain an even length. A single-byte blank has been added at the beginning of the string to correct the length.

Programmer Response: Verify the DBCS substring.

ISPC115 **ISPC115W: Warning.** Line *aaaaaaaa* of file *bbbbbbbb*. No keys were defined for *cccccccc*.

Explanation: No KEYI (Key Item) tag was found for processing within the KEYL (Key List) tag.

Programmer Response: Update the KEYL tag to include at least one KEYI.

ISPC120 **ISPC120E: Error.** ISPF Keylist was not created. Possible reasons may be that the conversion tool was not run as a dialog on ISPF or ISPF was not active.

Explanation: An invalid return code was received from the SELECT service.

User Response: Contact the responsible programmer.

ISPC121 **ISPC121W: Warning.** Line *aaaaaaaa* of file *bbbbbbbb*. Key Description exceeds allowable length of *ccccccc* characters.

Explanation: The maximum key description allowed by the Dialog Tag Language is 64. The first 8 bytes of description are used by ISPF.

User Response: Reduce the length of the key description to 64 for compatibility with OS/2 DM.

ISPC123 **ISPC123W: Warning.** Line *aaaaaaaa* of file *bbbbbbbbb*. Internal-command-name *cccccccc* is not valid for the *dddddddd* function key.

Explanation: When the HELP command is specified in a keylist, it must be assigned to the F1 or F13 key.

When the EXIT command is specified in a keylist, it must be assigned to the F3 or F15 key.

When the CANCEL command is specified in a keylist, it must be assigned to the F12 or F24 key.

User Response: Use the appropriate key for the HELP, EXIT, or CANCEL command.

ISPC126 **ISPC126W: Warning.** Line *aaaaaaaa* of file *bbbbbbbbb*. Duplicate *cccccccc* key was encountered and will be ignored.

Explanation: Only 1 definition of the *cccccccc* key is allowed in each keylist.

User Response: Remove the duplicate definition for the *cccccccc* key.

ISPC127 **ISPC127W: Warning.** Line *aaaaaaaa* of file *bbbbbbbbb*. The key value *cccccccc* is not supported by the conversion utility as a valid key assignment. Valid values are F1-F24 only.

Explanation: This message is self-explanatory.

User Response: Use a key value in the F1-F24 range.

ISPC128 **ISPC128E: Error.** Line *aaaaaaaa* of file *bbbbbbbbb*. Key list Application ID required. *cccccccc* must be specified as an invocation option in order to write *dddddddd*.

Explanation: No application ID is available to identify the keylist.

User Response: Specify the application ID on the invocation panel, or use the KEYLAPPL=xxxx keyword from the invocation syntax to specify the application ID for this keylist.

ISPC129A **ISPC129AE: Error.** Line *aaaaaaaa* of file *bbbbbbbbb*. Return code of "12" (Attributes are not valid) from the SELECT service attempting to create an ISPF Keylist.

Explanation: The keylist update program has detected an invalid key attribute.

User Response: Provide a valid value for the FKA attribute of the KEYI tag.

ISPC129B **ISPC129BE: Error.** Line *aaaaaaaa* of file *bbbbbbbbb*. Return code of "16" (Key defined is not valid) from the SELECT service attempting to create an ISPF Keylist.

Explanation: The keylist update program has detected an invalid key name.

User Response: Provide a valid value for the KEY attribute of the KEYI tag.

ISPC129C **ISPC129CE: Error.** Line *aaaaaaaa* of file *bbbbbbbbb*. Return code of *cccccccc* (Severe Error) from the SELECT service attempting to create an ISPF Keylist.

Explanation: The keylist update program has detected a severe error while attempting to update the keylist.

User Response: If the error continues, contact your system programmer.

System Programmer Response: If you are not running mixed levels of ISPF code, you may need to contact IBM support.

ISPC129F **ISPC129FE: Error.** Line *aaaaaaaa* of file *bbbbbbbbb*. Return code of "32" (Keylist table open) from the SELECT service attempting to create an ISPF Keylist. (The keylist update program received a return code of "12" from the TBOPEN service.)

Explanation: The keylist update program received a return code of 12 from the TBOPEN service. The keylist update cannot be performed on the currently active application ID.

User Response: ISPD TLC must be run with a different application ID.

ISPC129G **ISPC129GE: Error.** Line *aaaaaaaa* of file *bbbbbbbbb*. Return code of "36" (ISPTABL file not allocated) from the SELECT service attempting to create an ISPF Keylist. (The keylist update program received a return code of "16" from the TBCLOSE service.)

Explanation: The keylist update program received a return code of 16 from the TBCLOSE service. The output table library is not allocated.

User Response: Verify that the ISPTABL file has been allocated before running ISPD TLC.

ISPF Messages

ISPC130 **ISPC130W: Warning. Line aaaaaaaa of file "bbbbbbbb". Unknown numeric value found processing DTL source string "ccccccc". Check for sequence numbers in the DTL source file.**

Explanation: During source file processing, an 8 character numeric value string was found. This value might be a file sequence number. DTL source file records cannot contain sequence numbers.

User Response: Check the GML source file. Remove any sequence numbers and restart the conversion process.

ISPC131 **ISPC131W: Warning. Line aaaaaaaa of file "bbbbbbbb". Text string found in source file where tag is expected. Text string is ignored.**

Explanation: While scanning the source file for the next tag, an extraneous text string was found, possibly an unclosed tag or a missing end-tag.

User Response: Check the GML source file and restart the conversion process.

ISPC132 **ISPC132W: Warning. Line aaaaaaaa of file "bbbbbbbb". Undefined "ccccccc" start-tag. "ccccccc" is ignored.**

Explanation: The start-tag specified is not valid.

Programmer Response: Update the GML to contain a valid start-tag, and restart the conversion process.

ISPC133 **ISPC133E: Error. Line aaaaaaaa of file "bbbbbbbb". The first character in keyword "ccccccc" is not valid. "ccccccc" must start with characters "A-Z" and the ">" must be used as the closing tag delimiter. One possible cause is that a previous tag was not closed with the ">" delimiter.**

Explanation: A keyword was detected with invalid syntax. The keyword must begin with an alphabetic character and must contain a closing tag delimiter of ">". This error could occur if the previous tag did not contain the closing tag delimiter.

Programmer Response: Update the GML to contain a valid keyword and restart the conversion process.

ISPC134 **ISPC134E: Error. Line aaaaaaaa of file "bbbbbbbb". Pending quote was not closed and caused all records in the file to be read in an attempt to find the closing quote.**

Explanation: A single quote was encountered and the closing quote was not found in the rest of the file.

Programmer Response: Update the GML to contain matching opening and closing quotes and restart the conversion process.

ISPC135 **ISPC135W: Warning. Line aaaaaaaa of file "bbbbbbbb". Unmatched quotes in entity value: ccccccc.. Panel formatting may be affected.**

Explanation: A single('') or double("") quote was encountered within ccccccc that is the same kind of quote character found immediately before or after the symbolic variable.

Programmer Response: Update the GML to contain matching opening and closing quotes and restart the conversion process.

ISPC136 **ISPC136E: Error. Line aaaaaaaa of file "bbbbbbbb". Incorrect tag syntax with multiple close tag delimiters found on the ccccccc tag.**

Explanation: Multiple close tag delimiters found when processing the ccccccc tag.

User Response: Check the GML source file and restart the conversion process.

ISPC137 **ISPC137E: Error. Line aaaaaaaa of file "bbbbbbbb". Incorrect tag syntax. The ccccccc tag must follow the preceding tag with no intervening blanks or text. Only one ccccccc tag is allowed within a LI, LP or P tag.**

Explanation: This message is self-explanatory.

User Response: If any blanks precede the CAUTION or WARNING tag, remove the blanks and reconvert the DTL source file. If multiple CAUTION or WARNING tags are present, remove the multiple occurrence of the tag.

ISPC140 **ISPC140W: The DBCS option is required when KANA has been specified. The conversion utility has automatically enabled the DBCS option.**

Explanation: The KANA keyword has been specified without specification of the DBCS option. DBCS is required when processing with KANA. The conversion utility has automatically enabled the DBCS option.

User Response: If KANA is not to be used, restart the conversion process without the KANA and DBCS options.

ISPC141 **ISPC141W: The JAPANESE language is required when KANA has been specified. The conversion utility has automatically set the language to "JAPANESE".**

Explanation: The KANA keyword has been specified without specification of the JAPANESE language. The conversion utility requires the use of the JAPANESE language when processing KANA. The conversion utility has automatically set the language specification to JAPANESE.

User Response: If KANA is not to be used, restart the conversion process without the KANA and JAPANESE options.

ISPC142 **ISPC142W: The DBCS option has been specified, but either no language has been specified or the language selected is not a DBCS language. The conversion utility has automatically set the language to "JAPANESE".**

Explanation: The DBCS keyword has been specified. However, either no language was selected, or the language specified does not support DBCS. The conversion utility has automatically set the language specification to JAPANESE.

User Response: If DBCS is not to be used, restart the conversion process without the DBCS and JAPANESE options.

ISPC149 **ISPC149E: Error. Line aaaaaaaa of file "bbbbbbbb". Line contains DBCS data which is not valid.**

Explanation: Line contains DBCS data which is not valid. Check for proper use of shift out and shift in control bytes, and make sure the DBCS data is an even number of bytes.

User Response: Correct the DTL source file and rerun the conversion process.

ISPC150 **ISPC150W: Warning. Line aaaaaaaa of file "bbbbbbbb". When "ccccccc", "ddddddd" on the eeeeeeee tag does not conform to the CUA Architecture definition and will therefore not be CUA compliant. This will be accepted by ISPF but will not be portable to the OS/2 Dialog Manager.**

Explanation: This is an informational message.

ISPC151 **ISPC151W: Warning. Line aaaaaaaa of file "bbbbbbbb". The use of "ccccccc="ddddddd" on the eeeeeeee tag does not conform to the CUA Architecture definition and will therefore not be CUA compliant. This will be accepted by ISPF but will not be portable to the OS/2 Dialog Manager.**

Explanation: This is an informational message.

ISPC201 **ISPC201E: Error. Line aaaaaaaa of file "bbbbbbbb". No help panel title specified after Help Tag.**

Explanation: A Help panel tag requires a panel title.

User Response: Update the DTL source file to add a panel title and rerun the conversion utility.

ISPC202 **ISPC202W: Warning. Line aaaaaaaa of file "bbbbbbbb". Panel title has been truncated.**

Explanation: The panel title is too long for the specified panel width.

User Response: Reduce the length of the title text or increase the specified panel width, as appropriate.

ISPC203 **ISPC203W: Warning. Line aaaaaaaa of file "bbbbbbbb". Panel title cannot be centered within the available panel width.**

Explanation: This is an informational message.

ISPC205 **ISPC205E: Error. Line aaaaaaaa of file "bbbbbbbb". Unable to create any more ccccccc panels dynamically to simulate scrolling. The maximum of 37 panels has been exceeded.**

Explanation: Help panel text has exceeded the number of panels that can be created by the conversion utility.

User Response: Increase the width or depth (or both) of the help panels to allow more text on each panel, convert the DTL source to generate a scrollable panel, or divide the help text into multiple HELP tags.

ISPC240 **ISPC240W: Warning. Line aaaaaaaa of file "bbbbbbbb". Lines that are wider than the current INFO width have been truncated.**

Explanation: This is an informational message.

ISPF Messages

ISPC241 **ISPC241W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Lines that are longer than the current PANEL record length have been truncated.

Explanation: This is an informational message.

ISPC242 **ISPC242W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Lines that are wider than the current PANEL width have been truncated.

Explanation: This is an informational message.

ISPC243 **ISPC243W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Extraneous text *"cccccccc"* found during the format process of *"dddddddd"* tag. Text is ignored.

Explanation: Text was present following the close tag delimiter on the *dddddddd* tag. This tag does not allow a tag text field.

User Response: Remove the invalid text string.

ISPC244 **ISPC244W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. No text found during the format process for the *"cccccccc"* tag. Panel formatting may be affected.

Explanation: No text was provided for the *cccccccc* tag. This tag should have a text field for proper panel formatting.

User Response: Place text between the *cccccccc* tag and the *cccccccc* end-tag.

ISPC245 **ISPC245W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Panel width too small to include LSTCOL DATAVAR=*cccccccc*..*cccccccc* will not be written to the panel.

Explanation: There is insufficient room for the *cccccccc* table column.

User Response: Adjust table column width specifications.

ISPC246 **ISPC246W: Warning.** Panel width too small to include *"aaaaaaaa"*.

Explanation: Formatting of panel fields extends beyond the available panel width. Data on the right side of the panel is not formatted.

User Response: Adjust horizontal field formatting to permit formatting within the available panel width.

ISPC247 **ISPC247W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Panel width too small to include LSTCOL text *"cccccccc"*.

Explanation: This is an informational message.

ISPC248 **ISPC248W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Unable to format a divider line for the LSTFLD tag because all 8 available model lines have been used by nested LSTCOL tags.

Explanation: This is an informational message.

ISPC249 **ISPC249W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. LSTCOL tag *"column-heading"* extends beyond right panel boundary and will be truncated to *"cccccccc"*.

Explanation: This is an informational message.

ISPC250 **Keyword file saved — The updated keyword file was successfully saved to *"aaaaaaaa"* .**

Explanation: This is an informational message.

ISPC251 **Keyword file verified — Keyword file *"aaaaaaaa"* was verified and is correct.**

Explanation: This is an informational message.

ISPC252 **Keyword file errors — Errors were found during verification of keyword file *"aaaaaaaa"* and were previously displayed.**

Explanation: The keyword verification function found errors in the keyword file being processed. A listing showing the errors was previously displayed to the user.

User Response: Correct the errors in the keyword file and reprocess it.

ISPC253 **Load module built— The configuration table load module and VSAM load module were successfully saved to *"aaaaaaaa"* .**

Explanation: The specified keyword file contained keywords for both the configuration table and the VSAM Edit/View/Browse support. Both load modules have been successfully built.

ISPC254 **Load module build error — An error was encountered building load module "aaaaaaaa" from keyword file "bbbbbbbb".**

Explanation: An error was encountered converting the specified file to a load module. An assembler or link edit listing should have been displayed to indicate the error.

User Response: If the error can be corrected by a change to the keyword file, make the change and reprocess. If the problem cannot be corrected, contact your system programmer.

ISPC255 **Conversion successful —Conversion of assembler file "aaaaaaaa" to keyword file "bbbbbbbb" was successful.**

Explanation: This is an informational message.

ISPC256 **Conversion error — Conversion of assembler source file "aaaaaaaa" to keyword file "bbbbbbbb" failed.**

Explanation: An error was encountered converting the specified source file to the keyword file.

User Response: Verify the input assembler file is an ISPF configuration table assembler member (member ISPCNFIG from SAMPLIB).

ISPC257 **Member name not allowed — Member name is not allowed on the load and object data sets. Specify the member name in the Configuration Member and VSAM Member fields.**

Explanation: A data set name string that included a member name was specified for either the "Output Configuration Table Load Module Data Set" or "Object data set" field of the Build Configuration Table Load Module panel. Member names for these data sets should be specified in the "Configuration Member" and "VSAM member" fields if you wish to use names other than the defaults of ISPCFIGU and ISPCFIGV.

ISPC258 **Assemble failed — The assemble of the configuration table source failed, see below for details.**

Explanation: This is an informational message.

ISPC259 **Link Edit failed — The link edit of the configuration table failed, see below for details.**

Explanation: This is an informational message.

ISPC260 **Rename needed — The configuration load modules were successfully saved to "aaaaaaaa", but using names "bbbbbbbb", and "cccccccc". These members must be named ISPCFIGU and ISPCFIGV to be used as ISPF configuration modules.**

Explanation: The configuration load module and VSAM load module were successfully built using the names specified in the "Configuration member" and "VSAM member" fields. These load module members must be renamed to ISPCFIGU and ISPCFIGV and placed in a load library accessible to ISPF for them to be used by ISPF.

ISPC261 **Allocation error — An error was encountered allocating Keyword data set "aaaaaaaa".**

Explanation: The TSO ALLOCATE command file failed when attempting to allocate the specified keyword file to a DDNAME.

User Response: Verify the data set is not in use by another user.

ISPC262 **EXECIO error — An error was encountered reading Keyword data set "aaaaaaaa".**

Explanation: An EXECIO error was received attempting to read the specified keyword file.

User Response: Check if the data set is the correct data set and readable by other functions.

ISPC263 **Allocation error— An error was encountered allocating the temporary assembler data set.**

Explanation: ISPF was unable to create the temporary SYSIN data set that will be used in building the configuration table load module.

User Response: Contact your system programmer.

ISPC264 **Rename needed — The configuration load module was successfully saved to "aaaaaaaa", but using name "bbbbbbbb". This member must be named ISPCFIGU to be used as an ISPF configuration module.**

Explanation: The configuration load module was successfully built using the name specified in the "Configuration member" field. This load module member must be renamed to ISPCFIGU and placed in a load library accessible to ISPF for it to be used by ISPF.

ISPF Messages

ISPC265 **Load module built — The configuration table load module was successfully saved to "aaaaaaaa" .**

Explanation: This is an informational message.

ISPC266 **Allocation error — An error was encountered allocating the temporary object data set.**

Explanation: ISPF was unable to create the temporary SYSLIN data set that will be used in building the configuration table load module.

User Response: Contact your system programmer.

ISPC268 **Incorrect attributes — The keyword data set must be a partitioned data set with a record length of at least 251 for fixed data sets and 255 for variable data sets.**

Explanation: This is an informational message.

ISPC269 **Allocation error — An error was encountered allocating assembler input data set "aaaaaaaa" .**

Explanation: The TSO ALLOCATE command file failed when attempting to allocate the specified assembler data set file to a DDNAME.

User Response: Verify the data set is not in use by another user.

ISPC270 **EXECIO error — An error was encountered reading Keyword data set "aaaaaaaa" .**

Explanation: An EXECIO error was received attempting to read the specified assembler input file.

User Response: Check if the data set is the correct data set and readable by other functions.

ISPC271 **Keyword file saved — Updated keyword file has been saved to "aaaaaaaa" and verified as correct.**

Explanation: This is an informational message.

ISPC272 **Verification failed — Updated keyword file has been saved to "aaaaaaaa" but failed verification. Verification messages were previously displayed.**

Explanation: This is an informational message.

ISPC273 **Keyword file saved — Updated keyword file has been saved to "aaaaaaaa" but not verified.**

Explanation: The edited keyword file has been successfully updated, but the verification step was bypassed as requested.

ISPC275 **Function required — The function letter of B(rowse) E(dit) or V(iew) is required.**

Explanation: When specifying a data set or pattern to be restricted from the ISPF VSAM Edit/View/Browse, you must specify to which function the data set name or pattern applies.

ISPC276 **Defaults loaded — Keyword file "aaaaaaaa" was not found, default values have been set for all configuration options.**

Explanation: This is an informational message.

ISPC277 **Keyword file loaded — Defaults have been initialized from keyword file "aaaaaaaa" .**

Explanation: This is an informational message.

ISPC278 **Block size value of aaaaaaaa is not a multiple of bbbbbbbb .**

Explanation: This is an informational message.

ISPC279 **Block size value of aaaaaaaa is not a multiple of record length value bbbbbbbb .**

Explanation: This is an informational message.

ISPC280 **Assemble failed — The assemble of the configuration table VSAM module failed, see below for details.**

Explanation: This is an informational message.

ISPC281 **Link Edit failed — The link edit of the configuration table VSAM module failed, see below for details.**

Explanation: This is an informational message.

ISPC282 **Invalid data set name — The data set name specified is invalid. Enter the data set name and member for the keyword file in the separate fields provided.**

Explanation: The data set name entered is syntactically incorrect.

User Response: Correct the data set name.

ISPC284 **Invalid data set name — Remove the quotes from the data set name or pattern entered.**

Explanation: The specified name must be an unquoted data set name or pattern.

User Response: Correct the data set name or pattern entered.

ISPC285 **Invalid combination — At least one data set must be specified for each restriction field selected.**

Explanation: Both a data set name or pattern and a VSAM restriction field must be selected. It is not valid to specify only one or the other.

ISPC286 **Input file empty — The input data set or member specified for conversion is empty.**

Explanation: This is an informational message.

ISPC287 **Invalid input file — The input file specified is not an ISPF Configuration Table assembler source module, no ISRCONFG CSECT found.**

Explanation: The source file specified as input to the Conversion option does not appear to be an ISPF Configuraton Table assembler module. ISPF looks for the string 'ISRCONFG CSECT' on the first line not containing an asterisk in column 1 and the string was not found in the file specified.

User Response: Specify the correct input file.

ISPC301 **ISPC301W: Warning. Line *aaaaaaaa* of file *bbbbbbbb*. Duplicate MSG tag SUFFIX found. This MSG tag will be ignored.**

Explanation: Message SUFFIX must be unique for each message within a MSGMBR.

User Response: Remove the duplicate suffix specification and rerun the conversion utility.

ISPC302 **ISPC302W: Warning. Line *aaaaaaaa* of file *bbbbbbbb*. Message text is longer than *cccccccc* characters and will be truncated.**

Explanation: The message text provided exceeds the ISPF maximum message length.

User Response: Reduce the length of the message text and rerun the conversion utility.

ISPC303 **ISPC303W: Warning. Line *aaaaaaaa* of file *bbbbbbbb*. MSGMBR has no messages. No message file will be written.**

Explanation: No valid MSG tags were formatted within the current MSGMBR tag.

User Response: Correct reported problems or include MSG tag(s) within the MSGMBR tag, as appropriate, and rerun the conversion utility.

ISPC304 **ISPC304W: Warning. Line *aaaaaaaa* of file *bbbbbbbb*. MSG tag contains no text. Message cannot be created.**

Explanation: MSG tag must include the message text.

User Response: Add the required message text and rerun the conversion utility.

ISPC305 **ISPC305W: Warning. Line *aaaaaaaa* of file *bbbbbbbb*. Conflict on VARSUB tag between attributes "VAR" and "FIELD". "FIELD" cannot be specified if "VAR" is used. "FIELD" is ignored for this conversion. Please update your tag source for portability to the OS/2 Dialog Manager.**

Explanation: DTL does not allow both VAR and FIELD attributes on the same VARSUB tag. FIELD is not supported by ISPF.

User Response: Remove the FIELD attribute and rerun the conversion utility.

ISPC306 **ISPC306W: Warning. Line *aaaaaaaa* of file *bbbbbbbb*. The format of *ccccccc* specified on the *ddddddd* tag (*ccccccc=eeeeeee*) is an ISPF extension to the tag language and will not be portable to the OS/2 Dialog Manager.**

Explanation: This is an informational message.

ISPC307 **ISPC307W: Warning. Line *aaaaaaaa* of file *bbbbbbbb*. The SUFFIX value *ccccccc* is not valid because the resulting message number would be more than 8 characters in length. This MSG tag will be ignored.**

Explanation: A combination of a 7 character MSGMBR name and a 2 character SUFFIX is invalid.

User Response: Change either the MSGMBR name or the SUFFIX and rerun the conversion utility.

ISPF Messages

ISPC308 **ISPC308W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The format of SUFFIX specified on the MSG tag (*"ccccccc=ddddddd"*) is an ISPF extension to the tag language and will not be portable to the OS/2 Dialog Manager.

Explanation: This is an informational message.

ISPC310 **ISPC310W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The first line of the message created by MSG tag formatting is longer than 80 characters. Message cannot be created.

Explanation: A combination of short message and message attributes for the first line of a message has exceeded the width of the message file.

User Response: Remove the short message specification or reduce the length of variable names used for message attributes HELP, MSGTYPE, and LOCATION, as appropriate.

ISPC311 **ISPC311W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. NAME on MSGMBR tag is not valid. No message file will be written.

Explanation: The name provided does not follow the ISPF message member name format.

User Response: Change the name to match the ISPF name format and rerun the conversion utility.

ISPC400 **ISPC400W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. External-command-name must be one word. It cannot contain any blanks. The external-command-name is ignored.

Explanation: None.

User Response: Enter a valid command name and rerun the conversion utility.

ISPC401 **ISPC401W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The RUN option for the ACTION tag was specified without a command. The ACTION tag is ignored.

Explanation: None.

User Response: Add a command name to the RUN attribute on the ACTION tag and rerun the conversion utility.

ISPC402 **ISPC402W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Internal-command-name must be equal to the external-command-name in order to allow command truncation when the T tag is used. There will be no minimum command name in this command.

Explanation: None.

User Response: Correct the DTL source so the internal-command-name and external-command-name match, and rerun the conversion utility.

ISPC403 **ISPC403W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Command table was not written because the required "APPLID" keyword was not specified.

Explanation: None.

User Response: Specify the APPLID attribute on the CMDTBL tag

ISPC404 **ISPC404W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. An error occurred while processing a command table. Processing of command table has been cancelled after a return code of *ccccccc* from table service *"ddddddd"*.

Explanation: None.

User Response: Refer to *ISPF Services Guide* for explanations of table services return codes.

ISPC405 **ISPC405E: Error.** ISPF Command Table was not created. An error occurred while opening a command table. Refer to your ISPF documentation on TBOPEN for a Return Code of *"aaaaaaaa"*.

Explanation: None.

User Response: Refer to *ISPF Services Guide* for explanations of table services return codes.

ISPC406 **ISPC406E: Error.** ISPF Command Table was not created. Possible reasons may be that the conversion tool was not run as a dialog on ISPF or ISPF was not active.

Explanation: None.

User Response: Rerun the conversion utility from the ISPF command line.

ISPC407A **ISPC407AE: Error.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Return code of "16" (ISPTABL file not allocated) from the SELECT service attempting to create an ISPF Command Table.

Explanation: None.

User Response: Refer to *ISPF Services Guide* for explanations of table services return codes.

ISPC407B **ISPC407BE: Error.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Return code of "cccccccc" (Severe Error) from the SELECT service attempting to create an ISPF Command Table.

Explanation: None.

User Response: Refer to *DM Guide and Reference* for explanations of table services return codes.

ISPC408 **ISPC408E: Error.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The dynamic area identifier "cccccccc" is longer than the *dddddddd* characters of dynamic area width.

Explanation: None.

User Response: Increase the width of the dynamic area to at least the number of characters shown in the area identifier.

ISPC409 **ISPC409E: Error.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The graphic area identifier "cccccccc" is longer than the *dddddddd* characters of graphic area width.

Explanation: None.

User Response: Increase the width of the graphic area to at least the number of characters shown in the area identifier.

ISPC410 **ISPC410W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The ALIAS for command *cccccccc* was found after the command. The ALIAS entry must precede the command it references. The ALIAS will be unavailable to ISPF. Please update your tag source file to move the ALIAS before the referenced command.

Explanation: None.

User Response: Move the ALIAS reference in the DTL source as indicated and rerun the conversion utility.

ISPC411 **ISPC411W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. *cccccccc* is longer than *dddddddd* characters, will be truncated.

Explanation: None.

User Response: Adjust *cccccccc* to be equal to *dddddddd* characters and rerun the conversion utility.

ISPC412 **ISPC412W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. A LSTGRP heading must include at least one field from the first model line to be displayed. This heading cannot be formatted and is being reset to blanks.

Explanation: None.

User Response: At least one LSTCOL tag from the first model line should be included within the LSTGRP tag.

ISPC413 **ISPC413W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. External command string cannot be less than 2 characters in length and will be set to " ".

Explanation: None.

User Response: Correct the command name to be a minimum of 2 characters in length and rerun the conversion utility.

ISPC414 **ISPC414W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Only one keyword from the following list can be specified on an ACTION tag: RUN, CLASS, SETVAR, TOGVAR.

Explanation: None.

User Response: Correct the DTL source to specify only one of the attributes listed and rerun the conversion utility.

ISPC415 **ISPC415W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. ISPF will support a Command Action up to 240 characters in length. The Command Action will be truncated.

Explanation: None.

User Response: Correct the command action to the stated length limit and rerun the conversion utility.

ISPF Messages

ISPC416 **ISPC416W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. ISPF does not support the *"ACTION=cccccccc"* coded on the *dddddddd* tag. The Command Action will be set to *"NOP"*.

Explanation: None.

User Response: Replace the invalid action and rerun the conversion utility.

ISPC417 **ISPC417E: Error.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Additional parameters must follow *cccccccc* and will affect processing.

Explanation: None.

User Response: Add the additional command parameters and rerun the conversion utility.

ISPC418 **ISPC418W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. No parameters are valid following *cccccccc*.

Explanation: None.

User Response: Remove the indicated invalid parameters and rerun the conversion utility.

ISPC419 **ISPC419W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. No commands were specified within the CMDTBL tag. No command table will be written.

Explanation: None.

User Response: Add the required CMD tag definitions and rerun the conversion utility.

ISPC420 **ISPC420W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. A valid CMDACT ACTION was not specified for *cccccccc*.

Explanation: This message is self-explanatory.

User Response: Provide a valid command action and rerun the conversion utility.

ISPC421 **ISPC421W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. *"cccccccc"* exceeds the maximum length of *dddddddd* text characters that can be placed on the current panel command line. *"cccccccc"* will be truncated to fit on the command line.

Explanation: This message is self-explanatory.

User Response: Shorten the command prompt text or increase the panel width, as appropriate, and rerun the conversion utility.

ISPC422 **ISPC422W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. This panel contains a)MODEL line generated by the LSTFLD and LSTCOL tags but not a required CMDAREA command line to accompany it. A command line is being added to the panel.

Explanation: This message is self-explanatory.

User Response: Provide a CMDAREA tag to eliminate this message.

ISPC423 **ISPC423W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The requested SCROLL amount field will not fit on the command line for this panel. The SCROLL amount field is ignored.

Explanation: This message is self-explanatory.

User Response: Shorten the command prompt text or increase the panel width, as appropriate, and rerun the conversion utility.

ISPC423A **ISPC423AW: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The point—and—shoot text as specified by the PSBUTTON attribute will not fit on the command line for this panel. The point-and-shoot text is not added to the command line.

Explanation: This message is self-explanatory.

User Response: Shorten the command prompt text, shorten the point-and-shoot text or increase the panel width, as appropriate, and rerun the conversion utility.

ISPC424 **ISPC424E: Error.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. An error occurred during the completion of processing for command table *"cccccccc"*. Processing of the command table has been cancelled after a return code of *dddddddd* from ISPF service *"eeeeeeee"*. A temporary command table member *"ffffff"* has been created on table file *"ggggggggg"*.

Explanation: This message is self-explanatory.

User Response: Refer to *ISPF Services Guide* for explanations of table services return codes.

ISPC425 **ISPC425W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. *"cccccccc"* tag field width of *eeeeeeee* characters available for the name. The NOZVARS option is ignored for field name *"dddddddd"*.

Explanation: This message is self-explanatory.

User Response: Shorten the field name to be less than

or equal to the field width and rerun the conversion utility.

ISPC426 **ISPC426E: Error. Line *aaaaaaaa* of file *bbbbbbbb*. "LINE=ccccccc" is not valid because a previous variable model line definition list exists for this line.**

Explanation: This message is self-explanatory.

User Response: Specify a different line number for this variable model line definition and rerun the conversion utility.

ISPC427 **ISPC427E: Error. Line *aaaaaaaa* of file *bbbbbbbb*. "LINE=ccccccc" is not valid because a standard model line definition list exists for this line.**

Explanation: This message is self-explanatory.

User Response: Specify a different line number for this variable model line definition and rerun the conversion utility.

ISPC430 **ISPC430W: Warning. Line *aaaaaaaa* of file *bbbbbbbb*. This is a selection panel and requires a command line, but no CMDAREA tag was present. A command line is being added to the panel.**

Explanation: None.

User Response: Provide a CMDAREA tag to eliminate this message.

ISPC431 **ISPC431W: Warning. Line *aaaaaaaa* of file *bbbbbbbb*. The default name "ZCMD" was used to generate ")INIT" and ")PROC" section panel statements. These panel statements are not correct because the CMDAREA tag name has been specified as "ccccccc". Move the CMDAREA tag so that it is placed before the SELFLD tag that defines the menu choices and reconvert the panel.**

Explanation: The CMDAREA tag was placed in the DTL source file following the SELFLD tag. The specified CMDAREA name "ccccccc" was not available when the panel statements were generated.

User Response: Move the CMDAREA tag so that it is placed before the SELFLD tag that defines the menu choices. The specified name "ccccccc" will be used in the panel statements.

ISPC432 **ISPC432W: Warning. Line *aaaaaaaa* of file *bbbbbbbb*. ACTION tags following an ACTION tag with the RUN attribute specified are not valid and will be ignored.**

Explanation: None.

User Response: Place the ACTION tag with the RUN attribute after the other ACTION tags for this PDC or CHOICE tag and rerun the conversion utility.

ISPC433 **ISPC433W: Warning. Line *aaaaaaaa* of file *bbbbbbbb*. TYPE=MENU on the SELFLD tag is not valid on a panel when the MENU keyword is not specified on the PANEL tag. This tag will be formatted as TYPE=SINGLE.**

Explanation: None.

User Response: Add the MENU attribute to the PANEL tag and rerun the conversion utility.

ISPC434 **ISPC434W: Warning. Line *aaaaaaaa* of file *bbbbbbbb*. TYPE=MENU on the SELFLD tag can only be specified one time on a panel. This tag will be formatted as TYPE=SINGLE.**

Explanation: None.

User Response: Place each set of option menu selections on a separate panel.

ISPC500 **ISPC500W: Warning. NLS language literals could not be obtained by ISPF for the requested language. The values for the current session language will be used.**

Explanation: This message is self-explanatory.

User Response: Contact your system programmer.

System Programmer Response: Make sure that all NLS modules have been made available to ISPF. Verify that the user is running with enough virtual storage to allow ISPF to load the requested language module. If the error persists, contact IBM support.

ISPC501 **ISPC501W: Warning. NLS language literals could not be obtained by ISPF for the requested language. The default English literals will be used.**

Explanation: This message is self-explanatory.

User Response: Contact your system programmer.

System Programmer Response: Make sure that all NLS modules have been made available to ISPF. Verify that the user is running with enough virtual storage to allow ISPF to load the requested language module. If

ISPF Messages

the error persists, contact IBM support.

ISPC502 **ISPC502W: Warning. ISPD TLC received a non-zero return code from EXECIO while processing 'aaaaaaaa'. Refer to the 'bbbbbbbb' documentation for an EXECIO Return code = 'ccccccc'.**

Explanation: None.

User Response: Correct the condition causing return code *ccccccc*.

ISPC503 **ISPC503W: Warning. Data will not replace the 'aaaaaaaa' file because NOREPLACE was specified on invocation.**

Explanation: None.

User Response: To replace the data on the *aaaaaaaa* file, change the invocation option to REPLACE or select the Replace Panel/Message/Script option on the invocation panel.

ISPC503A **ISPC503AW: Warning. Data will not replace the 'aaaaaaaa' file because NOLOGREPL was specified on invocation.**

Explanation: None.

User Response: To replace the data on the *aaaaaaaa* file, change the invocation option to LOGREPL or select the Replace Log File Members option on the invocation panel.

ISPC503B **ISPC503BW: Warning. Data will not replace the 'aaaaaaaa' file because NOLISTREPL was specified on invocation.**

Explanation: None.

User Response: To replace the data on the *aaaaaaaa* file, change the invocation option to LISTREPL or select the Replace List File Members option on the invocation panel.

ISPC504 **ISPC504E: Error. Log file output is directed to the ISPF log file. The ISPF log file is not allocated. Change ISPF Option 0 to allocate the log file or provide an ISPD TLC log file.**

Explanation: The ISPF log file is not allocated and cannot be used by ISPD TLC.

User Response: If the user intends to direct the log file to the ISPF log and no ISPF log can be allocated, then the Option 0 (ISPF Settings) update is required to allow ISPF to allocate the log file. Alternatively, the user can create a private log file and provide this log

file name to ISPD TLC. If the ISPD TLC command syntax invocation is being used, the log file name is provided in the ISPD TLC profile. If the interactive ISPD TLC invocation panel is being used, then the log file name is entered on the panel.

ISPC505 **ISPC505E: Error. File was not preprocessed by ISPF. Possible reasons may be the Conversion was not successful resulting in no generated output for preprocessing, or the ISPF Preprocessing Utility was unable to successfully preprocess a generated file. Preprocessor input is on work file aaaaaaaa. Refer to the ISPF log file for more information about the ISPPREP error.**

Explanation: A non-zero return code was returned from ISPPREP.

User Response: Correct the error described in the ISPF log.

ISPC506 **ISPC506E: Error. File 'aaaaaaaa' was not found or was empty.**

Explanation: None.

User Response: Provide a file that contains DTL source records.

ISPC507 **ISPC507E: Error. Data cannot be written to disk because a name conflict exists between input aaaaaaaa file "bbbbbbbb" and output file ccccccc "ddddddd".**

Explanation: The input file *ddddddd* will be overwritten.

User Response: Provide a unique output member name.

The input and output file names may be the same, but the member name for the output file must be different than the member name for the input file to avoid overwriting the source data. *ccccccc* identifies the output file type where the conflict was found.

ISPC508 **ISPC508W: Warning. Data cannot be written to the file name 'aaaaaaaa'. There is a name conflict with active ISPF files.**

Explanation: The output name specified for the ISPD TLC log or list file conflicts with the ISPF log or list name.

User Response: Provide a unique output log or list name.

ISPC508A **ISPC508AE: Error. You cannot specify the same file name for both the LOG and LIST files.**

Explanation: The output file names specified for the LOG and LIST file are the same.

User Response: Provide a unique output log or list name.

The input and output file names may be the same, but the member name for the LOG file must be different than the member name for the LIST file.

ISPC509 **ISPC509E: Error. Incorrect syntax: 'aaaaaaaa'.**

Explanation: ISPD TLC parameters provided as command invocation syntax are in error.

User Response: Refer to *DTL Guide and Reference* for an explanation of the command syntax.

ISPC510 **ISPC510E: Error. Incorrect syntax: Option must be "aaaaaaaa" or "bbbbbbbb" but not both.**

Explanation: None.

User Response: Specify either option *aaaaaaaa* or option *bbbbbbbb*.

ISPC511 **ISPC511E: Error. Incorrect syntax: aaaaaaaa="bbbbbbbb". Keylist Application ID must be from 1 to 4 characters in length.**

Explanation: None.

User Response: Provide a 1 to 4 character application ID.

ISPC512 **ISPC512E: Error. Incorrect syntax: aaaaaaaa="bbbbbbbb" contains character(s) which are not valid. The first character of the Keylist Application ID must be 'cccccccc' or 'dddddddd'. Characters 2 - 4, if entered, must be 'cccccccc', 'dddddddd' or 'eeeeeeee'.**

Explanation: None.

User Response: Provide a correct 1 to 4 character application ID.

ISPC513 **ISPC513W: Warning. Conversion option 'aaaaaaaa' is valid only when running ISPD TLC under ISPF Option 7 (Dialog Test). 'aaaaaaaa' changed to 'bbbbbbbb'.**

Explanation: Option *aaaaaaaa* is valid only for ISPF test mode processing and is changed to *bbbbbbbb*.

User Response: Remove the specification of option

aaaaaaaa unless you are running in ISPF test mode.

ISPC514 **ISPC514W: Warning. Invocation option "aaaaaaaa" has been removed.**

Explanation: Invocation option *"aaaaaaaa"* has been removed from ISPD TLC.

User Response: Remove the specification of option *"aaaaaaaa"* from the command syntax invocation.

ISPC515 **ISPC515W: Warning. Option is not valid: 'aaaaaaaa' changed to 'bbbbbbbb'.**

Explanation: Option *aaaaaaaa* is not valid for batch processing and is changed to *bbbbbbbb*.

User Response: Remove the specification of option *aaaaaaaa* from the batch invocation.

ISPC516 **ISPC516W: Warning. ISPF option 0 log file disposition is set to "aaaaaaaa". Log file messages cannot be written to the ISPF log. The "DISK" option is ignored.**

Explanation: None.

User Response: Change the log file disposition or place log messages on an ISPD TLC log file.

ISPC517 **ISPC517E: Error. Unable to gain exclusive allocation of "aaaaaaaa". The file "aaaaaaaa" will not be written.**

Explanation: None.

User Response: Use a private output file instead of file *"aaaaaaaa"*.

ISPC518 **ISPC518E: Error. Conversion Utility message number aaaaaaaa is missing in message file: 'bbbbbbbb'.**

Explanation: This message is self-explanatory.

User Response: Contact your system programmer.

System Programmer Response: Make sure that all messages provided for ISPF have been properly installed. If the error persists, contact IBM support.

ISPC519 **ISPC519E: Error. Line aaaaaaaa of file "bbbbbbbb". The ISPF LIBDEF service for "cccccccc" has ended with return code: "dddddddd". "eeeeeeee" will not be updated.**

Explanation: None.

User Response: Refer to *ISPF Services Guide* for a description of LIBDEF return codes.

ISPF Messages

ISPC521 ISPPREP is being called to preprocess
aaaaaaa panel(s) from the work file
bbbbbbb to the panel file ccccccc.

Explanation: This is an informational message.

ISPC522 ISPC522W: Warning. Line aaaaaaaa of file
"bbbbbbb". A panel with the "ccccccc"
option specified cannot be preprocessed.
Panel ddddddd will be saved in ISPF
source format.

Explanation: None.

User Response: If ISPD TLC was invoked with
command syntax, specify the NOPREP conversion
option. If the invocation was from the interactive panel,
deselect the Preprocess Panel Output option.

ISPC525 The "aaaaaaa" file cannot be saved
because no aaaaaaa file records have
been created.

Explanation: This message is self-explanatory.

User Response: Issue the SAVELOG, SAVEDLIST, or
SAVEALL commands only when a log or list file
member is to be written to a partitioned data set.

ISPC526 The "aaaaaaa" file was specified as a
sequential format file. All records have
previously been written.

Explanation: None.

User Response: Issue the SAVELOG, SAVEDLIST, or
SAVEALL commands only when a log or list file
member is to be written to a partitioned data set.

ISPC527 The "aaaaaaa" file was defaulted to the
ISPF aaaaaaa file. All records have
previously been written.

Explanation: The option to write the ISPD TLC log or
list file to disk has been selected, but no log or list
name was provided. ISPD TLC has placed the log or list
output on the ISPF log or list file, respectively.

User Response: Issue the SAVELOG, SAVEDLIST, or
SAVEALL commands only when a log or list file
member is to be written to a partitioned data set.

ISPC528 There are no records available to be
saved to the aaaaaaa file.

Explanation: No log or list records have been created
since the last SAVELOG, SAVEDLIST, or SAVEALL
command was issued.

User Response: Issue the SAVELOG, SAVEDLIST, or
SAVEALL commands only when a log or list file
member is to be written to a partitioned data set.

ISPC529 The output library "aaaaaaa" is being
updated with member "bbbbbbb".

Explanation: This is an informational message. A
pending log or list file is being written to the specified
output file.

ISPC560 ISPC560W: Warning. Line aaaaaaaa of file
"bbbbbbb". There is a conflict in the use
of "ccccccc" with "ddddddd". "ddddddd"
is being reset to "eeeeeee".

Explanation: None.

User Response: Change either the ccccccc or the
ddddddd value to remove the conflict.

ISPC561 ISPC561W: Warning. Line aaaaaaaa of file
"bbbbbbb". The "ccccccc" tag and its
attributes have been removed from the
tag language. ccccccc will be ignored for
this conversion and will be syntax
checked only. The ccccccc tag should be
removed from the tag source as it is no
longer required and is not portable to
the OS/2 Dialog Manager.

Explanation: None.

User Response: Remove the obsolete tag from the
DTL source file.

ISPC562 ISPC562W: Warning. Line aaaaaaaa of file
"bbbbbbb". "ccccccc=ddddddd" is not
defined. Default values will be set.

Explanation: None.

User Response: Provide the missing attribute.

ISPC563 ISPC563W: Warning. Line aaaaaaaa of file
"bbbbbbb". The "ccccccc" tag and its
attributes will be ignored during the
conversion process and syntax checked
only. Text following the "ccccccc" tag
will appear as normal text.

Explanation: This is an informational message. The
ccccccc tag is not supported by ISPF.

ISPC565 ISPC565W: Warning. Line aaaaaaaa of file
"bbbbbbb". Tag "ccccccc" and its
attributes will be ignored in the
conversion process.

Explanation: This is an informational message. The
ccccccc tag is not supported by ISPF.

ISPC566 **ISPC566W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Keyword *"cccccccc=ddddddd"* found on the *eeeeeee* tag will be ignored in the conversion process but will be syntax checked.

Explanation: This is an informational message. The attribute *cccccccc* is not supported by ISPF.

ISPC567 **ISPC567W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Keyword *"cccccccc=ddddddd"* found on the *eeeeeee* tag is valid for the conversion process but will not be portable to the OS/2 Dialog Manager.

Explanation: None.

ISPC568 **ISPC568W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Comment ending delimiter *"cccccccc"* is valid for the conversion process but will not be portable to the OS/2 Dialog Manager.

Explanation: None.

ISPC569 **ISPC569W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The *cccccccc* attribute is missing for the *ddddddd* tag. The conversion process will continue. Please update your tag source file because the *cccccccc* attribute is required for the OS/2 Dialog Manager.

Explanation: None.

User Response: Add the *cccccccc* attribute definition to the *ddddddd* tag.

ISPC570 **ISPC570W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Keyword *"cccccccc"* found on the *ddddddd* tag will be ignored in the conversion process but will be syntax checked.

Explanation: This is an informational message. The *cccccccc* attribute cannot be used and will be ignored.

ISPC571 **ISPC571W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The attribute value *"cccccccc"* is not valid when the *ddddddd* tag is found in this nesting context.

Explanation: The *cccccccc* attribute cannot be used and will be ignored.

User Response: Remove the *cccccccc* attribute on this use of the *ddddddd* tag.

ISPC572 **ISPC572W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The attribute *"PMTWIDTH=cccccccc"* does not provide enough space to format the ISPF prompt indicator *"===>"*. *"PMTFMT=ISPF"* will be ignored.

Explanation: The combination of the length of the prompt text plus the length of the ISPF prompt indicator will not fit within the prompt width specified.

User Response: Increase the PMTWIDTH attribute value.

ISPC577 **ISPC577W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. *cccccccc="ddddddd"* maximum length is *eeeeeee* character(s). *cccccccc* will be truncated to *"ffffff"*.

Explanation: None.

User Response: Update the DTL source to the appropriate maximum length.

ISPC578 **ISPC578W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. *cccccccc="ddddddd"* minimum length is *eeeeeee* character(s). *cccccccc* will be set to *"ffffff"*.

Explanation: None.

User Response: Update the DTL source to the appropriate minimum length.

ISPC579 **ISPC579W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. *cccccccc="ddddddd"* contains character(s) which are not valid. *cccccccc* will be set to *"eeeeeee"*.

Explanation:

- For panel attributes, pad characters, or expand characters, the *ddddddd* character has been previously used and another character should be specified.
- For CHECKI tag processing of the PICT attribute, the *ddddddd* character(s) are invalid for the "VER (xxx,PICT,string)" panel statement.
- For MSGMBR tag processing of the NAME attribute, the *ddddddd* character(s) do not follow the rules for message member names.
- For MSG tag processing of the SUFFIX attribute, the *ddddddd* character(s) are invalid or the SUFFIX is more than two characters in length.
- For processing of the MSG attribute, the *ddddddd* character(s) do not follow the rules for message names.
- For other NAME (or %varname) validation processing, the *ddddddd* character(s) do not follow the rules for variable names.

User Response: Correct the *ddddddd* character(s).

ISPF Messages

ISPC580 **ISPC580E: Error. Line aaaaaaaa of file "bbbbbbbb". ccccccc="ddddddd" must be an integer.**

Explanation: None.

User Response: Change ddddddd to an integer value.

ISPC581 **ISPC581W: Warning. Line aaaaaaaa of file "bbbbbbbb". ccccccc="ddddddd" must be an integer. ccccccc will be set to "eeeeeee".**

Explanation: None.

User Response: Change ddddddd to an integer value.

ISPC583 **ISPC583W: Warning. Line aaaaaaaa of file "bbbbbbbb". ccccccc="ddddddd" must be an integer eeeeeee. ccccccc will be set to "eeeeeee".**

Explanation: None.

User Response: Change ddddddd to an integer value.

ISPC584 **ISPC584E: Error. Line aaaaaaaa of file "bbbbbbbb". ccccccc="ddddddd" must be an integer within a range of eeeeeee to fffffff..**

Explanation: None.

User Response: Change the value ddddddd to be within the specified range.

ISPC585 **ISPC585W: Warning. Line aaaaaaaa of file "bbbbbbbb". ccccccc="ddddddd" must be an integer within a range of eeeeeee to fffffff.. ccccccc will be set to "ggggggg".**

Explanation: None.

User Response: Change the value ddddddd to be within the specified range.

ISPC586 **ISPC586E: Error. Line aaaaaaaa of file "bbbbbbbb". Incorrect value "ccccccc" specified for ddddddd="ccccccc".**

Explanation: None.

User Response: Change the ccccccc value to a valid choice.

ISPC587 **ISPC587W: Warning. Line aaaaaaaa of file "bbbbbbbb". Incorrect value "ccccccc" specified for ddddddd="ccccccc". ddddddd will be set to default "eeeeeee".**

Explanation: None.

User Response: Change the ccccccc value to a valid choice.

ISPC588 **ISPC588W: Warning. Line aaaaaaaa of file "bbbbbbbb". Duplicate field names are not permitted by ISPF. ccccccc="ddddddd" has already been defined as a panel field name. ccccccc will be set to "eeeeeee".**

Explanation: None.

User Response: Choose a different ddddddd value for the ccccccc attribute.

ISPC600 **ISPC600E: Error. Line aaaaaaaa of file "bbbbbbbb". Multiple Action Bars not allowed in panel definition.**

Explanation: Only one AB tag group is allowed in a panel definition.

User Response: Remove the multiple AB tag(s).

ISPC601 **ISPC601E: Error. Line aaaaaaaa of file "bbbbbbbb". No Action Bar Choices defined within AB Tag.**

Explanation: A minimum of one ABC tag must be specified within the AB tag.

User Response: Add ABC tag definitions to the AB tag.

ISPC602 **ISPC602W: Warning. Line aaaaaaaa of file "bbbbbbbb". The ccccccc tag "ddddddd" attribute value cannot be used without a "eeeeeee" attribute value.**

Explanation: This message is self-explanatory.

User Response: Remove the ddddddd attribute or add an eeeeeee attribute, as appropriate.

ISPC603 **ISPC603W: Warning. Line aaaaaaaa of file "bbbbbbbb". The RUN option for the ACTION tag can only be nested within the PDC tag or within the CHOICE tag when TYPE=MENUE has been specified on the SELFLD tag.**

Explanation: This message is self-explanatory.

User Response: Remove the RUN option for this ACTION tag.

ISPC604 **ISPC604W: Warning. Line aaaaaaaa of file "bbbbbbbb". Required ccccccc "ddddddd" was not provided and may affect processing.**

Explanation: The ccccccc tag text described as ddddddd is missing.

User Response: Provide the appropriate description.

ISPC605A **ISPC605AW: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The ABC tag limit of *"cccccccc"* has been exceeded. Remaining action bar choices will be ignored.

Explanation: This message is self-explanatory.

User Response: Remove the extra ABC tags from the DTL source.

ISPC605B **ISPC605BW: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The PDC tag limit of *"cccccccc"* has been exceeded. Remaining pull-down choices will be ignored.

Explanation: This message is self-explanatory.

User Response: Remove the extra PDC tags from the DTL source.

ISPC605C **ISPC605CW: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The ASSIGNI tag limit of *"cccccccc"* has been exceeded. Remaining ASSIGNI tags will be ignored.

Explanation: This message is self-explanatory.

User Response: Remove the extra ASSIGNI tags from the DTL source.

ISPC605D **ISPC605DW: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The XLATI tag limit of *"cccccccc"* has been exceeded. Remaining XLATI tags will be ignored.

Explanation: This message is self-explanatory.

User Response: Remove the extra ASSIGNI tags from the DTL source.

ISPC606 **ISPC606W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Cursor Position *"cccccccc"* exceeds the length (*dddddddd*) of the *"eeeeeeee"* field on the *ffffff* tag. The conversion utility will not use the Cursor Position. ISPF will default the position to 1.

Explanation: This message is self-explanatory.

User Response: Change the cursor position to a value within the length of the *eeeeeeee* field.

ISPC607 **ISPC607W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. A panel has been defined with either a Width > 80 and/or a Depth > 24 and will require a device larger than 24x80 for display of the panel.

Explanation: This message is self-explanatory.

ISPC608 **ISPC608W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. No text encountered following the *cccccccc* tag.

Explanation: This message is self-explanatory.

User Response: Add a description to the *cccccccc* tag definition following the close tag delimiter.

ISPC609 **ISPC609W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. No text encountered following the TOPINST tag.

Explanation: This message is self-explanatory.

User Response: Add a description to be placed at the top of the panel.

ISPC610 **ISPC610W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. *cccccccc* *"dddddddd"* larger than the maximum allowed. *"dddddddd"* will be truncated to *eeeeeeee* bytes.

Explanation: *dddddddd* is longer than the maximum allowed length of *eeeeeeee*.

User Response: Reduce the length of *dddddddd* to *eeeeeeee*.

ISPC611 **ISPC611W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The cursor field *"cccccccc"* specified on the PANEL tag was not matched to any field found on the panel.

Explanation: None.

User Response: Correct the field name specified on the PANEL tag.

ISPC612 **ISPC612W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The cursor row will be set to *"cccccccc"* as requested on the *dddddddd* tag. *"cccccccc"* may not be a valid value for the OS/2 Dialog Manager. The Cursor Index will be checked by ISPF for valid position.

Explanation: None.

ISPC613 **ISPC613W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The attribute *"cccccccc=dddddddd"* will be ignored by the conversion utility because the CURSOR attribute has not been specified.

Explanation: None.

User Response: Add the CURSOR attribute to the PANEL definition.

ISPF Messages

ISPC614 **ISPC614W: Warning.** Line *aaaaaaaa* of file "*bbbbbbbbb*". The cursor position "*cccccccc*" specified on the PANEL tag was not set for any field found on the panel.

Explanation: None.

ISPC615 **ISPC615W: Warning.** Line *aaaaaaaa* of file "*bbbbbbbbb*". The cursor index to table row "*cccccccc*" specified on the PANEL tag was not set for any field found on the panel.

Explanation: None.

ISPC616 **ISPC616W: Warning.** Line *aaaaaaaa* of file "*bbbbbbbbb*". Duplicate Action Bar Choice description is not allowed. ABC will not be included on Action Bar.

Explanation: None.

User Response: Provide a unique action bar choice description.

ISPC617 **ISPC617W: Warning.** Line *aaaaaaaa* of file "*bbbbbbbbb*". No pull-down choice(s) found for Action Bar Choice being processed. ABC will not be included on Action Bar.

Explanation: None.

User Response: Provide at least one pull-down choice for each ABC tag.

ISPC618 **ISPC618W: Warning.** Line *aaaaaaaa* of file "*bbbbbbbbb*". Undefined value "*cccccccc*" specified for "*dddddddd=cccccccc*". *cccccccc* has not been defined in a *dddddddd* tag.

Explanation: None.

User Response: Provide an *cccccccc* definition using an *dddddddd* tag.

ISPC618A **ISPC618AW: Warning.** Line *aaaaaaaa* of file "*bbbbbbbbb*". Undefined value "*cccccccc*" specified for "*dddddddd=cccccccc*". "*cccccccc*" has not been defined in a *eeeeeeee* tag.

Explanation: This message is self-explanatory.

User Response: Provide an *cccccccc* definition using an *eeeeeeee* tag. For a CHOICE tag, *cccccccc* can be either a system generated selection choice number or a value specified using the SELCHAR attribute.

ISPC619 **ISPC619W: Warning.** Line *aaaaaaaa* of file "*bbbbbbbbb*". Duplicate *cccccccc* ID "*dddddddd*" specified for "*eeeeeeee=dddddddd*". Only one *cccccccc* entry is accepted for each ID name. This entry is rejected and the first one processed will be used.

Explanation: None.

User Response: Remove the duplicate *cccccccc* ID.

ISPC620 **ISPC620E: Error.** Line *aaaaaaaa* of file "*bbbbbbbbb*". The format for the DOCTYPE statement is not valid.

Explanation: This message is self-explanatory.

User Response: Refer to *ISPF Dialog Tag Language Guide and Reference* for an explanation of the Document Type and Entity declarations.

ISPC621 **ISPC621E: Error.** Line *aaaaaaaa* of file "*bbbbbbbbb*". Parentheses or brackets are required for enclosing ENTITY definition(s).

Explanation: This message is self-explanatory.

User Response: Refer to *DTL Guide and Reference* for an explanation of the Document Type and Entity declarations.

ISPC622 **ISPC622E: Error.** Line *aaaaaaaa* of file "*bbbbbbbbb*". No ending comment delimiter (-->) found during ENTITY processing of source file record "*cccccccc*".

Explanation: This message is self-explanatory.

User Response: Refer to *DTL Guide and Reference* for an explanation of the Document Type and Entity declarations.

ISPC623 **ISPC623E: Error.** Line *aaaaaaaa* of file "*bbbbbbbbb*". ENTITY Symbol name expected.

Explanation: This message is self-explanatory.

User Response: Refer to *DTL Guide and Reference* for an explanation of the Document Type and Entity declarations.

ISPC624 **ISPC624E: Error.** Line *aaaaaaaa* of file "*bbbbbbbbb*". Illegal ENTITY symbol value encountered.

Explanation: This message is self-explanatory.

User Response: Refer to *DTL Guide and Reference* for

an explanation of the Document Type and Entity declarations.

ISPC625 **ISPC625E: Error. Line aaaaaaaa of file "bbbbbbbb". Each ENTITY definition must be enclosed within either single (') or double (") quotes and must be ended with '>'. Check for missing or mismatched quote delimiters and verify that each ENTITY is ended with '>'.**

Explanation: This message is self-explanatory.

User Response: Refer to *DTL Guide and Reference* for an explanation of the Document Type and Entity declarations.

ISPC626 **ISPC626E: Error. Line aaaaaaaa of file "bbbbbbbb". No <!ENTITY or <:ENTITY definition encountered or ENTITY definition(s) not ended with a close parenthesis or close bracket character.**

Explanation: This message is self-explanatory.

User Response: Refer to *DTL Guide and Reference* for an explanation of the Document Type and Entity declarations.

ISPC627 **ISPC627E: Error. Line aaaaaaaa of file "bbbbbbbb". Recursive use of ENTITY file "ccccccc".**

Explanation: This message is self-explanatory.

User Response: Review the !ENTITY file includes and remove the recursive use of file "ccccccc".

ISPC628 **ISPC628W: Warning. Line aaaaaaaa of file "bbbbbbbb". Duplicate ENTITY name "ccccccc" found. This entry will be ignored and the first use of name "ccccccc" for value "ddddddd" will be used.**

Explanation: This message is self-explanatory.

User Response: Remove the duplicate !ENTITY name.

ISPC629 **ISPC629W: Warning. Line aaaaaaaa of file "bbbbbbbb". The CDATA keyword cannot be used with a parameter entity definition and will be ignored.**

Explanation: This message is self-explanatory.

User Response: Refer to *ISPF Dialog Tag Language Guide and Reference* for an explanation of the Document Type and Entity declarations.

ISPC630 **ISPC630W: Warning. Line aaaaaaaa of file "bbbbbbbb". The ENTITY "ccccccc" will override the system defined entity value dddddddd with the new value eeeeeeee..**

Explanation: This message is self-explanatory.

ISPC631 **ISPC631W: Warning. Line aaaaaaaa of file "bbbbbbbb". The maximum number of single choices allowed within the limit of "ENTWIDTH=ccccccc" has been exceeded. The remaining sequentially numbered CHOICE tags will be ignored.**

Explanation: This message is self-explanatory.

User Response: Increase the ENTWIDTH value, if possible, or remove the excess CHOICE tags.

ISPC632 **ISPC632W: Warning. Line aaaaaaaa of file "bbbbbbbb". ccccccc="ddddddd" will not fit within the remaining space available of eeeeeeee character(s). ccccccc will be set to "ffffff".**

Explanation: This message is self-explanatory.

User Response: Reduce the ccccccc value to eeeeeeee.

ISPC633 **ISPC633W: Warning. Line aaaaaaaa of file "bbbbbbbb". The ccccccc tag attribute dddddddd is not valid unless the eeeeeeee attribute is also specified. dddddddd=ffffff will not be used.**

Explanation: This message is self-explanatory.

User Response: Remove the dddddddd attribute or include the eeeeeeee attribute as part of the ccccccc tag definition.

ISPC634 **ISPC634W: Warning. Line aaaaaaaa of file "bbbbbbbb". The ccccccc tag attribute "ddddddd" is not valid unless the "eeeeeee" attribute is also specified. "ddddddd" will not be used.**

Explanation: This message is self-explanatory.

User Response: Remove the dddddddd attribute or include the eeeeeeee attribute as part of the ccccccc tag definition.

ISPC635 **ISPC635W: Warning. The aaaaaaaa option is not valid unless the bbbbbbbb option is also specified. aaaaaaaa will not be used.**

Explanation: This message is self-explanatory.

User Response: Remove the aaaaaaaa option or add the bbbbbbbb option.

ISPF Messages

ISPC636 **ISPC636W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The *"ccccccc=ddddddd"* attribute specification on the *"eeeeeee"* tag conflicts with the *"ffffff"* conversion option. The attribute value is accepted but may cause inconsistent results when the panel is displayed.

Explanation: The *"ffffff"* conversion option is in conflict with the use of attribute *ccccccc* specified for value *ddddddd* on the *eeeeeee* tag.

User Response: To eliminate the message either change the attribute value or change the conversion utility option.

ISPC637 **ISPC637W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The *"ccccccc=ddddddd"* attribute specification on the *"eeeeeee"* tag is a reserved keyword. The attribute value cannot be used and is reset to blank.

Explanation: The specified *ddddddd* attribute value is a reserved keyword.

User Response: Specify a different value for the *ccccccc* attribute.

ISPC640 **ISPC640W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. A PDSEP tag has been found in the DTL source before the first PDC tag has been processed. The PDSEP tag is ignored.

Explanation: PDSEP tags are valid only between PDC tags. A separator cannot be placed before the first pull-down choice.

User Response: Remove the PDSEP tag which is coded before the first PDC tag for this action bar item.

ISPC641 **ISPC641W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. A PDSEP tag has been found in the DTL source after the last PDC tag has been processed. The PDSEP tag is ignored.

Explanation: PDSEP tags are valid only between PDC tags. A separator cannot be placed after the last pull-down choice.

User Response: Remove the PDSEP tag which is coded after the last PDC tag for this action bar item.

ISPC642 **ISPC642W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Multiple PDSEP tags have been found in the DTL source between PDC tags. The first PDSEP tag is accepted. Additional PDSEP tags are ignored.

Explanation: Only one PDSEP tag is valid between PDC tags.

User Response: Remove the multiple PDSEP tags which are coded between PDC tags.

ISPC643 **ISPC643W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The combined specification of accelerator key values for ACC1, ACC2, and ACC3 exceed the implementation limit of 30 bytes. The accelerator key description *"ccccccc"* will be discarded.

Explanation: The accelerator key description is limited to 20 bytes.

User Response: Revise the selection of ACCn values to reduce the number of bytes in the accelerator key description.

ISPC644 **ISPC644W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. *"ccccccc"* is not a valid single accelerator key. Valid values are: INSERT, DELETE, BACKSPACE, and F1 through F12. The accelerator key description *"ccccccc"* will be discarded.

Explanation: CTRL, SHIFT, ALT, A-Z and 0-9 cannot be used as a single accelerator key.

User Response: Revise the accelerator key selection to use only valid key combinations.

ISPC645 **ISPC645W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. *"ccccccc"* is a duplicate of a previously specified accelerator key. The accelerator key description *"ccccccc"* will be discarded.

Explanation: Do not specify the same accelerator key value for attributes ACC1, ACC2, and ACC3.

User Response: Revise the accelerator key attributes ACC1, ACC2, and ACC3 to remove duplicate key specifications.

ISPC646 **ISPC646W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. *"ccccccc"* is not a valid accelerator key combination. The accelerator key description *"ccccccc"* will be discarded.

Explanation: Combinations of keys such as SHIFT and A-Z or 0-9 are not valid.

User Response: Revise the accelerator key selection to use only valid key combinations.

ISPC647 **ISPC647W: Warning. Line aaaaaaaa of file "bbbbbbbb". The "ccccccc" attribute has been specified without the previous "ddddddd" attribute(s). The accelerator key description will be created using the available "ACCn" attributes in numerical order.**

Explanation: The ACC3 attribute was present without ACC1 or ACC2, or the the ACC2 attribute was present without ACC1. The accelerator will be created using the available attributes in numerical order.

User Response: Specify accelerator key selection in numerical order.

ISPC648 **ISPC648W: Warning. Line aaaaaaaa of file "bbbbbbbb". "ccccccc" is a duplicate of a previously specified accelerator key combination. The accelerator key description "ccccccc" will be discarded.**

Explanation: The accelerator key combination cannot be duplicated within the panel.

User Response: Revise the accelerator key specifications to remove the duplicate accelerator key combinations.

ISPC700 **ISPC700E: Error. Line aaaaaaaa of file "bbbbbbbb". Displayable lines have been exceeded. Panel will not be saved.**

Explanation: More lines have been formatted for the panel body than will fit within the specified panel depth.

User Response:

- Increase the specified panel depth, if possible.
- Remove some of the fields or text included in this panel.

ISPC701 **ISPC701W: Warning. Line aaaaaaaa of file "bbbbbbbb". Panel width has been exceeded. ccccccc field data will be truncated.**

Explanation: None.

User Response:

- Increase the panel width, if possible.
- Review the generated ISPF panel source result and adjust field widths or spacing as necessary.

ISPC702 **ISPC702W: Warning. Line aaaaaaaa of file "bbbbbbbb". ccccccc tag was specified without the NAME or DATAVAR keyword and will cause the absence of the field on the panel.**

Explanation: The field could not be formatted because no field identifier was provided.

User Response: Add the DATAVAR attribute to the DTL source file.

ISPC703A **ISPC703AW: Warning. Line aaaaaaaa of file "bbbbbbbb". Entry width will not fit within the Panel width and will be changed to "ccccccc".**

Explanation: None.

User Response:

- Increase the panel width, if possible.
- Review the generated ISPF panel source result and adjust field widths or spacing as necessary.

ISPC703B **ISPC703BW: Warning. Line aaaaaaaa of file "bbbbbbbb". Prompt width will not fit within the Panel width and will be changed to "ccccccc".**

Explanation: None.

User Response:

- Increase the panel width, if possible.
- Review the generated ISPF panel source result and adjust field widths or spacing as necessary.

ISPC703C **ISPC703CW: Warning. Line aaaaaaaa of file "bbbbbbbb". Choice width will not fit within the Panel width and will be changed to "ccccccc".**

Explanation: None.

User Response:

- Increase the panel width, if possible.
- Review the generated ISPF panel source result and adjust field widths or spacing as necessary.

ISPC703D **ISPC703DW: Warning. Line aaaaaaaa of file "bbbbbbbb". Description width will not fit within the Panel width and will be changed to "ccccccc".**

Explanation: None.

User Response:

- Increase the panel width, if possible.
- Review the generated ISPF panel source result and adjust field widths or spacing as necessary.

ISPF Messages

ISPC704A **ISPC704AW: Warning. Line aaaaaaaa of file "bbbbbbbb". ccccccc tag entry width value is "0" and may affect the display of the entry field.**

Explanation: There is insufficient space for the entry field.

User Response:

- Increase the panel width, if possible.
- Review the generated ISPF panel source result and adjust field widths or spacing as necessary.

ISPC704B **ISPC704BW: Warning. Line aaaaaaaa of file "bbbbbbbb". ccccccc tag prompt width value is "0" and may affect the display of the prompt field.**

Explanation: There is insufficient space for the field prompt.

User Response:

- Increase the panel width, if possible.
- Review the generated ISPF panel source result and adjust field widths or spacing as necessary.

ISPC704C **ISPC704CW: Warning. Line aaaaaaaa of file "bbbbbbbb". ccccccc tag description width value is "0" and may affect the display of the description field.**

Explanation: There is insufficient space for the field description.

User Response:

- Increase the panel width, if possible.
- Review the generated ISPF panel source result and adjust field widths or spacing as necessary.

ISPC705A **ISPC705AW: Warning. Line aaaaaaaa of file "bbbbbbbb". The "SELWIDTH" value of the SELFLD tag is not large enough to contain the entry field.**

Explanation: None.

User Response:

- Increase the panel width, if possible.
- Review the generated ISPF panel source result and adjust field widths or spacing as necessary.

ISPC705B **ISPC705BW: Warning. Line aaaaaaaa of file "bbbbbbbb". The "SELWIDTH" value of the SELFLD tag is not large enough to contain the choice field.**

Explanation: None.

User Response:

- Increase the panel width, if possible.
- Review the generated ISPF panel source result and adjust field widths or spacing as necessary.

ISPC706 **ISPC706W: Warning. Line aaaaaaaa of file "bbbbbbbb". Both ENTWIDTH and COLWIDTH were specified on the LSTCOL tag. The value of "ccccccc" will be used as the column width.**

Explanation: None.

User Response: Change the ENTWIDTH attribute to COLWIDTH.

ISPC707 **ISPC707W: Warning. Line aaaaaaaa of file "bbbbbbbb". Conflict between "REQUIRED=NO" with a "MSG" specified.**

Explanation: The MSG attribute is valid only when REQUIRED=YES.

User Response: Remove the MSG attribute from the DTL source.

ISPC708 **ISPC708W: Warning. Line aaaaaaaa of file "bbbbbbbb". Conflict between "REQUIRED" keyword value or "MSG" keyword value specified for an output field. These keywords should not be used with USAGE=OUT.**

Explanation: The REQUIRED and MSG attributes are not valid for an output field.

User Response: Remove the REQUIRED and/or MSG attributes from the DTL source.

ISPC709 **ISPC709W: Warning. Line aaaaaaaa of file "bbbbbbbb". There is a conflict between using the "ALIGN=END" attribute value for a field and specifying either the PAD or PADC attributes. The PAD or PADC attribute is ignored.**

Explanation: ISPF does not pad right justified fields.

User Response: Remove the PAD or PADC attributes (or both) from the DTL source.

ISPC710 **ISPC710W: Warning. Line aaaaaaaa of file "bbbbbbbb". ccccccc tag attribute "ddddddd" default is set to a width of "eeeeeee" and may affect the display of fields.**

Explanation: The conversion utility has changed the indicated width.

User Response:

The conversion utility has set a width in one of the following contexts:

- A DTAFLD defined without an ENTWIDTH attribute, either on the DTAFLD or DTACOL tag, that has a length specified on an associated VARCLASS tag.
- A DTAFLD tag for which no entry width can be determined is set to zero.
- A DTAFLD tag defined without a PMTWIDTH attribute is set to the length of the prompt text, or to zero if no space is available to format the prompt.
- A DTAFLD tag defined without a DESWIDTH attribute is set to the length of the description text on the associated DTAFLDD tag, or to zero if no space is available to format the description.
- A DTAFLD or LSTCOL tag that has an associated VARCLASS specified as one of the VEDIT keywords is forced to the defined display length.
- A SELFLD defined without an SELWIDTH attribute, either on the SELFLD or DTACOL tag, is set to the remaining available width.
- A SELFLD defined with an SELWIDTH value larger than the remaining available width is set to the remaining available width.
- A SELFLD tag defined without a PMTWIDTH attribute is set to the length of the prompt text, or to zero if no space is available to format the prompt.
- A VARCLASS tag with a TYPE of VMASK specified with a length greater than 20 is reset to 20.

ISPC711 **ISPC711W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. *ccccccc* tag *"ddddddd"* attribute value is less than the ISPF defined minimum allowable width of 20 characters for a scrollable area. The scrollable area will not be formatted.

Explanation: The minimum width for a scrollable area is 20.

User Response: Set the width of the scrollable area to 20 or more.

ISPC712 **ISPC712E: Error.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Keyword **"NAME"** must be specified with **"TYPE=SINGLE"**.

Explanation: The NAME attribute is required on a SELFLD tag with **"TYPE=SINGLE"**.

User Response: Add the NAME attribute to the SELFLD tag.

ISPC714 **ISPC714E: Error.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. **NAME** attribute must be specified on CHOICE tag if SELFLD TYPE=MULTI.

Explanation: None.

User Response: Review the CHOICE tags defined

within the SELFLD and make sure each has a NAME attribute specified.

ISPC715A **ISPC715AW: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Duplicate **"CHECKVAR"** name *"ccccccc"* found on a CHOICE tag. The *"ccccccc"* variable name cannot be repeated for more than one CHOICE if SELFLD TYPE=MULTI. This name will be accepted but it is not portable to the OS/2 Dialog Manager.

Explanation: None.

User Response: For a multi-choice selection list, each CHECKVAR name should be unique.

ISPC715B **ISPC715BW: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Duplicate **"MATCH"** value *"ccccccc"* used on a CHOICE tag. The *"ccccccc"* value cannot be repeated for more than one CHOICE if SELFLD TYPE=SINGLE. This value will be accepted but it is not portable to the OS/2 Dialog Manager.

Explanation: None.

ISPC716 **ISPC716W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Inconsistent CHECKVAR value found on CHOICE tag. The CHECKVAR variable name must be the same for all CHOICE tags if SELFLD TYPE=SINGLE. This name will be accepted but it is not portable to the OS/2 Dialog Manager.

Explanation: None.

User Response: For a single choice selection list, each CHECKVAR name should be unique.

ISPC717 **ISPC717W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Inconsistent use of MENU keyword on the PANEL tag. No selection choice list was created on panel *"ccccccc"*.

Explanation: A PANEL specified with MENU keyword should include a SELFLD tag specified as TYPE=MENU.

User Response: Remove the MENU attribute from the PANEL tag, or add an option menu selection list with the SELFLD tag.

ISPF Messages

ISPC718 **ISPC718E: Error.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. More than one *"cccccccc"* tag found within *"dddddddd"*. Only 1 *"cccccccc"* tag can be used within each *"dddddddd"* tag.

Explanation: The *"cccccccc"* tag can only be specified one time within the *"dddddddd"* tag.

User Response: Update the DTL source to remove the multiple use of the *"cccccccc"* tag.

ISPC719A **ISPC719AW: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Inconsistent use of Mnemonics within *"cccccccc"* entries. CUA requires that all *"cccccccc"* entries must have a Mnemonic or none can. The conversion utility will process the mnemonic values but they are not portable to the OS/2 Dialog Manager.

Explanation: This message is self-explanatory.

User Response: ISPF supports the Mnemonic tag only within the ABC and PDC tags.

If this message is the result of providing a Mnemonic tag within a CHOICE tag, consider removing the tag from the DTL source file.

If this message relates to ABC or PDC tag processing, consider adding a Mnemonic tag to the ABC or PDC tag identified within the message.

ISPC719B **ISPC719BW: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. A duplicate mnemonic value has been found during processing of a *"cccccccc"* tag. Only one mnemonic may be specified for each *"cccccccc"*. Mnemonic characters used within a set of tags (ABC, PDC or CHOICE) must be unique. The conversion utility will ignore the duplicate value but it is not portable to the OS/2 Dialog Manager.

Explanation: This message is self-explanatory.

User Response: Remove the duplicate use of the M (Mnemonic) tag coded on the *"cccccccc"* tag.

ISPC719C **ISPC719CW: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. A DBCS mnemonic value has been found within a *"cccccccc"* tag. Mnemonic characters must be single byte format. The specified mnemonic character will not be used.

Explanation: This message is self-explanatory.

User Response: Specify a single byte character for the mnemonic.

ISPC719D **ISPC719DW: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The mnemonic *"cccccccc"* specified for the *"dddddddd"* tag description is not valid and will not be used. The mnemonic character must be in the range *"A-Z"*, *"a-z"*, or *"0-9"*.

Explanation: The mnemonic character must be in the range A-Z, a-z, or 0-9.

User Response: Change the M tag to specify a valid character.

ISPC719F **ISPC719FW: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. A duplicate mnemonic value has been found during processing of a *"cccccccc"* tag. The conversion utility will attempt to automatically select a mnemonic character to replace the specified value. Review the generated panel and if the resulting mnemonic selection is unsatisfactory, add Mnemonic tags to remove the duplicate condition.

Explanation: This message is self-explanatory.

User Response: Add additional Mnemonic tag(s) as required to prevent the automatic mnemonic character selection from generating a mnemonic which conflicts with your choice for the current item.

ISPC720 **ISPC720W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The tag language has been changed for the *cccccccc* tag. The attribute *"dddddddd"* has been replaced by *"eeeeeeee"*. The conversion utility will use the value of *"dddddddd"* as *"eeeeeeee"*. However, you should change your source to use the new attribute for portability to the OS/2 Dialog Manager.

Explanation: None.

User Response: Change the DTL source value *dddddddd* to *eeeeeeee*.

ISPC721 **ISPC721W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The tag language has been changed for the *cccccccc* tag. The attribute value *"dddddddd"* has been replaced by *"eeeeeeee"*. The conversion utility will accept the entry *"ffffff=dddddddd"*. However, you should change your source to use the new attribute value (*"ffffff=eeeeeeee"*) for portability to the OS/2 Dialog Manager.

Explanation: None.

User Response: Change the DTL source value *"dddddddd"* to *"eeeeeeee"*.

ISPC722 **ISPC722W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The tag language has been changed for the *cccccccc* tag. The attribute value *"dddddddd"* has been removed from the *cccccccc* tag and will be ignored in this conversion. You should update your source file to remove the *"eeeeeee=dddddddd"* entry for portability to the OS/2 Dialog Manager.

Explanation: None.

User Response: Change the DTL source to remove the entry *"eeeeeee=dddddddd"*.

ISPC723 **ISPC723W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The tag language has been changed for the *cccccccc* tag. The attribute *"dddddddd"* has been removed from the *cccccccc* tag and will be ignored in this conversion. You should remove the *dddddddd* reference from your tag source for portability to the OS/2 Dialog Manager.

Explanation: None.

User Response: Change the DTL source to remove the entry *"dddddddd"*.

ISPC724 **ISPC724W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The WIDTH attribute was not specified on the INFO tag. The conversion utility will use the current available panel width. The default for the WIDTH attribute is 45 for the OS/2 Dialog Manager. You should update your source to specify the WIDTH attribute for portability to the OS/2 Dialog Manager.

Explanation: None.

User Response: Add the WIDTH attribute to the INFO tag.

ISPC725 **ISPC725W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The tag language has been changed to require the INFO tag to be coded within the AREA tag when creating a HELP panel. You should update your source for portability to the OS/2 Dialog Manager.

Explanation: None.

User Response: Add the INFO tag to the HELP panel.

ISPC726 **ISPC726W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The tag language has been changed to not allow the *cccccccc* tag within a HELP panel. The *cccccccc* tag will be ignored by the conversion utility. You should update your source for portability to the OS/2 Dialog Manager.

Explanation: None.

User Response: Remove the *cccccccc* tag from the DTL source.

ISPC729 **ISPC729W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The *"cccccccc"* attribute has been specified on a *"dddddddd"* tag but the attribute *"eeeeeee"* was not specified (or is not valid). The *"cccccccc"* attribute will be reset to blank.

Explanation: The use of *cccccccc* depends on the specification of *eeeeeee*.

User Response: Either add the *eeeeeee* attribute to the DTL source or correct other related coding to make the *eeeeeee* attribute valid.

ISPC730 **ISPC730W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The required attribute "DATAVAR" is missing from the DTAFLD tag. The "NAME" value will become the panel field name. You should add the "DATAVAR" attribute to your tag source for compatibility with the OS/2 Dialog Manager. (It is recommended that you code both attributes with the same value.)

Explanation: None.

User Response: Add the DATAVAR attribute using the same name value specified for the NAME attribute.

ISPC731 **ISPC731W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Both "DATAVAR" and "NAME" are specified on the DTAFLD tag, but they have different values. The "DATAVAR" value will become the panel field name. It is recommended that you code both attributes with the same value.

Explanation: None.

User Response: Change the NAME attribute to the same value as the DATAVAR attribute.

ISPF Messages

ISPC732 **ISPC732W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbb"*. The *"AUTOTAB=YES"* attribute is in conflict with *"USAGE"* on the *ccccccc* tag. AUTOTAB will be changed to *"NO"*.

Explanation: None.

User Response: Change AUTOTAB=YES to AUTOTAB=NO, or remove the AUTOTAB attribute from the DTL source.

ISPC733 **ISPC733W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbb"*. The *"ccccccc"* attribute is not valid without a valid *"DEPTH"* value. The *"ccccccc"* attribute will be ignored.

Explanation: None.

User Response: Remove the *ccccccc* attribute from the DTL source.

ISPC734 **ISPC734W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbb"*. The *"EXTEND"* attribute has already been specified for this panel or *"EXTEND"* is not valid in this tag nesting configuration. The *"EXTEND"* attribute will be ignored.

Explanation: None.

User Response: Remove the EXTEND attribute from the DTL source.

ISPC735 **ISPC735W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbb"*. The *"SCROLL"* attribute has already been specified for this panel either on an enclosing AREA tag or on another DA tag. The *"SCROLL"* attribute for this DA tag will be ignored.

Explanation: None.

User Response: Remove the SCROLL attribute from the DTL source.

ISPC736 **ISPC736E: Error.** Line *aaaaaaaa* of file *"bbbbbbbb"*. The *"ccccccc"* attribute has been specified for this panel and is in conflict with table display. The panel will not be saved.

Explanation: None.

User Response: Remove the *ccccccc* attribute from the DTL source.

ISPC737 **ISPC737W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbb"*. Both *"PAD"* and *"PADC"* attributes have been specified on the *"ccccccc"* tag. The value of *"PADC"* will be used.

Explanation: None.

User Response: Remove either the PAD or PADC attribute from the DTL source.

ISPC738A **ISPC738AW: Warning.** Line *aaaaaaaa* of file *"bbbbbbbb"*. The *"EXTEND=ON"* attribute specification is not valid on a *"ccccccc"* tag within a horizontal region. The *"EXTEND"* attribute will be ignored.

Explanation: None.

User Response: Remove the EXTEND attribute from the DTL source.

ISPC738B **ISPC738BW: Warning.** Line *aaaaaaaa* of file *"bbbbbbbb"*. The *"EXTEND=ON"* attribute specification is not valid on a *"ccccccc"* tag formatted horizontally. The *"EXTEND"* attribute will be ignored.

Explanation: None.

User Response: Remove the EXTEND attribute from the DTL source.

ISPC738C **ISPC738CW: Warning.** Line *aaaaaaaa* of file *"bbbbbbbb"*. The *"EXTEND=FORCE"* attribute specification is coded on a *"ccccccc"* tag within a horizontal region. The resulting panel will not display unless the extendable portion of the panel is below all other fields or text on the panel.

Explanation: None.

User Response: Verify the panel by displaying it using ISPF Dialog Test.

ISPC738D **ISPC738DW: Warning.** Line *aaaaaaaa* of file *"bbbbbbbb"*. The *"EXTEND=FORCE"* attribute specification is coded on a *"ccccccc"* tag formatted horizontally. The resulting panel will not display unless the extendable portion of the panel is below all other fields or text on the panel.

Explanation: None.

User Response: Verify the panel by displaying it using ISPF Dialog Test.

ISPC739 **ISPC739W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbb"*. The *"ccccccc"* attribute has been specified on a previous tag. The *"ccccccc"* attribute value *"ddddddd"* will be reset to blank.

Explanation: None.

User Response: Remove the *ccccccc* attribute from the DTL source or change the *ddddddd* value to remove the conflict.

ISPC740 **ISPC740W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbb"*. The *"ccccccc"* tag *"PMTWIDTH"* value is too small to allow for leader dots.

Explanation: None.

User Response: Increase the value for prompt width so that a minimum of two leader dots can be formatted following the prompt text.

ISPC741 **ISPC741W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbb"*. A DIVIDER within a horizontal region with GUTTER=1 must specify TYPE=NONE. TYPE is reset to NONE.

Explanation: A divider which specifies TYPE=SOLID requires a minimum of two spaces to provide for the divider attribute byte and the divider character.

User Response: Either increase the GUTTER value to 2 or change the TYPE value to NONE.

ISPC742 **ISPC742W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbb"*. The NOENDATTR attribute on the DIVIDER tag is valid only when the GUTTER value is 2 or more. NOENDATTR is ignored.

Explanation: When NOENDATTR is specified, the ending attribute for the divider is not included. The starting attribute for a divider is always used. A divider must be more than one character in width to use NOENDATTR.

User Response: Either increase the GUTTER value or remove the NOENDATTR attribute from the DIVIDER tag.

ISPC743 **ISPC743W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbb"*. *DEPTH="ccccccc"* will exceed the remaining panel depth due to prompt text formatting. DEPTH will be reset to *"ddddddd"*.

Explanation: The prompt text provided has been formatted on more than one line causing the remaining available panel depth to be reduced.

User Response: Either increase the prompt width to

format the prompt on one line or change the panel depth to compensate for the multiple line prompt.

ISPC744 **ISPC744W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbb"*. There is insufficient remaining depth to format a scrollable area.

Explanation: A scrollable area requires a minimum of two panel body lines.

User Response: If possible, increase the panel depth.

ISPC745 **ISPC745W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbb"*. The *"CHOICECOLS=ccccccc"* value of the SELFLD tag does not provide enough columns to sub-divide all of the CHOICE tags. The remaining CHOICE tags will be placed in the last column available for the current SELFLD tag.

Explanation: None.

User Response: Increase the specified number of choice columns.

ISPC746 **ISPC746E: Error.** Line *aaaaaaaa* of file *"bbbbbbbb"*. The *"CHOICECOLS=ccccccc"* value of the SELFLD tag specified more scrollable columns than the *"CHOICEDEPTH=ddddddd"* value could create from the number of CHOICE tags processed. This condition results in a mismatch between defined scrollable areas in the panel)BODY section and)AREA sections generated. The panel will not be saved.

Explanation: None.

User Response: The source file can be changed to either:

- Reduce the choice depth so that the available choices are distributed to all of the specified choice columns.
- Reduce the choice columns so that at least one choice is formatted for each choice column.

ISPC747 **ISPC747W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbb"*. The *"CHOICECOLS=ccccccc"* value of the SELFLD tag specified more columns than the *"CHOICEDEPTH=ddddddd"* value could create from the number of CHOICE tags processed.

Explanation: None.

User Response: The source file can be changed to either:

- Reduce the choice depth so that the available choices are distributed to all of the specified choice columns.

ISPF Messages

- Reduce the choice columns so that at least one choice is formatted for each choice column.

ISPC748 **ISPC748W: Warning. Line *aaaaaaaa* of file *bbbbbbbb*. The panel line *ccccccc* contains EXPAND characters which cannot operate due to horizontal region formatting.**

Explanation: The expand processing of display cannot operate when attribute bytes are found on a line following the expand characters. Panel lines formatted as part of horizontal regions contain attribute bytes for limiting the region width and for alignment of horizontal data.

User Response: Remove the EXPAND characters from line *ccccccc* or revise the panel to use only vertical region formatting.

ISPC749 **ISPC749W: Warning. Line *aaaaaaaa* of file *bbbbbbbb*. The NOENDATTR attribute on the DIVIDER tag is valid only when the DIVIDER tag is placed within a horizontal region. NOENDATTR is ignored.**

Explanation: The NOENDATTR attribute only applies to DIVIDER tag formatting within a horizontal region. NOENDATTR does not apply in vertical regions or when DIVIDER is used outside of the REGION tag.

User Response: Remove the NOENDATTR attribute from this use of the DIVIDER tag.

ISPC750 **ISPC750W: Warning. Line *aaaaaaaa* of file *bbbbbbbb*. The special ENTITY *ccccccc* requires *ddddddd* bytes of space. The DTL source file has specified *"PMTWIDTH"* as *eeeeeee* bytes.**

Explanation: None.

User Response: Increase the value for prompt width to *ddddddd* to provide adequate prompt formatting space.

ISPC751 **ISPC751W: Warning. Line *aaaaaaaa* of file *bbbbbbbb*. The ENTITY name *ccccccc* maximum length is *ddddddd* byte(s). *ccccccc* will be truncated to *eeeeeee*.**

Explanation: ENTITY names must follow these rules for name length:

- Parameter entities&colon 1-7.
- System entities&colon 1-8.
- Other entities&colon 1-17.

User Response: Correct the ENTITY name to follow the listed rules.

ISPC752 **ISPC752W: Warning. Line *aaaaaaaa* of file *bbbbbbbb*. The ENTITY name *ccccccc* minimum length is *ddddddd* character(s). *ccccccc* will be set to blank.**

Explanation: ENTITY names must follow these rules for name length:

- Parameter entities&colon 1-7.
- System entities&colon 1-8.
- Other entities&colon 1-17.

User Response: Correct the ENTITY name to follow the listed rules.

ISPC753 **ISPC753W: Warning. Line *aaaaaaaa* of file *bbbbbbbb*. The ENTITY name *ccccccc* contains character(s) which are not valid. *ccccccc* will be set to blank. Parameter and System entity names must be from 1 to 8 bytes. Other entity names can be from 1 to 17 bytes. One or more underscore ("*_*") bytes must be included in names longer than 8 bytes. The underscore is not valid in names of 1 to 8 bytes.**

Explanation: ENTITY names must follow these rules:

- Length.
 - Parameter entities: 1-8.
 - System entities: 1-8.
 - Other entities: 1-17.
- The first character must be A-Z, a-z, @, #, or \$.
- Remaining characters, if any, can be A-Z, a-z, 0-9, @, #, or \$.
- - When an 'other' entity name is longer than 8 bytes, one or more of the remaining characters must be an underscore ("*_*").
 - When an 'other' entity name is 1 - 8 bytes, the underscore ("*_*") is not considered a valid character.
- Entity-names are case-sensitive.

User Response: Correct the ENTITY name to follow the listed rules.

ISPC760 **ISPC760W: Warning. Line *aaaaaaaa* of file *bbbbbbbb*. Unable to create a new cursor group for the specification of *"CSRGRP=YES"*. CSRGRP is reset to *"NO"*.**

Explanation: The total number of cursor groups is limited to 99. Each specification of CSRGRP=YES causes ISPDTLC to create a new cursor group. All of the available cursor group numbers from 1 to 99 have been used and no additional group numbers are available.

User Response: Reduce the number of occurrences of

CSRGRP=YES or combine fields currently specified as separate cursor groups.

ISPC761 **ISPC761W: Warning. Line aaaaaaaa of file "bbbbbbbb". The ")LIST" section entries referenced by "LISTREF=ccccccc" are not found. The LISTREF attribute is ignored. Panel formatting may be affected.**

Explanation: The ")LIST" section name specified by the LISTREF attribute must be created by a previous SELFLD tag which includes CHOICE tags to define the ")LIST" section entries.

User Response: Correct the LISTREF specification to refer to a previously defined SELFLD tag group, or include CHOICE tags within the current SELFLD tag to define a new ")LIST" section.

ISPC762 **ISPC762W: Warning. Line aaaaaaaa of file "bbbbbbbb". The ")LIST" section name specified by "LISTREF=ccccccc" is a duplicate of a previous name. "ccccccc" is changed to "ddddddd". Panel formatting may be affected.**

Explanation: The ")LIST" section name specified by the LISTREF attribute on a SELFLD tag which includes CHOICE tags is a duplicate of a previously defined ")LIST" section name.

User Response: Correct the LISTREF specification to specify a unique name, or remove the LISTREF attribute from the current SELFLD tag.

ISPC763 **ISPC763W: Warning. Line aaaaaaaa of file "bbbbbbbb". The CHOICE text "ccccccc" is too long to display as one line. ISPF does not support multiple lines of panel text for "LISTTYPE=ddddddd". The LISTTYPE attribute is ignored. This SELFLD tag group will be formatted as a numbered single-choice list.**

Explanation: Multiple lines of text for a CHOICE tag are not supported for GUI mode panel display. The LISTTYPE attribute on the associated SELFLD tag is ignored. A numbered single-choice selection list is created by default.

User Response: Reduce the CHOICE text length to fit within the available SELFLD width, or increase the SELFLD width to allow for longer CHOICE text.

ISPC764 **ISPC764W: Warning. Line aaaaaaaa of file "bbbbbbbb". The CHOICE text formatting width of "ccccccc" exceeds the ISPF maximum for "LISTTYPE=ddddddd". The formatting width is reset to "99".**

Explanation: The CHOICE text formatting width is calculated based on the SELWIDTH value, allowing for the entry width and required panel attribute bytes.

User Response: No action is necessary. To eliminate this message, reduce the SELWIDTH attribute value on the enclosing SELFLD tag.

ISPC765 **ISPC765W: Warning. Line aaaaaaaa of file "bbbbbbbb". The specified "LISTDEPTH=ccccccc" value may cause part of the listbox choices or the horizontal scroll bar for the listbox to overlay other panel fields. Review the resulting panel for proper format.**

Explanation: ISPF displays a listbox in GUI mode with an additional panel line for a horizontal scroll bar. The LISTDEPTH value "ccccccc" will place part of the listbox section below the last line of CHOICE description. These lines may overlay subsequent panel fields.

User Response: Review the resulting panel by displaying it in GUI mode. If other panel fields are affected, reduce the LISTDEPTH value in the DTL source file and reconvert the panel.

ISPC766 **ISPC766W: Warning. Line aaaaaaaa of file "bbbbbbbb". There is only one formatted CHOICE text line which may cause the horizontal scroll bar for the listbox to overlay other panel fields. Review the resulting panel for proper format.**

Explanation: ISPF displays a listbox in GUI mode with an additional panel line for a horizontal scroll bar. The listbox display will place the horizontal scroll bar below the line of CHOICE description. This may overlay subsequent panel fields.

User Response: Review the resulting panel by displaying it in GUI mode. If other panel fields are affected, provide an additional blank line in the DTL source file (possibly adding a DIVIDER tag) and reconvert the panel.

ISPF Messages

ISPC767A **ISPC767AW: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. A CHOICE tag that specified the UNAVAIL attribute has also specified the RP (Reference Phrase) tag as part of the CHOICE tag text. ISPF does not support Reference Phrases on unavailable choices. The UNAVAIL (and UNAVAILMAT) attribute specifications are ignored.

Explanation: ISPF does not support Reference Phrases on unavailable choices. The conversion utility will format the Reference Phrase and will ignore the UNAVAIL (and UNAVAILMAT) attribute specifications.

User Response: If unavailable choice support is required for this CHOICE, remove the RP (Reference Phrase) tag specification from the choice text and reconvert the panel. If unavailable choice support is not required, remove the UNAVAIL (and UNAVAILMAT) attributes from this CHOICE tag.

ISPC767B **ISPC767BW: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. A CHOICE tag that specified the UNAVAIL attribute has also specified the HP (Emphasized Text) tag as part of the CHOICE tag text. ISPF does not support Emphasized Text on unavailable choices. The UNAVAIL (and UNAVAILMAT) attribute specifications are ignored.

Explanation: ISPF does not support Emphasized Text on unavailable choices. The conversion utility will format the Emphasized Text and will ignore the UNAVAIL (and UNAVAILMAT) attribute specifications.

User Response: If unavailable choice support is required for this CHOICE, remove the HP (Emphasized Text) tag specification from the choice text and reconvert the panel. If unavailable choice support is not required, remove the UNAVAIL (and UNAVAILMAT) attributes from this CHOICE tag.

ISPC768 **ISPC768W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. A CHOICE tag that is used to build a COMBO list cannot have user defined *"cccccccc"* tag text. The *"cccccccc"* tag is ignored.

Explanation: The conversion utility automatically generates Point-and-Shoot entries for CHOICES that are part of a COMBO list.

User Response: Remove any Emphasized Text (HP), Reference Phrase (RP), or Point-and-Shoot (PS) tag definitions within CHOICE tag.

ISPC769 **ISPC769W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The number of SELFLD tags containing unavailable choices has exceeded the maximum of 36. Remaining SELFLD tags will use the *"ZS#"* prefix for variable names used for unavailable choice text fields. If duplicate field names result, the panel cannot be displayed.

Explanation: The number of SELFLD tags containing unavailable choices has exceeded the maximum that can be successfully created by the conversion utility.

User Response: Revise the panel to limit the number of SELFLD tags with unavailable choices to 36.

ISPC770 **ISPC770W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The *cccccccc* tag text *"dddddddd"* is not valid when the TYPE=NONE attribute is either specified or defaulted. The text is ignored.

Explanation: Text on the *cccccccc* tag is in conflict with the TYPE=NONE attribute which is defined as creating a blank divider line.

User Response: Remove the text from the *cccccccc* tag, or change the TYPE attribute.

ISPC771 **ISPC771W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The *cccccccc* tag text *"dddddddd"* is not valid unless the FORMAT attribute is specified. The text is ignored.

Explanation: Text on the *cccccccc* tag is not accepted unless the FORMAT attribute is also specified.

User Response: Remove the text from the *cccccccc* tag, or add the FORMAT attribute.

ISPC772 **ISPC772W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The *cccccccc* tag text *"dddddddd"* is not valid within a horizontal region. The text is ignored.

Explanation: Text on the *cccccccc* tag is not accepted within a horizontal region.

User Response: Remove the text from the *cccccccc* tag.

ISPC773 **ISPC773W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The CHDIV tag is not supported for selection lists that specify LISTTYPE=COMBO. The tag is syntax checked but will be ignored during panel formatting.

Explanation: The LISTTYPE=COMBO specification creates a single input field in the panel)BODY section. Divider lines can only be used within choice lists

formatted in the panel)BODY section.

User Response: Remove the CHDIV tag from the selection list.

ISPC774 **ISPC774W: Warning.** Line "aaaaaaaa" of file "bbbbbbbb". The "ccccccc" tag attribute "ddddddd" is not valid when the ccccccc tag is used with the eeeeeeee tag. "ddddddd=ffffff" will not be used.

Explanation: The dddddddd attribute of the cccccccc tag is restricted. The dddddddd attribute is not valid with the eeeeeeee tag.

User Response: Remove the dddddddd attribute from the ccccccc tag definition.

ISPC775 **ISPC775W: Warning.** Line aaaaaaaaa of file "bbbbbbbb". The ccccccc tag attribute "ddddddd" is not valid when the ccccccc tag is used within a horizontal region. dddddddd will not be used.

Explanation: The dddddddd attribute is not valid with the &s6 tag.

User Response: Remove the dddddddd attribute from the ccccccc tag definition.

ISPC776 **ISPC776W: Warning.** Line aaaaaaaaa of file "bbbbbbbb". The definition for "IMAPNAME=ccccccc" specifying a blank text string is not valid. Image "ccccccc" will not be used.

Explanation: Each image definition must map to a unique text string.

User Response: Remove the image definition attributes from the tag definition, or change the PS tag to enclose a non-blank text string.

ISPC777 **ISPC777W: Warning.** Line aaaaaaaaa of file "bbbbbbbb". The definition for "IMAPNAME =ccccccc" specifying the text "ddddddd" is a duplicate of a previously defined image text string. Image "ccccccc" will not be used.

Explanation: Each image definition must map to a unique text string.

User Response: Remove the image definition attributes from the tag definition. or change the text enclosed by the PS tag.

ISPC778 **ISPC778W: Warning.** There is a conflict in the use of "aaaaaaaa" as a panel data set with "bbbbbbbb". "bbbbbbbb is being reset to "ccccccc".

Explanation: The converted panel can be displayed only after it has been written to the output panel file.

User Response: Either provide a valid file name in place of "aaaaaaaa" or remove the selection for the "Display converted panels" or "Display converted panels in a window" option.

ISPC779 **ISPC779W: Warning.** The invocation option NODSNCHK has been changed to DSNCHK because an EXECIO error occurred.

Explanation: DSNCHK will cause a full validation of all input and output file names to assist in correcting the EXECIO error.

User Response: Use the NODSNCHK option again after the EXECIO error is resolved.

ISPC801 **ISPC801E: Error.** Line aaaaaaaaa of file "bbbbbbbb". ccccccc and dddddddd tags were not matched.

Explanation: This message is issued during processing of a DL (definition List) or PARML (Parameter list) tag set when the nested term and description tags are not matched.

User Response: Make sure that each ccccccc tag has a matching dddddddd tag.

ISPC802 **ISPC802E: Error.** Line aaaaaaaaa of file "bbbbbbbb". Processing for tag ccccccc has generated attribute "ddddddd" which is outside of the range of attribute values available to ISPD TLC. Panel will not be saved.

Explanation: Scrollable areas, dynamic areas, graphic areas, and ISPD TLC generated expand characters use characters in the range of X'00' through X'2f'. The panel in process requires more characters than are available.

User Response: Reduce the number of special formatting areas on the panel.

ISPC803 **ISPC803E: Error.** The list nesting level exceeds the maximum allowed (aaaaaaaa) for the bbbbbbbb tag.

Explanation: ISPD TLC allows nesting of UL, SL, and OL to a maximum of 10 levels. The current tag source exceeds the maximum nesting allowed.

User Response: Reduce the nested tags to a maximum of 10 levels.

ISPF Messages

ISPC804 **ISPC804E: Error. Line aaaaaaaa of file "bbbbbbbb". The maximum number (ccccccc) of panel attributes has been exceeded. Panel will not be saved.**

Explanation: ISPF allows a maximum of ccccccc attributes on this panel.

User Response: Reduce the number of requested attributes to a maximum of ccccccc.

ISPC805 **ISPC805W: Warning. Line aaaaaaaa of file "bbbbbbbb". Multiple LSTFLD tag (and nested tags) will be syntax checked only and will be discarded by the conversion utility.**

Explanation: ISPD TLC allows only one LSTFLD tag group on a panel. The first group found will be used; remaining groups will be discarded.

User Response: Provide only one LSTFLD tag group for each panel.

ISPC806 **ISPC806E: Error. Line aaaaaaaa of file "bbbbbbbb". Conflict between attribute being generated for the "ccccccc" tag and a previously defined attribute. Panel will not be saved.**

Explanation: There is a duplicate of the current attribute specified on an ATTR or DA tag, or as the EXPAND characters for the panel.

User Response: Review the use of the ATTRCHAR attribute (ATTR tag), USERMOD and DATAMOD attributes (DA tag) and panel expand characters. Choose values above x'2F' for these items.

ISPC807 **ISPC807E: Error. Line aaaaaaaa of file "bbbbbbbb". Conflict between the "ccccccc" attribute specified on the "ddddddd" tag and either a previously defined attribute or a reserved attribute. Panel will not be saved.**

Explanation: ISPD TLC uses characters in the range of X'00' through X'2f' as panel attribute bytes. An attribute specified in the DTL source on the "ddddddd" tag is either:

- In conflict with an attribute required by ISPD TLC, or
- A duplicate of an attribute previously specified.

User Response:

1. If the message is issued during conversion of an ISPF product panel (FLMxxxxx, ISPxxxxx, or ISRxxxxx), specify the keylist application id as ISR and rerun the conversion.
2. In other cases, make one of the following changes and rerun the conversion.

- Change the indicated attribute to a different character.
- Specify ATTRUSE=YES or ATTRUSE=ALL on the PANEL tag.

Explanation: None.

User Response: Change the indicated attribute to a different character.

ISPC809 **ISPC809E: Error. Line aaaaaaaa of file "bbbbbbbb". A scrollable area has been defined without any lines. A null)AREA section is not valid for ISPF. Panel will not be saved.**

Explanation: None.

User Response: Review the log for other errors that may have caused data for the scrollable area to be discarded.

ISPC850 **ISPC850W: Warning. Line aaaaaaaa of file "bbbbbbbb". "ccccccc=ddddddd" on the "eeeeeee" tag is an ISPF extension to the tag language and will not be portable to the OS/2 Dialog Manager.**

Explanation: None.

ISPC851 **ISPC851W: Warning. Line aaaaaaaa of file "bbbbbbbb". A help panel has been defined with either a Width > 76 and/or a Depth > 22 and will require a device larger than 24x80 for display of the panel. The width must allow for 4 bytes and the depth must allow 2 lines for pop-up borders on help panels.**

Explanation: None.

ISPC852 **ISPC852W: Warning. Line aaaaaaaa of file "bbbbbbbb". The "ccccccc" tag is an ISPF extension to the tag language and will not be portable to the OS/2 Dialog Manager.**

Explanation: None.

ISPC853 **ISPC853W: Warning. Line aaaaaaaa of file "bbbbbbbb". Multiple AREA tags on a panel are an ISPF extension to the tag language and will not be portable to the OS/2 Dialog Manager.**

Explanation: None.

ISPC854 **ISPC854W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. *cccccccc* tags within a HELP panel are an ISPF extension to the tag language and will not be portable to the OS/2 Dialog Manager.

Explanation: This message is self-explanatory.

ISPC855 **ISPC855W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. *"cccccccc"* on the *"dddddddd"* tag is an ISPF extension to the tag language and will not be portable to the OS/2 Dialog Manager.

Explanation: None.

ISPC856 **ISPC856W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The panel width *"cccccccc"* will not fit within the output file record length of *"dddddddd"*. The WIDTH of panels being converted with the NOPREP option must be less than or equal to the record length of the output panel file.

Explanation: None.

User Response: Reduce the value of the WIDTH attribute or specify an output panel file with a larger record length.

ISPC858 **ISPC858W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The *"cccccccc"* tag text longer than *"dddddddd"* bytes is accepted as an ISPF extension to the tag language. It will not be portable to the OS/2 Dialog Manager.

Explanation: None.

ISPC859 **ISPC859W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The LSTFLD tag (and nested LSTCOL tags) will be formatted at the bottom of the panel for use by ISPF table display.

Explanation: None.

User Response: This message is issued when the LSTFLD tag group is followed by other panel tags.

ISPC860 **ISPC860W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. *"cccccccc=dddddddd"* on the *"eeeeeeee"* tag is an ISPF extension to the tag language and will not be portable to the OS/2 Dialog Manager. The *ffffff* panel will be formatted using a maximum *gggggggg* of *"hhhhhhhhh"*. The *gggggggg* value will be reset after formatting is complete to the actual *gggggggg* required.

Explanation: None.

ISPC861 **ISPC861W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The value *"cccccccc"* specified for *"dddddddd"* on the *"eeeeeeee"* tag contains characters supported as an ISPF extension to the tag language and will not be portable to the OS/2 Dialog Manager.

Explanation: None.

ISPC862 **ISPC862W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The variable name *"cccccccc"* specified for *"dddddddd"* on the *"eeeeeeee"* tag is an ISPF extension to the tag language and will not be portable to the OS/2 Dialog Manager.

Explanation: None.

ISPC863 **ISPC863W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. *"cccccccc=dddddddd"* on the *"eeeeeeee"* tag is an ISPF extension to the tag language and will not be portable to the OS/2 Dialog Manager. The *ffffff* panel will be formatted using a maximum *gggggggg* of *"hhhhhhhhh"*.

Explanation: None.

ISPC864 **ISPC864W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The *"cccccccc"* tag attribute *"dddddddd=eeeeeeee"* is being applied to panel *ffffff*. The panel will be formatted using a maximum *gggggggg* of *"hhhhhhhhh"*.

Explanation: None.

ISPC865 **ISPC865W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The comment *"cccccccc"* does not conform to OS/2 DM rules for the use of the *'-'* character. This comment is accepted as an ISPF extension to the tag language, but will not be portable to the OS/2 Dialog Manager.

Explanation: The rules for DTL comments allow only single *"-"* (dash) characters within the comment text.

ISPF Messages

Multiple contiguous "-" (dash) characters indicate comment continuation text.

User Response: Revise the comment to use only single "-" (dash) characters within the comment text.

ISPC866 **ISPC866W: Warning. Line aaaaaaaa of file "bbbbbbbb". The GML source "ccccccc" does not conform to OS/2 DM rules for comment continuation. This syntax is accepted as an ISPF extension to the tag language, but will not be portable to the OS/2 Dialog Manager.**

Explanation: Each line of a continued comment should begin with the characters "--". ISPD TLC treats all lines following an open comment delimiter (" ") is encountered.

User Response: Correct the comment syntax by placing the comment continuation characters "--" at the start of each comment continuation line.

ISPC867 **ISPC867W: Warning. Line aaaaaaaa of file "bbbbbbbb". The use of the "ccccccc" tag and its attributes in this context is an ISPF extension to the Dialog Tag Language and will not be portable to the OS/2 Dialog Manager.**

Explanation: ISPF supports the use of Reference Phrase on panels created from both the HELP and PANEL tags. The RP tag is not supported on panels created from the PANEL tag by the OS/2 Dialog Manager.

ISPC868 **ISPC868E: Error. Line aaaaaaaa of file "bbbbbbbb". The use of the "ccccccc" tag is limited to the first 99 scrollable areas. Panel will not be saved.**

Explanation: The naming structure for Reference Phrases is ZRPxyyy, and the naming structure for point-and-shoot entries is ZPSxyyy, where xx is 00 for the panel body, or 01 - 99 for the number of the scrollable area, and yyy is the number of the entries within area xx. The maximum number of scrollable areas that can contain Reference Phrases or point-and-shoot entries is 99.

User Response: Remove any RP or PS tags found in the scrollable areas that are beyond the defined limit.

ISPC869 **ISPC869E: Error. Line aaaaaaaa of file "bbbbbbbb". The maximum of 999 uses of the "ccccccc" tag for a ddddddd panel section has been exceeded. Panel will not be saved.**

Explanation: The naming structure for Reference Phrases is ZRPxyyy, and the naming structure for point-and-shoot entries is ZPSxyyy, where xx is 00 for

the panel body, or 01 - 99 for the number of the scrollable area, and yyy is the number of the Reference Phrase or point-and-shoot entry within area xx. The maximum number of entries within any area xx is 999.

User Response: Remove any RP or PS tags found in the ddddddd section that are beyond the defined limit.

ISPC901 **ISPC901W: Warning. Line aaaaaaaa of file "bbbbbbbb". Horizontal AREA formatting has reached the panel width. Tags following this AREA will be formatted below the current AREA(s), beginning at the left edge of the panel.**

Explanation: An AREA tag specifying DIR=HORIZ is in process, and the width of the AREA matches or exceeds the PANEL width. ISPD TLC will format the current AREA as specified. The next AREA or other tag will continue formatting at the left edge of the panel.

User Response: Review the WIDTH and DIR attributes on the AREA tags. The combined width of horizontally formatted AREAs cannot exceed the PANEL width.

ISPC908 **ISPC908W: Warning. Line aaaaaaaa of file "bbbbbbbb". CHECKI tag syntax error. CHECKI tag will be discarded.**

Explanation: This message is self-explanatory.

User Response: Refer to previous log messages for more information about the syntax errors.

ISPC909 **ISPC909W: Warning. Line aaaaaaaa of file "bbbbbbbb". CHECKI can be specified only once. First specification will be used.**

Explanation: This message is self-explanatory.

User Response: ISPD TLC supports only one CHECKI tag within each CHECKL definition.

ISPC910 **ISPC910W: Warning. Line aaaaaaaa of file "bbbbbbbb". Variable by the same name "ccccccc" was already defined.**

Explanation: None.

User Response: Each VARCLASS name and VARDCL name must be unique.

ISPC911 **ISPC911W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The VARCLASS attribute *cccccccc* requires a *dddddddd* value. The conversion process will continue but defaults may be affected. You should update your tag source file because the *cccccccc* attribute is required for the OS/2 Dialog Manager.

Explanation: None.

User Response: Add the missing information to the TYPE=*cccccccc* attribute.

ISPC912 **ISPC912W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. *cccccccc* is a required attribute when TYPE=*dddddddd*.. CHECKI tag will be ignored.

Explanation: The required attribute *cccccccc* is not present.

User Response: Add the required attribute information.

ISPC913 **ISPC913W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. *cccccccc* attribute value does not correspond with *dddddddd*.. CHECKI tag will be ignored.

Explanation: The PARM2 data is not valid for TYPE=CHARS.

User Response: Specify one of the listed character strings as documented in *DTL Guide and Reference*

ISPC914 **ISPC914W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. PARM1 is larger than PARM2. CHECKI tag will be ignored.

Explanation: PARM2 specifies the high bound of a RANGE check and must be larger than the low bound specified by PARM1.

User Response: Adjust the range values so that PARM2 is larger than PARM1.

ISPC915 **ISPC915W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Attribute ignored, not needed for TYPE=*cccccccc*..

Explanation: None.

User Response: Remove the extra attribute and value.

ISPC916 **ISPC916W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The *cccccccc*=*"dddddddd"* attribute value is not supported in the conversion process. Attribute *cccccccc* will be set to the default *"eeeeeee"*.

Explanation: None.

User Response: Change *dddddddd* to a valid value.

ISPC918 **ISPC918W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. *cccccccc* keyword was not specified. *cccccccc* will be set to *dddddddd*..

Explanation: None.

User Response: Provide the *cccccccc* attribute with an appropriate value.

ISPC919 **ISPC919W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The NAME = *"cccccccc"* keyword has not been defined by the *dddddddd* tag.

Explanation: A VARDCL tag has referenced an undefined VARCLASS tag.

User Response: Provide the missing VARCLASS definition.

ISPC921 **ISPC921W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. More than 100 items found in PARM2 attribute value for "TYPE=VALUES" on the CHECKI tag. First 100 items will be used.

Explanation: None.

User Response: Reduce the number of values to a maximum of 100.

ISPC922 **ISPC922W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The attributes PARM2 and PARM3 contain duplicate values on the CHECKI tag. The PARM3 value is ignored.

Explanation: TYPE=INCLUDE on the CHECKI tag must have a different value for PARM3 than the value provided for PARM2.

User Response: Provide unique PARM2 and PARM3 values.

ISPF Messages

ISPC930 **ISPC930W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. A VARLIST tag has been found within the PANEL tag. The VARLIST found within the PANEL tag will be accepted for this conversion. You should update your tag source file to change the VARLIST tag to occur outside the PANEL tag. VARLIST within PANEL is not portable to the OS/2 Dialog Manager.

Explanation: None.

User Response: Move the VARLIST tag group outside of the PANEL definition.

ISPC931 **ISPC931W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. A VARDCL tag has been found both under the scope of !DOCTYPE and within the PANEL tag for variable *"cccccccc"*. The VARDCL found within the PANEL tag will be ignored. You should update your tag source file to remove the VARDCL for *"cccccccc"* located within the PANEL tag as this is not portable to the OS/2 Dialog Manager.

Explanation: None.

User Response: Remove the VARLIST tag group within the PANEL definition.

ISPC932 **ISPC932W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. A VARDCL tag has been found within the PANEL tag for variable *"cccccccc"*. The VARDCL(s) found within the PANEL tag will be accepted for this conversion. You should update your tag source file to change all VARDCL(s) to occur outside the PANEL tag. VARDCL within PANEL is not portable to the OS/2 Dialog Manager.

Explanation: None.

User Response: Move the VARLIST tag group outside of the PANEL definition.

ISPC933 **ISPC933W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. "TYPE=NUMERIC" has been specified on the CHECKI tag and will be accepted for this conversion. "TYPE=NUMERIC" should be removed from the CHECKI tag and placed on the enclosing VARCLASS tag for portability to the OS/2 Dialog Manager.

Explanation: None.

User Response: Remove the TYPE=NUMERIC coding from the CHECKI tag and add it to the enclosing VARCLASS tag.

ISPC934 **ISPC934W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. "TYPE=NUMERIC" has been specified both on the CHECKI tag and the VARCLASS tag. The entry on the CHECKI tag will be ignored for this conversion. "TYPE=NUMERIC" should be removed from the CHECKI tag for portability to the OS/2 Dialog Manager.

Explanation: None.

User Response: Remove the TYPE=NUMERIC coding from the CHECKI tag.

ISPC935 **ISPC935W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. "USAGE" has been specified on the XLATL tag. This attribute has been removed from the tag language. "USAGE" should be determined by the referencing tag (explicit or implied). "USAGE" should be removed from the XLATL tag for portability to the OS/2 Dialog Manager.

Explanation: None.

User Response: Remove the USAGE coding from the XLATL tag.

ISPC936 **ISPC936W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. "VARDCL" was not found for variable *cccccccc* specified on the *dddddddd* tag. Each variable must be specified by a "VARDCL" tag for portability to the OS/2 Dialog Manager.

Explanation: None.

User Response: Add a VARDCL tag for each panel variable.

ISPC937 **ISPC937W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. A VARLIST tag has been found both outside and within the PANEL tag. The conversion utility does not support a mixed occurrence of VARLIST. The VARLIST found within the PANEL tag will be ignored for this conversion. You should update your tag source file to remove the VARLIST tags found within the PANEL tag. VARLIST within PANEL is not portable to the OS/2 Dialog Manager.

Explanation: None.

User Response: Remove the VARLIST tag group within the PANEL definition.

ISPC938 **ISPC938W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. A VARDCL tag has been found within the PANEL tag for variable *"cccccccc"*. The VARDCL found within the PANEL tag will be ignored because a VARLIST was found outside the PANEL tag. You should update your tag source file to remove the complete VARLIST/VARDCL tag group located within the PANEL tag as this is not portable to the OS/2 Dialog Manager.

Explanation: None.

User Response: Remove the VARLIST tag group within the PANEL definition.

ISPC939 **ISPC939W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The VARCLASS attribute specified on a VARDCL tag found within the PANEL tag will be ignored. VARDCL within the panel tag is supported for prior release level attributes only. The VARCLASS attribute is valid only on VARDCL tags found outside the PANEL tag. You should update your tag source file to remove the complete VARLIST/VARDCL tag group located within the PANEL tag as this is not portable to the OS/2 Dialog Manager.

Explanation: None.

User Response: Remove the VARLIST tag group within the PANEL definition.

ISPC940 **ISPC940E: Error.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. The VARCLASS tag to define *"cccccccc"* must precede the VARDCL tag which references *"cccccccc"*.

Explanation: None.

User Response: Place the VARCLASS tag for *cccccccc* before the VARDCL tag which references it.

ISPC941 **ISPC941E: Error.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. All VARCLASS tags must precede any VARLIST tag in the source file.

Explanation: None.

User Response: Place all VARCLASS tags before any VARLIST tag group.

ISPC943 **ISPC943W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. Length=*"cccccccc"* must be an even number for *"TYPE=DBCS"*. *"cccccccc"* has been changed to *"dddddddd"*.

Explanation: None.

User Response: Change the *cccccccc* value to an even number.

ISPC944 **ISPC944W: Warning.** Line *aaaaaaaa* of file *"bbbbbbbbb"*. *cccccccc="dddddddd"* must be an even number for field *"eeeeeeee"* which is specified as DBCS. *"dddddddd"* has been changed to *"ffffff"*.

Explanation: None.

User Response: Change the *dddddddd* value to an even number.

ISPC970 **ISPC970W: Warning.** ISPD TLC received a non-zero return code from EXECIO while processing *'aaaaaaaa'*. Refer to the *'bbbbbbbbb'* documentation for an explanation of EXECIO return code *'cccccccc'*

Explanation: This message is self-explanatory.

User Response: Correct the condition causing return code *cccccccc*.

ISPC971 **ISPC971E: Error.** Check file allocation for *'aaaaaaaa..'*.

Explanation: The ISPD TLC EXECIO write routine has encountered an error on data set *'aaaaaaaa'*. This message will be followed by message ISPC972 if space allocated is equal to space used. This message will be followed by message ISPC973 if directory blocks allocated is equal to directory blocks used.

User Response: Reallocate the data set name with more space or with additional directory blocks.

ISPC972 **ISPC972W: Warning.** File space allocated = file space used.

Explanation: This message follows message ISPC971 if space allocated is equal to space used.

User Response: Reallocate the data set name with more space.

ISPC973 **ISPC973W: Warning.** Directory blocks allocated = directory blocks used.

Explanation: This message follows message ISPC971 if directory blocks allocated is equal to directory blocks used.

ISPF Messages

User Response: Reallocate the data set name with additional directory blocks.

ISPC974 **ISPC974W: Warning. Data has been truncated during DISKW operation.**

Explanation: The length of the output record exceeds the LRECL of the output file.

User Response: Verify that the record length of the file is correct.

ISPC975 **ISPC975W: Warning. End of file reached before the specified number of records have been read.**

Explanation: This message is self-explanatory.

User Response: If message recurs , notify IBM service.

ISPC976 **ISPC976E: Error. EXECIO completed unsuccessfully.**

Explanation: This message is self-explanatory. Review any immediately previous messages for additional information.

User Response: If message recurs , notify IBM service.

ISPC978 **ISPC978W: Warning. ISPD TLC received a non-zero return code from ISPF service 'aaaaaaaa'. Please refer to the ISPF documentation for an explanation of 'aaaaaaaa' return code 'bbbbbbbb'.**

Explanation: This message is self-explanatory.

User Response: Refer to the ISPF documentation for a more complete description of 'aaaaaaaa' return codes.

If message recurs , notify IBM service.

ISPC979 **ISPC979W: Warning. Refer to the 'aaaaaaaa' documentation for a more complete description of EXECIO return codes.**

Explanation: This message is self-explanatory.

User Response: Refer to the 'aaaaaaaa' documentation for a more complete description of EXECIO return codes.

If message recurs , notify IBM service.

ISPC980A **ISPC980AE: Error. Do not specify a member name for the aaaaaaaa file sequential data set "bbbbbbbb".**

Explanation: A sequential data set name has been entered with a member name on the ISPD TLC invocation panel for the log file or list file.

User Response: Correct the data set name by

removing the member name.

ISPC980B **ISPC980BE: Error. Do not specify a member name for the aaaaaaaa file partitioned data set "bbbbbbbb".**

Explanation: A partitioned data set name has been entered with a member name on the ISPD TLC invocation panel.

User Response: Correct the data set name by removing the member name.

ISPC981 **ISPC981E: Error. The aaaaaaaa file "bbbbbbbb" is a partitioned data set and must be specified with a member name. You may use an asterisk (*) as the member name to specify that the aaaaaaaa member name is the same as the input GML member name.**

Explanation: A log or list partitioned data set provided in the ISPD TLC profile must be specified with a member name. The member name can be an asterisk (*) to specify that the aaaaaaaa member name is the same as the input GML member name.

User Response: Correct the profile entry by providing a member name for data set bbbbbbbb referenced on DDNAME DTLaaaaaaaa.

ISPC981A **ISPC981AI: Notify. The aaaaaaaa file "bbbbbbbb" is a partitioned data set specified without a member name. An asterisk (*) is assumed as the member name to specify that the aaaaaaaa member name is the same as the input GML member name.**

Explanation: A log or list partitioned data set provided in the ISPD TLC profile may be specified with a member name. If no member name is provided, an asterisk (*) is assumed to specify that the aaaaaaaa member name is the same as the input GML member name.

User Response: No action is required. You can eliminate this message by updating the profile entry to provide a member name for data set bbbbbbbb referenced on DDNAME DTL aaaaaaaa.

ISPC982 **ISPC982E: Error. The aaaaaaaa file "bbbbbbbb" is not available. The TSO function SYSDSN has returned the message: "cccccccc".**

Explanation: This message is self-explanatory.

User Response: Correct the specified file name.

ISPC983 **ISPC983E: Error. "aaaaaaaa" profile not found.**

Explanation: The ISPD TLC profile *aaaaaaaa* was not found.

User Response: Specify a correct profile data set name.

ISPC984 **ISPC984E: Error. Bad *aaaaaaaa* structure for "*bbbbbbbb*".**

Explanation: This message is self-explanatory.

User Response: The response to this message depends on the error information in the message as returned to ISPD TLC from TSO.

ISPC985 **ISPC985E: Error. Bad profile structure. DDNAME "*aaaaaaaa*" in profile "*bbbbbbbb*" is not valid.**

Explanation: This message is self-explanatory.

User Response: Correct the DDNAME values within profile data set "*bbbbbbbb*".

ISPC986 **ISPC986E: Error. The *aaaaaaaa* file "*bbbbbbbb*" record format "*ccccccc*" is not valid. This file must have a "*ddddddd*" format.**

Explanation: All referenced *aaaaaaaa* files must have the same record format.

User Response: Change the record format for file *bbbbbbbb* as indicated.

ISPC987 **ISPC987E: Error. The allocation for file "*aaaaaaaa*" has failed. The TSO ALLOC function has returned the message: "*bbbbbbbb*".**

Explanation: The TSO allocation for file *aaaaaaaa* failed.

User Response: Make sure the *aaaaaaaa* file is available. If the allocation failure is caused by a previous error, you may have to logoff TSO to correct the problem.

ISPC988 **ISPC988E: Error. The "SCRIPT" option has been specified, but no SCRIPT output file name has been provided.**

Explanation: This message is self-explanatory.

User Response: Provide a file for SCRIPT output.

ISPC990 **ISPC990E: Error. Incorrect syntax: Option must be "*aaaaaaaa*" or "*bbbbbbbb*" but not both.**

Explanation: None.

User Response: Remove either option *aaaaaaaa* or option *bbbbbbbb* from the invocation syntax.

ISPC991 **ISPC991E: Error. Incorrect syntax: *aaaaaaaa*="bbbbbbbb". The value for *aaaaaaaa* must be from 1 to *ccccccc* characters in length.**

Explanation: This message is self-explanatory.

User Response: Change *bbbbbbbb* to a maximum of *ccccccc* characters.

ISPC992 **ISPC992E: Error. Incorrect syntax: *aaaaaaaa*="bbbbbbbb" contains character(s) which are not valid. The first character of "*bbbbbbbb*" must be "A-Z" or "#, \$, @". Remaining characters must be "A-Z", "#, \$, @" or "0-9".**

Explanation: This message is self-explanatory.

User Response: Remove the invalid characters from the invocation syntax.

ISPC994 **ISPC994E: Error. Option is not valid: "*aaaaaaaa*".**

Explanation: The invocation syntax *aaaaaaaa* is not valid.

User Response: Remove the invalid value *aaaaaaaa* from the invocation syntax.

ISPC996 **ISPC996E: Error. Duplicate option: "*aaaaaaaa*".**

Explanation: The invocation syntax *aaaaaaaa* is a duplicate value.

User Response: Remove the duplicate value *aaaaaaaa* from the invocation syntax.

ISPC997 **ISPC997E: Error. Option is not valid: "*aaaaaaaa=bbbbbbbb*".**

Explanation: The invocation syntax *aaaaaaaa=bbbbbbbb* is invalid.

User Response: Remove the invalid value *aaaaaaaa=bbbbbbbb* from the invocation syntax.

ISPF Messages

ISPC998 **ISPC998E: Error. The ISPD TLC invocation syntax is: "ISPD TLC source-filespec (invocation options". The "(" is required to identify the invocation options.**

Explanation: This message is self-explanatory.

User Response: The invocation syntax requires that the 'source-filespec' and invocation options be separated by the character "(" . Respecify the invocation command, including the "(" delimiter.

ISPC999 **ISPC999E: Conversion terminated due to severe error.**

Explanation: This message is self-explanatory.

User Response: This message follows one or more other errors in the log. Refer to the earlier error messages for the problem explanation.

ISPD001 **Allocation failed - DAIR RC = aaaaaaaa dec, DARC = bbbbbbbb hex.**

Explanation: A TSO allocation failed. The Dynamic Allocation Interface Return Code (DAIR) and the Dynamic Allocation Return Code have been supplied. For more information on these return codes, see the System Programmer response below.

User Response: Contact your system programmer.

System Programmer Response: The DAIR and DARC codes are listed in the ISPF tutorial. Enter HELP to get the first tutorial panel, then enter INDEX on the command line. Enter D on the command line to get to the topics screen, and select D1 to get the listing of the DAIR and DARC codes.

ISPD002 **Data set not found - 'aaaaaaaa' not on volume 'bbbbbbbb'.**

Explanation: The data set specified was not found on the volume specified.

User Response: Verify the data set name and the volume. Contact your system programmer.

System Programmer Response: Verify the data set name and the volume. If the data set name is valid, determine its volume location.

ISPD003 **Catalog or VTOC error - I/O, insufficient storage, or unrecoverable error with volume aaaaaaaa.**

Explanation: The return code from TSO DAIR indicates one of the three problems listed above. Contact your system programmer with the information in this error message.

User Response: Contact your system programmer.

System Programmer Response: If you are unable to determine the problem with the listed volume, contact IBM support.

ISPD004 **Volume 'aaaaaaaa' not avail - Volume not mounted or not authorized for your use.**

Explanation: The volume you requested is not mounted, or you are not authorized to use this volume.

User Response: Contact your system programmer.

System Programmer Response: Determine why this user is unable to use the volume.

ISPD005 **Data set in use - Data set 'aaaaaaaa' in use by another user, try later.**

Explanation: Another user is using this data set. Try to access this data set later.

User Response: Try to access the data set later.

ISPD006 **VTOC full on vol 'aaaaaaaa' - No room in volume table of contents for more data sets.**

Explanation: The Volume Table of Contents (VTOC) on this volume is full. Another data set cannot be added to the VTOC.

User Response: Provide the above information to the system programmer.

System Programmer Response: Correct the DASD space problem.

ISPD007 **No space on vol 'aaaaaaaa' - Insufficient space for data set 'bbbbbbbb'.**

Explanation: The volume specified has insufficient space for the data set specified.

User Response: Contact your system programmer.

System Programmer Response: Correct the DASD space problem.

ISPD008 **Invalid index structure - Dsname 'aaaaaaaa' index conflict.**

Explanation: The TSO DAIR routine has reported a problem with this data set.

User Response: Contact your system programmer.

System Programmer Response: Correct the DASD index problem.

ISPD009 DDNAME not found - DDNAME
'aaaaaaaa' not allocated.

Explanation: The ddname has not been allocated.

User Response: Allocate the ddname or contact the responsible programmer.

ISPD010 File name in use - File name
(DDNAME) 'aaaaaaaa' is allocated to
another data set.

Explanation: The ddname is not available for your use at this time.

User Response: Contact the responsible programmer.

System Programmer Response: Correct the allocations.

ISPD011 Syntax error in DDNAME - File name
(DDNAME) 'aaaaaaaa' contains invalid
special character.

Explanation: An invalid special character was found in the DDNAME.

User Response: Correct the syntax of the ddname.

ISPD012 Syntax error member name - Member
name 'aaaaaaaa' contains invalid special
character.

Explanation: The member name specified contains an invalid special character.

User Response: Correct the syntax of the member name.

ISPD013 Invalid data set name - Syntax error in
data set name 'aaaaaaaa'.

Explanation: This message is self-explanatory.

User Response: Correct the syntax of the data set name.

ISPD014 Data set not cataloged - 'aaaaaaaa' was
not found in catalog.

Explanation: The data set was not found in the catalog.

User Response: Enter a valid data set name.

ISPD015 Dd dynams exhausted - Data set
'aaaaaaaa' cannot be allocated.

Explanation: You will be unable to allocate additional ddnames.

User Response: Contact your system programmer.

ISPD016 Duplicate data set name - Data set
'aaaaaaaa' already exists.

Explanation: You cannot create a data set with this name.

User Response: Create your data set using another name.

ISPD017 Data set not partitioned - Member
'aaaaaaaa' was specified for data set
'bbbbbbbb'.

Explanation: This data set is not a partitioned data set.

User Response: Store this member in a partitioned data set or store it as a sequential data set.

ISPD018 Multivolume data set - Data set
'aaaaaaaa' occupies more than one
volume.

Explanation: You do not have multivolume support.

User Response: Contact your system programmer.

ISPD019 Catalog error - Already cataloged,
VSAM protected, or other - 'aaaaaaaa'.

Explanation: Catalog attempt was unsuccessful.

User Response: Use another name or contact the system programmer.

ISPD020 Data set already open - Data set
'aaaaaaaa' is already in use on your
behalf.

Explanation: You are already using the data set and you cannot open it again.

User Response: Complete the other task that uses the data set, and then this task can use it.

ISPD021 Allocation denied - Data set 'aaaaaaaa' -
request denied by installation exit.

Explanation: Your installation will not allow you to use this data set.

User Response: Contact your system programmer.

ISPD022 Allocation failed - DAIR RC = 'aaaaaaaa'
dec, CTRC = 'bbbbbbbb' hex.

Explanation: Allocation failed, the return codes listed above will be required to determine why the allocation failed.

User Response: Contact your system programmer.

System Programmer Response: The DAIR and DARC codes are listed in the ISPF tutorial. Enter HELP to

ISPF Messages

reach the first tutorial panel, then enter INDEX on the command line. Enter D on the command line to get to the topics screen. Select D1 for the listing of the DAIR and DARC codes.

ISPD023 **Tape not supported - ISPF does not support data sets on tape.**

Explanation: Allocation failed for a data set on tape. ISPF does not support data sets on tape.

ISPD101 **Invalid panel name - 'aaaaaaaa' - 8 char limit**

Explanation: The panel name must be 8 characters or fewer.

Programmer Response: Use a shorter panel name.

ISPD102 **Invalid PGM name - 'aaaaaaaa' - 8 char limit**

Explanation: The program name must be 8 characters or fewer.

Programmer Response: Retry with a shorter program name.

ISPD103 **Invalid keyword given - 'aaaaaaaa' invalid**

Explanation: A keyword name is invalid for one of the following reasons:

- The keyword name is longer than 10 characters.
- The keyword name is not one of the valid keyword names.
- The MODE keyword is not used with PGM or CMD.

Programmer Response: Correct the keyword and try again.

ISPD104 **Invalid parameter given - 'aaaaaaaa' invalid**

Explanation: A keyword is invalid for one of the following reasons:

- A value is given in parentheses with no name before it.
- The keyword does not have an expected value.
- The keyword is longer than 10 characters.
- The value of the MODE keyword is not FSCR or LINE.

Programmer Response: Correct the keyword and try again.

ISPD105 **Insufficient storage - Unable to process command.**

Explanation: A GETMAIN command for main storage failed while analyzing ISPF command syntax, or while

creating internal file control tables. The command was not processed.

Programmer Response: Try running the program in a larger region.

ISPD106 **Conflicting parameters - CMD conflicts with another parameter.**

Explanation: A keyword was found that is inconsistent with the CMD keyword. For example, PGM and CMD cannot both be used in the same command.

Programmer Response: Check the usage of the CMD keyword, and eliminate the conflict.

ISPD107 **Conflicting parameters - PGM conflicts with another parameter**

Explanation: A keyword was found which is inconsistent with the PGM keyword. For example, PGM and PANEL cannot both be used in the same command.

Programmer Response: Check the usage of the PGM keyword, and eliminate the conflict.

ISPD108 **Conflicting parameters - PANEL conflicts with another parameter.**

Explanation: A keyword was found that is inconsistent with the PANEL keyword. For example, the PANEL and PARM keywords cannot both be used in the same command.

Programmer Response: Check the usage of the PANEL keyword and remove the conflict.

ISPD109 **Invalid command - Parentheses are not paired correctly.**

Explanation: Each left parenthesis must be matched with a right parenthesis. The command has a left or right parenthesis that is unpaired.

Programmer Response: Correct the syntax to make sure parentheses are paired correctly.

ISPD110 **CMD abended - 'aaaaaaaa' terminated abnormally.**

Explanation: The ISPF command *aaaaaaaa* has abnormally terminated. If this was a system abend, message ISPG075 was issued with the system abend code. If this was a user abend, message ISPG073 was issued with the user abend code.

Programmer Response: Review the other messages that explain the abend.

ISPD111 **CMD did not complete - 'aaaaaaaa' was terminated with an ATTENTION.**

Explanation: The command or CLIST did not complete because an ATTENTION was signalled. This probably happened because the PA1 key was pressed.

User Response: No response is required.

ISPD112 **Invalid PGM name - Link to 'aaaaaaaa' failed.**

Explanation: An MVS LINK to the program named *aaaaaaaa* has failed. The reason could be one of the following:

- The program was not found.
- The program was not authorized.

Programmer Response: Check the name and authorization of *aaaaaaaa* for errors.

ISPD113 **Invalid panel - 'aaaaaaaa' is not a valid 'selection' panel.**

Explanation: The panel that was asked to display is not a valid menu panel. This is probably because it does not have a ZSEL variable.

User Response: Be sure that the panel name is that of a menu panel.

Programmer Response: If necessary, add a ZSEL variable to the panel definition.

ISPD114 **Invalid NEWAPPL ID - aaaaaaaa is not a valid NEWAPPL ID. Length exceeds 4 characters.**

Explanation: The NEWAPPL keyword requires a 1 to 4 character application ID. The supplied ID was greater than 4 characters.

Programmer Response: Retry the command with a 1 to 4 character NEWAPPL keyword value.

ISPD115 **Option conflict - An OPT keyword conflicts with a previously specified option.**

Explanation: The OPT keyword specifies an option on the first menu. This keyword cannot be used more than once.

Programmer Response: Retry the command with only a single OPT keyword.

ISPD116 **Option too long - Maximum option length supported is 24 characters.**

Explanation: The OPTION value has a length limit and this limit has been exceeded.

Programmer Response: Use a shorter OPTION length.

ISPD117 **The initially invoked CLIST ended with a return code = aaaaaaaa.**

Explanation: A CLIST or REXX procedure was selected at ISPSTART time that ended with a return code that was not 0 or 4. These are the only valid values.

Programmer Response: If you wish to return a value to the calling program or procedure, consider using the ZISPFRC variable. See *ISPF Dialog Developer's Guide and Reference* for details.

ISPD118 **The initially invoked module ended with a return code = aaaaaaaa.**

Explanation: A program module was selected at ISPSTART time that set a return code value other than 0 or 4. These are the only valid values.

Programmer Response: If you wish to set a return code for the program or procedure that invoked ISPSTART, consider using the ZISPFRC variable to return this value. See *ISPF Dialog Developer's Guide and Reference* for details.

ISPD119 **Required parm missing - A select parameter requires one of PGM, CMD, or PANEL.**

Explanation: A required SELECT parameter was omitted. If the OPT parameter was specified, PANEL was omitted. If the LANG parameter was specified, CMD was omitted. If the PARM parameter was specified, PGM was omitted.

Programmer Response: Add the required parameter and retry the request.

ISPD120 **Invalid CLIST name - 'aaaaaaaa' - name greater than 8 characters.**

Explanation: The CLIST name specified in the CMD parameter cannot be longer than 8 characters.

Programmer Response: Correct the CLIST name so that it is fewer than or equal to 8 characters.

ISPD121 **Specified option invalid - 'aaaaaaaa' - contains invalid opt selection.**

Explanation: The SELECT service request used an OPT keyword but the keyword value was invalid for the panel selected. For example, on panel XYZ, options 1 to 5 are valid and OPT(6) was specified.

Programmer Response: Change the panel name or OPT value on the SELECT request.

ISPF Messages

ISPD122 **Command not allowed - 'aaaaaaaa' command not allowed within ISPEXEC select service request.**

Explanation: A nested command, probably ISPEXEC, was found within an ISPEXEC command request.

Programmer Response: Avoid the use of nested ISPEXEC commands.

ISPD123 **Invalid command - Command 'aaaaaaaa' not found or contains invalid syntax.**

Explanation: The command was not found, was otherwise not executable, or the exit routine returned an invalid return code.

Programmer Response: The command was not found in the assumed library.

ISPD124 **Invalid command - Command name 'aaaaaaaa' contains invalid syntax.**

Explanation: The command name is invalid. Command names must start with an alphabetic character or @, #, or \$. The remaining characters must be alphanumeric. In MVS, the remaining characters (but not the initial character) can be X'C0' (left brace).

Programmer Response: Correct the command name syntax to conform to the above rules.

ISPD126 **Invalid command - Commands such as LOGON, LOGOFF, SPF, ISPF, etc. are not permitted.**

Explanation: Special commands that may harm the ISPF environment are not permitted. These commands include LOGON, LOGOFF, SPF, ISPF, test authorized commands, and commands invoking an authorized program. CLISTs cannot invoke these commands either.

Programmer Response: Remove the unauthorized command and continue.

ISPD130 **Recursion error - Recursive use of an ISPF function (aaaaaaaa) is not allowed.**

Explanation: A non-recursive ISPF function was already active and an attempt was made to link to another program. This is not allowed.

Programmer Response: Correct the application so that ISPF is not entered recursively.

ISPD132 **Insufficient storage - Insufficient storage to load the subroutines for the PDF component of ISPE.**

Explanation: Not enough main storage is available to load PDF.

Programmer Response: Increase ISPF's region size as necessary.

ISPD133 **Invalid application ID - Appl ID 'aaaaaaaa' is reserved for system use by the dialog manager.**

Explanation: Any application ID that starts with "ISP" and whose fourth character is non-blank is an invalid ID.

Programmer Response: Use an application ID that does not violate the rule in the message explanation.

ISPD134 **Invalid application ID - Appl ID 'aaaaaaaa' starts with or contains an invalid character.**

Explanation: The application ID must start with an alphabetic character or with @, #, or \$ and the remaining characters must be alphanumeric. The MVS X'C0' (left brace) character may be used in any character except the first.

Programmer Response: Correct the application ID to conform to the rules in the message explanation.

ISPD135 **Select string truncated - Substituted select string exceeded allowable length of 32767.**

Explanation: The ISPF command text length exceeded 32 767 bytes after substitution of variables.

Programmer Response: Correct the substituted variables so the command text is less than 32 767 bytes after substitution.

System Action: The command is not executed.

ISPD136 **Language parm invalid - 'aaaaaaaa' specified in LANG parameter is not valid.**

Explanation: The value of the LANG parameter must be APL, COBOL, PL1, or PLI. The value specified was not valid.

Programmer Response: Change the command to use one of the allowed LANG values.

ISPD137 **Language parameter error - Syntax error in language parameter value 'aaaaaaaa'.**

Explanation: The language parameter value has some kind of syntax error. There may be extra characters after the language name, imbedded blanks in the name, or an invalid delimiter.

Programmer Response: Correct the language parameter to remove the syntax error.

ISPD139 Language size error - Language size contains non-numeric characters or too many digits.

Explanation: The language size parameter has a non-numeric character or has more than 8 digits.

Programmer Response: Correct the language size parameter.

ISPD140 Enter option - Enter one of the listed options.

Explanation: No option value was entered on a menu panel. This applies to all menu panels except the primary option menu.

User Response: Key one of the options highlighted on the menu panel and press Enter.

ISPD141 Invalid option - The option that was entered was not valid.

Explanation: The option entered was not one of the options defined in the menu panel. The menu panel definition replaced an invalid option selection with a "?" character that caused this message to display.

User Response: Enter a valid option value for this menu.

ISPD144 Panel definition error - 100 panels processed. No return key stop found. ZPARENT causing loop.

Explanation: After executing the RETURN command, ISPF tries to display the primary option menu in the hierarchy or explicit panel chain. If more than 100 panels are in the chain, ISPF assumes that there is an error in the specification of ZPARENT that is causing an infinite loop in the panel chain. Processing stops.

Programmer Response: Look for errors in the specification of ZPARENT in panel definitions or in the application.

ISPD145 Invalid logo panel name - 'aaaaaaaa' - name greater than 8 characters.

Explanation: The LOGO keyword on the ISPSTART command specifies a panel name whose length is greater than 8 characters. No more than 8 are allowed.

Programmer Response: Correct the LOGO keyword value to use a shorter panel name.

ISPD146 Keyword conflict - BARRIER and NEST are only allowed with the CMD keyword.

Explanation: Use BARRIER and NEST only in a TSO environment.

Programmer Response: Remove the BARRIER or NEST keyword unless a CMD function is being invoked. These keywords are only valid when used with the CMD parameter.

ISPD147 Wrong environment - BARRIER and NEST keywords are only valid in the TSO environment.

Explanation: Use BARRIER and NEST only in a TSO environment.

Programmer Response: Only use BARRIER and NEST in a TSO environment.

ISPD148 BLDL error - Error processing LIBDEF search for program aaaaaaaa. BLDL return code = bbbbbbbb.

Explanation: A LIBDEF was specified for ISPLLIB and BLDL encountered an error trying to locate a program while invoking the SELECT service. A return code of 8 would normally indicate an I/O error.

User Response: Refer to the appropriate system documentation for an explanation of the BLDL macro return codes.

ISPD150 Invocation error - System error encountered invoking authorized command 'aaaaaaaa'.

Explanation: ISPF cannot invoke an authorized command, such as LOGON. It is also possible that the TSO command start exit routine rejected the command.

Programmer Response: Avoid usage of authorized commands in ISPF.

ISPD151 Language qualifier error - The only value valid for the APL language is START.

Explanation: Some value other than START was specified for the APL language qualifier. Or START was followed by something else, which is invalid.

Programmer Response: Correct the syntax of the APL language qualifier.

ISPD153 PASSLIB spec invalid - NEWAPPL must be specified to specify PASSLIB.

Explanation: The PASSLIB keyword was used but NEWAPPL was omitted.

Programmer Response: Correct the syntax and retry the command.

ISPF Messages

ISPD154 **Storage release error - Error occurred when releasing application library blocks.**

Explanation: A severe error occurred while doing FREEMAIN of LIBDEF control blocks.

Programmer Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPD155 **Deallocation failure - Deallocation failure - check allocated data sets.**

Explanation: The deallocation of LIBDEF data sets failed during the termination of ISPEXEC.

User Response: Contact your system programmer.

Programmer Response: Contact IBM support.

ISPD156 **Authorization failure - Request rejected by exit routine for select service start.**

Explanation: The exit routine rejected the request because it lacked authority to use the exit.

Programmer Response: Correct the authorization failure.

ISPD157 **Severe error - Select service start exit routine returned invalid code *aaaaaaaa*.**

Explanation: The select service start exit routine returned an unexpected return code, which is shown in the message.

Programmer Response: Examine the exit routine to see where the unexpected return code was generated.

ISPD158 **Invocation error - System error encountered invoking command *'aaaaaaaa'*.**

Explanation: Routine IKJTBLS abended while starting this command.

Programmer Response: Examine the abend information to determine cause of abend.

ISPD175 **IKJADTAB interface error - RC = *'aaaaaaaa'* from TSO routine IKJADTAB, function = *'bbbbbbbb'*.**

Explanation: During NEWAPPL processing of the SELECT service, TSO routine IKJADTAB was invoked to set up or free an ALTLIB table for the new select level. IKJADTAB set return code *aaaaaaaa*, which is an internal error. The service function *bbbbbbbb* is what was passed to IKJADTAB.

Programmer Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPD176 **Interface error - RC = *'aaaaaaaa'* from TSO routine IRXSTK, function = DROPTERM.**

Explanation: During NEWAPPL processing for the SELECT service, TSO routine IRXSTK is called to remove a barrier (DROPTERM) from the REXX data stack. IRXSTK set return code *aaaaaaaa*, which is an internal error.

Programmer Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPD177 **Interface error - RC = *'aaaaaaaa'* from TSO routine IRXSTK, function = MARKTERM.**

Explanation: During NEWAPPL processing for the SELECT service, routine IRXSTK is called to place a barrier (MARKTERM) on the REXX data stack. IRXSTK set return code *aaaaaaaa*, which is an internal error.

Programmer Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPD178 **Invalid screen name - A screen name must be more than one character, and all alphanumerics, and cannot be LIST, PREV, or NEXT.**

Explanation: A screen name can only be 2 to 8 characters and all alphanumerics. It cannot be LIST, PREV, or NEXT.

Programmer Response: Correct the screen name specified on the SELECT service.

ISPD189 **Mis-matched quotes - The string contains an uneven number of quotes.**

Explanation: Unmatching quotes were found in a parenthesized keyword value for an ISPF service request.

Programmer Response: Correct the command syntax so there are no unmatched quotation marks.

ISPD201 **Panel name is invalid - *'aaaaaaaa'* - name greater than 8 characters.**

Explanation: The panel name must be 8 characters or fewer.

Programmer Response: Use a shorter panel name.

ISPD202 **PGM name is invalid - 'aaaaaaaa' - name greater than 8 characters.**

Explanation: The program name must be 8 characters or fewer.

Programmer Response: Use a shorter program name.

ISPD203 **Invalid keyword - 'aaaaaaaa' contains unrecognized keyword.**

Explanation: A keyword name is invalid for one of the following reasons:

- The name is longer than 10 characters.
- The name is not one of the valid keyword names.
- The MODE keyword is not used with PGM or CMD.

Programmer Response: Correct the keyword and try again.

ISPD204 **Invalid parameter - 'aaaaaaaa' contains unrecognized parameter.**

Explanation: A keyword is invalid for one of the following reasons:

- A value was given in parentheses with no name before it.
- The keyword did not have an expected value.
- The keyword was longer than 10 characters.
- The value of the MODE keyword was not FSCR or LINE.

Programmer Response: Correct the keyword and try again.

ISPD205 **Insufficient storage - Unable to continue processing.**

Explanation: A GETMAIN for main storage failed while analyzing ISPF command syntax or while creating internal file control tables. The command was not executed.

Programmer Response: Try running the application in a larger region. For further assistance, contact IBM support.

ISPD206 **Conflicting parameters - CMD conflicts with another keyword.**

Explanation: A keyword was found that is inconsistent with the CMD keyword. For example, PGM and CMD cannot both be used in the same command.

Programmer Response: Check the usage of the CMD keyword and eliminate the conflict.

ISPD207 **Conflicting parameters - PGM conflicts with another keyword.**

Explanation: A keyword was found that is inconsistent with the PGM keyword. For example, PGM and PANEL cannot both be used in the same command.

Programmer Response: Check the usage of the PGM keyword and eliminate the conflict.

ISPD208 **Conflicting parameters - PANEL conflicts with another keyword.**

Explanation: A keyword was found that is inconsistent with the PANEL keyword. For example, the PANEL and PARM keywords cannot both be used in the same command.

Programmer Response: Check the usage of the PANEL keyword and remove the conflict.

ISPD209 **Incorrect parameters - Parentheses are not paired correctly.**

Explanation: Each left parenthesis must be matched with a right parenthesis. The command had a left or right parenthesis that was unpaired.

Programmer Response: Correct the syntax to make sure parentheses are paired correctly.

ISPD210 **CMD abended - 'aaaaaaaa' terminated abnormally.**

Explanation: The *aaaaaaaa* command has abnormally terminated.

Programmer Response: Use the provided error message and log information to determine the cause of the abend. Consider using the ENVIRON command and the Dialog Test facility to aid in problem determination. See *ISPF Dialog Developer's Guide and Reference* for further help.

ISPD211 **CMD did not complete - 'aaaaaaaa' was terminated with an ATTENTION.**

Explanation: The command or CLIST did not complete because an ATTENTION was received, probably because the PA1 key was pressed.

User Response: No response is required.

ISPD212 **Invalid PGM name - Link to 'aaaaaaaa' failed, abend code = x'bbbbbbbb'.**

Explanation: An MVS LINK to the program named *aaaaaaaa* has failed. The reason could be one of the following:

- The program was not found.
- The program was not authorized.

ISPF Messages

Programmer Response: Check the name and authorization of `aaaaaaaa` for errors.

ISPD213 **Invalid panel - 'aaaaaaaa' is not a valid 'selection' panel.**

Explanation: The panel you asked to display is not a valid menu panel. This is probably because it does not have a ZSEL variable.

User Response: Be sure that the panel name is that of a menu panel.

Programmer Response: If necessary, add a ZSEL variable to the panel definition.

ISPD214 **Invalid NEWAPPL ID - 'aaaaaaaa' is not a valid 'NEWAPPL ID'. Length exceeds 4 characters.**

Explanation: The NEWAPPL keyword requires a 1 to 4 character application ID. The supplied ID was greater than 4 characters.

Programmer Response: Retry the command with a 1 to 4 character NEWAPPL keyword value.

ISPD215 **Option conflict - An OPT keyword conflicts with a previously specified option.**

Explanation: The OPT keyword specifies an option on the first menu. This keyword cannot be used more than once.

Programmer Response: Retry the command with only a single OPT keyword.

ISPD216 **Option too long - Maximum option length supported is 24 characters.**

Explanation: The OPTION value has a length limit and this limit has been exceeded.

Programmer Response: Use a shorter OPTION length.

ISPD217 **Initial CLIST RC > 4 - The initially invoked CLIST ended with a return code = aaaaaaaa.**

Explanation: A CLIST or REXX procedure was selected ending with a return code that was not 0 or 4. These are the only valid values.

Programmer Response: If you wish to return a value to the calling program or procedure, consider using the ZISPFRC variable. See *ISPF Dialog Developer's Guide and Reference* for details.

ISPD218 **Initial program RC > 4 - The initially invoked module ended with a return code = aaaaaaaa.**

Explanation: A program module was selected with a return code value other than 0 or 4. These are the only valid values.

Programmer Response: If you wish to set a return code for the program or procedure, consider using the ZISPFRC variable to return this value. See *ISPF Dialog Developer's Guide and Reference* for details.

ISPD219 **Required parm missing - A select parameter requires one of PGM, CMD, or PANEL.**

Explanation: A required SELECT parameter was omitted. If the OPT parameter was specified, then PANEL was omitted. If the LANG parameter was specified, then CMD was omitted. If the PARM parameter was specified, then PGM was omitted.

Programmer Response: Add the required parameter and retry the request.

ISPD220 **CLIST name is invalid - 'aaaaaaaa' - name greater than 8 characters.**

Explanation: The CLIST name specified in the CMD parameter cannot be longer than 8 characters.

Programmer Response: Correct the CLIST name so that it is less than or equal to 8 characters.

ISPD221 **Specified option invalid - 'aaaaaaaa' - contains invalid OPT selection.**

Explanation: The selected option is invalid.

User Response: Contact the responsible programmer.

Programmer Response: Correct the option selected with the SELECT service.

ISPD222 **Command not allowed - 'aaaaaaaa' not allowed from command line or nested in SELECT CMD request.**

Explanation: A nested command, probably ISPEXEC, was found within an ISPEXEC command request.

Programmer Response: Avoid the use of nested ISPEXEC commands.

ISPD223 **Invalid command - Command 'aaaaaaaa' not found or contains invalid syntax.**

Explanation: The command was not found, was otherwise not executable, or the exit routine returned an invalid return code (0, 4, or 16).

Programmer Response: Verify that the command is in the assumed library, that it is executable, and that any

user exit routine for commands is returning a valid return code.

ISPD224 Invalid command - Command name 'aaaaaaaa' contains invalid syntax.

Explanation: The command name is invalid. Command names must start with an alphabetic character, or @, #, or \$. The remaining characters must be alphanumeric. In MVS, the remaining characters (but not the initial character) can be X'C0' (left brace).

Programmer Response: Correct the command name syntax to conform to the above rules.

ISPD226 Invalid command - Commands such as LOGON, LOGOFF, SPF, ISPF, etc. are not permitted.

Explanation: Special commands that may harm the ISPF environment are not permitted. These commands include LOGON, LOGOFF, SPF, ISPF, test authorized commands, and commands invoking an authorized program. CLISTs cannot invoke these commands either.

Programmer Response: Remove the unauthorized command and continue.

ISPD230 Recursion error - Recursive use of an ISPF function is not allowed.

Explanation: A non-recursive ISPF function was already active and an attempt was made to link to another program. This is not allowed.

Programmer Response: Correct the application so that ISPF is not entered recursively.

ISPD232 Insufficient storage - Insufficient storage to load the subroutines for the PDF component of ISPF.

Explanation: Not enough main storage was available to load PDF.

Programmer Response: Increase the region size for ISPF as necessary.

ISPD233 Invalid application ID - Application ID 'aaaaaaaa' is reserved for system use by the dialog manager.

Explanation: Any application ID that starts with ISP and whose fourth character is non-blank is an invalid ID.

Programmer Response: Use an application ID that does not violate the rule in the message explanation.

ISPD234 Invalid application ID - Application ID 'aaaaaaaa' starts with or contains an invalid character.

Explanation: The application ID must start with an alphabetic character or with @, #, or \$ and the remaining characters must be alphanumeric. The MVS X'C0' (left brace) character may be used in any character position except the first.

Programmer Response: Correct the application ID to conform to the rules in the message explanation.

ISPD235 Select string truncated - Substituted select string exceeded allowable length of 32767.

Explanation: The ISPF command text length exceeded 32 767 bytes after substitution of variables.

Programmer Response: Correct the substituted variables so the command text is less than 32 767 bytes after substitution.

ISPD236 LANG parm invalid - 'aaaaaaaa' specified in LANG parameter is not valid.

Explanation: The value of the LANG parameter must be APL, COBOL, PL1, or PLI. The value specified was not valid.

Programmer Response: Change the command to use one of the allowed LANG values.

ISPD237 Language parameter error - Syntax error in language parameter value 'aaaaaaaa'.

Explanation: The language parameter value had a syntax error. There may be extra characters after the language name, imbedded blanks in the name, or an invalid delimiter.

Programmer Response: Correct the language parameter to remove the syntax error.

ISPD239 Language size error - Language size contains non-numeric characters or too many digits.

Explanation: The language size parameter has a non-numeric character or has more than 8 digits.

Programmer Response: Correct the language size parameter.

ISPD240 Enter option - Enter one of the listed options.

Explanation: No option values were entered on a menu panel. This applies to all menu panels except the primary option menu.

User Response: Key one of the options highlighted on

ISPF Messages

the menu panel and press Enter.

ISPD241 **Invalid option - The option that was entered was not valid.**

Explanation: The option entered was not one of the options defined in the menu panel. The menu panel definition replaced an invalid option selection with a "?" character which caused this message to display.

User Response: Enter a valid option value for this menu.

ISPD244 **Panel definition error - 100 panels processed. No return key stop found. ZPARENT causing loop.**

Explanation: After executing the RETURN command, ISPF tries to display the primary option menu in the hierarchy or explicit panel chain. If more than 100 panels are in the chain, ISPF assumes that there is an error in the specification of ZPARENT that is causing an infinite loop in the panel chain. Processing stops.

Programmer Response: Look for errors in the specification of ZPARENT in panel definitions or in the application.

ISPD245 **Invalid logo panel name - 'aaaaaaaa' - name greater than 8 characters.**

Explanation: The LOGO keyword on the ISPSTART command specifies a panel name with a length greater than 8 characters. No more than 8 characters are allowed.

Programmer Response: Correct the LOGO keyword value to use a shorter panel name.

ISPD246 **Keyword conflict - BARRIER and NEST are only allowed with the CMD keyword.**

Explanation: The BARRIER and NEST keywords are only valid when coded with the CMD keyword.

Programmer Response: Remove the BARRIER or NEST keyword unless a CMD function is being invoked. These keywords are only valid when used with the CMD parameter.

ISPD247 **Wrong environment - BARRIER and NEST keywords are only valid in the TSO environment.**

Explanation: Use BARRIER and NEST only in a TSO environment.

Programmer Response: Only use BARRIER and NEST in a TSO environment.

ISPD248 **BLDL error - Error processing LIBDEF search for program aaaaaaaa. BLDL return code = bbbbbbbb..**

Explanation: A LIBDEF was specified for ISPLLIB, and BLDL encountered an error trying to locate a program while invoking the SELECT service. A return code of 8 normally indicates an I/O error.

User Response: Contact your system programmer.

System Programmer Response: Refer to the appropriate system documentation for an explanation of the BLDL macro return codes.

ISPD250 **Invocation error - System error encountered invoking authorized command 'aaaaaaaa'.**

Explanation: ISPF cannot invoke an authorized command, such as LOGON. It is also possible that the TSO command start exit routine rejected the command.

Programmer Response: Avoid usage of authorized commands in ISPF.

ISPD251 **Language qualifier error - The only value valid for the APL language is START.**

Explanation: Some value other than START was specified for the APL language qualifier. Or START was followed by something else, which is invalid.

Programmer Response: Correct the syntax of the APL language qualifier.

ISPD253 **PASSLIB spec invalid - NEWAPPL must be specified to specify PASSLIB.**

Explanation: The PASSLIB keyword was used but NEWAPPL was omitted.

Programmer Response: Correct the syntax and retry the command.

ISPD254 **Storage release error - Error occurred when releasing application library blocks.**

Explanation: A severe error occurred while processing a FREEMAIN of LIBDEF control blocks.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPD255 **Deallocation failure - Deallocation failure - check allocated data sets.**

Explanation: Deallocation of LIBDEF data sets failed during termination of ISPEXEC.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPD256 Authorization failure - Request rejected by exit routine for select service start.

Explanation: The exit routine rejected the request because it lacked authority to use the exit.

Programmer Response: Correct the authorization failure.

ISPD257 Severe error - Select service start exit routine returned invalid code *aaaaaaaa*

Explanation: The select service start exit routine returned an unexpected return code, which is shown in the message.

Programmer Response: Examine the exit routine to see where the unexpected return code was generated.

ISPD258 Invocation error - System error encountered invoking command *'aaaaaaaa'*.

Explanation: Routine IKJTBL5 abended while starting this command.

Programmer Response: Examine the abend information to determine the cause of the abend.

ISPD275 IKJADTAB interface error - RC = *'aaaaaaaa'* from TSO routine IKJADTAB, function = *'bbbbbbbb'*.

Explanation: During NEWAPPL processing of the SELECT service, TSO routine IKJADTAB was invoked to set up or free an ALTLIB table for the new select level. IKJADTAB set return code *aaaaaaaa* which is an internal error. The service function *bbbbbbbb* is what was passed to IKJADTAB.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPD276 Interface error - RC = *'aaaaaaaa'* from TSO routine IRXSTK, function = *'dropterm'*

Explanation: During NEWAPPL processing for the SELECT service, TSO routine IRXSTK is called to remove a barrier ('DROPTERM') from the REXX data stack. IRXSTK set return code *aaaaaaaa* which is an internal error.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPD277 Interface error - RC = *'aaaaaaaa'* from TSO routine IRXSTK, function = *'markterm'*

Explanation: During NEWAPPL processing for the SELECT service, routine IRXSTK is called to place a barrier ('MARKTERM') on the REXX data stack. IRXSTK set return code *aaaaaaaa* which is an internal error.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPD278 Invalid screen name - A screen name must be more than one character, and all alphanumerics, and cannot be LIST, PREV or NEXT.

Explanation: A screen name can only be 2 to 8 characters and all alphanumerics. It cannot be LIST, PREV or NEXT.

Programmer Response: Correct the screen name specified on the SELECT service.

ISPD286 Invalid PFSHOW parm - Valid PFSHOW parameters are ON, OFF, TAILOR, or blank.

Explanation: An incorrect parameter was specified on the PFSHOW command. Correct parameters are ON, OFF, TAILOR, or no parameter.

User Response: Correct the parameter and retry the command.

ISPD287 Key display forced off - Current application does not allow ISPF to display function keys.

Explanation: The application that is running has set the ZPFCTL system variable so that you cannot use PFSHOW to view the function key area.

User Response: Try to use the application to do what you want. For example, the application may allow you to select a Help function on the screen rather than by pressing a function key.

ISPD288 Key display forced on - Current application does not allow function key display to be removed.

Explanation: The application that is running has set the ZPFCTL system variable so that you cannot use PFSHOW to remove the function key area.

User Response: This application is dependent on function keys. Contact your system programmer for application information.

ISPF Messages

ISPD289 **Mis-matched quotes - The string contains an uneven number of quotes**

Explanation: Unmatched quotes were found in a parenthesized keyword value for an ISPF service request.

Programmer Response: Correct the keyword value so there are no unmatched quotation marks.

ISPD290 **Invalid CONTROL parm - 'aaaaaaaa' is invalid as request type parameter to the CONTROL service.**

Explanation: The CONTROL service has been called with a parameter that is not valid. The valid request type parameters for the CONTROL service in MVS are DISPLAY, NONDISPL, ERRORS, SPLIT, NOCMD, and SUBTASK.

Programmer Response: Correct the CONTROL parameter and retry.

ISPD291 **Invalid CONTROL parm - 'aaaaaaaa' is invalid option for CONTROL ERRORS service request.**

Explanation: The CONTROL ERRORS service has been called with an option that is not valid. The valid options are CANCEL and RETURN. CANCEL is the default.

Programmer Response: Specify a valid option for CONTROL ERRORS.

ISPD292 **Invalid CONTROL parm - 'aaaaaaaa' is invalid option for CONTROL DISPLAY service request.**

Explanation: The CONTROL DISPLAY service request has been called with an option that is not valid. The valid options are LOCK, LINE, SM, REFRESH, SAVE, RESTORE, and ALLVALID.

Programmer Response: Change *aaaaaaaa* to one of the options listed above.

ISPD293 **Invalid CONTROL parm - The start line-number is invalid for CONTROL DISPLAY service request.**

Explanation: The starting line number specified with the CONTROL DISPLAY service request is invalid, probably because it is a negative number.

Programmer Response: Specify a valid start line number.

ISPD294 **Missing CONTROL parm - A required parameter is missing from the CONTROL service request.**

Explanation: The CONTROL service request requires a parameter but none was specified. Valid parameters are DISPLAY, NONDISPL, ERRORS, SPLIT, NOCMD, and SUBTASK. Most of these parameters require other parameters which are described in *ISPF Services Guide*.

Programmer Response: Supply a valid parameter for the CONTROL request.

ISPD295 **Missing CONTROL parm - A required parameter missing from CONTROL DISPLAY service request.**

Explanation: The CONTROL DISPLAY service request requires another parameter. Valid parameters are LOCK, LINE, SM, REFRESH, SAVE, RESTORE, and ALLVALID. One of these must be specified.

Programmer Response: Supply a valid parameter for CONTROL DISPLAY.

ISPD296 **Invalid CONTROL parm - 'aaaaaaaa' is invalid option for CONTROL ABEND service request.**

Explanation: In CMS, the CONTROL ABEND service request requires another parameter, either ON or OFF. Another value *aaaaaaaa* was specified, which is incorrect.

Programmer Response: Change *aaaaaaaa* to ON or OFF.

ISPD297 **Invalid CONTROL parm - 'aaaaaaaa' is invalid option for CONTROL CRETURN service request.**

Explanation: In CMS, the CONTROL RETURN service request requires another parameter, either CSTART or CSTOP. An invalid value *aaaaaaaa* was used instead.

Programmer Response: Change *aaaaaaaa* to CSTART or CSTOP.

ISPD298 **Invalid CONTROL parm - 'aaaaaaaa' is invalid option for CONTROL NONDISPL service request.**

Explanation: The CONTROL NONDISPL service request requires another parameter, which can be either ENTER or END. An incorrect value *aaaaaaaa* was used instead.

Programmer Response: Change *aaaaaaaa* to ENTER or END.

ISPD299 SPLIT not supported - The ISPF batch environment does not support SPLIT.

Explanation: The CONTROL SPLIT ENABLE service request is not allowed while running in the ISPF batch display environment.

Programmer Response: Avoid using this request if the application is to be run in batch.

ISPD301 Invalid FKA parm - Valid FKA parameters are ON, OFF, PREFIX, NOPREFIX, or blank. PREFIX and NOPREFIX are only valid when running in GUI mode.

Explanation: The parameter for the FKA command must be ON, OFF, PREFIX, NOPREFIX, or blank. PREFIX and NOPREFIX are only valid when running in GUI mode. Something else was used, which is incorrect.

User Response: Correct the parameter to the FKA command and retry.

ISPD302 Invalid upload target – The target for the upload must be a specific member of a PDS or a sequential data set.

Explanation: When uploading a workstation file to the host, the host file specified must be either a sequential data set or a member or a PDS. Something else was used, which is incorrect.

User Response: Correct host data set name and retry.

ISPD303 Member name not allowed – You cannot specify a member name for a sequential data set.

Explanation: When uploading a workstation file to the host, the host file specified must be either a sequential data set or a member or a PDS. Something else was used, which is incorrect.

User Response: Correct host data set name and retry.

ISPD801 TBOPEN failure - Return code *aaaaaaaa* from TBOPEN for table "*bbbbbbbb*". (1+)

Explanation: The ISPPUP panel update utility could not open the input table using the TBOPEN service due to a severe error. The return code value and the table name are given in the message. Processing is terminated.

System Programmer Response: Use the return code value to determine the reason for the severe error.

ISPD802 Table not found - Table "*aaaaaaaa*" not found in ISPTLIB, or ISPTLIB not allocated. (1+)

Explanation: The input table for the ISPPUP panel update utility was not found. This could be because the table name was misspelled, or the table library was not allocated. The return code from TBOPEN is 8 or 16. Processing is terminated.

System Programmer Response: Make sure the desired table is in the table library and that the correct library is allocated.

ISPD803 ISPLLIB error - The panel input library ISPLLIB is not open. (*aaaaaaaa+*)

Explanation: The panel being updated for the ISPPUP panel update utility could not be found because the ISPLLIB panel library is not open. The modified panel output library (ISPPMOD) was searched and the panel was not there. Processing is terminated.

System Programmer Response: Make sure that the proper panel input library is allocated before running ISPPUP.

ISPD804 Panel not found - Panel "*aaaaaaaa*" not found in panel input library "ISPLLIB". (*bbbbbbbb*)

Explanation: The ISPPUP panel update utility could not find the input panel *aaaaaaaa* in the panel input library ISPLLIB. Processing continues with the next panel.

System Programmer Response: Correct the name of the input panel, or make sure it is in a data set allocated to ISPLLIB.

ISPD805 BLDL error - I/O error during BLDL for ddname "*aaaaaaaa*". (*bbbbbbbb*)

Explanation: The panel update utility, ISPPUP, had a severe error from the BLDL request when trying to find a panel member in the ISPLLIB or ISPPMOD library. The return code in the message indicates a severe error for BLDL. Processing is terminated.

System Programmer Response: Analyze the reason why the BLDL failed. Contact IBM support if further help is needed.

ISPD806 *aaaaaaaa* error - The panel output library "*aaaaaaaa*" has not been allocated. (1+)

Explanation: The ISPPUP panel update utility could not continue because the ISPPMOD panel output library was not allocated. Processing is terminated.

System Programmer Response: Make sure the correct library is allocated to ISPPMOD before running ISPPUP.

ISPF Messages

ISPD807 **No asterisk found - The "&ZSEL =" in panel "aaaaaaaa" has no asterisk translation. (bbbbbbbb)**

Explanation: While the selection panel update utility, ISPPUP, was updating panel *aaaaaaaa*, no asterisk (*) translation was found in the TRANS statement. Processing continues with the next panel.

System Programmer Response: It is desirable to have an asterisk selection in all selection panel TRANS statements.

ISPD808 **Model section found - Panel "aaaaaaaa" is an invalid selection panel (model section found).(bbbbbbbb)**

Explanation: A)MODEL section should be used only in table display panels. The selection panel update utility (ISPPUP) found a)MODEL section in a selection panel. Processing continues with the next panel.

System Programmer Response: Check to make sure this panel is a selection panel.

ISPD809 **GETMAIN error - Return code aaaaaaaa from common subroutine CSM. (1+)**

Explanation: While the panel update utility (ISPPUP) was initializing, it attempted to get storage for a panel buffer or internal control blocks. The GETMAIN failed and processing has terminated.

System Programmer Response: Check to make sure adequate main storage is allocated to the job.

ISPD810 **Read error - I/O error reading panel "aaaaaaaa" from "bbbbbbbb". (ccccccc)**

Explanation: An I/O error occurred in the Select Panel Update Utility, ISPPUP, while reading panel definition *aaaaaaaa* from the library file defined by *bbbbbbbb*. Processing has terminated.

System Programmer Response: Determine the reason for the I/O error, if possible. Contact IBM support for further help if needed.

ISPD811 **Panel too large - Definition for panel "aaaaaaaa" will exceed bbbbbbbb lines. (ccccccc)**

Explanation: The Selection Panel Update utility cannot handle a selection panel that has more than *bbbbbbbb* lines. Processing continues with the next panel.

System Programmer Response: Remove unnecessary lines from the panel and run the utility again.

ISPD812 **Body size error - Body of panel "aaaaaaaa" is empty or larger than bbbbbbbb lines. (ccccccc)**

Explanation: The Selection Panel Update utility, ISPPUP, was processing panel *aaaaaaaa* which has either zero lines or more than *bbbbbbbb* lines in the body section. Processing continues with the next panel.

System Programmer Response: Correct the body section of the panel so that it can be handled by the utility, or update the panel by hand.

ISPD813 **Missing)END stmt - End of file found before)END statement for panel "aaaaaaaa". (bbbbbbbb)**

Explanation: The Selection Panel Update utility, ISPPUP, reached the end of the current panel, *aaaaaaaa*, unexpectedly. The utility expects an)END statement to complete the panel definition. Processing continues with the next panel.

System Programmer Response: Correct the incomplete panel so that it contains an)END statement.

ISPD814 **No PROC section - "aaaaaaaa" is an invalid selection panel (no PROC section found). (bbbbbbbb)**

Explanation: The Selection Panel Update utility, ISPPUP, did not find a)PROC section in panel *aaaaaaaa*. Selection panels must have a)PROC section. Processing continues with the next panel.

System Programmer Response: Correct the panel so that it has a)PROC section.

ISPD815 **No &ZSEL assignment - No &ZSEL assignment found in PROC section of panel "aaaaaaaa". (bbbbbbbb)**

Explanation: The Selection Panel Update utility, ISPPUP, did not find any statement in the)PROC section of panel *aaaaaaaa* that assigns a value to ZSEL. Processing continues with the next panel.

System Programmer Response: Ensure that all panels processed by ISPPUP have ZSEL assignment statements.

ISPD816 **Invalid option - Existing option "aaaaaaaa" in panel "bbbbbbbb" is too long. (ccccccc)**

Explanation: The Selection Panel Update utility, ISPPUP, has found an option value in an input panel (panel being updated) that is too long. Processing continues with the next panel.

System Programmer Response: Make sure the option value is no more than 4 characters.

ISPD817 **Long select string - Select string specified for panel "aaaaaaa" is too long. (bbbbbbbb)**

Explanation: The Selection Panel Update utility, ISPPUP, tried to add the selection string text to the)PROC section of a panel but the text would not fit into the logical record (80 characters). The limit on selection string text is 30 characters. Processing continues with the next panel.

System Programmer Response: Shorten the selection panel text.

ISPD819 **Invalid option - Option "aaaaaaa" for "bbbbbbbb" has blanks, commas, or periods. (ccccccc)**

Explanation: The Selection Panel Update utility, ISPPUP, found the OPTION field in the input table to have a faulty value. The field is faulty because it contains an imbedded blank, comma, or period character. Processing continues with the next panel.

System Programmer Response: Correct the option field in the input table that drives the ISPPUP.

ISPE000 **Invalid return code (aaaaaaa) received from ISPF reserve exit.**

Explanation: The Reserve installation exit has returned a return code other than 0 or 16.

User Response: Contact your system programmer.

System Programmer Response: See *ISPF Planning and Customizing* to determine which exit is the Reserve installation exit, then determine the reason the exit is returning a return code other than 0.

ISPE001 **ISPF reserve exit, RC=16, resource not available.**

Explanation: The requested resource is not available. This is determined by the Reserve installation exit.

User Response: Contact your system programmer.

System Programmer Response: See *ISPF Planning and Customizing* to determine which exit is the Reserve installation exit, then determine which resource is not available.

ISPE002 **Severe error - Display service exit routine returned invalid return code aaaaaaa.**

Explanation: The Display Service installation exit routine has returned a return code other than 0 or 4.

User Response: Contact your system programmer.

System Programmer Response: See *ISPF Planning and Customizing* to determine which exit is the DISPLAY

installation exit, then determine why the exit returned a return code other than 0 or 4.

ISPE003 **Authorization failure - Command 'aaaaaaa' rejected by exit routine for TSO command start.**

Explanation: A TSO command has been rejected by the TSO Command installation exit.

User Response: Contact your system programmer for a list of commands that are not allowed by your TSO Command installation exit.

System Programmer Response: See *ISPF Planning and Customizing* to determine which exit is the TSO Command installation exit then determine why the exit rejected the command.

ISPE004 **TSO command error - Exit routine for command 'aaaaaaa' returned invalid code bbbbbbbb.**

Explanation: The TSO Command installation exit has returned a return code other than 0, 4, or 16.

User Response: Contact your system programmer.

System Programmer Response: See *ISPF Planning and Customizing* to determine which exit is the TSO Command installation exit, then determine why the exit returned an invalid return code.

ISPE005 **Resource not available - Reserve exit, RC=16, resource not available.**

Explanation: The requested resource is not available, as determined by the Reserve installation exit.

User Response: Contact your system programmer.

System Programmer Response: See *ISPF Planning and Customizing* to determine which exit is the Reserve installation exit, then determine the resource that is not available.

ISPE006 **Invalid return code - Invalid return code received from reserve exit - valid RC=0,16.**

Explanation: The Reserve installation exit has returned a return code other than 0 or 16.

User Response: Contact your system programmer.

System Programmer Response: See *ISPF Planning and Customizing* to determine which exit is the Reserve installation exit, then determine the reason for the exit returning a return code other than 0 or 16.

ISPF Messages

ISPE102 **ENVIRON** *aaaaaaaa error - bbbbbbbb is an invalid parameter for ENVIRON aaaaaaaa command.*

Explanation: The second parameter used with the ENVIRON command is invalid.

User Response: Correct the parameters using the following example.

```
ENVIRON <ENBLDUMP <ON|OFF>> Default: ON
<TERMTRAC <ON|ERROR|DUMP|OFF>>
Default: ON
<TERMSTAT <QUERY>>
```

ISPE103 **Ddname not specified - A ddname must be specified for ENVIRON TERMTRAC aaaaaaaa.**

Explanation: For TERMTRAC ON, ERROR, or DUMP, a ddname is required for the output of the terminal tracing.

User Response: Enter a ddname using the ENVIRON panel selection.

ISPE104 **TERMTRAC not activated - Storage could not be obtained for the TERMTRAC buffer.**

Explanation: Insufficient storage is available to obtain a buffer for TERMTRAC.

Programmer Response: Allocate additional storage and retry the TERMTRAC command.

ISPE105 **TERMTRAC activated - TERMTRAC has been activated.**

Explanation: Terminal tracing is active. Output will be written to the requested ddname.

ISPE106 **TERMTRAC not active - ENVIRON TERMTRAC dump requested when TERMTRAC is not active.**

Explanation: TERMTRAC with DUMP parameter cannot be executed until TERMTRAC has been activated using the ENVIRON TERMTRAC ON command.

Programmer Response: Start TERMTRAC by issuing the ENVIRON TERMTRAC command. See the following example.

```
ENVIRON <ENBLDUMP <ON|OFF>> Default: ON
<TERMTRAC <ON|ERROR|DUMP|OFF>>
Default: ON
<TERMSTAT <QUERY>>
```

ISPE107 **TERMTRAC turned off - TERMTRAC has been turned off.**

Explanation: This is an informational message.

ISPE108 **ENVIRON ENBLDUMP on - ENVIRON ENBLDUMP has been turned on.**

Explanation: This is an informational message.

ISPE109 **ENVIRON ENBLDUMP off - ENVIRON ENBLDUMP has been turned off.**

Explanation: This is an informational message.

ISPE110 **Invalid ENBLDUMP value - An ENBLDUMP value of ON or OFF must be specified.**

Explanation: To enable a dump for subtask abend when not in ISPF TEST mode, set ENBLDUMP to ON. To disable the dump, set ENBLDUMP to OFF.

User Response: Enter one of the correct values.

ISPE111 **Invalid TERMTRAC value - A TERMTRAC value of ON, OFF, or ERROR must be specified.**

Explanation: To turn terminal tracing on, specify ON. To turn terminal tracing off, specify OFF. To turn terminal tracing on and initiate an MVS SNAP dump if a TPUT or TGET error occurs, specify ERROR.

User Response: Enter one of the correct values.

ISPE112 **Invalid ddname - Ddname must be alphanumeric with first character alphabetic.**

Explanation: The ddname must follow the given naming conventions.

User Response: Enter an alphanumeric ddname with an alphabetic first character.

ISPE113 **Invalid TERMSTAT value - YES or QUERY must be specified to invoke ENVIRON TERMSTAT.**

Explanation: The value entered for TERMSTAT is invalid.

User Response: Enter one of the correct values.

Programmer Response: Enter YES or QUERY to invoke ENVIRON TERMSTAT.

ISPE114 *aaaaaaaa = bbbbbbbb*

Explanation: This is an informational message.

ISPE115 *aaaaaaaa = bbbbbbbb - x'ccccccc'*

Explanation: This is an informational message.

ISPE116 *aaaaaaaa = x'bbbbbbbb'*

Explanation: This is an informational message.

ISPE117 *aaaaaaaa*

Explanation: This is an informational message.

ISPE118 **ENVIRON parm error - The parameter is longer than 8 characters.**

Explanation: A parameter entered with the ENVIRON command exceeds 8 characters.

User Response: Enter the ENVIRON command using correct parameters.

ISPF101 **Router service error - Unknown file tailoring service.**

Explanation: An incorrect File Tailoring service request was used. Valid requests are FTOPEN, FTINCL, FTERASE, and FTCLOSE.

Programmer Response: Correct the request to use one of the valid names above.

ISPF102 **No work file - Work file not open.**

Explanation: During file tailoring, the output is written to a temporary data set. For some reason, the temporary data set could not be opened.

Programmer Response: Check the log for other errors that explain the open failure.

ISPF103 **No imbed file - Imbed file 'aaaaaaaa' does not exist, bbbbbbbb record-ccccccc.**

Explanation: During file tailoring, an imbed statement named an input file, *aaaaaaaa*, that was not found. The imbed statement was in *bbbbbbbb*. The record number of the imbed statement is *ccccccc*.

Programmer Response: Correct the skeleton file name in the imbed statement, or create the skeleton file named in the imbed statement.

ISPF104 **)SEL error -)ENDSEL has no matching)SEL, aaaaaaaa record-bbbbbbbb.**

Explanation: In file tailoring, an)ENDSEL was found before a matching)SEL statement. The control file is *aaaaaaaa*, the error is found in record number *bbbbbbbb*.

Programmer Response: Correct the control statements so that each)ENDSEL has a matching)SEL.

ISPF105 **Output overflow - Line to be written greater than data set LRECL (aaaaaaaa), bbbbbbbb record-ccccccc.**

Explanation: During file tailoring, the substitution of variables has created a record that is greater than the logical record length (*aaaaaaaa*) of the output file. The name *bbbbbbbb* and record number (*ccccccc*) of the input file are also given.

Programmer Response: Increase the logical record length of the output file, or restructure the input file so that output record is not exceeded due to variable substitution.

ISPF106 **Control word error - Invalid control word, aaaaaaaa record-bbbbbbbb.**

Explanation: An unexpected control word was found in the file tailoring control file. The file name is *aaaaaaaa*; the error was found at record *bbbbbbbb* in the file.

Programmer Response: Correct the control word error in the control file.

ISPF107 **Control word error - Invalid control word parameter, aaaaaaaa record-bbbbbbbb.**

Explanation: One of the parameters in a file tailoring control statement is invalid. The control file is *aaaaaaaa*; record number *bbbbbbbb* is where the error was found.

Programmer Response: Correct parameter in the file tailoring control statement.

ISPF108 **Variable name error - Invalid variable name, aaaaaaaa record-bbbbbbbb.**

Explanation: A file tailoring variable name is invalid, perhaps because it is too long, or because it contains only a single ampersand character. The tailoring input file is *aaaaaaaa*; the record number is *bbbbbbbb*.

Programmer Response: Correct the variable in record *bbbbbbbb* of control file *aaaaaaaa*.

ISPF109 **)IM error - Exceeds maximum)IM level of 3, aaaaaaaa record-bbbbbbbb.**

Explanation: The file tailoring control file *aaaaaaaa* has more than three levels of imbeds (imbed within imbed). Only three are allowed. The error was discovered at record *bbbbbbbb* of the control file.

Programmer Response: Correct the control file so that no more than 3 imbed levels are used.

ISPF Messages

ISPF110 **)SEL error - Exceeds maximum)SEL level of 8, aaaaaaaa record-bbbbbbbb.**

Explanation: In file tailoring, up to 8 levels of nesting are allowed when doing)SEL within)SEL. This limit was exceeded in record *bbbbbbbb* of member *aaaaaaa*.

Programmer Response: Correct the file tailoring dialog so that only 8 nesting levels are used.

ISPF111 **Record missing - Continuation card missing, aaaaaaaa record-bbbbbbbb.**

Explanation: The end of file was reached on a data file or imbedded file, but the last record was marked as "continued" because it had a "?" at the end. It is assumed that the continuation record is missing and processing stops. The error was detected at record *bbbbbbbb* in member *aaaaaaa*.

Programmer Response: Remove the "?" character from the last record, or supply the missing record to complete the continuation.

ISPF112 **Substitution error - Invalid cond. sub. string, aaaaaaaa record-bbbbbbbb.**

Explanation: The conditional substitution string in record *bbbbbbbb* of member *aaaaaaa* has incorrect syntax.

Programmer Response: See *ISPF Dialog Developer's Guide and Reference* for help with the syntax. Correct the syntax of the conditional substitution string.

ISPF114 **)IM error -)IM ends in wrong)SEL, aaaaaaaa record-bbbbbbbb.**

Explanation: This is an internal error in ISPF. The stack pointers for)SEL and)IM have become inconsistent and processing cannot continue.

Programmer Response: Contact IBM support.

ISPF115 **)IM error -)IM ends in wrong)DOT, aaaaaaaa record-bbbbbbbb.**

Explanation: This is an internal error in ISPF. The stack pointers for)DOT and)IM have become inconsistent and processing cannot continue.

Programmer Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPF116 **)SEL error -)SEL has no matching)ENDSEL, aaaaaaaa record-bbbbbbbb.**

Explanation: A)SEL was in progress and the end of file was reached on either the main skeleton file or an imbedded file. ISPF was expecting to see the matching)ENDSEL before the end of the imbed or main file and

didn't find it. The member name is *aaaaaaa* and *bbbbbbbb* is the record number where the error was detected.

Programmer Response: Examine the file and provide the matching)ENDSEL.

ISPF117 **)SEL error -)SEL ends in wrong)DOT, aaaaaaaa record-bbbbbbbb.**

Explanation: This is an internal error in ISPF. The internal stack pointers for)SEL and)DOT have become inconsistent and processing cannot continue.

Programmer Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPF118 **Too many tables - Table stack is full, aaaaaaaa record-bbbbbbbb.**

Explanation: More than 4 levels of)DOT nesting was attempted during file tailoring. Only 4 levels are allowed. The error was detected in member *aaaaaaa* while processing record number *bbbbbbbb*.

Programmer Response: Change the file tailoring skeleton so that no more than 4 nesting levels are used.

ISPF119 **)DOT error -)ENDDOT has no matching)DOT, aaaaaaaa record-bbbbbbbb.**

Explanation: A)ENDDOT statement was found in the file tailoring input and there is no corresponding)DOT.)ENDDOT must be preceded by a)DOT. The error was discovered in member *aaaaaaa* at record number *bbbbbbbb*.

Programmer Response: Correct the file so that)ENDDOT is preceded by)DOT.

ISPF120 **)DOT error -)DOT has no matching)ENDDOT, aaaaaaaa record-bbbbbbbb.**

Explanation: File tailoring reached the end of the current imbed or input file without finding an)ENDDOT to match a previous)DOT. The error is in member *aaaaaaa* at record *bbbbbbbb*.

Programmer Response: Provide an)ENDDOT statement in the same input file or imbed to match the previous)DOT.

ISPF121 **)DOT error -)DOT ends in wrong)SEL, aaaaaaaa record-bbbbbbbb.**

Explanation: This is an internal error in ISPF. The internal pointers for)DOT and)SEL have become inconsistent and processing cannot continue. The error was detected in member *aaaaaaa* at record number *bbbbbbbb*.

Programmer Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

**ISPF122 Service error - RC aaaaaaaa from
bbbbbbbb, ccccccc record-dddddddd**

Explanation: An error occurred in table processing for file tailoring, related to)DOT or)ENDDOT. The table service is bbbbbbbb and the return code from the service is aaaaaaaa. The error was discovered while processing record dddddddd of member ccccccc.

Programmer Response: Use the return code value to help determine the nature of the problem.

**ISPF123 Invalid operator - Invalid relational
operator, aaaaaaaa record-bbbbbbbb**

Explanation: A relational operator in the file tailoring)SEL statement is invalid, or the relational expression is incomplete. Relational operators are things like (=) or GE. See *ISPF Dialog Developer's Guide and Reference* for a description of relational expressions. The error was found in record bbbbbbbb of member aaaaaaaa.

Programmer Response: Correct the relational operator in the)SEL statement.

**ISPF124 Invalid operator - Invalid Boolean
operator, aaaaaaaa record-bbbbbbbb**

Explanation: A Boolean operator was expected in the file tailoring)SEL statement. What was found was neither "or" nor "and". The error was found at record bbbbbbbb in member aaaaaaaa.

Programmer Response: Correct the Boolean operator in the)SEL statement.

**ISPF125 Invalid operation - Invalid operation
code in)set, aaaaaaaa record-bbbbbbbb**

Explanation: An arithmetic operator other than "+" (plus) or "-" (minus) was found in the)SET statement of a file tailoring file. The error is found in record bbbbbbbb of member aaaaaaaa.

Programmer Response: Correct the)SET statement to use a valid arithmetic operator.

**ISPF126)DOT error - Table being processed via
)DOT, aaaaaaaa record-bbbbbbbb**

Explanation: In file tailoring, the same table is being processed recursively via)DOT. The same table cannot be used more than once in nested)DOT statements. The error was discovered at record bbbbbbbb in member aaaaaaaa.

Programmer Response: Correct the nested)DOT

statements so that no table name is used more than once.

**ISPF127)DEFAULT error - Invalid character in
)DEFAULT, aaaaaaaa record-bbbbbbbb**

Explanation: More than 7 characters were specified in the)DEFAULT statement for file tailoring. Exactly 7 must be specified. The error was found in record bbbbbbbb of member aaaaaaaa.

Programmer Response: Correct the)DEFAULT statement so that no more than 7 characters are specified.

**ISPF128)DEFAULT error - Character missing in
)DEFAULT, aaaaaaaa record-bbbbbbbb**

Explanation: Fewer than 7 characters were specified in a)DEFAULT statement for file tailoring. Exactly 7 characters must be specified. The error was found in record bbbbbbbb of member aaaaaaaa.

Programmer Response: Correct the)DEFAULT statement so that exactly 7 characters are specified.

**ISPF130 GETMAIN error - Module aaaaaaaa
received RC-bbbbbbbb from ISPCSM.**

Explanation: An unexpected error return code appeared while getting or freeing storage. The storage routine is ISPCSM, the code it returned is bbbbbbbb, and calling module is aaaaaaaa. The error occurred during file tailoring. If the return code is 4, a conditional GETMAIN was unsuccessful. If 8, then an invalid request code was used, or an error was returned from GETMAIN or FREEMAIN.

User Response: The region size may not be large enough. Check your region size, then contact IBM support.

**ISPF131 Build TFD error - Module aaaaaaaa
received RC-bbbbbbbb from ISPCBTFD.**

Explanation: An unexpected internal error occurred in ISPF while trying to build an internal control block for file tailoring. The return code and the module name that received the return code are given in the message.

Programmer Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

**ISPF132 Data set name error - Module aaaaaaaa
received RC-bbbbbbbb from ISPCDSN.**

Explanation: An internal error occurred in ISPF during file tailoring. Module aaaaaaaa called ISPCDSN to get a data set name but ISPCDSN set return code bbbbbbbb, which was unexpected. If the return code is 4,

ISPF Messages

ISPCDSN found no DD statement or the DDNAME in the DCB was blank.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPF133 DEQUEUE error - Module *aaaaaaaa* received RC-*bbbbbbbb* from ISPCDQ.

Explanation: An internal error occurred in ISPF while trying to dequeue a data set or member during file tailoring. Module ISPCDQ, which is a dequeue service module, returned unexpected return code *bbbbbbbb* to module *aaaaaaaa*. If the return code is 4, DEQ was unable to remove the task from wait state. If 8, DEQ got a Resource Not Found return code. If 12, there is an invalid input parameter.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPF134 FIND error - Module *aaaaaaaa* received RC-*bbbbbbbb* from ISPCFI.

Explanation: An internal error occurred in ISPF during file tailoring. Module *aaaaaaaa* called ISPCFI to FIND a Partitioned Data Set member and received an unexpected return code, *bbbbbbbb*. If the return code is 4, then a member was not found. If the return code is 8, an I/O error occurred during BLDL.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPF135 I/O error - Unrecoverable I/O error on *aaaaaaaa*.

Explanation: An input I/O error occurred during file tailoring. The error may have occurred on the main skeleton file, on a)DOT file, an)IM file, or while reading a temporary file. *aaaaaaaa* is the member name that was being processed.

User Response: Check the input files for obvious incompatibilities with the ISPF recommended values, such as wrong record length. Also make sure that variable and fixed record types have not been mixed in the concatenation of input data sets.

ISPF136 I/O error - Unrecoverable I/O error on output data set.

Explanation: An I/O error occurred writing the output data set for file tailoring.

User Response: Check the output data set for possible incompatibilities, such as wrong data set organization. If further help is needed, call IBM support.

ISPF138 STOW error - Module *aaaaaaaa* received decimal return code *bbbbbbbb*, decimal reason code *cccccccc* from the STOW macro.

Explanation: An internal error occurred in ISPF while doing file tailoring. An unexpected error code was returned from the common STOW module (ISPCST). The module that received the code is *aaaaaaaa*; the value of *bbbbbbbb* is the decimal return code, the value of *cccccccc* is the decimal reason code returned from the MVS STOW macro. Possible STOW errors are directory out of space or I/O error. For a more complete list of possible error conditions refer to the appropriate system documentation on the STOW macro.

User Response: Contact your system programmer.

System Programmer Response: Refer to the appropriate system documentation on the STOW macro.

ISPF139 Output error - Output file is not a PDS.

Explanation: One of the following occurred:

- An FTCLOSE was attempted with a specified member name and the output file was not a partitioned data set,
- An FTCLOSE was attempted on a data set that was not a library, or
- An FTERASE was attempted on a data set that was not partitioned.

Programmer Response: Correct the error.

ISPF140 Data set not allocated - *aaaaaaaa* data set is not allocated.

Explanation: The input data set or an imbed data set for file tailoring was not allocated. The ddname is *aaaaaaaa*.

Programmer Response: Allocate the input data sets and retry file tailoring.

ISPF141 ENQUEUE failed - Data set *aaaaaaaa* in use, ENQUEUE failed.

Explanation: During file tailoring the input, output, or a temporary data set could not be enqueued. *aaaaaaaa* is either the ddname or data set name that could not be enqueued. The data set is in use by another task, and file tailoring cannot continue.

Programmer Response: Using *aaaaaaaa* as a guide, resolve the conflicting use of the data set.

ISPF142 Variable truncation - Variable truncation has occurred.

Explanation: During file tailoring, a file tailoring variable was replaced with a value that was truncated.

Programmer Response: Analyze the variables to see which one may have been truncated. Look at the data files to see if there are lines that can be shortened to provide extra room for expansion.

ISPF143 STAE error - Module *aaaaaaaa* received RC-*bbbbbbbb* from STAE.

Explanation: An internal error occurred in ISPF while file tailoring was trying to establish or cancel an STAE exit. The return code from the STAE macro is *bbbbbbbb*. *aaaaaaaa* is the name of the module where the STAE macro was called.

Programmer Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPF144 System abend - Module *aaaaaaaa* intercepted system abend *bbbbbbbb*.

Explanation: A system abend occurred during file tailoring. The system abend code is *bbbbbbbb* and the STAE exit routine which generated this message is in module *aaaaaaaa*. Data sets have been closed and dequeued.

Programmer Response: Use the abend code to help discover the reason for the abend. Contact IBM support if further help is needed.

ISPF145 Output data conflict - Generated data in last output column, last input column cannot be moved.

Explanation: Column 72 in the skeleton data file already has data in it, and there is generated data that would replace it. This existing data might be a sequence number which cannot be moved.

Programmer Response: Avoid generating data in column 72 of the skeleton if the file contains sequence numbers.

ISPF151 Invalid tab position - Tab (*aaaaaaaa*) out of range (1-255), *bbbbbbbb* record-*cccccccc*.

Explanation: One of the tab values in the file tailoring)TB or)TBA statement is not in the correct range of 1 through 255. The incorrect value is *aaaaaaaa*, and the error was discovered in record *cccccccc* of member *bbbbbbbb*.

Programmer Response: Correct the)TB or)TBA statement to use tab values in the range 1 to 255.

ISPF152 Invalid tab position - Tab (*aaaaaaaa*) must exceed previous tab, *bbbbbbbb* rec-*cccccccc*.

Explanation: The numeric tab positions in the)TB or)TBA statement for file tailoring are not in increasing

sequence. *aaaaaaaa* is the value of the offending tab value; it was found in record *cccccccc* of member *bbbbbbbb*.

Programmer Response: Correct the)TB or)TBA statement so each tab value is higher than the previous one.

ISPF153 Too many tab stops - Tab control word has more than 16 tab stops, *aaaaaaaa* rec-*bbbbbbbb*.

Explanation: The)TB or)TBA statement in file tailoring has more than 16 tab stops specified. No more than 16 are allowed. The error was found in record *bbbbbbbb* of member *aaaaaaaa*.

Programmer Response: Correct the)TB or)TBA statement so no more than 16 tab stops are specified.

ISPF154 Invalid LRECL - The limit of input/output data set logical record length is 255.

Explanation: File tailoring data sets cannot have a logical record length greater than 255. This applies to both input and output data sets.

Programmer Response: Check logical record length of input and output data sets for file tailoring, including temporary data sets. Make sure none has a logical record length greater than 255.

ISPF155 STOW password error - File tailoring does not support password protected members.

Explanation: FTCLOSE or FTERASE is being attempted on a file tailoring output data set member and the member is password protected. File tailoring output to password protected members is not supported.

Programmer Response: Select an output data set for file tailoring that is not password protected.

ISPF156 Output overflow - Line to be written greater than data set LRECL *aaaaaaaa*.

Explanation: During a file tailoring FTCLOSE, the last non-blank character of the tailored output data would not fit within the logical record length of the output data set. The data set logical record length is *aaaaaaaa*.

Programmer Response: Increase the logical record length of the output data set or ensure that data will fit within the output data set logical record.

ISPF Messages

ISPF160 **FTP errors have occurred - Review the following FTP output for the error that has occurred. See the TCP/IP User Guide for FTP return code explanations. Enter the HELP command for a list of FTP installation requirements. After determining the cause of the error, return to the install dialog and rerun the ISPF C/S INSTALL command.**

Explanation: This is an informational message. This message is issued by the FTP ISPF C/S INSTALL command.

The following are requirements to download the ISPF Client/Server Component using FTP:

- TCP/IP must be installed and running.
- FTP must be installed and running.
- The path specified must have write access (Review TRUSERS file).
- You must have read access to the MVS data set where ISPF Client/Server Component resides.
- The directory where ISPF Client/Server Component is being copied must exist or you must have selected the 'Create directory' choice field.
- If you have asked to create the workstation directory, you must be able to change directory to the parent of the specified directory.

ISPF161 **FTP command not found. - The ISPF C/S INSTALL program received a severe error running the FTP command, probably due to not being able to find the FTP command.**

Explanation: This is an informational message. This message is issued by the FTP ISPF C/S INSTALL command.

ISPF162 **EXE not found - The workstation executable part was not found in the data set specified. Either the language specified is not installed or the data set specified is incorrect.**

Explanation: The EXE was not found in the data set specified on the panel.

User Response: Ask your system programmer for the correct data set name in which the workstation executables reside. Enter the correct data set name.

ISPF163 **DLL not found - The workstation dynamic link library (DLL) part was not found in the data set specified.**

Explanation: The dynamic link library was not found in the data set specified on the panel.

ISPF164 **Allocation failed - File allocation in preparation for invoking FTP failed. FTP was not invoked and the download was aborted.**

Explanation: This message is issued by the FTP ISPF C/S INSTALL command.

User Response: Retry the download or download the workstation agent with a method other than FTP.

System Programmer Response: Capture any additional messages from TSO/E. Make sure the WTPMSG and MSGID options are in effect in the user's TSO/E profile.

ISPG002 **Enter project name - Project name is missing or invalid.**

Explanation: The Project name field is blank or invalid in the ISPF library data set input fields.

User Response: A valid Project name must be entered for the ISPF library. An ISPF library is a cataloged partitioned data set with a three-level data set name in this format:
'project.group.type'.

ISPG003 **Enter group name - Group name is missing or invalid.**

Explanation: The Group name field is blank or invalid in the ISPF library data set input fields.

User Response: A valid Group name must be entered for the ISPF library. An ISPF library is a cataloged partitioned data set with a three-level data set name in this format:
'project.group.type'.

ISPG004 **Enter type qualifier - Type is missing or invalid.**

Explanation: The Type name field is blank or invalid in the ISPF library data set input fields.

User Response: A valid Type name must be entered for the ISPF library. An ISPF library is a cataloged partitioned data set with a three-level data set name in this format:
'project.group.type'

ISPG007 **Vol serial not allowed - Use "Other data set name" field when specifying volume serial.**

Explanation: The Volume Serial input field invalidly contains a value when not specifying Other Data Set Name field.

User Response: When using the ISPF Library input fields for entering the data set name, do not put any value in the Volume Serial input field. Only when

using the Other Data Set Name input field may the Volume Serial input field contain a valid value.

ISPG010 Data set is open - Data set is currently being used by ISPF.

Explanation: The specified data set is open and currently being used by ISPF.

User Response: This message is issued when one of the data sets LIST, LOG, TEMPLIST, TEMPCNTL, or EDIT RECOVERY is specified and ISPF is currently using the data set. The LOG and LIST data sets are controlled by the LOG and LIST commands. These two commands can keep the current data set and continue with a new data set so that keep data set can be used. The TEMPLIST, TEMPCNTL, and EDIT RECOVERY data sets need to be saved and closed in order to be used.

ISPG024 Invalid scroll amount - Valid: M (MAX), P (PAGE), H (HALF), C (CSR), D (DATA) or 1 to 9999

Explanation: An invalid scroll amount has been specified.

User Response: Enter one of the valid responses listed in the Help message, either - M (MAX), P (PAGE), H (HALF), C (CSR), D (DATA), or 1 TO 9999.

ISPG026 No top panel defined - The ZHTOP dialog variable is not set to a panel name.

Explanation: The dialog variable ZHTOP does not contain the name of the first tutorial panel.

User Response: The variable ZHTOP must contain the name of the first tutorial panel. The variable can be set in the beginning of the application to ensure that the user can always display the tutorial panel regardless of how the tutorial was entered. ZHTOP can also be set on the primary option menu.

ISPG028 Invalid selection - Valid codes are B, S, U, T or I, or a number if selection list present.

Explanation: An invalid code or selection number entered on a tutorial panel.

User Response: You can view the tutorial sequentially by leaving the command/option field blank and repeatedly pressing the Enter key.

Alternatively, you can select topics from lists displayed on many of the tutorial pages. For example, enter

OPTION ==> 3

to select topic number three.

You can also enter one of the following commands on any tutorial page:

BACK or B

to back up to the previously viewed page.

SKIP or S

to skip the current topic and go on to the next topic.

UP or U

to display a higher level list of topics.

TOC or T

to display the table of contents.

INDEX or I

to display the tutorial index.

ISPG029 No index panel defined - The ZHINDEX dialog variable is not set to a panel name.

Explanation: The dialog variable ZHINDEX does not contain the name of the first INDEX panel.

User Response: The variable ZHINDEX must contain the name of the first INDEX panel. The variable can be set in the beginning of the application to ensure that the user can always display the INDEX panel regardless of how tutorial was entered. ZHINDEX can also be set on the primary option menu.

ISPG038 I/O error - I/O error return from BLDL (reading PDS directory).

Explanation: A permanent I/O error was detected when the system attempted to search the directory of the specified data set.

User Response: Ensure that the specified data set is the correct data set. Note message number and text, then contact your system programmer.

System Programmer Response: Restore the specified data set from backup, if possible. Contact IBM support if further assistance is required.

ISPG040 Invalid DSORG - Data set organization must be partitioned or sequential.

Explanation: The data set organization was entered incorrectly.

User Response: Correct the data set organization.

ISPG041 Interface error - Rc = 'aaaaaaaa' from TSO routine IKJADTAB, function = ENDTABLE

Explanation: An error occurred on return from link to IKJADTAB.

User Response: Contact your system programmer.

System Programmer Response: Determine what the user was doing when the error occurred, then contact IBM support.

ISPF Messages

ISPG044 **Concatenation failed - Unable to concatenate the specified libraries.**

Explanation: Concatenation failed, ISPCDAIR did not return with RC=0.

User Response: Contact your system programmer.

System Programmer Response: If the user's action was correct, contact IBM support.

ISPG045 **STAE macro error - Unable to obtain storage for STAE macro, subpool 0 full.**

Explanation: Storage has been exhausted, there was a previous error that could have used all of the available storage.

User Response: Verify that your region size is large enough to run the task that just failed. If you still have a problem, contact the system programmer.

System Programmer Response: Verify that the task is not looping and that the storage is sufficient to execute the failing function.

ISPG046 **IKJTBLS interface error - Authorized table name 'aaaaaaaa' not recognized.**

Explanation: An error has occurred between the ISPF and TSO interface.

User Response: Contact your system programmer.

Programmer Response: Verify that the program has been properly authorized.

ISPG047 **IRXTERMA interface error - ISPF received return code 'aaaaaaaa' from TSO routine IRXTERMA**

Explanation: An error occurred while initializing the REXX environment.

User Response: Contact your system programmer.

System Programmer Response: If the user's action was correct, contact IBM support.

ISPG048 **TSO interface error - - Abend 'aaaaaaaa' dec, reason code 'bbbbbbbb' in TSO routine IKJTBLS**

Explanation: An abend occurred while searching for a program name in the authorization tables.

User Response: Contact your system programmer.

System Programmer Response: Verify that the user has the ability to run authorized programs. Contact IBM support to determine why IKJTBLS returned an error code of 20.

ISPG049 **TSO interface error - - Abend 'aaaaaaaa' hex, reason code 'bbbbbbbb' in TSO routine IKJTBLS**

Explanation: An abend while searching for a program name in the authorization tables.

User Response: Contact your system programmer.

System Programmer Response: Verify that the user has the ability to run authorized programs. Contact IBM support to determine why IKJTBLS returned an error code of 20.

ISPG050 **aaaaaaaa is not active - The command or function key entered is not defined.**

Explanation: Either an invalid command was entered or the function key is not defined.

User Response: Correct the command.

ISPG051 **aaaaaaaa command error - The command or function key entered is defined incorrectly.**

Explanation: The command or function key action was unsuccessful.

User Response: Correct the command.

ISPG052 **Invalid PANELID parm - Valid panelid parameters are ON, OFF, or blank.**

Explanation: The PANELID command should be followed by ON, OFF, or nothing.

User Response: Correct the PANELID command.

ISPG053 **Command is not active - The command or function key entered is not defined.**

Explanation: The command entered or the function entered is not defined.

User Response: Correct the command.

ISPG054 **Command parm is missing - The entered command requires a parameter.**

Explanation: Additional data must follow this command.

User Response: Enter a complete command. If additional information is needed, use the ISPF documentation that defines the command.

ISPG055 **Invalid MSGID parm - Valid MSGID parameters are ON, OFF or blank.**

Explanation: The MSGID command requires the additional information shown above.

User Response: Correct the command.

ISPG056 **The message ID of the last message was**
aaaaaaaa.

Explanation: This is an informational message.

ISPG057 **Line command error - A command is**
already in the line command field.

Explanation: There is a line command conflict. A command is already in the line command field.

User Response: Correct the line commands.

ISPG058 **Line command error - The line with the**
cursor does not contain a line command
field.

Explanation: There is not a field designated to accept line commands in the line that contains the cursor.

User Response: Correct the attempted use of the line command.

ISPG059 **Data truncated - Command input string**
larger than command input buffer for
this panel.

Explanation: The command string entered is too large and will be truncated.

User Response: Correct the command input string.

ISPG060 **Invalid command name - A command**
entered or contained in a CLIST has
invalid syntax.

Explanation: The command entered or used within a CLIST has invalid syntax.

User Response: Contact the responsible programmer.

Programmer Response: Correct the CLIST syntax at the failing line.

ISPG061 **Invalid command name - The command**
entered or contained in a CLIST is null
(all blanks).

Explanation: This message is self-explanatory.

User Response: Contact the responsible programmer.

Programmer Response: Correct the CLIST by entering a valid command name.

ISPG062 **Invalid command - Unable to process**
command. IKJSCAN return code =
aaaaaaaa.

Explanation: The command entered is unauthorized.

User Response: Enter the correct command name. If the command is correct, contact the responsible programmer.

Programmer Response: Verify that the command name is an authorized command.

ISPG063 **Command rejected - Command rejected**
- 'aaaaaaaa' command not supported
under ISPF.

Explanation: This command name cannot be used while using ISPF.

User Response: Enter the name correctly, or contact the responsible programmer.

Programmer Response: Correct the command name to avoid conflict with ISPF.

ISPG064 **Command abend - User abend** *aaaaaaaa*
dec occurred processing command
'bbbbbbbb'.

Explanation: The subtask abended during execution of the command.

User Response: Contact the responsible programmer.

Programmer Response: Determine why the subtask abended. Contact IBM support, if necessary.

ISPG065 **Attach error - Unable to attach command**
'aaaaaaaa'. Attach return code=bbbbbbbb.

Explanation: The command cannot be executed.

User Response: Contact the responsible programmer.

Programmer Response: Check the ATTACH macro documentation to determine why the ATTACH command failed.

ISPG066 **Command abend - Abend** *aaaaaaaa* **hex**
occurred processing command *'bbbbbbbb'.*

Explanation: The command cannot be processed.

User Response: Contact the responsible programmer.

Programmer Response: If you are unable to determine why the abend occurred, contact IBM support.

ISPG067 **PUTGET error - PUTGET return code**
aaaaaaaa **hex. Notify your system**
programmer.

Explanation: A system failure occurred.

User Response: Contact your system programmer.

System Programmer Response: An unexpected return code was received while executing a command. Refer to the PUTGET documentation for additional information about this return code.

ISPF Messages

ISPG068 **Member name too long - Member name must be less than or equal to 8 characters.**

Explanation: The member name of the data set exceeds the 8 character limit.

User Response: Correct the member name.

ISPG069 **No members in data set - The PDS specified contains no members.**

Explanation: This is an informational message.

ISPG070 **IKJEFTSR interface error - Authorized command 'aaaaaaaa'. Return code = bbbbbbbb.. Reason code = cccccccc..**

Explanation: The command that was processing has failed.

User Response: Contact the responsible programmer.

Programmer Response: IKJEFTSR has returned the above listed return and reason codes. Use the above codes to determine the reason for the failure.

ISPG071 **IKJEFTSR interface error - Authorized program 'aaaaaaaa'. Return code = bbbbbbbb.. Reason code = cccccccc..**

Explanation: The authorized program that was processing has failed.

User Response: Contact the responsible programmer.

Programmer Response: IKJEFTSR has returned the above listed return and reason codes. Use the above codes to determine the reason for the failure.

ISPG072 **Attention termination - Authorized program 'aaaaaaaa' was terminated by an attention.**

Explanation: If an attention key was pressed, this is an informational message only.

User Response: If the attention key was not pressed, contact the system programmer.

System Programmer Response: If the user did not press an attention key, contact IBM support.

ISPG073 **Command abended - User abend aaaaaaaa dec occurred processing authorized command 'bbbbbbbb'.**

Explanation: The command being processed has failed.

User Response: Report this message to the responsible programmer.

Programmer Response: IKJEFTSR has returned the

above user abend code to assist in problem determination.

ISPG074 **BLDL error message - Error processing 'aaaaaaaa' command. BLDL return code was greater than 4.**

Explanation: The BLDL failed while running the dialog.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPG075 **Command abended - Abend aaaaaaaa hex occurred processing authorized command 'bbbbbbbb'.**

Explanation: A system failure occurred during execution of the command.

User Response: Contact your system programmer.

System Programmer Response: A subtask dump may help to determine where the failure occurred.

ISPG076 **Attention message - Command terminated due to attention.**

Explanation: If an attention was entered, this message is informational only.

User Response: If an attention was not entered, contact the system programmer.

System Programmer Response: Contact IBM support.

ISPG077 **Abend 806 - Command 'aaaaaaaa' abended with code 806000. Load module not found.**

Explanation: This is an informational message.

User Response: Contact the responsible programmer.

Programmer Response: Verify that both your concatenations and the LIBDEF concatenations are correct.

ISPG078 **Program abend - User abend aaaaaaaa dec occurred processing authorized program 'bbbbbbbb'.**

Explanation: The program was unsuccessful.

User Response: Contact the responsible programmer.

Programmer Response: Use the above abend code returned from IKJEFTSR to determine the reason for the abend.

ISPG079 **Program abend - Abend** *aaaaaaaa* **hex occurred processing authorized program** *'bbbbbbbb'*.

Explanation: The program that was processing has failed.

User Response: Contact the responsible programmer.

Programmer Response: A subtask dump may be necessary to determine the reason for the failure. Contact IBM support if additional assistance is needed.

ISPG080 **Inconsistent data sets - Data set organizations are not the same.**

Explanation: An incorrect data set name may have been entered.

User Response: Verify that all data set names are entered correctly. If the data set names are correct, contact the responsible programmer.

Programmer Response: Correct the DSORG of the data sets entered. Sequential and partitioned data sets cannot be mixed.

ISPG081 **Data set not partitioned - Member name specified, but the data set is not a partitioned data set.**

Explanation: You have specified a member name for a non-partitioned data set.

User Response: Enter the correct data set name.

ISPG082 **Data set not partitioned - Only partitioned data sets may be concatenated.**

Explanation: A non-partitioned data set has been entered in the concatenation sequence.

User Response: Enter the correct data set names, or delete any data sets that are not partitioned.

ISPG083 **Deconcatenation failed - Unable to deconcatenate the specified libraries.**

Explanation: One of the libraries cannot be deconcatenated; it is probably still in use.

User Response: End the job that is using one of the libraries.

ISPG084 **Reallocation failed - DAIR RC =** *aaaaaaaa* **dec, DARC =** *bbbbbbbb* **hex, dsn =** *'ccccccc'*

Explanation: The data set could not be reallocated as old.

User Response: Use the following return codes to

determine why the operation failed. Contact the system programmer, if necessary.

Following are the DAIR return codes:

CODE	MEANING
0	DAIR completed successfully. Secondary error code in DARC field.
4	Invalid parameter list passed to DAIR.
8	Catalog Management error. Error code in CTRC field.
12	Dynamic Allocation error. Error code in DARC field.
16	No TIOT entries were available for use.
20	The DDNAME requested is unavailable.
24	The DSNAME requested is a member of a concatenated group.
28	DDNAME or DSNAME not allocated, or ATTR list name not found.
32	DISP=NEW specified for previously permanently allocated data set.
36	Catalog information routine error.
40	More index blocks exist than the program provided room for.
44	DISP=OLD, MOD, or SHR for data set previously allocated for delete.
48	Reserved.
52	Request denied by Installation Exit.

ISPG085 **Deallocation failed - DAIR RC =** *aaaaaaaa* **dec, DARC =** *bbbbbbbb* **hex, dsn =** *'ccccccc'*

Explanation: The deallocation of the data set failed.

User Response: See message ISPG084.

ISPG086 **Delete data set failed - 'aaaaaaaa' is open, cannot be deleted.**

Explanation: The data set is in use and cannot be deleted.

User Response: End the task that is using the data set.

ISPG087 **Data set in use - The data set is currently in use by you.**

Explanation: The data set is being used in another task.

User Response: End the other task before starting this task.

ISPG088 **Dsn ALLOC check failed - Unable to check if data set is already allocated.**

Explanation: The allocation check failed.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPF Messages

ISPG090 **Invalid data set name - Data set name contains unbalanced apostrophes.**

Explanation: The data set name entered contains unbalanced apostrophes.

User Response: Reenter the data set name with the correct apostrophes.

ISPG091 **Invalid data set name - Data set name must be 1-44 characters in length counting prefix (if any).**

Explanation: The data set name you entered had an invalid length. It must be no more than 44 characters including the TSO prefix, if used.

User Response: Check the data set name, and reenter it correctly.

ISPG092 **Invalid member name - Member name must be 1-8 characters and enclosed in parentheses.**

Explanation: The member name that was entered was invalid. The member name must be 1 to 8 characters, enclosed in parentheses.

User Response: Reenter the member name using the correct syntax.

ISPG093 **Invalid data set name - Imbedded blanks, parentheses, or apostrophes in data set name are invalid.**

Explanation: The data set name that was entered contained blanks, apostrophes, or parentheses, which are invalid in a data set name.

User Response: Reenter the data set name following the correct syntax.

ISPG094 **Data set not cataloged - Generation data set not found. Check catalog of generation group.**

Explanation: The data set specified was not found.

User Response: Check the data set name entered.

ISPG095 **Inconsistent block size - The first library must have the largest block size.**

Explanation: The first library of the concatenation must have the largest block size of the libraries within the concatenation.

System Programmer Response: Update the concatenation so that the largest block size data is first in the concatenation.

ISPG096 **Inconsistent record size - All libraries must have the same record length.**

Explanation: All libraries within a concatenation must have the same record length.

System Programmer Response: Update the concatenation and library allocations to have consistent record lengths.

ISPG097 **Inconsistent record type - All libraries must be the same record type.**

Explanation: All libraries within a concatenation must be defined with the same record type.

Programmer Response: Review the libraries within the concatenation for the correct record type.

ISPG098 **Inconsistent record size - The first library must have the largest record length.**

Explanation: The first library within a concatenation must be defined with the largest record length.

Programmer Response: Review the libraries within the concatenation for the correct record length and concatenation sequence.

ISPG099 **Not generation data set - Data set is not a generation data set.**

Explanation: Data set specified is not a generation data set.

Programmer Response: Check the data set name specified.

ISPG100 **Invalid data set org - Data set is not sequential or partitioned.**

Explanation: The data set referenced does not have an organization of either sequential or partitioned. The data set organization must be either sequential or partitioned.

User Response: Contact your system programmer.

System Programmer Response: Update the data set referenced, or reallocate the data set so that it is either sequential or partitioned.

ISPG101 **STAE failed - Unable to open data set. Possibly insufficient storage for STAE.**

Explanation: There is insufficient storage available to open the data set.

User Response: Make sure you have sufficient storage and retry the function.

ISPG102 Invalid DSORG - Data set specified is a PDS, which is not allowed for this function.

Explanation: The data set referenced for this function is a partitioned data set (PDS). A PDS is not allowed for this function.

User Response: Contact your system programmer.

System Programmer Response: Update the function so that it references a data set with the correct organization.

ISPG103 Invalid record format - S type partitioned data sets are not supported by ISPF.

Explanation: The data set referenced is an S type partitioned data set, which is not supported by ISPF.

User Response: Select a data set that is not an S type partitioned data set.

ISPG104 Invalid DSORG - Data set is sequential, which is not allowed for this function

Explanation: The data set referenced for this function is a sequential data set. Sequential data sets are not allowed for this function.

User Response: Contact your system programmer.

System Programmer Response: Update the function so that it references a data set with the correct organization.

ISPG105 Invalid block size - Block size of data set must not be zero.

Explanation: The block size of the data set specified must not be equal to zero.

User Response: Contact your system programmer.

System Programmer Response: Specify a data set with a valid block size, or reallocate the data set so that it does not have a block size of zero.

ISPG106 Invalid record length - Record length exceeds maximum ('aaaaaaaa') allowed for this function.

Explanation: The data set specified contains an invalid record length for this function.

User Response: Contact your system programmer.

System Programmer Response: Specify a data set with a valid record length for this function, or reallocate the data set.

ISPG107 Invalid record format - Fixed length records not supported for this function.

Explanation: The data set specified contains an invalid record format for this function. The function does not support fixed length records.

User Response: Contact your system programmer.

System Programmer Response: Specify a data set with a valid record format, or reallocate the data set referenced.

ISPG108 Invalid record length - LRECL must be 0 or equal to block size for unblocked RECFM=F.

Explanation: The record length for an unblocked RECFM=F data set must be either zero or equal to the block size.

User Response: Contact your system programmer.

System Programmer Response: Reallocate the data set so that it has a valid record length for the block size specified.

ISPG109 Invalid block size - Data set block size is not a multiple of LRECL for RECFM=FB.

Explanation: The block size of a fixed block data set must be a multiple of the record length.

User Response: Contact your system programmer.

System Programmer Response: Reallocate the data set so that it has a valid block size for the record format specified.

ISPG110 Invalid record format - Variable length records invalid for this function.

Explanation: The data set specified for this function contains an invalid record format. The function does not support variable length records.

User Response: Contact your system programmer.

System Programmer Response: Either specify a valid data set for the function or reallocate the data set with a valid record format.

ISPG111 Invalid block size - Data set block size must be > 8 for RECFM=V.

Explanation: The data set specified for the function contains an invalid block size. The data set block size must be greater than 8 for a data set with a RECFM=V.

User Response: Contact your system programmer.

System Programmer Response: Update the data set allocation to a valid block size.

ISPF Messages

ISPG112 Invalid record length - Data set LRECL must be > 4 for RECFM=V.

Explanation: The data set specified for the function contains an invalid record length. The data set record length must be greater than 4 for a data set with a RECFM=V.

User Response: Contact your system programmer.

System Programmer Response: Update the data set allocation to a valid record length.

ISPG113 Invalid record length - LRECL and block size are inconsistent for RECFM=V data set.

Explanation: The record length and block size specified are inconsistent for data sets with RECFM=V.

User Response: Contact your system programmer.

System Programmer Response: Update the data set allocation so that it has a valid block size and LRECL.

ISPG114 Invalid record format - RECFM=U is not allowed for this function.

Explanation: Data sets that have RECFM=U are not allowed for the specified function.

User Response: Contact your system programmer.

System Programmer Response: Update the data set allocation so that it has a valid record format.

ISPG115 Invalid record format - Data set has record format not supported by ISPF. Must be F, V, or U.

Explanation: The data set specified has a record format that is not supported by ISPF and its services.

User Response: Contact your system programmer.

System Programmer Response: Specify a valid record format for the data set. Valid formats are F, V, and U.

ISPG116 Open failed - Unable to open data set. DCB open flag is not set.

Explanation: The data set could not be opened.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPG117 Open failed - Open for data set abended.

Explanation: The data set could not be opened.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPG118 Obtain failed - Unable to open data set. Obtain returned non-zero return code.

Explanation: The DSCB for this data set could not be found, and the data set could not be opened.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPG119 Invalid record format - ISPF does not support spanned records.

Explanation: The data set referenced uses spanned records and so is not supported by ISPF.

User Response: Use a data set that does not contain spanned records.

ISPG120 Empty data set or member - Empty PDS member or sequential data set has been requested.

Explanation: The partitioned data set member or sequential data set requested is empty.

User Response: Verify the data set or member specified.

ISPG121 I/O error - An I/O error was encountered reading the first record requested.

Explanation: The data set cannot be read.

User Response: Contact your system programmer.

System Programmer Response: If this error is not caused by a defective DASD, contact IBM support.

ISPG122 Insufficient storage - Not enough storage is available for browse to proceed.

Explanation: Storage has been exhausted.

User Response: Contact your system programmer.

System Programmer Response: Verify that the user has sufficient storage to meet the minimum ISPF requirements. Contact IBM support if the storage is sufficient.

ISPG123 Invalid type of data set - Data set has non-zero key. This data set is not supported by ISPF.

Explanation: This message is self-explanatory.

ISPG130 Reserve failed - Abend occurred during reserve processing. Unable to open data set.

Explanation: ISPF was unable to reserve and open the data set for your use.

User Response: If the error continues, contact the system programmer.

System Programmer Response: Contact IBM support.

ISPG131 Unable to open data set - The dd that should be in the TIOT cannot be found.

Explanation: The data set could not be opened.

User Response: If the error continues, contact the system programmer.

System Programmer Response: Contact IBM support.

ISPG132 Authorization failed - You may not use this protected data set. Open 913 abend.

Explanation: You are not authorized to use this data set.

User Response: Contact your system programmer.

System Programmer Response: Authorize the user, if required.

ISPG133 Insufficient storage - Not enough storage for buffer. Log on with larger SIZE parameter.

Explanation: This message is self-explanatory.

ISPG200 GDDM load failed. - Attempt to load GDDM was not successful.

Explanation: The attempt to load GDDM was not successful. One possible reason is that the GDDM libraries were not found within the user's concatenations.

User Response: Contact your system programmer.

System Programmer Response: Check the allocations for the proper GDDM libraries.

ISPG201 Device not supported. - The ISPF/GDDM interface does not support the current device.

Explanation: This is an informational message. The current device is not supported while the ISPF/GDDM interface is active. For example, GDDM is not available on devices with a primary width different from the alternate width, such as a 3278 model 5.

ISPG202 SPLIT not supported. - The ISPF/GDDM interface does not support SPLIT on the current device.

Explanation: This is an informational message. The use of SPLIT is not supported on the current device while the ISPF/GDDM interface is active. For example, on 3290 terminals, the vertical split function is disabled. Panels are displayed with a larger-size character set,

and the partition jump key is not functional.

ISPG203 GDDM terminated. - The user selected to terminate the GDDM initialization.

Explanation: This is an informational message. The user selected to terminate initialization of GDDM. The GRINIT service ended with return code 20.

ISPG204 GRINIT failure - GDDM cannot be initialized since a specified ISPSTART GUISCRD or GUISCRW value is different than the actual host screen size.

Explanation: GDDM cannot be initialized because the user specified on the ISPSTART statement a GUISCRD or GUISCRW value different than the actual host screen size. The GRINIT service ended with return code 20.

User Response: Contact your system programmer.

System Programmer Response: The user should reinvoke ISPF without the GUISCRD and GUISCRW parameters in order to run this GDDM application.

ISPG205 GRINIT failure - GDDM cannot be initialized when running GUI in Batch Mode.

Explanation: GDDM cannot be initialized because the user is running in batch mode within the Client/Server environment (GUI mode).

User Response: Contact your system programmer.

System Programmer Response: The user should reinvoke ISPF outside of a batch environment in order to run this GDDM application.

ISPG208 ISPG208 GDDM error — function = Return code =

Explanation: GDDM had an error. The GDDM Function and Return code is posted to assist the user.

User Response: Contact your system programmer.

Programmer Response: The reported function should be examined for proper GDDM usage.

ISPG209 ISPG209 GDDM error message —

Explanation: GDDM has detected an error and posted an error message.

User Response: Contact your system programmer.

System Programmer Response: GDDM documentation should be used to determine the source of the error.

ISPF Messages

ISPG213 **Invalid value - Valid values are: 0 or 1**

Explanation: An invalid value was supplied for the variable. Valid values for the variable are 0 and 1

User Response: Enter either 0 or 1 into the variable.

ISPH001 **TRANS parameter error -
"FRMCCSID(aaaaaaaaa)" is not the
required 5 numeric digits.**

Explanation: The TRANS service required from-CCSID-number parameter FRMCCSID(aaaaaaaaa) must be composed of 5 numeric digits.

User Response: Ensure that the correct 5-digit decimal number that specifies the CCSID to be used has FRMCCSID parameter. Refer to TRANS service in *ISPF Services Guide* for more information.

ISPH002 **TRANS parameter error -
"TOCCSID(aaaaaaaaa)" is not the required
5 numeric digits.**

Explanation: The TRANS service required to-CCSID-number parameter TOCCSID(aaaaaaaaa) must be composed of 5 numeric digits.

User Response: Ensure that the correct 5-digit decimal number that specifies the CCSID to be used has the TOCCSID parameter. Refer to TRANS service in *ISPF Services Guide* for more information.

ISPH003 **TRANS parameter error -
"LENGTH(aaaaaaaaa)" must be a numeric
value from 0 to 32767.**

Explanation: The TRANS service LENGTH parameter contains an integer value greater than 32 767.

User Response: Enter a correct value for the LENGTH parameter that is an integer value between 0 and 32 767. Refer to TRANS service in *ISPF Services Guide* for more information.

ISPH004 **CCSID TRANSLate error - Translate
tables do not support "aaaaaaaa" to
"bbbbbbbb", (ccccccc).**

Explanation: The translate tables do not support or are not available to support from CCSID aaaaaaaaa to bbbbbbbb.

User Response: Contact your system programmer.

System Programmer Response: Ensure that the correct CCSID translate tables exist. Contact IBM support.

ISPI001 **ISPI001 Invalid screen size. The width
cannot exceed 160 and the depth cannot
exceed 62.**

Explanation: The terminal is configured for a screen size that is not within the ISPF supported configuration.

User Response: Contact your system programmer.

System Programmer Response: Correct the terminal configuration screen size.

ISPI002 **ISPI002 Following file could not be
opened:**

Explanation: A DDNAME is posted with this message and a file within that DDNAME is probably entered incorrectly and is not found.

User Response: Check the user specified allocations. If correct, contact the system programmer for assistance with the Logon proc.

System Programmer Response: Check for correct allocations.

ISPI003 **ISPI003 Following file was not
preallocated:**

Explanation: The DDNAME that follows this message had an invalid dataset name or a name was missing.

User Response: Check your allocations and if correct contact the system programmer.

ISPI004 **ISPI004 Unidentified ISPF system error
specified.**

Explanation: During initialization an error was encountered. It was not one of the common initialization errors.

User Response: Contact your system programmer.

System Programmer Response: Determine why ISPF can't initialize.

Problem Determination: Does any logon proc work? What is different about the one that fails.

ISPI005 **ISPI005 User character translation
discontinued.**

Explanation: Control Characters for Line Deleting and Character Deleting has been turned off.

ISPI006 **ISPI006 Following file has invalid data
set characteristics**

Explanation: The DDNAME that follows this message contains a dataset that has invalid characteristics.

User Response: Check the allocations for the DDNAME in the message.

ISPI007	ISPI007 ISPF command not allowed. You are already under ISPF
Explanation:	You cannot execute the ISPF command when ISPF is already running.
User Response:	Correct the command.
ISPI009	ISPI009 Following required module for selected language could not be loaded:
Explanation:	The translate table module could not be loaded.
User Response:	Assure the module can be loaded and that there is enough storage to load the module.
ISPI010	ISPI010 Invalid environment, TSO/E 2.1 or later required.
Explanation:	Wrong release of TSO installed.
User Response:	Contact your system programmer.
System Programmer Response:	Check for the correct version of TSO.
ISPI011	ISPI011 Invalid environment, ISPF version 4 requires TSO/E 2.1 or later.
Explanation:	The NOREXX keyword is required for this release of TSO.
User Response:	Correct your clist or exec.
ISPI021	ISPI021 Unrecoverable error in initialization of
Explanation:	A problem exists with the initialization of the function listed with this message.
User Response:	Contact your system programmer.
System Programmer Response:	Possible bad dataset in the allocations shown in the message. If initialization continues to fail, contact IBM for assistance.
ISPI022	ISPI022 ISPF cannot continue. ISPF abending.
Explanation:	A severe error occurred when ISPF was initializing. This message follows ISPI021 and can be eliminated when the problem described by the first message is corrected.
User Response:	Contact your system programmer.
System Programmer Response:	Correct the problem described by ISPI021.

ISPI023	ISPI023 ENVIRON TERMTRAC definition OFF, buffer could not be obtained.
Explanation:	Storage was not available for creating the buffer and thus ENVIRON TERMTRAC is not available.
User Response:	Contact your system programmer.
System Programmer Response:	Determine why storage is not available.
ISPI024	ISPI024 TSO module IRXECUSP could not be loaded.
Explanation:	REXX could not be initialized.
User Response:	Contact your system programmer.
System Programmer Response:	Determine if IRXECUSP exists and why the load fails. Contact IBM support for further assistance.
ISPI025	ISPI025 TSO routine IRXINIT severe error — REXX environment could not be initialized.
Explanation:	A severe error occurred while initializing the REXX environment.
User Response:	Contact your system programmer.
System Programmer Response:	Determine why the REXX environment cannot be initialized. Contact IBM support for further assistance.
ISPJ001	Load error - 'aaaaaaaa' load module not found.
Explanation:	The translation table load module aaaaaaaaa for the parameter used when invoking ISPTTDEF was not found.
User Response:	Check the parameter for correct spelling and that the terminal type is listed on the option 0.1 panel. If the parameter is correct, contact your system programmer.
System Programmer Response:	Ensure that the translate table load module exists and that the load module is correctly allocated. Refer to <i>ISPF Dialog Developer's Guide and Reference</i> for related information on invoking ISPTTDEF.
ISPLO999	Licensed Materials - Property of IBM 5655-042 (C) Copyright IBM Corp. 1980, 1999. All rights reserved. US Government Users Restricted Rights - Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
Explanation:	This is an informational message.

ISPF Messages

ISPL010 **Invalid variable name - LIST service variable name, 'aaaaaaaa', is syntactically incorrect.**

Explanation: Specified variable name *aaaaaaaa* is syntactically incorrect.

User Response: Enter a syntactically correct variable name. Dialog variables are referred to symbolically by a name composed of 1 to 8 characters (6, for FORTRAN). Alphanumeric characters A-Z, 0-9, #, \$, or @ can be used in the name, but the first character cannot be numeric. APL variable names cannot contain #, \$, or @.

ISPL011 **Variable not found - LIST service dialog variable, 'aaaaaaaa', does not exist.**

Explanation: The specified LIST service dialog variable *aaaaaaaa* was not found.

User Response: Check the specified dialog variable name for incorrect spelling, and verify that the dialog variable name exists.

ISPL012 **Invalid line length - Minimum LIST service line length is one when CC is specified.**

Explanation: The specified LINELEN value for the LIST service is incorrect.

User Response: Verify that the LINELEN value contains 1 byte for the carriage control character when using the LIST service with CC specified.

ISPL013 **Invalid variable value - LIST service variable, 'aaaaaaaa', cannot be null when CC is specified.**

Explanation: The specified LIST service dialog variable *aaaaaaaa* contains a null value and CC option has been specified for the LIST service.

User Response: Ensure that the specified dialog variable contains a value other than null when specifying the LIST service with the CC option.

ISPL014 **Invalid line length - LIST service line length must be greater than or equal to 0.**

Explanation: The LINELEN value for the LIST service contains a value less than zero.

User Response: Ensure that the line length is greater than zero. The LINELEN value specifies the length of each line in the buffer being passed to ISPF. ISPF truncates these lines if the line length specified is greater than the truncation value in system variable ZLSTTRUN. The line length must have an unsigned integer value and, for a call, must be a full word fixed integer.

ISPL015 **LIST data set error - Severe error occurred when allocating/opening the LIST data set.**

Explanation: An error occurred when allocating or opening the LIST data set.

User Response: Notify system programmer of the message and the return code.

System Programmer Response: Verify the correct allocation of the LIST data set. Contact IBM support for further assistance.

ISPL016 **LIST not available - Error previously encountered when allocating the LIST data set.**

Explanation: A previous allocation error exists for the LIST data set.

User Response: Contact your system programmer.

System Programmer Response: Verify the correct allocation of the LIST data set. Contact IBM support for further assistance.

ISPL017 **LIST not available - Error previously encountered when opening/writing to the LIST data set.**

Explanation: A previous error exists for opening or writing to the LIST data set.

User Response: Contact your system programmer.

System Programmer Response: A previous OPEN/PUT DCB abend exists and needs to be corrected. Verify the correct allocation and status of the LIST data set. Contact IBM support for further assistance.

ISPL018 **LIST data set error - Severe error occurred when writing to the LIST data set.**

Explanation: A severe error occurred when attempting to WRITE to the LIST data set.

User Response: Contact your system programmer.

System Programmer Response: The LIST data set may be closed or a DCB abend may have occurred against the LIST data set. Ensure that the LIST data set allocation is correct. Contact IBM support for further assistance.

ISPL030 **Command not allowed - aaaaaaaa not allowed while aaaaaaaa disposition or termination panel is active.**

Explanation: The LOG/LIST command cannot be issued on the active LOG/LIST disposition panel, or when the TERMINATION panel is active.

User Response: The user must exit from the panel in order to perform the specified command.

ISPL031 **Data set not active - The *aaaaaaaa* data set is not allocated or has not been used this session.**

Explanation: The LOG or LIST data set is not allocated, or has not been used this session.

User Response: ISPF will allocate the LOG or LIST data set when log or list information is first generated during a session, or first generated after the data sets have been processed. The user can preallocate the LOG or LIST data sets prior to invoking ISPF. More information on ISPF log and list data sets can be found in in *ISPF User's Guide*

ISPL032 **Command not active - The *aaaaaaaa* data set cannot be processed when it has been preallocated.**

Explanation: The LOG or LIST commands are not active if the LOG or LIST data sets are preallocated.

User Response: The user may preallocate both the LOG and LIST data sets; however, the LOG and LIST commands cannot be issued to process a preallocated LOG or LIST data set. Refer to *ISPF Planning and Customizing* for further information on preallocated data sets.

ISPL033 ***aaaaaaaa* job not submitted - *aaaaaaaa* print job cannot be submitted while file tailoring is active.**

Explanation: The LOG or LIST print job cannot be submitted while file tailoring is active.

User Response: Reissue LOG or LIST print command when file tailoring is complete.

ISPL034 ***aaaaaaaa* data set in use - *aaaaaaaa* data set cannot be processed while data set is in use.**

Explanation: The LOG data set is currently in use and cannot be processed.

User Response: The LOG cannot be processed when using option 7.5 Dialog Test to display the LOG data set. Exit option 7.5 to process the LOG data set.

ISPL035 **Invalid *aaaaaaaa* command - Valid *aaaaaaaa* parameters are PRINT, KEEP, DELETE, or blank.**

Explanation: An invalid LOG or LIST command parameter was issued.

User Response: Enter a valid LOG or LIST command parameter. Valid parameters are PRINT, KEEP, DELETE, or BLANK.

ISPL036 **Invalid command - First parameter to ISPLLP must be LOG or LIST.**

Explanation: An invalid ISPLLP command parameter was issued.

User Response: The first parameters to ISPLLP must be either LOG or LIST.

ISPL0999 **Licensed Materials — Property of IBM 5647-A01 (C) Copyright IBM Corp. 1980, 1998. All rights reserved. US Government Users Restricted Rights — Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.**

Explanation: This is an informational message.

ISPL101 **LIBDEF display error - The ISPLIBD utility detected an unexpected decimal return code *aaaaaaaa* from the "*bbbbbbbb*" service.**

Explanation: The dialog utility, ISPLIBD, received an error from the interface routine between dialog modules and ISPF.

User Response: Contact your system programmer.

System Programmer Response: Check the return codes to determine the error.

ISPL102 **Enter *aaaaaaaa* parameter - Enter a specific library name for the *aaaaaaaa* command.**

Explanation: You must enter a library name when issuing the LOCATE command for the LIBDEF display utility.

User Response: Enter the name of the library you wish to locate. The library name must be 1 to 8 characters in length and cannot be ISPPROF.

ISPL103 **Invalid library name - "*aaaaaaaa*" is not a valid LIBDEF library name. The library name must be 1 to 8 characters long and cannot be ISPPROF.**

Explanation: The LOCATE command of the LIBDEF Display Utility requires a valid LIBDEF library name of 1 to 8 characters in length, and it cannot be ISPPROF.

User Response: Reenter the LOCATE command with a valid LIBDEF library name.

ISPL104 **Invalid command - "*aaaaaaaa*" is not a valid command for the ISPLIBD utility.**

Explanation: An invalid command was entered. The LIBDEF Display Utility supports the LOCATE command, and two abbreviations, LOC and L. The

ISPF Messages

LOCATE command is used to locate a specific library name. For example, LOCATE ISPLLIB locates the LIBDEF definition for ISPLLIB.

User Response: Reenter the command using LOCATE, LOC, or L and the library name.

ISPL105 **Library name invalid - "aaaaaaaa" is not a valid LIBDEF library name. The library name must be 1 to 8 characters long and cannot be ISPPROF. The value is ignored.**

Explanation: The ISPLIBD command of the LIBDEF Display Utility requires a valid LIBDEF library name of 1 to 8 characters in length, and it cannot be ISPPROF.

User Response: Reenter the ISPLIBD command with a valid LIBDEF library name.

ISPL106 **ISPLIBD recursion - The ISPLIBD command may not be issued recursively within the same logical screen.**

Explanation: You entered the ISPLIBD command more than once within the same logical screen. The ISPLIBD command may not be issued more than once within the same logical screen.

User Response: Issue the ISPLIBD command only once per logical screen.

ISPN101 **Storage release error - Error occurred when releasing application library blocks.**

Explanation: An error occurred trying to FREEMAIN the skeleton library block with the ddname, ISPSLIB.

User Response: Contact your system programmer.

System Programmer Response: Diagnose the FREEMAIN error that occurred when releasing storage for the skeleton library block, ISPSLIB. Contact IBM support.

ISPN102 **Storage obtain error - Error occurred when obtaining storage for application library blocks.**

Explanation: An error occurred when obtaining storage for application library blocks.

User Response: Contact your system programmer.

System Programmer Response: Diagnose the GETMAIN error which occurred when obtaining storage. Contact IBM support.

ISPN103 **Invalid LIBDEF type - ISPPROF is not a valid LIBDEF type.**

Explanation: An application-level definition for ISPPROF, the ISPF profile library, is not permitted because ISPPROF contains user-related data.

User Response: ISPPROF is an invalid LIBDEF type. Enter a valid LIBDEF type such as the ISPF ddname libraries: ISPMLIB, ISPLLIB, ISPSLIB, ISPTLIB, ISPTABL, ISPFIL, ISPLLIB, or a valid generic library name.

ISPN104 **Invalid dsname list - Data set name(s) incorrectly specified.**

Explanation: The data set name or names are incorrectly specified.

User Response: Correct spelling and statement format errors.

ISPN105 **Multiple ddnames - Only one ddname may be specified when LIBRARY is specified.**

Explanation: The LIBRARY keyword on a LIBDEF service request associates an allocated ddname with an ISPF lib-type. This is a one-to-one correspondence, thus only one ddname can be specified using the LIBRARY keyword on a LIBDEF service request.

User Response: Remove all but one of the specified ddnames from the LIBDEF statement.

ISPN106 **Ddname not allocated - Ddname 'aaaaaaaa' specified on LIBDEF service not allocated.**

Explanation: Ddname aaaaaaaaa is not allocated.

User Response: Ensure correct spelling of the ddname. Allocate the specified ddname prior to entering ISPF.

ISPN107 **Member name specified - Data set member specification is invalid.**

Explanation: The LIBDEF service provides a data set list parameter. It does not support specifying member names of data sets. You can specify a single data set or a list of data sets.

User Response: Remove the member name specification from the data set name specified on the LIBDEF service statement.

ISPN108 **Invalid dsname framing - Dsname specification contains inconsistent framing characters.**

Explanation: The data set list parameter on the LIBDEF service has been coded incorrectly. The data set

name should be specified with a starting and ending single quote. For example, DATASET('PROJECT.LEVEL.USER1'). A list of data set names must be separated by blanks or commas. For example, DATASET('PROJECT.LEVEL.USER1','PROJECT.LEVEL.USER2')

User Response: Correct the quotation marks for the specified data set name.

ISPN109 Invalid dsname length - Data set name specification cannot exceed 44 characters.

Explanation: The data set name specified is longer than 44 characters. Data set names must conform to TSO data set naming conventions.

User Response: Verify the spelling of the specified data set name. If the spelling is correct, contact your system programmer.

System Programmer Response: Rename the specified data set if the name exceeds 44 characters. Contact IBM support.

ISPN110 Invalid library ddname - EXCLDATA or EXCLLIBR must be specified with ISPLLIB.

Explanation: EXCLDATA or EXCLLIBR keyword must be specified with ISPLLIB library type.

User Response: Only ISPLLIB library type may be used for the EXCLDATA or EXCLLIBR LIBDEF keywords.

ISPN112 Invalid volume serials - Volume serials operand incorrectly specified.

Explanation: An invalid volume serial number was specified on the ISPPREP command.

User Response: Correct the specified volume serial number.

ISPN113 Too many parameters - Too many parameters specified on the LIBDEF service.

Explanation: Too many parameters are specified on the LIBDEF service.

User Response: Correct the specified parameters for the ISPPREP service call or the LIBDEF service call, or both.

ISPN114 Authorization failure - Authorization failure from LIBDEF exit point.

Explanation: There is an authorization failure from user LIBDEF service exit point.

User Response: Contact your system programmer.

System Programmer Response: Correct the authorization failure for LIBDEF service exit.

ISPN115 Severe error - Severe error from LIBDEF exit point.

Explanation: A severe error was returned from the user's LIBDEF service exit.

User Response: Contact your system programmer.

System Programmer Response: Correct the LIBDEF service exit error.

ISPO001 Selection panel error - "aaaaaaaa" is invalid parameter for program ISPOPT on panel "bbbbbbbb".

Explanation: There is an invalid parameter, aaaaaaaa, for program ISPOPT on panel bbbbbbbb.

User Response: Contact the responsible programmer.

Programmer Response: Correct the parameter on the selection panel.

ISPO003 Invalid pad character - Input field pad character and command delimiter may not be the same.

Explanation: The input field pad character will be used to fill input fields on a panel. It must be different than the command delimiter and it cannot be a-z, A-Z, 0-9, or /, except N and B can be used to indicate nulls and blanks respectively.

User Response: Enter a character that is different than the command delimiter character.

ISPO004 Invalid value - Press Help for tutorial page giving valid options.

Explanation: Valid values for the number of PFKEYS are 12 or 24. For more information about PFKEYS review the Help information.

User Response: Enter a valid value after reviewing the Help information.

ISPO005 Inconsistent parameters - Part may not be specified with 3278T.

Explanation: The screen format of PART (format using hardware partitions) cannot be used for terminal type 3278T. The screen format of PART is valid only for the 3290 terminal type. Formats valid for 3278T terminal types are STD and MAX.

User Response: Enter a screen format other than Part for terminal type 3278T.

ISPF Messages

ISPO006 Display format invalid - Display format must be NO, SHORT, or LONG.

Explanation: For a keylist, the display format options are: 1.)LONG indicates that the key label should be displayed in the function key area when the FKA command is toggled to the first cycle after OFF. 2.)SHORT indicates that the key label should be displayed in the function key area when the FKA command is toggled to the first or second cycle after OFF. 3.) NO indicates that the key label should never be displayed in the function key area.

User Response: Enter one of the correct Display Format values: LONG, SHORT, or NO.

ISPO007 F key value required - A function key must be assigned a value in order to have a display format.

Explanation: When working with keylists, if a display format or a label is specified a definition must also be specified. Any definition is valid.

User Response: Assign a value to the function key.

ISPO008 F key value required - A function key must be assigned a value in order to have a label.

Explanation: When defining or changing keylists, if a label or a display format is specified for the function key, the function key must have a definition. Any definition is valid.

User Response: Assign a value (definition) to the function key.

ISPO009 Invalid selection - Enter a keylist name or select an existing keylist.

Explanation: You must enter a new keylist name or an existing keylist name and then select the action.

User Response: Enter or select a keylist, then select an action.

ISPO010 Keylist does not exist - The keylist selected does not exist; therefore, it cannot be changed.

Explanation: The selected keylist does not exist for this application ID

User Response: Create a new keylist for this application ID, or select the application ID that contains the required keylist.

ISPO011 Keylist already exists - The keylist name entered already exists; therefore, it cannot be created.

Explanation: When creating a keylist, a keylist was entered that already exists. To create a keylist, enter the name of a keylist that is not in the displayed list.

User Response: Enter a valid keylist name that does not already exist.

ISPO012 Keylist not saved - The keylist changes were not saved or the keylist was not created.

Explanation: Either the changes to the keylist were not saved, or the keylist was not created.

User Response: Either select the Save action to save the keylist changes, or create a new keylist.

ISPO013 Keylist not selected - Enter a keylist name or select one from the list and select an action.

Explanation: To create, change, delete, or browse a keylist from the Keylist Utility, enter the keylist name or select a keylist name from the displayed list. Next, select create, change, delete, or browse from the Functions pull-down.

ISPO014 Keylist does not exist - The keylist selected does not exist; therefore, it cannot be browsed.

Explanation: The keylist does not exist for this application ID.

User Response: Either create the required keylist, or select the application ID under which the keylist exists.

ISPO015 Keylist in use - The selected keylist is currently being updated by you.

Explanation: You have selected a keylist that you are currently updating.

User Response: Finish updating the keylist and save it before performing another action on the specified keylist.

ISPO016 Delete Warning - This keylist belongs to a currently running application. If this keylist is deleted, a dialog error can occur if a current application panel references this keylist.

Explanation: A keylist for a currently running application cannot be deleted.

User Response: To delete the keylist, press Enter on the confirmation panel. If you do not want to delete the keylist, press Cancel.

ISPO017 Keylist tables in use - The internal tables used by keylist are presently in use.

Explanation: The KEYLIST command may not be issued from the Keylist Utility. However, you can split the screen and issue the KEYLIST command on the other screen.

User Response: The KEYLIST command may not be issued while actions are being performed on keylist from a previous KEYLIST command. Splitting the screen allows the user to access the KEYLIST command on the other screen.

ISPO018 Invalid Action - The action selected is not defined for the keylist utility.

Explanation: An invalid action was selected. Select one of the valid actions displayed on the informational line of the keylist panel.

User Response: Enter a valid selection from the action bar or enter N, E, V, or D as the selection character to perform a New, Edit, View, or Delete action.

ISPO019 Keylist saved - The keylist changes were saved or the keylist was created.

Explanation: This is an informational message.

ISPO020 Invalid keylist name - The specified keylist name is invalid.

Explanation: The keylist name that was specified is invalid.

User Response: Enter a valid keylist name.

ISPO021 Updates not allowed - No modifications will be accepted while editing or browsing a keylist.

Explanation: No modifications to the profile will be accepted while editing or browsing a keylist.

User Response: Finish editing or browsing the keylist before updating the profile.

ISPO022 Input command error - Command entered is not recognized.

Explanation: When updating a command table from the Command Table Utility, you entered a command that was not recognized.

User Response: Enter a valid command. Enter HELP for a list of valid commands, or refer to *ISPF User's Guide*

ISPO023 Keylist not altered - The keylist was not altered, therefore it is not saved.

Explanation: This is an informational message. The keylist was not altered.

ISPO024 Keylist not deleted - The keylist was not found so it cannot be deleted.

Explanation: The keylist was not found under this application ID.

User Response: Select the appropriate application ID from which to delete the keylist.

ISPO025 Keylist not deleted - The keylist selected is not a private copy of the keylist.

Explanation: The keylist selected is a shared keylist, not a private copy, and cannot be deleted using KEYLIST.

User Response: Only private copies of the keylist can be deleted using KEYLIST.

ISPO026 Profile not created - The profile table could not be created and is required for keylist. ** aaaaaaaa ******

Explanation: The Keylist Utility could not create a profile table, ISPPROF. A profile table is necessary when working with keylists.

User Response: Note message ID and text. Contact your system programmer.

System Programmer Response: Determine the reason the profile was not created. Contact IBM support.

ISPO027 Keylist not saved - Internal error code aaaaaaaa resulted in the keylist not being saved. ** bbbbbbbb ******

Explanation: ISPF's attempt to save the keylist resulted in an error and the keylist was not saved.

User Response: Note the error message and text. Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPO028 Invalid Help name - The specified keylist Help panel name is invalid.

Explanation: The specified keylist Help panel name is invalid.

User Response: Check the GML source code for the ISPD TLC generated keylist, and correct the Help panel name. Contact your system programmer.

System Programmer Response: Check and correct the GML source code as needed. Contact IBM support.

ISPF Messages

ISPO029 **Keylist deleted - The selected keylist was deleted.**

Explanation: This is an informational message. A request was made to delete a keylist and the delete was performed.

ISPO030 **Invalid color - Enter valid color of: BLUE, RED, PINK, GREEN, TURQ, YELLOW, or WHITE.**

Explanation: An invalid COLOR was entered.

User Response: Enter one of the correct COLOR responses as listed in the message.

ISPO031 **Invalid intensity - Enter valid intensity value of: LOW or HIGH.**

Explanation: An invalid INTENSITY value was entered.

User Response: Enter one of the correct INTENSITY responses as listed in the message.

ISPO032 **Invalid highlighting - Enter valid highlight value of: BLINK, REVERSE, NONE, or USCORE.**

Explanation: An invalid HIGHLIGHT value was entered.

User Response: Enter one of the correct HIGHLIGHT responses as listed in the message.

ISPO033 **Invalid ISPFVAR parm - The ISPFVAR command only accepts the ABTAB, PSTAB, JUMP, EDPRT, SESM, LMSG, and SPLTLINE parameters. The values may be set by specifying (ON) or (OFF) immediately after the parameter. For example, ISPFVAR ABTAB(ON).**

Explanation: The ISPFVAR command was entered with an invalid parameter.

User Response: The only values accepted are ABTAB, PSTAB, JUMP, EDPRT, SESM, LMSG, and SPLTLINE. If the user specifies a value of (ON) or (OFF), the option is turned on or off. If no value is specified, the current return code is set to 0 if the value is off and 1 if the value is on.

ISPO034 **Keylist not deleted - The keylist was not deleted due to user's request.**

Explanation: This is an informational message. On the confirmation dialog prompt, the user requested that the keylist not be deleted. That request was honored.

ISPO035 **Select a file action - Select a file action bar item to set a default "/" action. The default action will remain set until a different file action is selected, the keylist view is changed, or keylist utility is terminated.**

Explanation: A default "/" was entered, but no file action was selected.

User Response: Select a file action bar item to set a default action to perform.

ISPO901 **Enter required field - Enter required field at the cursor position.**

Explanation: The Terminal type field was left blank.

User Response: Enter a valid choice for terminal type.

ISPO902 **Valid input field pad values are anything but A-Z, 0-9 and /, except N which indicates nulls and B which indicates blanks. It must also be different than the command delimiter.**

Explanation: An invalid pad value was entered.

User Response: Enter one of the correct values shown above.

ISPO903 **Valid command delimiters are anything but A-Z and 0-9 and = or .**

Explanation: An invalid command delimiter has been entered.

User Response: Enter one of the values listed above.

ISPO904 **Invalid value - When running in GUI mode, you must select 'Panel display CUA mode'.**

Explanation: When running in GUI mode, you must select Panel display CUA mode.

User Response: Enter a / in the Panel display CUA mode field.

ISPO905 **Starting a GUI session when running in split screen mode or 3290 partition mode is not supported.**

Explanation: You cannot start a GUI session if you are in split screen mode or 3290 partition mode on your host session.

User Response: If you are in split screen mode, terminate the other screen and select the Start GUI session field. If you are in 3290 partition mode, go back to the main Settings panel, select a screen format other than PART, and exit ISPF. Then, to start a GUI session, invoke ISPF with the GUI parameter, or initiate it from

the ISPF Settings GUI option.

ISPO906 **Cannot connect to the workstation. Ensure that the communications from MVS to the workstation are functioning and that the correct level of the ISPF Client/Server component is running on the workstation. Also, make sure that you entered the correct machine address.**

Explanation: ISPF cannot make a connection to your workstation.

User Response: Verify that the communications from MVS to your workstation are functioning and that the correct level of the ISPF Client/Server component is running on your workstation. Also, verify that you specified your correct machine address.

ISPO907 **Recursion error - GUI mode cannot be invoked recursively.**

Explanation: You are already in GUI mode. Invoking GUI mode recursively is not supported.

ISPO908 **Already connected - This session is already connected to the workstation (aaaaaaaa).**

Explanation: You are already in connected to the workstation at the address specified in the message.

User Response: If the user would like to be connected to a different workstation, then the user must exit ISPF before connecting to a new workstation address.

ISPO909 **Connected - A connection has been successfully made to the workstation (aaaaaaaa).**

Explanation: The connection to the workstation at the address specified in the message has been established.

ISPO910 **The address for the workstation display must be the same as the address already established for the workstation connection (aaaaaaaa).**

Explanation: You cannot start a GUI session at an address other than the one in which the workstation connection has been established.

User Response: Do not change the workstation address on the panel.

ISPO911 **Connecting to a workstation when running 3290 partition mode is not supported.**

Explanation: You cannot start a GUI session if you are in 3290 partition mode on your host session.

User Response: If you are in 3290 partition mode, go back to the main Settings panel, select a screen format other than PART, and exit ISPF. Then, to start a GUI session, invoke ISPF with the GUI parameter, or initiate it from the ISPF Settings GUI option.

ISPO913 **Valid values: FBA or VBA**

Explanation: An invalid value has been entered.

User Response: Enter a correct value as shown above.

ISPO914 **Valid values: 1 to 999 for FBA and 5 to 999 for VBA**

Explanation: An invalid value has been entered.

User Response: Enter a correct value as shown above.

ISPO915 **Valid values: 80 to 160**

Explanation: An invalid value has been entered.

User Response: Enter a correct value as shown above.

ISPO916 **Changing the "Always show split line" setting has no effect in partition mode.**

Explanation: The user changed a setting that has no effect in partition mode.

ISPO917 **You cannot initiate a GUI display while in split screen mode. Exit all but one screen and try again or select option 2 to connect to the workstation without a GUI display.**

Explanation: ISPF cannot initiate a GUI display while in split screen mode.

User Response: Exit all but one screen and attempt the connection again or select option 2 to connect to the workstation without a GUI display.

ISPO918 **Changing the CUA colors will have no effect in GUI mode unless you have selected to use host colors on all fields in the Global Color utility available from the COLOR command or the Color action bar choice on the ISPF Settings panel.**

Explanation: ISPF allows a user to choose whether to map host colors to the workstation or not. If the user has chosen to not map host color for CUA fields (the default), the user will be warned with this message that changes made in the CUA Attribute Utility will not be seen. The setting for using host colors is in the Global Color utility available from the COLOR command or the Color action bar choice on the ISPF Settings panel.

ISPF Messages

ISPO919 **Valid number of keys are: 12 or 24**

Explanation: An invalid value has been entered.

User Response: Enter a correct value as shown above.

ISPO920 **Unable to communicate with ISPF workstation agent at specified network address. Probable causes: (1) the workstation agent is not active at the specified network address; (2) the APPC transaction program names or TCP/IP port numbers specified are not identical on the host and on the workstation. Network data:'aaaaaaaa'.**

Explanation: ISPF can communicate with the TCP/IP or APPC subsystem at the workstation but is unable to communicate with the ISPF Client/Server component at the workstation.

User Response: Verify that you specified the network address of a machine on which the ISPF Client/Server component is active. If you are using TCP/IP and a port number was specified, verify that the specified port number matches the port number specified or defaulted at the workstation. If you are using APPC and a transaction program name was specified, verify that the specified transaction program name matches the transaction program name specified or defaulted at the workstation.

Problem Determination: NETWORK DATA shows the TCP/IP socket or SNA APPC function invoked, and numeric code returned, that indicated the failing condition. A complete explanation of MVS TCP/IP socket return codes can be found in "Chapter 7. TCP/IP Error Codes" on page 565. A complete explanation of MVS APPC return codes can be found in *Writing Transaction Programs* for APPC/MVS. Any additional message received with the prefix "LSCX" is issued by the SAS/C runtime support shipped with ISPF. The message may provide additional helpful information for the user or for support personnel.

ISPO921 **Unable to communicate with workstation at the specified network address. Probable causes: (1) the specified network address does not exist or cannot be accessed; (2) if specified, the SNA network address does not support APPC communication. Network data:'aaaaaaaa'.**

Explanation: ISPF cannot make a connection to your workstation.

User Response: Verify that the specified network address represents the workstation on which the ISPF Client/Server component is active. If you are using TCP/IP verify that a dotted decimal IP address (for example, 9.67.224.96) was specified. If you are using APPC verify that a fully qualified SNA network name

(for example, USIBMNR.NRI41H00) was specified. Also, for APPC remember that the specified network address must represent a SNA independent logical unit type 6.2. SNA logical unit type 2 used for 3270 terminal or emulator connectivity will not support APPC communication.

Problem Determination: NETWORK DATA shows the TCP/IP socket or SNA APPC function invoked, and numeric code returned, that indicated the failing condition. A complete explanation of MVS TCP/IP socket return codes can be found in "Chapter 7. TCP/IP Error Codes" on page 565. A complete explanation of MVS APPC return codes can be found in *Writing Transaction Programs* for APPC/MVS. Any additional message received with the prefix "LSCX" is issued by the SAS/C runtime support shipped with ISPF. The message may provide additional helpful information for the user or for support personnel.

ISPO922 **Unable to utilize local communications subsystem. Probable causes: (1) the communications interface modules could not be loaded; (2) the communications subsystem did not provide an acceptable response to the initialization request. Network data:'aaaaaaaa'.**

Explanation: ISPF cannot make a connection to your workstation.

User Response: Notify your MVS system support personnel regarding the failure.

System Programmer Response: Verify that the TCP/IP or APPC/MVS communications subsystem has been properly installed, configured, and activated on the MVS system. Consult the ISPF installation documentation for ISPF requirements. If you are using IBM TCP/IP for MVS ensure that the setting specified or defaulted for the "IPDATA" or "IPPREF" parameter value on the ISPMTAIL macro used to create the ISPDFLTS module allows the TCP/IP system parameters data set (tcpip.TCPIP.DATA) to be located. This message may also be received for TCP/IP if the "SOCIM" parameter value specified on the ISPMTAIL macro indicates that MVS Open Edition sockets are to be used, but MVS Open Edition support is not installed or is not active. If you are using APPC verify that the data set containing the APPC/MVS callable services modules is in the MVS "linklist" concatenation.

Problem Determination: NETWORK DATA shows the TCP/IP socket or SNA APPC function invoked, and numeric code returned, that indicated the failing condition. A complete explanation of MVS TCP/IP socket return codes can be found in "Chapter 7. TCP/IP Error Codes" on page 565. A complete explanation of MVS APPC return codes can be found in *Writing Transaction Programs* for APPC/MVS. Any additional message received with the prefix "LSCX" is issued by the SAS/C runtime support shipped with

ISPF. The message may provide additional helpful information for the user or for support personnel.

ISPO923 **Unable to connect to the workstation. Ensure that the communications from MVS to the workstation are functioning and that the correct level of the ISPF Client/Server component is running on the workstation. Network data:'aaaaaaaa'.**

Explanation: ISPF cannot make a connection to your workstation.

The following error codes may be returned to an ISPF application or to a Workstation Agent Applet by the Application Server if a connection cannot be established between the ISPF application and the Workstation Agent Applet:

- 17 The maximum time to wait for a connection to an ISPF application or to a Workstation Agent Applet has been exceeded.
- 19 The Application Server was unable to submit the batch ISPF application JCL to the target OS/390 system.
- 20 The Application Server was unable to find an application properties entry for batch JCL submission of an ISPF application to a target OS/390 system.
- 21 A connection protocol error was encountered between the Application Server and an ISPF application or a Workstation Agent Applet.
- 22 A waiting ISPF application connection or Workstation Agent Applet connection to the Application Server was deleted from the Application Server main window.

User Response: An unanticipated failure has occurred. Retry the attempt to connect to the workstation and if the failure persists notify your MVS system support personnel regarding the failure.

System Programmer Response: Use the error message NETWORK DATA, if any, to diagnose the failure.

Problem Determination: NETWORK DATA shows the TCP/IP socket or SNA APPC function invoked, and numeric code returned, that indicated the failing condition. A complete explanation of MVS TCP/IP socket return codes can be found in "Chapter 7. TCP/IP Error Codes" on page 565. A complete explanation of MVS APPC return codes can be found in *Writing Transaction Programs* for APPC/MVS. Any additional message received with the prefix "LSCX" is issued by the SAS/C runtime support shipped with ISPF. The message may provide additional helpful information for the user or for support personnel

ISPO924 **Unable to connect to the workstation because the user at the workstation rejected the connection request.**

Explanation: ISPF cannot make a connection to your workstation.

User Response: Verify that the specified network address represents the workstation with which you intended to establish communication.

ISPO925 **You have already connected to the workstation with codepage 'aaaaaaaa' and character set 'bbbbbbbb'. The new values you specified will be ignored on your GUI display.**

Explanation: Once ISPF has made a connection to the workstation using a particular codepage and character set, you cannot switch to GUI mode using a different codepage and character set.

User Response: To run in GUI mode using the codepage and character set you just specified, you must first disconnect from the workstation and then reconnect specifying these values.

ISPO926 **You have requested to connect to the ISPF application server. You must enter the following application name in your workstation agent applet in order to run your ISPF application: aaaaaaaa...Hit enter to submit your request to connect to the ISPF application server. Note that any additional updates you make to this panel before hitting enter will be ignored.**

Explanation: You have requested to connect to the ISPF application server. Before your ISPF application can be invoked from your browser, you must enter the specified application name in the input field in the ISPF workstation agent applet.

User Response: Enter the specified application name in the appropriate input field in the ISPF workstation agent applet.

ISPO927 **Unable to connect to the workstation. ISPDTPRF DDNAME is not allocated or the profile data file allocated to ISPDTPRF cannot be opened.**

Explanation: You have requested to connect to the workstation using an address for your userid defined in a profile data file allocated to ISPDTPRF DDNAME. However, ISPDTPRF has not been allocated or the allocated file cannot be opened.

User Response: Make sure that a file containing the WORKSTAT keyword for your userid is allocated to ISPDTPRF DDNAME and try the workstation connection again

ISPF Messages

ISPO928 **Unable to connect to the workstation. The profile data file allocated to ISPDTPRF DDNAME cannot be read.**

Explanation: You have requested to connect to the workstation using an address for your userid defined in a profile data file allocated to ISPDTPRF DDNAME. However, there is a problem reading the file allocated to ISPDTPRF.

User Response: Make sure that a readable file containing the WORKSTAT keyword for your userid is allocated to ISPDTPRF DDNAME and try the workstation connection again.

ISPO929 **Unable to connect to the workstation. A WORKSTAT keyword defining an address for your userid was not found in the profile data file allocated to ISPDTPRF DDNAME.**

Explanation: You have requested to connect to the workstation using an address for your userid defined in a profile data file allocated to ISPDTPRF DDNAME. However, there was no WORKSTAT keyword for your userid found in the data file.

User Response: Make sure that a WORKSTAT keyword entry defining an address for your userid is in the profile data file allocated to ISPDTPRF and try the workstation connection again.

System Programmer Response: If your system programmer is maintaining the profile data file, make sure it contains a WORKSTAT keyword for your userid with your correct workstation address.

ISPO930 **Enter required field - Enter message identifier default at the cursor position.**

Explanation: The message identifier default was left blank.

User Response: Enter a valid choice for the message identifier default.

ISPO931 **Enter required field - Enter panel identifier default at the cursor position.**

Explanation: The panel identifier default was left blank.

User Response: Enter a valid choice for the panel identifier default.

ISPO932 **Enter required field - Enter screen name default at the cursor position.**

Explanation: The screen name default was left blank.

User Response: Enter a valid choice for the screen name default.

ISPO933 **Download error RC = aaaaaaaa : An unexpected error related to the host or host data set, causing the download of the workstation agent to fail. Verify the host data set, retry the download or use the Client/Server Component Download function of the ISPF Utilities panel to download the workstation agent manually.**

Explanation: The download failed.

User Response: Verify the host data set, retry the download or use the Client/Server Component Download function of the ISPF Utilities panel to download the workstation agent manually.

Problem Determination: If problem persists, record the return code reported in the message and contact IBM Support.

ISPO934 **Download error RC = aaaaaaaa: An error related to the workstation or workstation file caused the download of the workstation agent to fail. Check the directory or try another directory.**

Explanation: The download failed. There are several possible causes to the problem, including but not limited to:

- out of space on disk
- insufficient permission to write to or create directory or file
- directory cannot be found
- disk drive does not exist

User Response: Correct the directory name, try another workstation directory, retry the download, or use the Client/Server Component Download function of the ISPF Utilities panel to download the workstation agent manually.

Problem Determination: If problem persists, record the return code reported in the message and contact IBM Support.

ISPO935 **Download error RC = aaaaaaaa : An unexpected error caused the download of the workstation agent to fail. Retry the download or use the Client/Server Component Download function of the ISPF Utilities panel to download the workstation agent manually.**

Explanation: The download failed.

User Response: Retry the download or use the Client/Server Component Download function of the ISPF Utilities panel to download the workstation agent manually.

Problem Determination: If problem persists, record

the return code reported in the message and contact IBM Support.

ISPO937 **Agent not downloaded — The new workstation agent was not downloaded. You may download the agent manually using the Client/Server Component Download function of the ISPF Utilities panel.**

Explanation: The component was not downloaded.

User Response: The user may wish to download the component.

ISPO938 **You are using a downlevel version of the ISPF workstation agent. Use the Client/Server Component Download function from the ISPF Utilities panel to download the latest version.**

Explanation: The workstation agent should be upgraded to the new level.

User Response: The user should use the Client/Server Component Download function of the ISPF Utilities panel to download the new agent and then install the agent.

ISPP000 **ISPF Log continued - - - Session #**
aaaaaaaa

Explanation: This is an informational message. This message is placed at the beginning of a continued ISPF log file when the session number is available.

ISPP001 **Start of ISPF Log - - - - Session #**
aaaaaaaa

Explanation: This is an informational message. This message is placed at the beginning of a new ISPF log file when the session number is available.

ISPP002 **End of ISPF Log - - - - Session #**
aaaaaaaa

Explanation: This is an informational message. This message is placed at the end of the ISPF log file when the ISPF session is ended.

ISPP003 **ISPF Log continued - - - Session # not available**

Explanation: This is an informational message. This message is placed at the beginning of a continued ISPF log file when the session number is not available.

ISPP004 ******* Dialog Error *******
Application(aaaaaaaa); Function bbbbbbbb
(ccccccc); Service(dddddddd)

Explanation: This is an informational message. This message is placed in the ISPF log file when a dialog error occurs.

ISPP005 **Line from panel: - aaaaaaaaa**

Explanation: This is an informational message. This message is added to the ISPF log file when a dialog error is found in the panel syntax. 'aaaaaaaa' contains the panel line where the error is found.

ISPP006 **Line from cmd: - aaaaaaaaa**

Explanation: This is an informational message. This message is added to the ISPF log file when a dialog error pertains to the command syntax. 'aaaaaaaa' contains the line where the error is found.

ISPP007 **Line from skeleton: - aaaaaaaaa**

Explanation: This is an informational message. This message is added to the ISPF log file when a dialog error occurs in skeleton processing. 'aaaaaaaa' contains the skeleton line where the error is found.

ISPP008 **Trace: Command line - 2ND LEVEL**
MSG NOT USED!!!, INSERTED
DIRECTLY IN TLD BY SEP

Explanation: This is an informational message.

ISPP009 **Start of ISPF Log - - - - Session # not available**

Explanation: This is an informational message. This message is placed at the beginning of a new ISPF log file when the session number is not available.

ISPP011 **ISPF subtaskabend - Completion code**
= aaaaaaaaa (No other information
available.)

Explanation: The subtask failed.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPP012 **ISPF subtaskabend - VS aaaaaaaa ISPF**
bbbbbbb Systemabend code = cccccccc
(HEX) PSW dddddddd eeeeeeee

Explanation: The task failed.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPF Messages

ISPP013 **Name** *aaaaaaaa* **EPA** *bbbbbbbb* **ISPSUBS**
EPA *cccccccc* **ISPTSI addr** *dddddddd*

Explanation: This is an informational message.

ISPP014 **Registers at - R0** *aaaaaaaa* **R1** *bbbbbbbb* **R2**
cccccccc **R3** *dddddddd*

Explanation: This is an informational message.

ISPP015 **Entry to - R4** *aaaaaaaa* **R5** *bbbbbbbb* **R6**
cccccccc **R7** *dddddddd*

Explanation: This is an informational message.

ISPP016 **Abend - R8** *aaaaaaaa* **R9** *bbbbbbbb* **R10**
cccccccc **R11** *dddddddd*

Explanation: This is an informational message.

ISPP017 **R12** *aaaaaaaa* **R13** *bbbbbbbb* **R14** *cccccccc*
R15 *dddddddd*

Explanation: This is an informational message.

ISPP018 **Reason code associated with abend =**
aaaaaaaa

Explanation: This is an informational message.

ISPP019 **ISPF subtask abend - VS** *aaaaaaaa* **ISPF**
bbbbbbbb **User abend code =** *cccccccc*
(DECIMAL) PSW *dddddddd* *eeeeeee*

Explanation: This is an informational message.

ISPP020 *aaaaaaaa* **data set kept -** *bbbbbbbb* *cccccccc*
has been kept.

Explanation: This is an informational message.

ISPP021 *aaaaaaaa* **data set deleted -** *bbbbbbbb*
cccccccc **has been deleted.**

Explanation: This is an informational message.

ISPP022 *aaaaaaaa* **print job submitted -** *bbbbbbbb*
cccccccc **will be printed/deleted by job**
dddddddd.

Explanation: This is an informational message.

ISPP022B *aaaaaaaa* **print job submitted -** *bbbbbbbb*
cccccccc **will be printed and kept by**
job*dddddddd*.

Explanation: This is an informational message.

ISPP023 *aaaaaaaa* **data set printed -** *bbbbbbbb*
cccccccc **has been queued to** *dddddddd*
and deleted.

Explanation: This is an informational message.

ISPP023B *aaaaaaaa* **data set printed -** *bbbbbbbb*
cccccccc **has been queued to** *dddddddd*
and kept.

Explanation: This is an informational message.

ISPP024 *aaaaaaaa* **print job error -** *bbbbbbbb* *cccccccc*
has been kept because of submit error.

Explanation: This message is self-explanatory.

ISPP025 *aaaaaaaa* **not printed. - ISPP025 - ISPF**
Print RC = *bbbbbbbb*. **See ISPF Messages**
and Codes. *cccccccc* *dddddddd* **has been**
kept.

Explanation: Possible return codes are:

- 2 The user cancelled local print.
- 4 ISPF issued the TSO PRINTDS command, but
the user pressed ATTENTION during
PRINTDS.
- 6 Local print has been disabled by the system
programmer. Your system programmer has set
the LOCALPRT field in ISRCNFID to blank,
which disables local print.
- 8 ISPF issued the TSO PRINTDS command, but
TSO PRINTDS abended. Further information
may be available from TSO PRINTDS by
setting WTPMSG and MSGID in your TSO
profile.
- 12 TSO PRINTDS had a return code greater than
zero. Further information may be available
from TSO PRINTDS by setting WTPMSG and
MSGID in your TSO profile.
- 16 Unexpected RC from local print.

User Response: Contact your system programmer.

System Programmer Response: Verify that the local
print function is set up correctly.

ISPP026 *aaaaaaaa* *bbbbbbbb* **has been kept.**

Explanation: This is an informational message.

ISPP027 *aaaaaaaa* *bbbbbbbb* **was preallocated (no**
free was done).

Explanation: This is an informational message.

ISPP028 **Print utility exit - The print utility exit produced a return code of aaaaaaaa when processing bbbbbbbb cccccccc.**

Explanation: This is an informational message.

ISPP028B **Print utility exit - The print utility exit produced a return code of aaaaaaaa on request for batch job bbbbbbbb.**

Explanation: This is an informational message.

ISPP031 **Specify required field - Specify either sysout class or printer ID.**

Explanation: In order for ISPF to determine the destination of the output, the sysout class OR the printer ID is required.

User Response: Specify either the sysout class or the printer ID.

ISPP032 **Duplicate specification - Specify either sysout class or printer ID, not both.**

Explanation: In order for ISPF to determine the destination of the output, the sysout class OR the printer ID is required.

User Response: Specify either the sysout class or the printer ID, not both.

ISPP040 **.ALARM not set - ALARM keyword specified on short message but it was not set.**

Explanation: This message is self-explanatory.

User Response: Contact the responsible programmer.

Programmer Response: Refer to *ISPF Dialog Developer's Guide and Reference* for a description of ISPF message syntax and keywords.

ISPP041 **.HELP has no menu name - The HELP keyword was specified on short message but with no menu name.**

Explanation: This message is self-explanatory.

User Response: Contact the responsible programmer.

Programmer Response: Refer to *ISPF Dialog Developer's Guide and Reference* for a description of ISPF message syntax and keywords.

ISPP043 **No message ID was found - The message ID was blank.**

Explanation: This message is self-explanatory.

User Response: Contact the responsible programmer.

Programmer Response: Refer to *ISPF Dialog*

Developer's Guide and Reference for a description of ISPF message syntax and keywords.

ISPP044 **Member not found - The member that should contain the message was not found.**

Explanation: This message is self-explanatory.

User Response: Contact the responsible programmer.

Programmer Response: Refer to *ISPF Dialog Developer's Guide and Reference* for a description of ISPF message syntax and keywords.

ISPP045 **Invalid message ID - The last character of the message ID was invalid.**

Explanation: This message is self-explanatory.

User Response: Contact the responsible programmer.

Programmer Response: Refer to *ISPF Dialog Developer's Guide and Reference* for a description of ISPF message syntax and keywords.

ISPP046 **Invalid message ID - The message ID contains more than 5 characters.**

Explanation: This message is self-explanatory.

User Response: Contact the responsible programmer.

Programmer Response: Refer to *ISPF Dialog Developer's Guide and Reference* for a description of ISPF message syntax and keywords.

ISPP047 **Invalid member name - The member name does not end in two numerics.**

Explanation: This message is self-explanatory.

User Response: Contact the responsible programmer.

Programmer Response: Refer to *ISPF Dialog Developer's Guide and Reference* for a description of ISPF message syntax and keywords.

ISPP048 **I/O error or end-of-file - An I/O error or end-of-file was encountered before message was found.**

Explanation: This message is self-explanatory.

User Response: Contact the responsible programmer.

Programmer Response: Refer to *ISPF Dialog Developer's Guide and Reference* for a description of ISPF message syntax and keywords.

ISPF Messages

ISPP049 **Leading quote missing - The leading quote was missing from either the long or short message.**

Explanation: This message is self-explanatory.

User Response: Contact the responsible programmer.

Programmer Response: Refer to *ISPF Dialog Developer's Guide and Reference* for a description of ISPF message syntax and keywords.

ISPP100 **Panel 'aaaaaaaa' error - Panel not found.**

Explanation: The requested panel is not found in the ISPLIB libraries. When modified or copied panels from prior ISPF releases are used with a newer ISPF release, an unpredictable error may occur.

Programmer Response: Verify the following:

- The panel name is spelled correctly.
- The expected libraries are allocated.
- The requested panel is in the expected library.

Only those panels shipped with a particular release should be modified and used under that release. This is because processing of the panel as defined in the)PROC sections may have changed significantly between releases.

ISPP102 **Panel 'aaaaaaaa' error - I/O error or other BLDL error in retrieving panel.**

Explanation: An I/O error from BLDL occurred while attempting to find the panel name.

User Response: Retry retrieving the panel. If another BLDL error occurs, consult your system programmer.

System Programmer Response: Ensure that the data set containing the panel is usable. Contact IBM support for additional assistance.

ISPP103 **Panel 'aaaaaaaa' error - Attribute character found has already been defined.**

Explanation: A specific attribute character has been defined more than once in the attribute section.

User Response: Contact the responsible programmer.

Programmer Response: Examine the panel attribute section and determine which attribute character is defined more than once. Ensure that each attribute character is defined only once.

ISPP104 **Panel 'aaaaaaaa' error - More than bbbbbbb attribute characters are defined.**

Explanation: The number of attribute characters defined exceeds the maximum allowed, 127. This limit includes the three default characters, attribute overrides, and TBDISPL dual defaults. For action bar

panels or panels with scrollable areas, you can specify a maximum of 110 attribute characters. This is because ISPF uses some attribute characters internally for action bar panels or panels with scrollable areas.

Programmer Response: Limit the number of defined attribute characters to a maximum of 127.

ISPP105 **Panel 'aaaaaaaa' error - DEFAULT keyword out of order in)ATTR section of panel.**

Explanation: The DEFAULT keyword is not specified correctly on the)ATTR section heading.

Programmer Response: Check the DEFAULT keyword on the)ATTR header statement. The)ATTR header statement allows only one DEFAULT keyword.

ISPP106 **Panel 'aaaaaaaa' error - Invalid attribute keyword value.**

Explanation: The keyword value specified for an attribute keyword is not one of the valid keyword values. For example, the attribute keyword INTENS has three valid keyword values, HIGH, LOW, and NON.

Programmer Response: Check the defined attribute keyword values, and determine if they are valid for the specified keyword.

ISPP107 **Panel 'aaaaaaaa' error - Invalid attribute keyword value type (not a literal or dialog var).**

Explanation: The panel)ATTR section contains an invalid attribute keyword value. The keyword value entered is not a literal or a dialog variable.

Programmer Response: Check the attribute keyword values for an invalid value.

ISPP108 **Panel 'aaaaaaaa' error - Expected right parenthesis missing while processing keyword.**

Explanation: A closing parenthesis (right parenthesis) is missing from the keyword value of an attribute.

Programmer Response: Check for a missing right parenthesis on attribute keyword values in the attribute section.

ISPP109 **Panel 'aaaaaaaa' error - Invalid keyword found within the)ATTR section.**

Explanation: A keyword that was not valid was found in the)ATTR section of a panel definition.

The valid keywords for the)ATTR section are:

AREA, ATTN, CAPS, COLOR, DATAMOD, EXTEND, FORMAT, HILITE, INTENS, JUST, NUMERIC, OUTLINE, PAD, PADC, REP, SCROLL, SKIP, TYPE, USERMOD

Programmer Response: Check the)ATTR section for invalid or missing keywords.

ISPP110 **Panel 'aaaaaaaa' error - Attribute keyword found before an attribute character.**

Explanation: Each statement in the panel attribute section,)ATTR, must begin with a single character or 2-digit hexadecimal code. The remainder of the statement can contain keyword parameters.

Programmer Response: Look for a keyword preceding the attribute.

For example, the following statement produces this error:

```
PAD(' ') @ TYPE(INPUT) INTENS(HIGH)
```

The keyword, PAD(' '), should not precede the single character attribute, @.

ISPP111 **Panel 'aaaaaaaa' error - Illegal characters or statement type found in)ATTR section.**

Explanation: An attribute statement contains illegal characters.

For example, the following statement produces this error:

```
@ TYPE(INPUT) INTENS(HIGH))
```

The keyword parameters should be enclosed in single parentheses. In the previous example, the keyword parameter HIGH is followed by a double right parenthesis.

Programmer Response: Check the panel attribute section statements for illegal characters or invalid keywords.

ISPP112 **Panel 'aaaaaaaa' error - 3 distinct, legal attribute characters not found with DEFAULT keyword**

Explanation: The DEFAULT keyword on the)ATTR or)BODY header statement must specify exactly three distinct, legal attribute characters.

Programmer Response: Check the DEFAULT keyword characters on either or both of the)ATTR and)BODY header statements for missing or illegal characters.

ISPP113 **Unable to get save area - Additional storage needed is unavailable for display processing.**

Explanation: An attempt by ISPF to get storage for display processing failed.

User Response: Contact your system programmer.

ISPP114 **Panel 'aaaaaaaa' error - REFRESH is not permitted for a graphic area.**

Explanation: The contents of fields within a graphic area cannot be retrieved prior to a redisplay. On redisplay, the variables within the graphic area are displayed as the user last saw them.

Programmer Response: The REFRESH statement is not valid for fields within the graphic area. Remove the REFRESH statement, or refresh only those fields outside the graphic area.

ISPP115 **Panel 'aaaaaaaa' error - Ampersand (&), blank, or null is invalid as an attribute character.**

Explanation: The attribute section contains one of the invalid attributes.

Programmer Response: Choose special (non-alphanumeric) characters for attribute characters so they do not conflict with the panel text. An ampersand (&), blank (hexadecimal 40), shift-out (hexadecimal 0E), shift-in (hexadecimal 0F), or null (hexadecimal 00) cannot be used as an attribute character.

ISPP116 **Panel 'aaaaaaaa' error - Unable to process redisplay request, last thing displayed not a panel.**

Explanation: A valid previous panel does not exist, thus ISPF is unable to process the redisplay request.

Programmer Response: Check the previous panel definition for possible errors.

ISPP118 **Panel 'aaaaaaaa' error - Invalid cursor field/area specified as a parameter.**

Explanation: An invalid field or area was specified for cursor position.

Programmer Response: Check for an invalid field specified for cursor position. For example, you cannot set the cursor to a dynamic area name in the panel body.

ISPF Messages

ISPP119 **Panel 'aaaaaaaa' error - Attempting to redisplay a panel that was never successfully created.**

Explanation: The panel contained an error that prevented ISPF from creating the panel image. You cannot redisplay a panel that was never created.

Programmer Response: Correct the error that prevented ISPF from creating the panel.

ISPP120 **Panel 'aaaaaaaa' error -)BODY section of panel not found when expected.**

Explanation: The panel definition sections must be used in the following order:

```
)CCSID
)PANEL
)ATTR
)ABC
)ABCINIT
)ABCPROC
)BODY
)MODEL
)AREA
)INIT
)REINIT
)PROC
)HELP
)END
```

Programmer Response: Check the order in which you use the panel definition sections. Ensure that they match the order described in the explanation above.

ISPP121 **Panel 'aaaaaaaa' error - Panel definition too large, greater than screen size.**

Explanation: The panel defined by the)BODY definition section contains more lines than can be displayed on your current terminal screen.

Programmer Response: Reduce the number of lines in the)BODY definition section to the maximum screen size. For example, if your maximum terminal screen size is 25 lines, reduce the number of lines in the)BODY definition section to 25 lines.

ISPP122 **Panel 'aaaaaaaa' error - Invalid statement or keyword on)BODY heading statement.**

Explanation: The)BODY header statement of a panel definition contains a keyword or statement that is not valid. The valid keywords for the)BODY header statement are:

```
ASIS
CMD
DEFAULT
EXPAND
FORMAT
KANA
```

LMSG
OUTLINE
SMSG
WIDTH
WINDOW

Programmer Response: Check the)BODY header statement for an invalid keyword or statement.

ISPP123 **Panel 'aaaaaaaa' error - The command field length is greater than 255.**

Explanation: The defined command field length on the panel is greater than 255 characters. The maximum command field length is 255 characters.

Programmer Response: Redefine the command field length on the panel to be less than or equal to 255 characters.

ISPP124 **Panel 'aaaaaaaa' error - Panel record longer than given (or defaulted) screen width to be used.**

Explanation: The length of a panel record exceeds the defined screen width.

Programmer Response: Adjust any panel records that exceed the screen width.

ISPP125 **Panel 'aaaaaaaa' error - Duplicate panel field (or area) name defined.**

Explanation: The panel contains two fields or areas with the same name.

Programmer Response: Ensure that all the defined panel fields and areas have unique variable names.

ISPP126 **Panel 'aaaaaaaa' error - Panel field name (or area name) exceeds maximum length of bbbbbbbb..**

Explanation: A panel field (or area name) is longer than the maximum length allowed for panel field names (or area names).

Programmer Response: Ensure that the panel field names (or area names) do not exceed the maximum length allowed.

ISPP127 **Panel 'aaaaaaaa' error - Field or area name missing following identifying attribute character.**

Explanation: The panel contains a defined area or field that does not have a name following the attribute character for that area or field.

Programmer Response: Check for defined areas or fields with missing field or area names following the identifying attribute character.

ISPP128 Panel 'aaaaaaaa' error - Shadow variable name must follow area name.

Explanation: If a dynamic area is to contain character attributes, a shadow variable must be defined. The shadow variable is associated with the dynamic area by placing the shadow variable name after the dynamic area name in the panel definition.

Programmer Response: Define a shadow variable, placing it after the dynamic area name. The two names must be separated by a comma only, and the shadow variable name must be followed by a blank.

ISPP129 Panel 'aaaaaaaa' error - String of CLEAR name values exceeds maximum size of 255 characters.

Explanation: The)MODEL header statement keyword, CLEAR, identifies the dialog variable names that are to be cleared to blank before each row of the table is read. This string of variable names, exceeds the maximum size of 255 characters.

Programmer Response: Ensure that the string of variable names does not exceed the maximum size of 255 characters.

ISPP130 Panel 'aaaaaaaa' error - A panel section is out of order or has already been defined.

Explanation: The panel definition sections must be used in the following order:

1.)CCSID
2.)PANEL
3.)ATTR
4.)ABC
5.)ABCINIT
6.)ABCPROC
7.)BODY
8.)MODEL
9.)AREA
10.)INIT
11.)REINIT
12.)PROC
13.)HELP
14.)END

Duplicate panel sections are not allowed.

Programmer Response: Verify the panel definitions, checking for out-of-order panel sections or duplicate names.

ISPP131 Panel 'aaaaaaaa' error - Required)BODY records not found following heading.

Explanation: A panel must have at least one line in the)BODY section.

Programmer Response: Check the)BODY section of

your panel and verify that the)BODY section has at least one line (record).

ISPP132 Panel 'aaaaaaaa' error - Invalid keyword found in)INIT,)REINIT, or)PROC section.

Explanation: An invalid keyword was found in the)INIT,)REINIT, or)PROC sections of the panel.

Programmer Response: Check that valid keywords are being used appropriately in the)INIT,)REINIT, and)PROC sections of the panel.

ISPP133 Panel 'aaaaaaaa' error - Invalid statement found within)INIT,)REINIT, or)PROC section.

Explanation: The)INIT,)REINIT, or)PROC section contains an invalid statement. The valid statements for these panel sections are:

- Assignment
- EXIT
- GOTO
- IF/ELSE
- REFRESH
- TOG
- VER
- VEDIT
- VGET
- VPUT
- PANEXIT

Programmer Response: Verify that the panel statements in the)INIT,)REINIT, or)PROC section are valid statements as shown in the list above.

ISPP134 Panel 'aaaaaaaa' error - Invalid statement or keyword found on section heading.

Explanation: One of section headings on the panel contained an invalid statement or keyword.

Programmer Response: Verify panel section heading statements for valid keywords.

ISPP136 Panel 'aaaaaaaa' error - Something other than an "=" operator found in an assignment statement.

Explanation: An assignment statement in the)INIT,)REINIT, or)PROC section contains something other than an "=" operator.

Programmer Response: Correct the assignment statement's operator.

ISPF Messages

ISPP137 **Panel 'aaaaaaaa' error - Table display panel, duplicate)MODEL statement found.**

Explanation: Only one)MODEL section is allowed per panel.

Programmer Response: Remove the duplicate)MODEL section from the panel definition.

ISPP138 **Panel 'aaaaaaaa' error - Invalid "clear" keyword value (not a literal or dialog variable).**

Explanation: The header CLEAR keyword value in the)MODEL section must be literal or a dialog variable.

Programmer Response: Verify that the section header CLEAR keyword values in the)MODEL section are literals or dialog variables.

ISPP139 **Panel 'aaaaaaaa' error - Something other than CLEAR or ROWS keyword found on)MODEL header statement.**

Explanation: The)MODEL section header contains an invalid keyword.

Programmer Response: Use only the CLEAR or ROWS keywords on the)MODEL header statement.

ISPP140 **Panel 'aaaaaaaa' error - Built-in function in the assignment statement is not recognized.**

Explanation: A built-in function defined in an assignment statement is in error. Only the 4 built-in functions listed below are valid:

- TRUNC (truncate)
- TRANS (translate)
- PFK (PF key)
- LVLINE (last visible line).

Programmer Response: Change the built-in function in error to one of the 4 valid built-in functions.

ISPP141 **Panel 'aaaaaaaa' error - Invalid assignment statement.**

Explanation: The)INIT,)REINIT, or)PROC section contains an invalid assignment statement.

Programmer Response: Verify that all assignment statements follow the assignment statement format: variable = value

ISPP144 **Panel 'aaaaaaaa' error - The max of bbbbbbbb levels of nested built-in functions has been exceeded.**

Explanation: The TRUNC and TRANS built-in functions exceed the maximum level (2) of nesting.

Programmer Response: The TRUNC and TRANS built-in functions allow only 2 levels of nesting. Limit the TRANS and TRUNC statements to 2 levels of nesting.

ISPP145 **Panel 'aaaaaaaa' error - Invalid nested keyword used within a built-in function.**

Explanation: An invalid keyword was used within a nested built-in function. For example, in the following statement the PFK built-in function keyword is invalid within the built-in function, TRANS.

&ESER = TRUNC(PFK(1),H)

Programmer Response: Remove the invalid nested keyword used within a built-in function.

ISPP146 **Panel 'aaaaaaaa' error - Invalid built-in function variable specified.**

Explanation: The variable used within the built-in function is invalid.

Programmer Response: Check for invalid variables within the TRUNC and TRANS built-in functions.

ISPP147 **RESTORE request error - A CONTROL service request, for which there was no matching SAVE.**

Explanation: For each CONTROL service Restore request, there should be a matching CONTROL service Save request.

Programmer Response: Verify that the CONTROL service Restore requests have matching Save requests.

ISPP148 **Panel 'aaaaaaaa' error - At least one of the CLEAR names listed is not a panel field name.**

Explanation: The keyword, CLEAR(var-name, varname ...) within the)MODEL section contains a variable name that is not a panel field name.

Programmer Response: Correct the)MODEL section's keyword, CLEAR, to contain variable names that are panel fields.

ISPP149 **Panel 'aaaaaaaa' error - The REFRESH statement is invalid within the)INIT section.**

Explanation: The panel section statement, REFRESH, is not valid in the)INIT section. The REFRESH statement can appear within the)PROC or)REINIT section of a panel definition.

Programmer Response: Remove the REFRESH statement from the)INIT section. Place the REFRESH statement in the appropriate section,)PROC or)REINIT.

ISPP150 Panel 'aaaaaaa' error - No)END found before reaching end of file.

Explanation: No)END statement was found on the last line of the panel definition. An)END statement is required as the last line of each panel definition. ISPF ignores any data that appears on lines following the)END statement.

Programmer Response: Update the panel definition to contain an)END statement on the last line.

ISPP151 Panel 'aaaaaaa' error - I/O error in retrieving panel (CDG).

Explanation: An attempt to retrieve the panel to read a logical record of the panel has failed.

User Response: Try to display the panel again. If this fails, contact your system programmer.

System Programmer Response: Contact IBM support.

ISPP152 Panel 'aaaaaaa' error - Invalid CDG return code, system error.

Explanation: An error occurred while trying to read a panel record.

User Response: Try to display the panel again. If this fails, contact your system programmer.

System Programmer Response: Contact IBM support.

ISPP153 Panel 'aaaaaaa' error - Invalid quoted string, end quote or continuation ("+" missing.

Explanation: The ending quotation mark is missing from a quoted string, or a continuation character, "+" is missing.

Programmer Response: Add the missing ending quotation mark or continuation character (+) to the statement in error.

ISPP155 Panel 'aaaaaaa' error - A dialog variable name must have a minimum length of bbbbbbb. and must not exceed a maximum length of ccccccc. characters.

Explanation: A dialog variable name must follow minimum or maximum length as specified in this message.

Programmer Response: Change the dialog variable name to meet the minimum or maximum length.

ISPP156 Panel 'aaaaaaa' error - Unrecognized keyword.

Explanation: An invalid panel keyword has been detected.

Programmer Response: Check the panel definition for invalid or misspelled keywords and correct the keyword.

ISPP157 Panel 'aaaaaaa' error - Unrecognized control variable.

Explanation: An invalid panel control variable was found. The ISPF panel control variables are:

.ALARM
.ATTR
.ATTRCHAR
.AUTOSEL
.CSRPOS
.CSRROW
.CUSOR
.HELP
.MSG
.PFKEY
.RESP
.TRAIL
.ZVAR

Programmer Response: Ensure all the panel control variables used are valid.

ISPP158 Panel 'aaaaaaa' error - Invalid field/area name assigned to the .CURSOR control variable.

Explanation: The .CURSOR control variable is set to an invalid panel field name or to a scrollable area name.

Programmer Response: Set the .CURSOR control variable to valid field/area name. Its value must be a character string that matches a field name or a DYNAMIC or GRAPHIC area name in the panel body. Its value cannot be a character that matches a scrollable AREA name, but it can be a character string that matches a field name within the scrollable area.

ISPP159 Panel 'aaaaaaa' error - Invalid response value assigned to the .RESP control variable.

Explanation: An invalid response value was assigned to the .RESP panel control variable. Valid values are END and ENTER.

Programmer Response: Set the .RESP control variable to the appropriate valid value, END or ENTER.

ISPP163 Panel 'aaaaaaa' error - Invalid TRANS value (not a literal or dialog variable).

Explanation: The TRANS value must be a literal or a dialog variable.

Programmer Response: Correct the appropriate TRANS value to a literal or a dialog variable.

ISPF Messages

ISPP164 **Panel 'aaaaaaaa' error - Invalid TRANS msg= value (not a literal or dialog variable).**

Explanation: The MSG=value option specified on the TRANS built-in function statement has an invalid value for the message ID.

Programmer Response: Correct the MSG=value option on the TRANS built-in function to a valid dialog variable or literal.

ISPP165 **Panel 'aaaaaaaa' error - TRUNC value is not a numeric or single character.**

Explanation: The TRUNC built-in function value must be either a numeric quantity indicating the length of the truncated result or any special character indicating truncation at the first occurrence of that character.

Programmer Response: Correct the TRUNC built-in function value to either the appropriate numeric quantity or to the appropriate special character needed to achieve the expected truncation results.

ISPP166 **Panel 'aaaaaaaa' error - Invalid TRUNC value (not a literal or dialog variable).**

Explanation: The value used in the TRUNC built-in function is invalid. The value must be a literal or a dialog variable.

Programmer Response: Correct the value in the TRUNC built-in function to be a literal or a dialog variable.

ISPP167 **Panel 'aaaaaaaa' error - Invalid IF keyword value (not a literal, dialog or control variable).**

Explanation: The IF statement keyword value is invalid. The IF statement keyword values must be literals, dialog variables, or control variables.

Programmer Response: Check the IF statements keyword values and verify that they are literals, dialog variables, or control variables.

ISPP168 **Panel 'aaaaaaaa' error - Invalid IF keyword operator found.**

Explanation: The operator used in the IF statements basic value test expression is invalid. Valid operators are:

=	EQ
!=	NE
<	LT
>	GT
!>	NG
!<	NL
>=	GE
<=	LE

Character symbol operators must be specified in uppercase.

If character symbols are used (for example, EQ or NE), use a blank to delimit them. Blanks cannot appear between compound numeric (for example, >=, !<) or character symbols.

Programmer Response: Examine the IF statement for invalid syntax.

ISPP169 **Panel 'aaaaaaaa' error - Invalid IF logical expression (not a dialog or control variable or VER statement construct).**

Explanation: The IF statement syntax is invalid. The IF statement may contain dialog variables, control variables, or the VER statement construct.

Programmer Response: Examine the IF statement for invalid syntax.

ISPP170 **Panel 'aaaaaaaa' error - Invalid ATTR keyword value (dialog var) found while initializing panel.**

Explanation: The dialog variable used for an)ATTR section keyword value is invalid. The dialog variable is substituted after processing the)INIT section.

Programmer Response: Check the dialog variables used in the)ATTR section for keyword values. Ensure that the dialog variables are set to valid values.

ISPP171 **Panel 'aaaaaaaa' error - Invalid value for TYPE keyword found while initializing panel.**

Explanation: A dialog variable was used for a TYPE keyword value and that TYPE keyword value must be coded explicitly. The following TYPE values must be coded explicitly. It is invalid to assign any of these values to dialog variables. The TYPE values are:

AB
NT

Programmer Response: Verify that the TYPE values in the list above have been coded explicitly and not as dialog variables.

ISPP172 **Panel 'aaaaaaaa' error - Invalid TRUNC value (dialog var) found while processing panel.**

Explanation: The TRUNC built-in function value (a dialog variable) is neither a numeric quantity indicating the length of the truncated result, nor any special character indicating truncation at the first occurrence of that character.

Programmer Response: Check that the dialog variable for the TRUNC value is a numeric quantity or a special character, whichever is appropriate.

ISPP173 **Panel 'aaaaaaaa' error - More than bbbbbbbb entries specified for a tutorial TRANS function.**

Explanation: The maximum number of entries allowed is 100.

Programmer Response: Limit the number of entries specified for a tutorial TRANS function to 100.

ISPP174 **Panel 'aaaaaaaa' error - Invalid value for a verify PICT string found while processing panel.**

Explanation: A PICT string in a VER statement in the)INIT,)REINIT, or)PROC section of a panel definition is incorrect.

The valid syntax is VER (xxx,PICT,string), where xxx is a variable. The string parameter can be composed of any of the following:

C	Any character
A	Any alphabetic character (A-Z, #, @, \$)
N	Any numeric character (0-9)
9	Any numeric character (same as "N")
X	Any hexadecimal character (0-9, A-F)

In addition, the string can contain any special characters (except #, @, \$) or lowercase alphabetic characters.

For example: VER(xxx, PICT,'A/NNN') The value of the variable must start with an alphabetic character followed by a slash, followed by 3 numeric characters.

Programmer Response: Correct the invalid value for the verify PICT string.

ISPP175 **Panel 'aaaaaaaa' error - Invalid value for a verify RANGE limit found while processing panel.**

Explanation: A RANGE limit in a VER statement in the)INIT,)REINIT, or)PROC section of a panel definition is not valid.

The valid syntax is:

VER (xxx,RANGE,lowerlimit,upperlimit)

where:

xxx is a variable
 "Lowerlimit" and "upperlimit" must be numeric characters (0-9) of no more than 16 digits each.

Negative values can be specified.

Programmer Response: Correct the invalid value for a verify RANGE limit.

ISPP176 **Panel 'aaaaaaaa' error - Invalid .CURSOR value found while processing panel.**

Explanation: The control variable .CURSOR value must be a character string that matches a field name, a DYNAMIC or GRAPHIC area name, or a field name within a scrollable AREA. It cannot be a character string that matches a scrollable AREA name.

Programmer Response: Verify that .CURSOR is set to a valid value.

ISPP177 **Panel 'aaaaaaaa' error - Invalid .RESP value found while processing panel.**

Explanation: An invalid response (.RESP) value was found when processing the panel. Valid values are ENTER or END.

Programmer Response: Set the value of the .RESP control variable to ENTER or END.

ISPP178 **Panel 'aaaaaaaa' error - Conversion or truncation problem found while attempting to store variable 'bbbbbbbb'.**

Explanation: A conversion or truncation problem was found when attempting to store the variable. The format or length of the variable value may be in error.

Programmer Response: Verify the length and format of the variable.

ISPP179 **Panel 'aaaaaaaa' error - Shadow variable name exceeds maximum length of bbbbbbbb.**

Explanation: The shadow variable name exceeds the maximum length specified.

Programmer Response: Shorten the shadow variable name to the maximum length allowed.

ISPP180 **Panel 'aaaaaaaa' error - Verification TYPE unrecognized.**

Explanation: The VER (verify) statement keyword is invalid. Valid keywords are:

- ALPHA
- ALPHAB
- NUM
- INCLUDE
- ENUM
- HEX
- BIT
- LEN
- FILEID
- PICT
- NAME
- DSNAME
- RANGE
- LIST
- LISTV

ISPF Messages

- DBCS
- EBCDIC
- MIX

Programmer Response: Verify that the keyword in the VER statement is one of the valid keywords.

ISPP181 **Panel 'aaaaaaaa' error - Invalid VERIFY value (not a literal or dialog variable).**

Explanation: The keyword value in the VER (verify) statement is invalid. This value must be a literal or dialog variable.

Programmer Response: Correct the invalid keyword value in the VER statement.

ISPP182 **Panel 'aaaaaaaa' error - Invalid VERIFY msg= value (not a literal or dialog variable).**

Explanation: The value in the VER (verify) statement msg=value parameter must be a literal or dialog variable.

Programmer Response: Correct the value to be a literal or a dialog variable.

ISPP183 **Panel 'aaaaaaaa' error - Incorrect # of VERIFY values for verification type indicated.**

Explanation: An incorrect number of verify values is specified for the verification type that is indicated.

Programmer Response: Check the syntax for the VER statement that uses your keyword type for verification.

ISPP184 **Panel 'aaaaaaaa' error - Invalid VERIFY picture string given.**

Explanation: A PICT string in a VER statement in the)INIT,)REINIT, or)PROC section of a panel definition is incorrect.

The valid syntax is VER (xxx,PICT,string), where xxx is a variable and the "string" parameter can be composed of any of the following:

- | | |
|---|--|
| C | Any character |
| A | Any alphabetic character (A-Z, #, @, \$) |
| N | Any numeric character (0-9) |
| 9 | Ay numeric character (same as "N") |
| X | Ay hexadecimal character (0-9, A-F) |

In addition, the string can contain any special characters (except #, @, or \$) or lowercase alphabetic characters.

Example: VER(xxx, PICT,'A/NNN') The value of the variable must start with an alphabetic character followed by a slash, followed by 3 numeric characters.

Programmer Response: Correct the VER statement picture string.

ISPP185 **Panel 'aaaaaaaa' error - Invalid VERIFY range value given.**

Explanation: A RANGE limit in a VER statement in the)INIT,)REINIT, or)PROC section of a panel definition is not valid.

The valid syntax is:
VER (xxx,RANGE,lowerlimit,upperlimit)

where:
xxx is a variable
"Lowerlimit" and "upperlimit" must be numeric characters (0-9) of no more than 16 digits each.

Negative values can be specified.

Programmer Response: Correct the RANGE limit, following the guidelines.

ISPP186 **Panel 'aaaaaaaa' error - Invalid VERIFY type given (second parameter must be a literal).**

Explanation: The VER statement second parameter, NONBLANK, is a literal. The literal, NB, may be used as an abbreviation of NONBLANK.

Programmer Response: Update the second parameter of the VER statement to either NONBLANK or NB.

ISPP187 **Panel 'aaaaaaaa' error - Invalid VERIFY variable (must be a dialog variable).**

Explanation: The first parameter of the VER statement inside the parentheses specifies the name of the variable to be checked. This first parameter must be a dialog variable.

Programmer Response: Check the first parameter specified and verify that this parameter is a dialog variable.

ISPP188 **Panel 'aaaaaaaa' error - Maximum of 100 list values exceeded on VER statement.**

Explanation: In the VER statement construct "LIST,value1,value2,...", the list of values cannot exceed 100.

Programmer Response: Limit your list of values in the VER statement to fewer than or equal to 100.

ISPP189 **Panel 'aaaaaaa' error - Control variable compare value too long, maximum length is 8 bytes.**

Explanation: An error was found in the IF statement processing comparing a control variable to a value that exceeds the maximum length of 8 bytes.

Programmer Response: Verify that the IF statement processing is comparing the control variable to a valid value.

ISPP190 **Enter required field - Enter required field at the cursor position.**

Explanation: This is an ISPF-supplied message displayed as the result of a verification failure.

User Response: Enter the appropriate data into the field at the cursor position.

ISPP191 **Must be alphabetic - Enter alphabetic characters (A-Z, a-z, #, \$, or @).**

Explanation: This is an ISPF-supplied message displayed as the result of an alphabetic verification failure.

User Response: Enter the appropriate data into the field pointed to by the cursor.

ISPP192 **Must be hexadecimal - Enter hexadecimal characters (0-9, A-F, a-f).**

Explanation: This is an ISPF-supplied message displayed as the result of a hexadecimal verification failure.

User Response: Enter the appropriate data into the field pointed to by the cursor.

ISPP193 **Must be numeric - Enter numeric characters (0-9).**

Explanation: This is an ISPF-supplied message displayed as the result of a numeric verification failure.

User Response: Enter the appropriate data into the field pointed to by the cursor.

ISPP194 **Value out of range - Enter a numeric value between aaaaaaaa. and bbbbbbbb.**

Explanation: This is an ISPF-supplied message displayed as the result of a RANGE,lower limit,upper limit verification failure.

User Response: Enter the appropriate data into the field pointed to by the cursor.

ISPP195 **Invalid value - Enter one of the listed values.**

Explanation: This is an ISPF-supplied message displayed as the result of a LIST,value1,value2,... verification failure.

User Response: Enter one of the listed values into the field pointed to by the cursor.

ISPP196 **Must be a bit string - Enter all '0's or '1's.**

Explanation: This is an ISPF-supplied message displayed as the result of a BIT verification failure.

User Response: Enter a binary value into the field pointed to by the cursor.

ISPP197 **Invalid fileid - Variable must contain a fileid (CMS syntax), valid with a LISTFILE command.**

Explanation: This is an ISPF-supplied message displayed as the result of a FILEID verification failure. The file name and type, if given, must be 1 to 8 alphanumeric characters, including A-Z, 0-9, \$, #, @, +, - (hyphen), : (colon), and _ (underscore). The filemode must be a single letter (A-Z), optionally followed by a single digit (0-9). In addition, one or more fields of the file ID can be an asterisk (*) or a string of characters followed by an asterisk.

User Response: Enter a valid file ID in CMS syntax.

ISPP198 **Must be numeric - Enter a numeric value between 'aaaaaaa' and 'bbbbbbb'.**

Explanation: This is an ISPF-supplied message displayed as the result of a RANGE verification failure.

User Response: Enter a valid numeric value within the range specified.

ISPP199 **Invalid value - Field has failed verification. Reenter or press the End key.**

Explanation: This is an ISPF-supplied message displayed as the result of a verification failure.

User Response: Reenter data or press the END key.

ISPP200 **Invalid name - Enter up to 8 alphanumeric chars (first must be alphabetic) or valid GDG suffix.**

Explanation: The variable must contain a valid name, following the rules of member names, using up to eight alphanumeric characters (A-Z, #, \$, @, 0-9). The first character must be alphabetic (A-Z, #, \$, @). Examples of valid Generation Data Group suffixes are:

xxxxx.yyyy.zzzz(-1)

ISPF Messages

or
xxxxxx.yyyy.zzzz(+2)

User Response: Reenter the member name, following the rules for member names.

Programmer Response: None

ISPP201 Invalid name - Enter a name of 1 to 8 alphanumeric characters.

Explanation: A verification failed on the VER statement with the NAME keyword. The variable being verified does not follow the rule of member names, using up to 8 alphanumeric characters (A-Z, #, \$, @, 0-9). The first character must be alphabetic (A-Z, #, \$, @).

User Response: Reenter a valid member name, following the rule of member names, using up to 8 alphanumeric characters (A-Z, #, \$, @, 0-9). The first character must be alphabetic (A-Z, #, \$, @).

Programmer Response: Check the variable in the VER statement with the keyword NAME. The variable must contain a valid member name following the rule of member names, using up to 8 alphanumeric characters (A-Z, #, \$, @, 0-9). The first character must be alphabetic (A-Z, #, \$, @).

ISPP202 Invalid sign - Press the Help key for additional information.

Explanation: The correct sign notation was not used. Sign notation for a number is not required, but if you do use it, remember the following rules:

- Indicate a negative number by a leading minus sign, -695; a trailing minus sign, 695-; or a number enclosed in parentheses, (695).
- If the number is negative, you cannot use blanks between the sign indicator and the number unless the numerical delimiter is a blank.
- Indicate a positive number by a leading plus sign, +695; or a number with no sign, 695.

User Response: Contact the responsible programmer.

Programmer Response: Correct the sign notation. Refer to the discussion in *ISPF Dialog Developer's Guide and Reference* under the VER statement's keyword, ENUM, for correct sign notation.

ISPP203 Invalid delimiter - Press the Help key for additional information.

Explanation: The delimiter notation entered within a numerical field is incorrect. You do not have to use delimiters, but once you do, you must continue using them throughout the field.

User Response: Contact the responsible programmer.

Programmer Response: Correct the delimiter notation

within the numerical field. Follow these rules when using delimiters:

Proceeding from the left of the field, specify three digits between delimiters.

7999,345,789. is a valid number since there are three digits between delimiters after finding the first delimiter.

98,88,765 is an incorrectly-specified number since there are only two digits between delimiters.

If you use a decimal, you cannot use any other delimiter to the right of the decimal.

345,789.0005 is correct.

45,879.531,20 is incorrect.

ISPP204 Invalid decimal - Press the Help key for additional information.

Explanation: The decimal notation that was entered is incorrect. Enter only one decimal indicator in a field. If numerical delimiters were also used, there must be three digits between the delimiters and the decimal.

User Response: Contact the responsible programmer.

Programmer Response: Correct the decimal notation. Follow these rules when entering decimal notation:

999,765.800 is correct.

999,7658.00 is incorrect (4 digits between the numerical indicator and the decimal).

ISPP205 Panel 'aaaaaaaa' error - Invalid VERIFY length operator.

Explanation: The length of the variable (number of characters) must satisfy the condition expressed by the relational operator and expected length. You have used an invalid relational operator.

User Response: Contact the responsible programmer.

Programmer Response: Correct the invalid relational operator. Valid relational operators are:

=	or EQ
!=	or NE
<	or LT
>	or GT
!>	or NG
!<	or NL
>=	or GE
<=	or LE

These character symbols must be expressed in uppercase.

ISPP206 Panel 'aaaaaaa' error - VERIFY length must be numeric.

Explanation: The expected-length operand on the VER statement is invalid. The expected-length operand should be a positive number having a maximum of 5 numeric characters. If the expected-length operand exceeds the maximum of 5 numeric characters, ISPF truncates the operand to 5. The expected-length operand can be expressed as a literal or as a dialog variable containing the value.

User Response: Contact the responsible programmer.

Programmer Response: Correct the expected-length operand to be a positive number that has a maximum of 5 numeric characters.

ISPP207 Panel 'aaaaaaa' error - Invalid VERIFY length operator found while processing panel.

Explanation: The value of the dialog variable used in the VER statement as the relational operator is invalid.

Programmer Response: Correct the value of the dialog variable used in the VER statement as the relational operator to one of the following valid relational operators:

```
=      or EQ
!=     or NE
<      or LT
>      or GT
!>    or NG
!<    or NL
>=    or GE
<=    or LE
```

These character symbols must be expressed in uppercase.

ISPP208 Panel 'aaaaaaa' error - Invalid VERIFY numeric length found while processing panel.

Explanation: The expected-length operand on the VER statement is invalid. The expected-length operand should be a positive number having a maximum of 5 numeric characters. If the expected-length operand exceeds the maximum of 5 numeric characters, ISPF truncates the operand to 5. The expected-length operand can be expressed as a literal or as a dialog variable containing the value.

Programmer Response: Correct the value of the dialog variable used in the VER statement as the expected-length operand. This dialog variable's value must be a positive number having a maximum of 5 numeric characters.

ISPP209 Invalid length - The length of the data must be aaaaaaaa. bbbbbbbb..

Explanation: The length of the variable (number of characters) does not satisfy the condition expressed by the relational operator and expected length in the VER statement using the LEN keyword.

User Response: Contact the responsible programmer.

Programmer Response: Correct the length of the variable to satisfy the condition expressed by the relational operator and expected length in the VER statement, or adjust the expected length in the VER statement.

ISPP210 Invalid DSN - quotes - Data set name contains unbalanced apostrophes; reenter dsname.

Explanation: The VER statement with the DSNAME keyword has detected an invalid TSO data set name. The quotation marks enclosing the data set name are unbalanced.

User Response: Check the quotation marks enclosing the data set name. The quotation marks should be balanced. For example,
'xxxxx.yyy.zzz'

has balanced quotation marks and

'xxxxx.yyy.zzz'

has unbalanced quotation marks. Reenter the data set name, enclosing it in balanced quotation marks.

ISPP211 Invalid DSN - member - Member name of data set name must be 1-8 chars and enclosed in ().

Explanation: The VER statement with the DSNAME keyword has detected an invalid TSO data set name. The member name of the data set must be 1-8 characters and enclosed in parentheses.

User Response: Check that the member name of the data set contains 1-8 characters and is enclosed in parentheses and reenter.

Programmer Response: Verify that the member name assigned to the variable in the VER statement complies with the data set member name length of 1-8 characters and is enclosed in parentheses.

ISPP212 Invalid DSN - length - Dsname must be 1-44 chars in length, including prefix. Reenter dsname.

Explanation: The VER statement with the DSNAME keyword has detected an invalid TSO data set name. The data set name must be 1-44 characters in length, including prefix.

User Response: Reenter the data set name. The data

ISPF Messages

set name must be 1-44 characters in length, including prefix.

Programmer Response: Verify that the data set name assigned to the variable in the VER statement complies with the data set name length of 1-44 characters.

ISPP213 **Invalid DSN - syntax - Dsname must not end with a period. Reenter dsname.**

Explanation: The VER statement with the DSNAME keyword has detected an invalid TSO data set name. The data set name must not end with a period.

User Response: Reenter the data set name. Do not end the data set name with a period.

Programmer Response: Verify that the data set name assigned to the variable in the VER statement does not end with a period.

ISPP214 **Invalid DSN - syntax - Dsname contains imbedded blanks, parentheses or apostrophes. Reenter.**

Explanation: The VER statement with the DSNAME keyword has detected an invalid TSO data set name. The data set name must not contain imbedded blanks, parentheses, or apostrophes.

User Response: Reenter the data set name. The data set name must not contain imbedded blanks, parentheses, or apostrophes.

Programmer Response: Verify that the data set name assigned to the variable in the VER statement does not contain imbedded blanks, parentheses, or apostrophes.

ISPP215 **Invalid DSN - qualifier - A data set name qualifier must contain from 1-8 characters. Reenter.**

Explanation: The VER statement with the DSNAME keyword has detected an invalid TSO data set name. The data set name qualifiers must contain from 1-8 characters.

User Response: Reenter the data set name. The data set name qualifiers must contain from 1-8 characters.

Programmer Response: Verify that the data set name assigned to the variable in the VER statement does not contain qualifiers greater than 8 characters or less than one character.

ISPP216 **Invalid DSN - qualifier - Each qualifier must be 1-8 alphanumeric characters, the first alphabetic.**

Explanation: The VER statement with the DSNAME keyword has detected an invalid TSO data set name. The data set name qualifiers must contain from 1-8 characters and the first character of each qualifier must be alphabetic.

User Response: Reenter the data set name. The data set name qualifiers must contain from 1-8 characters and the first character of each qualifier must be alphabetic.

Programmer Response: Verify that the data set name assigned to the variable in the VER statement does not contain qualifiers greater than eight characters or less than one character. Also, verify that the first character of each qualifier is alphabetic.

ISPP217 **Invalid number - A valid number contains at least one digit (0-9).**

Explanation: A VER statement expected a valid number. A valid number contains at least one digit (0-9).

User Response: Enter a valid number.

ISPP218 **Invalid name - Enter up to 8 alphanumeric characters (first must be alphabetic).**

Explanation: A VER statement expected a valid name of 1 to 8 alphanumeric characters and the first character must be alphabetic (not numeric).

User Response: Use a valid variable naming convention.

ISPP220 **Invalid string - Character number 'aaaaaaaa' must be alphabetic (A-Z, a-z, #, \$, or @).**

Explanation: The VER statement with the PICT keyword, has found characters within the variable that do not match the corresponding type of character in the picture string. In this case, the picture string characters are alphabetic.

User Response: Reenter the character string data using alphabetic characters (A-Z, a-z, #, \$, @).

Programmer Response: Verify that the data assigned to the variable in the VER statement with the PICT keyword contains alphabetic characters (A-Z, a-z, \$, #, @).

ISPP221 **Invalid string - Character number 'aaaaaaaa' must be numeric (0-9).**

Explanation: The VER statement with the PICT keyword has found characters within the variable that do not match the corresponding type of character in the picture string. In this case, the picture string characters are numeric.

User Response: Reenter the character string data using numeric characters (0-9).

Programmer Response: Verify that the data assigned to the variable in the VER statement with the PICT keyword contains numeric characters (0-9).

ISPP222 **Invalid string - Character number 'aaaaaaaa' must be hexadecimal (0-9, A-F, a-f).**

Explanation: The VER statement with the PICT keyword has found characters within the variable that do not match the corresponding type of character in the picture string. In this case, the picture string characters are hexadecimal.

User Response: Reenter the character string data using hexadecimal characters (0-9, A-F, a-f).

Programmer Response: Verify that the data assigned to the variable in the VER statement with the PICT keyword contains hexadecimal characters (0-9, A-F, a-f).

ISPP223 **Invalid string - Character number 'aaaaaaaa' must be 'bbbbbbbb'.**

Explanation: The VER statement with the PICT keyword has found a character within the variable that does not match the corresponding type of character in the picture string. For example, this VER statement, VER(&variable,PICT,'A/NNN'),

requires that the variable's value start with an alphabetic character followed by a slash, followed by 3 numeric characters. If the variable value was B1123, you would receive the error message "CHARACTER NUMBER '2' MUST BE '/'".

User Response: Reenter the character string data using characters that match the corresponding type of characters in the picture string.

Programmer Response: Verify that the data assigned to the variable in the VER statement with the PICT keyword contains characters that match the corresponding type of characters in the picture string.

ISPP224 **Invalid string - aaaaaaaa characters are required in the format, 'bbbbbbbb'.**

Explanation: The VER statement with the PICT keyword has found a character within the variable that does not match the corresponding format of characters in the picture string. For example, this VER statement, VER(&variable,PICT,'A/NN'), requires that the variable start with an alphabetic character, followed by a slash, followed by 2 numeric characters. If the variable was "B/123", you would receive this error message: "4" CHARACTERS ARE REQUIRED IN THE FORMAT, A/NN.

User Response: Reenter the character string data using characters that match the format and the corresponding type of characters in the picture string.

Programmer Response: Verify that the data assigned to the variable in the VER statement with the PICT keyword contains characters that match the corresponding type of characters in the picture string and the picture string format.

ISPP225 **Panel 'aaaaaaaa' error - Specify 1 compare value for IF when operator is 'bbbbbbbb'.**

Explanation: The operator you specified does not support comparison against multiple values. You can specify comparison against up to 255 values for the EQ (=) and NE (≠) operators. For the remaining operators, you can specify comparison against only one value.

User Response: Contact the responsible programmer.

Programmer Response: Specify only one compare value for the IF statement when using the operator specified in the error message.

ISPP226 **Panel 'aaaaaaaa' error - An ELSE in column 'bbbbbbbb' did not match a previous IF statement.**

Explanation: The ELSE statement is not column-aligned with the matching IF statement.

User Response: Contact the responsible programmer.

Programmer Response: Column-align the ELSE statement with the matching IF statement.

ISPP227 **Panel 'aaaaaaaa' error - Specify 255 or less IF compare values for operator 'bbbbbbbb'.**

Explanation: More than 255 compare values are specified for the IF statement with the operator EQ (=) or NE (≠).

User Response: Contact the responsible programmer.

Programmer Response: Limit the compare values to 255 values for the IF statement with the operator EQ (=) or NE (≠).

ISPP228 **Panel 'aaaaaaaa' error - MSG= parameter is illegal in IF statement VER logical expression.**

Explanation: The IF statement conditional-expression supports the VER statement construct coded without the MSG=parameter.

User Response: Contact the responsible programmer.

Programmer Response: Remove the MSG=parameter from the IF statement's VER statement construct.

ISPP229 **Panel 'aaaaaaaa' error - The IF statement has an illegal format. More than 255 logical expressions have been specified.**

Explanation: The IF statement supports Boolean operators and allows you to combine up to 255 logical expressions. You have exceeded the limit of 255 expressions.

User Response: Contact the responsible programmer.

ISPF Messages

Programmer Response: Limit the number of logical expressions specified on the IF statement to 255.

ISPP232 Invalid length - Command chain length exceeds the allowable maximum of 255.

Explanation: The command chain length is larger than the maximum of 255 bytes.

User Response: Limit the command chain length to the maximum of 255 bytes.

ISPP233 Invalid variable name - Variable 'aaaaaaaa' could not be retrieved by ISPDVCGT.

Explanation: The name of the variable that contains the command stack could not be retrieved from the ISPF variable pool.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the specified variable is spelled correctly. Check the command chain in the specified user variable. Contact IBM support.

ISPP234 Panel 'aaaaaaaa' error - The IF statement has an illegal format. A Boolean operator is specified with no following logical expression.

Explanation: The IF statement has a Boolean operator but no following logical expression.

User Response: Contact the responsible programmer.

Programmer Response: Redefine the IF statement following IF statement syntax:

IF (logical-expression Boolean operator logical expression)

ISPP235 Panel 'aaaaaaaa' error - Invalid LISTV value given for VERIFY statement (must be a dialog variable).

Explanation: The LISTV value is not a dialog variable. The keyword LISTV on a VER statement allows the use of a dialog variable containing a list of values to be used for the variable field verification.

User Response: Contact the responsible programmer.

Programmer Response: Place the list of values to be used for variable field verification into a dialog variable. The following example verifies an area code field. In the)INIT section, the LISTV value &varlist is set to the following area codes:

&varlist = '919 805 312'.

In the)PROC section, the following VER statement is coded:

VER (&areacode, NONBLANK, LISTV, &varlist,
MSG=NSL011)

ISPP236 Panel 'aaaaaaaa' error - Invalid syntax on IF statement. Right parenthesis or Boolean operator is missing.

Explanation: The IF statement syntax is invalid. A closing right parenthesis or Boolean operator is missing.

User Response: Contact the responsible programmer.

Programmer Response: Check the IF statement syntax for the missing right parenthesis or Boolean operator.

ISPP240 Panel 'aaaaaaaa' error -.ZVARS value, with "Z" replacement names, not found when expected.

Explanation: In the body and area sections of a panel definition and in the model lines for a table display panel, the name of an input or output field can be represented by the single character Z. This serves as a placeholder; the actual name of the field is defined in the initialization section of the panel definition and assigned to the control variable, .ZVARS. This error message indicates that the actual name of a field has not been defined and assigned to the control variable .ZVARS.

Programmer Response: Define and assign the actual name of the field (represented by the Z placeholder) to the control variable .ZVARS in the panel initialization section.

ISPP241 Panel 'aaaaaaaa' error - The # of .ZVARS field names does != the # of "Z" in/out fields on panel.

Explanation: There is a one-to-one correspondence between the placeholder Z variables and the corresponding field names for the Z variables defined and assigned in the initialization section to the control variable .ZVAR. For example, if the)BODY section contains 3 Z variables, the)INIT section must define and assign 3 field names to the control variable .ZVAR.

User Response: Contact the responsible programmer.

Programmer Response: VERIFY that there is a one-to-one correspondence between the Z variables in the)BODY section and the field names defined and assigned to the control variable, .ZVAR, in the)INIT section.

ISPP242 Panel 'aaaaaaaa' error - The .ZVARS value contains invalid variable name (1-8 alphanumeric chars)

Explanation: The field name defined and assigned to the control variable, .ZVAR, is invalid. Dialog variable names can be composed of 1-8 characters.

Alphanumeric characters A-Z, 0-9, #, \$, or @ can be used in the name, but the first character cannot be numeric.

User Response: Contact the responsible programmer.

Programmer Response: Follow the naming convention described above for variable names.

ISPP243 **Panel 'aaaaaaa' error - A "Z" variable replacement name within .ZVARS is a duplicate field name.**

Explanation: This message indicates that there is a duplicate field name defined and assigned to the control variable .ZVARS.

User Response: Contact the responsible programmer.

Programmer Response: Check the .ZVAR assignment statement for duplicate names and ensure all names in the list are unique.

ISPP244 **Panel 'aaaaaaa' error - The constructed "bbbbbbb" string exceeds 255 characters.**

Explanation: The constructed VPUT or VGET string has exceeded the VPUT or VGET string length of 255 characters.

User Response: Contact the responsible programmer.

Programmer Response: Limit the constructed string to the maximum of 255 characters.

ISPP245 **Panel 'aaaaaaa' error - Invalid "bbbbbbb" variable name (not a literal or dialog variable).**

Explanation: The VPUT or VGET statement contained an invalid variable name or a missing right parenthesis.

User Response: Contact the responsible programmer.

Programmer Response: VERIFY the VGET or VPUT statement contains valid variable names and VERIFY that there is no missing right parenthesis.

ISPP246 **Panel 'aaaaaaa' error - Unexpected ")" delimiter found in bbbbbbb. statement.**

Explanation: A closing right parenthesis was found in an unexpected position in a VGET or VPUT statement.

User Response: Contact the responsible programmer.

Programmer Response: Check the VPUT or VGET statement for the misplaced right parenthesis.

ISPP247 **Panel 'aaaaaaa' error - "bbbbbbb" pool TYPE or copy destination is not a literal value.**

Explanation: The variable pool TYPE or copy destination on the VGET or VPUT statement is not a literal value.

User Response: Contact the responsible programmer.

Programmer Response: The variable pool TYPE or copy destination on the VGET or VPUT statement must be a literal value. Valid literal values are: ASIS, SHARED, or PROFILE.

ISPP248 **Panel 'aaaaaaa' error -.ZVARS name list begins with "(" but does not end with ")".**

Explanation: If a list of names is assigned to .ZVARS, the name list must be enclosed in parentheses. The .ZVARS name list is missing a right parenthesis.

User Response: Contact the responsible programmer.

Programmer Response: Supply the missing right parenthesis to the .ZVARS statement name list.

ISPP249 **Panel 'aaaaaaa' error - Invalid VEDIT variable name**

Explanation: The name of the dialog variable specified in the VEDIT statement is invalid.

User Response: Contact the responsible programmer.

Programmer Response: VERIFY the name of the dialog variable specified in the VEDIT statement follows variable naming conventions. A name is composed of 1 to 8 alphanumeric characters (A-Z, 0-9, #, \$, or @). The first character of the variable name cannot be numeric.

ISPP250 **Panel 'aaaaaaa' error - Invalid ROWS keyword value (not a literal or dialog variable).**

Explanation: Table display panels contain a)MODEL section with the optional keyword ROWS(value). The value for the ROWS keyword can be either a dialog variable or a literal but the ROWS keyword value found is neither a dialog variable nor a literal.

Programmer Response: Correct the ROWS keyword value to be a literal or a dialog variable.

ISPP251 **Panel 'aaaaaaa' error - Invalid ROWS keyword value given on model line (not SCAN or ALL)**

Explanation: The)MODEL statement supports the optional keyword ROWS(value), where value can be ALL, SCAN, or a dialog variable that is assigned the value ALL or SCAN.

ISPF Messages

User Response: Contact the responsible programmer.

Programmer Response: Change the ROWS keyword value to SCAN or ALL.

ISPP252 **Panel 'aaaaaaaa' error - Invalid ROWS keyword value (dialog var) found while initializing panel.**

Explanation: The dialog variable used as the value for ROWS keyword on the)MODEL statement is set to an invalid value. A valid value for the ROWS keyword is SCAN or ALL.

User Response: Contact the responsible programmer.

Programmer Response: Change the ROWS keyword value to SCAN or ALL.

ISPP253 **Panel 'aaaaaaaa' error - SKIP(ON) or ATTN(ON) attributes are not valid for input fields.**

Explanation: The attribute section of the panel contains an attribute character with an attribute TYPE of input and the attribute keyword SKIP(ON) or ATTN(ON). The attribute keyword SKIP is valid only for text fields or output (protected) fields. The attribute keyword ATTN is valid only for text fields.

User Response: Contact the responsible programmer.

Programmer Response: Remove the attribute keyword SKIP(ON) or ATTN(ON) from the attribute defined with the TYPE value of input.

ISPP254 **Panel 'aaaaaaaa' error - ATTN(ON) attribute is valid for only protected text fields.**

Explanation: The attribute ATTN(ON) is valid only on fields with the attribute TYPE of protected text. .

User Response: Contact the responsible programmer.

Programmer Response: Remove the attribute keyword ATTN(ON) from the attribute where attribute TYPE is not protected text.

ISPP255 **Panel 'aaaaaaaa' error - A blank or null designer character must immediately follow light pen attribute.**

Explanation: The ATTN(ON) keyword specifies that the field can be selected by using a light pen or cursor select key. This attribute is valid only for fields with the TYPE protected text. The panel designer must provide an adequate number of blank characters before and after the single character or 2-digit hexadecimal code that defines this TYPE of field, as required by 3270 hardware.

User Response: Contact the responsible programmer.

Programmer Response: Provide an adequate number

of blank characters before and after the single character or 2-digit hexadecimal code that defines this TYPE of field, as required by 3270 hardware.

ISPP256 **Panel 'aaaaaaaa' error - NUMERIC(ON) attribute is valid only for unprotected fields.**

Explanation: The attribute keyword NUMERIC(ON) is valid only for fields with the TYPE of unprotected input.

User Response: Contact the responsible programmer.

Programmer Response: Remove the NUMERIC(ON) attribute keyword from the field that does not have the TYPE of unprotected input. The NUMERIC(ON) keyword is valid only for fields with the TYPE of unprotected input.

ISPP257 **Panel 'aaaaaaaa' error - Cannot specify both SKIP(ON) and NUMERIC(ON) attributes.**

Explanation: NUMERIC(ON) and SKIP(ON) attribute keywords cannot be specified for the same field.

User Response: Contact the responsible programmer.

Programmer Response: Use either the NUMERIC(ON) attribute keyword or the SKIP(ON) attribute keyword but not both for the same field.

ISPP258 **Panel 'aaaaaaaa' error - The attribute keyword, CKBOX, is valid on the following type input fields: INPUT, DATAIN, CEF, LEF, NEF, and EE. It is also valid on output field type, SC.**

Explanation: The attribute keyword, CKBOX, was specified on an invalid attribute type. CKBOX(ON|OFF) is valid on the following attribute types: INPUT, DATAIN, CEF, LEF, NEF, and EE. CKBOX(ON|OFF) is also valid on output field type, SC, to allow for an unavailable selection field.

User Response: Contact the responsible programmer.

Programmer Response: The CKBOX attribute keyword allows a one character input field followed by an output field to be processed as a check box in GUI mode. To code for check boxes, code the keyword, CKBOX(ON), on an input field type. The valid input field types are: INPUT, DATAIN, CEF, LEF, NEF, and EE. For providing the option of unavailable selection fields, the output field type, SC, accepts the CKBOX(ON) keyword used in conjunction with the UNAVAIL(ON) keyword.

ISPP259 **Panel 'aaaaaaaa' error - The attribute keyword, PAS, is valid only for input or output field types.**

Explanation: The attribute keyword, PAS(ON/OFF), was specified on a text field. The attribute keyword PAS(ON/OFF) is valid for input and output fields only.

User Response: Contact the responsible programmer.

Programmer Response: Verify that the panel definition has the PAS attribute keyword defined on input or output field types only. The PAS attribute keyword can be defined in the)ATTR section or used in attribute override statements.

ISPP260 **Panel 'aaaaaaaa' error - Invalid alternate field keyword value (not a literal or dialog variable).**

Explanation: The)BODY statement allows you to specify alternate locations for the system-defined (default) fields for messages and the command field. The keywords are:

CMD(field-name)

SMSG(field-name)

LMSG(field-name)

The field-name can be a literal or a dialog variable. This error indicates an invalid keyword value (not a literal or a dialog variable) has been coded for one of the three keywords.

Programmer Response: Change the keyword value to a literal or a dialog variable.

ISPP261 **Panel 'aaaaaaaa' error - Invalid alternate command field name given (must be a panel field name).**

Explanation: The)BODY statement keyword CMD has an invalid field-name value. The field-name value must be a panel field name.

Programmer Response: Correct the CMD field name value to a valid panel field name. The field-name value can be a literal or a dialog variable.

ISPP262 **Panel 'aaaaaaaa' error - Invalid alternate short message field name given (must be a panel field).**

Explanation: The)BODY statement keyword SMSG has an invalid field-name value. The field-name value must be a panel field name.

Programmer Response: Correct the SMSG field name value to a valid panel field name. The field-name value can be a literal or a dialog variable.

ISPP263 **Panel 'aaaaaaaa' error - Invalid alternate long message field name given (must be a panel field).**

Explanation: The)BODY statement keyword LMSG has an invalid field-name value. The field-name value must be a panel field name.

Programmer Response: Correct the LMSG field name value to a valid panel field name. The field-name value can be a literal or a dialog variable.

ISPP264 **Panel 'aaaaaaaa' error - Alternate command or message field name given is invalid (no panel fields).**

Explanation: The)BODY statement keyword CMD, SMSG, or LMSG has an invalid field-name value because there are no fields in the panel.

Programmer Response: If the panel is to remain as is with no field names, remove the CMD, SMSG, or LMSG keyword from the)BODY statement. Otherwise, add a field to the panel and set the corresponding field name value to the panel field name you created.

ISPP265 **Panel 'aaaaaaaa' error - There must be exactly two EXPAND characters, enclosed in parentheses.**

Explanation: The)BODY statement keyword EXPAND(xy) contains the repetition delimiter characters. You must specify exactly 2 delimiter characters; the starting delimiter character (x) and the ending delimiter character (y). The starting and ending delimiter can be the same character. The delimiter characters cannot be specified with a dialog variable.

Programmer Response: Correct the starting and ending delimiter characters in the EXPAND keyword of the)BODY statement.

ISPP266 **Panel 'aaaaaaaa' error - The alternate command field name given is not an input field.**

Explanation: The CMD keyword field name of the)BODY statement identifies the panel field (variable name) to be treated as the command field. The field name it identifies must be TYPE(INPUT).

Programmer Response: Correct the CMD keyword field name to identify a panel field which has the TYPE(INPUT).

ISPP267 **Panel 'aaaaaaaa' error - The alternate short or long message field name given is not an output field.**

Explanation: The LMSG or SMSG keyword field name of the)BODY statement identifies the panel field (variable name) to be treated as the long message field or the short message field. The field the LMSG or

ISPF Messages

SMSG identifies must be TYPE(OUTPUT).

Programmer Response: Correct the LMSG keyword field name or SMSG keyword field name to identify a panel field which has the TYPE(OUTPUT).

ISPP268 **Enter required field - Enter data or make a selection for the required field which has the focus.**

Explanation: This is an ISPF-supplied message displayed as the result of a verification failure when running in GUI mode.

User Response: Enter the appropriate data into the field at the cursor position, or for radio button groups select one of the radio buttons.

ISPP270 **Panel 'aaaaaaaa' error - Invalid double digit hex character given for attribute character or keyword code.**

Explanation: An invalid 2-digit hexadecimal code has been given for an attribute character or keyword code.

Programmer Response: Choose special (non-alphanumeric) characters for attribute characters that will not conflict with the panel text. An ampersand (&), blank (hexadecimal 40), shift-out (hexadecimal 0E), shift-in (hexadecimal 0F), or null (hexadecimal 00) cannot be used as an attribute character.

ISPP271 **Panel 'aaaaaaaa' error - The area-related keyword value must be explicitly stated (not a dialog variable)**

Explanation: The area related keywords EXTEND(ON|OFF), SCROLL(ON|OFF) do not allow keyword values to be specified as a dialog variable.

Programmer Response: Do not specify a dialog variable as the value for the area keywords EXTEND and SCROLL. Valid values for each keyword are ON or OFF. The default for each keyword is OFF.

ISPP272 **Panel 'aaaaaaaa' error -.ALARM value was not YES or NO or blank.**

Explanation: The control variable .ALARM is set to an invalid value. Valid values are YES, NO, blank, or null.

Programmer Response: Set the .ALARM value to one of the four valid values: YES, NO, blank, or null.

ISPP273 **Panel 'aaaaaaaa' error - Multiple graphic areas have been defined on the panel, only 1 allowed.**

Explanation: ISPF supports only one graphic area in a panel definition.

Programmer Response: Limit the number of defined graphic areas to one per panel.

ISPP274 **Panel 'aaaaaaaa' error - Overlapping AREAS have been defined on the panel.**

Explanation: Several AREAS have been defined that overlap on the panel.

Programmer Response: Ensure that the areas defined on the panel do not overlap.

ISPP275 **Panel 'aaaaaaaa' error - Multiple extend/scroll areas defined on the panel, only 1 allowed.**

Explanation: You can define only one area in the)BODY section with EXTEND(ON). This rule applies to scrollable areas, dynamic areas, and graphic areas. For example, if two scrollable areas are defined in the)BODY section, only one can be defined with EXTEND(ON).

Programmer Response: Define only one area in the)BODY section with the EXTEND(ON) keyword.

ISPP276 **Panel 'aaaaaaaa' error - SCROLL keyword is valid for only dynamic areas.**

Explanation: The keyword SCROLL is valid only for dynamic areas. It specifies that the dynamic area can be treated as a scrollable area.

Programmer Response: Use the SCROLL keyword only on dynamic areas that are defined by the keyword AREA(DYNAMIC).

ISPP277 **Panel 'aaaaaaaa' error - First line of an area must identify the left and right boundaries.**

Explanation: Scrollable, graphic, and dynamic areas require that the area's attribute (defined in the attribute section) must designate the right and left boundaries of the area's first line.

Programmer Response: Use the areas attribute character (defined in the attribute section) to designate the left and right boundaries of the area's first line.

ISPP278 **Panel 'aaaaaaaa' error - A panel field overlaps the boundary of a dynamic or scrollable area.**

Explanation: A panel field cannot overlap the boundary of a dynamic or scrollable area.

Programmer Response: Ensure that panel fields do not overlap the attribute-defined boundary of dynamic or scrollable areas.

ISPP279 **Panel 'aaaaaaaa' error - Area cannot be extended, other fields/areas would be extended also.**

Explanation: An invalid field or area extension was entered. Other fields could be duplicated or areas could be inadvertently extended if this extension is implemented.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that field and area panels are defined properly. Contact IBM support.

ISPP280 **Panel 'aaaaaaaa' error - AREA attribute keyword given for something other than AREA definition.**

Explanation: An area-specific keyword was given for an attribute other than the area attribute. For example, EXTEND(ON) was used on something other than the graphic, dynamic, or scrollable area definition. Another example, SCROLL, USERMOD, or DATAMOD keyword was used on something other than a dynamic or graphic area definition.

Programmer Response: Verify that your attribute keywords in the)ATTR sections are used with the correct attribute definitions.

ISPP281 **Panel 'aaaaaaaa' error - Invalid attribute keyword given as part of an AREA definition.**

Explanation: An invalid attribute keyword was given as part of an area definition. For example, the attribute keyword JUST(LEFT) is invalid on the dynamic area (AREA(DYNAMIC)) definition.

Programmer Response: Verify that all the attribute keywords used on the scrollable, dynamic, or graphic area definitions are valid for that specific area definition.

ISPP282 **Panel 'aaaaaaaa' error - A panel field overlaps the boundary of a dynamic or scrollable area.**

Explanation: A panel field may not be defined to overlap a dynamic or scrollable area.

Programmer Response: Ensure that no panel fields overlap a dynamic or scrollable area.

ISPP283 **Panel 'aaaaaaaa' error -.CSRPOS or .CSRROW value was not a valid numeric value.**

Explanation: The .CSRPOS and .CSRROW value must be an integer.

Programmer Response: Verify that the .CSRPOS and .CSRROW values are integers.

ISPP284 **Panel 'aaaaaaaa' error - Invalid .CSRPOS or .CSRROW value found while processing panel.**

Explanation: The .CSRPOS and .CSRROW value must be an integer.

Programmer Response: Verify that .CSRPOS and .CSRROW values are integers.

ISPP285 **Panel 'aaaaaaaa' error - Invalid LVLIN keyword value type (not a literal or dialog variable).**

Explanation: The LVLIN keyword value must be a literal or a dialog variable. The line number of the final visible line within a dynamic or graphic area on a screen is available through the use of the LVLIN built-in function on an assignment statement in the)INIT,)REINIT, or)PROC section panel. The value parameter of the LVLIN function is the name of the graphic or dynamic area.

Programmer Response: Assign the LVLIN keyword value a literal or a dialog variable that is (or contains the name of) the graphic or dynamic area.

ISPP286 **Panel 'aaaaaaaa' error - The area referenced by the LVLIN function is not a dynamic or graphic area on the panel.**

Explanation: The LVLIN built-in function provides the line number of the last visible line within a graphic or dynamic area on the currently displayed panel. The value parameter of the LVLIN function is the name of the graphic or dynamic area. This function is valid for dynamic or graphic areas only.

Programmer Response: Verify that the value of the LVLIN function is a literal that is the name of the graphic or dynamic area, or a dialog variable that contains the name of the graphic or dynamic area.

ISPP287 **Panel 'aaaaaaaa' error - Invalid LVLIN area name found while processing panel.**

Explanation: The LVLIN built-in function provides the line number of the last visible line within a graphic or dynamic area on the currently displayed panel. The value parameter of the LVLIN function is the name of the graphic or dynamic area. This function is valid for dynamic or graphic areas only.

Programmer Response: Verify that the value of the LVLIN function is a literal that is the name of the graphic or dynamic area or a dialog variable that contains the name of the graphic or dynamic area.

ISPF Messages

ISPP288 **Panel 'aaaaaaaa' error - Invalid WIDTH keyword value type (not a literal or dialog variable).**

Explanation: An invalid WIDTH keyword value has been found. The WIDTH keyword's value on the)BODY header statement can be a literal or a dialog variable. The WIDTH value must be numeric, not less than 80 or greater than the width of the terminal on which the panel is to be displayed.

Programmer Response: Verify that the WIDTH keyword value on the)BODY header statement is a literal or a dialog variable.

ISPP289 **Panel 'aaaaaaaa' error - Invalid WIDTH value, (must be numeric chars, >= 80, <= screen width).**

Explanation: An invalid WIDTH keyword value has been found. The value of the WIDTH keyword on the)BODY header statement can be a literal or a dialog variable. The WIDTH value must be numeric, not less than 80 or greater than the width of the terminal on which the panel is to be displayed.

Programmer Response: Verify that the WIDTH keyword value is numeric and not less than 80 or greater than the width of the terminal on which the panel is to be displayed.

ISPP290 **Panel 'aaaaaaaa' error - The EXPAND designation is improperly used within the panel record.**

Explanation: Within the panel body, the expand delimiters have been used improperly. The format of the EXPAND keyword on the)BODY statement is: EXPAND(xy). The value, xy, represents the repetition delimiter characters. Once defined, these delimiters can be used on any line within the panel body to enclose a single character that is to be repeated to expand the line to the required width. A missing right or left delimiter around the single character to be expanded could cause this error.

Programmer Response: Verify that the expand character in the panel body record is enclosed by both a starting and an ending delimiter.

ISPP291 **Panel 'aaaaaaaa' error - EXPAND keyword value may not be blank, "&", or an attribute character.**

Explanation: The format of the EXPAND keyword on the)BODY statement is: EXPAND(xy). The value, xy, represents the repetition delimiter characters. The delimiter characters cannot be blanks, dialog variables (&xx), or attribute characters.

Programmer Response: Verify that the delimiter characters are not blanks, dialog variables, or attribute characters.

ISPP292 **Panel 'aaaaaaaa' error - Invalid field/area name specified on REFRESH statement. It must be less than or equal to 8 characters.**

Explanation: The field or area name specified on the REFRESH statement had an invalid length. The field or area name must be fewer than or equal to 8 characters.

Programmer Response: Correct the field or area name to be fewer than or equal to 8 characters.

ISPP293 **Panel 'aaaaaaaa' error - REFRESH is specified for a field or area that is not on the panel.**

Explanation: ISPF searched the fields in the panel body to find a match for the field area name specified on the REFRESH statement and could not find a match.

Programmer Response: Verify that the field or area name specified on the REFRESH statement in the)PROC or)REINIT section is spelled correctly or is actually the name of a field or area as defined in the panel body.

ISPP294 **Panel 'aaaaaaaa' error - The .ATTR or .ATTRCHAR argument must be enclosed in parentheses.**

Explanation: An invalid format for the .ATTR or .ATTRCHAR statement was found. The format is: .ATTR(field) or .ATTRCHAR(char).

Programmer Response: Enclose the .ATTR or .ATTRCHAR argument in parentheses.

ISPP295 **Panel 'aaaaaaaa' error -.ATTR argument must be a literal, a dialog variable, or .CURSOR.**

Explanation: The .ATTR argument must be a literal, a dialog variable, or the control variable .CURSOR.

Programmer Response: Correct the .ATTR argument to be either a literal, a dialog variable, or the control variable .CURSOR.

ISPP296 **Panel 'aaaaaaaa' error -.ATTR is specified for a field that is not on the panel.**

Explanation: The .ATTR argument specified does not match any field on the panel.

Programmer Response: Verify that the .ATTR argument is set to a valid field on the panel.

ISPP297 **Panel 'aaaaaaaa' error -.ATTR or .ATTRCHAR may appear only on left side of assignment stmt.**

Explanation: The .ATTR or .ATTRCHAR keyword may appear only on the left side of the assignment

statement. For example: `.ATTR(field1) = 'COLOR(RED)'`

Programmer Response: Verify that the `.ATTR` or `.ATTRCHAR` keywords appear only on the left side of the assignment statement.

ISPP298 **Panel 'aaaaaaaa' error -.ATTRCHAR argument must be a literal or a dialog variable.**

Explanation: An invalid `.ATTRCHAR` argument was used. The `.ATTRCHAR` argument must be a dialog variable or a literal.

Programmer Response: Verify that all `.ATTRCHAR` arguments are either dialog variables or literals.

ISPP299 **Panel 'aaaaaaaa' error -.ATTRCHAR is specified for an invalid attribute character.**

Explanation: The `.ATTRCHAR` argument specified is not an attribute character defined on the panel.

Programmer Response: Ensure that all `.ATTRCHAR` arguments specified are attribute characters defined in the `)ATTR` section of the panel.

ISPP300 **Panel 'aaaaaaaa' error - ATTR override keyword value not given, or not enclosed in parentheses.**

Explanation: The `ATTRIBUTE` statement is entered incorrectly.

Programmer Response: Correct the `TYPE` or `VALUE` on the `ATTRIBUTE` statement.

ISPP301 **Panel 'aaaaaaaa' error - A value is not specified for one of the attribute override keywords.**

Explanation: An attribute override statement is missing a keyword required for that field type.

Programmer Response: Check the panel for attribute overrides and ensure that all field types have the required keywords.

ISPP302 **Panel 'aaaaaaaa' error - Invalid attribute keyword or value is specified for attribute override.**

Explanation: The attribute override keyword is invalid, or the value used with the keyword is invalid.

Programmer Response: Check the attribute override statements on the panel. Ensure that all field types have valid keywords, and all values following the keywords are valid.

ISPP303 **Panel 'aaaaaaaa' error - Attribute override may not be specified for area delimiter keywords.**

Explanation: The panel has improperly used one of the following in an attribute override:

- Area
- Rep
- Extend
- Scroll
- Usermod
- Datamod.

Programmer Response: Correct the panel so that it does not use any of the previous list in an attribute override.

ISPP304 **Panel 'aaaaaaaa' error - Duplicate keywords were specified on an ATTRIBUTE override statement.**

Explanation: An attribute override statement has used the same keyword twice.

Programmer Response: Correct the attribute override statement in your panel.

ISPP305 **Panel 'aaaaaaaa' error - Invalid attribute TYPE change attempted in an ATTR override statement.**

Explanation: There is an invalid type attribute override.

Programmer Response: For more information about the `.ATTR` and `.ATTRCHAR` override conditions, see *ISPF Dialog Developer's Guide and Reference*

ISPP306 **Panel 'aaaaaaaa' error -.ATTRCHAR defines a new character that is not DATAIN or DATAOUT.**

Explanation: A new attribute character must be used on `DATAIN` or `DATAOUT` field.

Programmer Response: Do not use a new attribute character unless it is for a `DATAIN` or `DATAOUT` field.

ISPP307 **Panel 'aaaaaaaa' error - Invalid override of cmd field or scroll amt field to TYPE(OUTPUT)**

Explanation: `TYPE(OUTPUT)` cannot be used to override the command field or the scroll amount field.

Programmer Response: Correct the override on the panel.

ISPF Messages

ISPP308 **Panel 'aaaaaaa' error - Invalid PAD character specified in .ATTR or .ATTRCHAR statement.**

Explanation: An .ATTR or .ATTRCHAR statement used an invalid PAD character.

Programmer Response: Correct the .ATTR or .ATTRCHAR statement in the panel.

ISPP309 **Panel 'aaaaaaa' error -.AUTOSEL value was not YES or NO or blank.**

Explanation: Set .AUTOSEL to YES to retrieve the CSRROW, even if the user did not explicitly select the row. Set .AUTOSEL to NO if the row is to be retrieved only if the user explicitly selects the row.

Programmer Response: Correct the .AUTOSEL statement in the panel.

ISPP310 **Panel 'aaaaaaa' error - Maximum allowable number of attributes exceeded by attribute override.**

Explanation: Attribute overrides plus attributes exceed 255.

Programmer Response: Correct the panel.

ISPP311 **Panel 'aaaaaaa' error - String of attribute override keywords exceeds maximum size of 255 characters.**

Explanation: The string of keywords on a .ATTR or .ATTRCHAR statement exceeds 255 characters.

Programmer Response: Correct the panel.

ISPP312 **Panel 'aaaaaaa' error - "Scrollable" or "extendable" area not allowed in a table display panel.**

Explanation: The SCROLL and EXTEND keywords are not valid when defining an area in a TBDISPL panel.

Programmer Response: Correct the panel.

ISPP313 **Panel 'aaaaaaa' error - An AREA definition is not permitted within the ")MODEL" section.**

Explanation: Any attribute except those associated with dynamic, graphic, or scrollable areas (AREA, EXTEND, SCROLL, USERMOD, and DATAMOD) can be used with any fields in the model lines.

Programmer Response: Correct the panel)MODEL section.

ISPP314 **Panel 'aaaaaaa' error - Invalid to specify both PAD and PADC attributes for one field.**

Explanation: You cannot specify both a pad character (PAD) and a conditional pad character (PADC) for the same field.

Programmer Response: Correct the attribute in the panel.

ISPP315 **Invalid MODEL definition - A variable model line may not be defined as a variable itself.**

Explanation: If a variable begins in column 1 of any model line, the value of that variable defines the model line. The variable can contain any character string that is a valid panel definition model line, except that the variable cannot define a variable model line.

Programmer Response: Correct the model line in the panel.

ISPP316 **Model line not defined - The variable model line has not been initialized before the display.**

Explanation: All model line variables must be initialized before the table display service is called with a nonblank panel name.

Programmer Response: Define a model line in the panel.

ISPP317 **Invalid model definition - The variable model is the only information allowed coded on the line.**

Explanation: For variable model lines, the variable must be the only information on the model line.

Programmer Response: Correct the model line on the panel.

ISPP318 **Invalid model definition - The variable model line width is greater than the panel width.**

Explanation: The value of the variable is greater than the panel width.

Programmer Response: Correct the model section of the panel.

ISPP319 **Panel "aaaaaaa" error - The command field may not be located within the)MODEL section.**

Explanation: The command field is identified as either the first input field in the panel, or by the CMD keyword of the)BODY statement. If the command field is within the)MODEL section, an error occurs.

Programmer Response: Correct the)MODEL section by removing the command field.

ISPP320 **Panel 'aaaaaaaa' error - Panel control variable .PFKEY cannot be set by a dialog.**

Explanation: .PFKEY cannot be set to a value, it is read only.

Programmer Response: Remove the panel statement that attempts to set .PFKEY.

ISPP321 **Panel 'aaaaaaaa' error - The INIT, REINIT, AREA, or PROC section is too long.**

Explanation: There is a potential 32KB internal table overflow because of the number of statements in the panel.

Programmer Response: Either reduce the number of statements in the panel or use more than one panel.

ISPP322 **Panel 'aaaaaaaa' error - A panel must have at least one line in the)BODY section.**

Explanation: The body section defines the format of the panel as seen by the user. A valid panel must have at least one line in the)BODY section.

Programmer Response: Add at least one panel line into the)BODY section.

ISPP323 **Panel 'aaaaaaaa' error - More than 126 pairs have been specified for the TRANS function.**

Explanation: TRANS logic has exceeded the maximum pairs allowed.

Programmer Response: The TRANS function of the panel must use fewer than 126 pairs.

ISPP324 **Panel 'aaaaaaaa' error - A panel cannot be preprocessed when WIDTH is specified as dialog variable.**

Explanation: The preprocessor will not preprocess panels that use a dialog variable with the WIDTH keyword.

Programmer Response: See "Restrictions for using ISPPREP" in *ISPF Dialog Developer's Guide and Reference*

ISPP325 **Panel 'aaaaaaaa' error - A panel cannot be preprocessed with areas defined as extendable.**

Explanation: The specification of EXTEND(ON) will cause ISPPREP to bypass the panel during preprocessing.

Programmer Response: Determine if EXTEND(ON) is needed. If it is needed, the panel cannot be preprocessed.

ISPP326 **Panel 'aaaaaaaa' error - A panel cannot be preprocessed when model lines are specified as variables.**

Explanation: Model lines cannot be defined as variables if the panels are to be preprocessed.

Programmer Response: If the panel must be preprocessed, the model lines must not be specified as variables.

ISPP327 **Panel 'aaaaaaaa' error - Variable name or name-list not coded for 'bbbbbbbb' statement.**

Explanation: The panel statement requires additional data.

Programmer Response: Complete the panel statement by adding a variable or a name-list.

ISPP328 **Panel 'aaaaaaaa' error - Required keylist 'bbbbbbbb' in applid 'ccccccc' was not found.**

Explanation: This message is self-explanatory.

Programmer Response: Create the proper named keylist or use an existing keylist.

ISPP330 **BDISPMAX exceeded - aaaaaaaa displays exceeded in batch mode on panel bbbbbbbb.**

Explanation: Either the maximum number of displays set in variable BDISPMAX on the ISPSTART command, or the default value of 100 has been exceeded.

Programmer Response: Verify that the batch job is not looping and, if not, increase the value of BDISPMAX. See "Avoiding panel loop conditions in the Batch environment" in *ISPF Dialog Developer's Guide and Reference*

ISPP331 **BREDIMAX exceeded - aaaaaaaa .msg redisplay exceeded in batch mode.**

Explanation: The Batch redisplay value in BREDIMAX on the ISPSTART command or the default value of 2 has been exceeded.

Programmer Response: Verify that the Batch job is not looping on a redisplay and, if not, increase the value of BREDIMAX. See "Message processing in the Batch environment" in *ISPF Dialog Developer's Guide and Reference*

ISPF Messages

ISPP332 **Panel 'aaaaaaaa' message - In batch, the following message was displayed on the panel.**

Explanation: A panel was displayed while in batch mode. The following message was displayed.

Programmer Response: This is an informational message. The message following this one may contain important information. Refer to that message number in this manual for additional information, if needed.

ISPP340 **Panel 'aaaaaaaa' error - Panel exit address must be dialog variable.**

Explanation: The panel exit cannot be processed because the address is not a variable.

Programmer Response: Correct the panel exit to include a variable for exit-add. See "Invoking the panel exit user routine" in *ISPF Dialog Developer's Guide and Reference*

ISPP341 **Panel 'aaaaaaaa' error - Panel exit message ID must be literal or dialog variable.**

Explanation: If the MSG keyword of the PANEXIT statement is specified, the message id must be either a literal value or a dialog variable.

Programmer Response: Correct the panel exit routine, MSGID must be a dialog variable or a literal value.

ISPP342 **Panel 'aaaaaaaa' error - Panel exit type must be a literal.**

Explanation: The exit type must be PGM or LOAD.

Programmer Response: Use the literal PGM or LOAD as the exit type.

ISPP343 **Panel 'aaaaaaaa' error - Valid panel exit type is PGM or LOAD.**

Explanation: This message is self-explanatory.

Programmer Response: Use PGM or LOAD for exit type.

ISPP344 **Panel 'aaaaaaaa' error - Invalid dialog variable name length on panel exit statement.**

Explanation: The variable name length on the panel exit statement exceeds 8 characters.

Programmer Response: Use a variable name with a length not exceeding 8 characters.

ISPP345 **Exit-defined failure - Panel exit routine exit-defined failure.**

Explanation: The exit routine returned RC=8 but did not provide a MSGID to describe the failure. This generic message is provided by ISPF.

Programmer Response: If appropriate, provide a meaningful error message for the user.

ISPP346 **Panel 'aaaaaaaa' error - Severe error encountered during panel exit routine.**

Explanation: A severe error was encountered while executing the panel exit routine.

Programmer Response: The return code from exit processing was not 0 or 8. The return code could have been 20 for severe error or some other return code that was not recognized by ISPF. Verify that your exit returned valid data. If the data is valid, contact IBM support for assistance.

ISPP347 **Panel 'aaaaaaaa' error - Dialog variable value length changed by panel exit.**

Explanation: The panel exit has changed the variable length from the length that was set on the panel exit statement.

Programmer Response: Your panel exit cannot change the variable length that was used on the panel exit statement.

ISPP348 **Panel 'aaaaaaaa' error - Exit data or message field defined incorrectly for panel exit.**

Explanation: The panel exit statement is incorrectly formatted.

Programmer Response: Reformat the panel exit statement using the format defined under "Invoking the Panel User Exit Routine" in *ISPF Dialog Developer's Guide and Reference*

ISPP349 **Panel 'aaaaaaaa' error - Invalid panel exit address or panel exit name specified.**

Explanation: The panel exit statement has invalid syntax.

Programmer Response: The panel exit-add or exit-mod entry in the panel exit statement does not conform to the syntax defined in "Invoking the Panel User Exit Routine" in *ISPF Dialog Developer's Guide and Reference*

ISPP351 **Panel 'aaaaaaa' error - Invalid window width value (must be numeric, >= 8, < screen width).**

Explanation: The value specified for the width on the WINDOW keyword on the)BODY section panel statement is invalid. It must be a numeric value that is greater than or equal to 8 and less than the screen width.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the width coded in the panel definition.

ISPP352 **Panel 'aaaaaaa' error - Invalid window depth value (must be numeric, > 0, < screen depth).**

Explanation: The value specified for the depth on the WINDOW keyword on the)BODY section panel statement is invalid. It must be a numeric value that is greater than or equal to 0 and less than the screen depth.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the depth coded in the panel definition.

ISPP353 **Panel 'aaaaaaa' error - Panel record longer than specified (or defaulted) window width.**

Explanation: A record in the panel definition is longer than the width specified on the WINDOW keyword on the)BODY section panel statement.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Make sure all of the panel definition statements are no longer than the value specified (or defaulted) for the width of the WINDOW keyword on the)BODY section panel statement. A common cause for this error is data past column 72; scroll right to see the data.

ISPP354 **Panel 'aaaaaaa' error - Number of body records > specified (or defaulted) window depth.**

Explanation: The number of records in the)BODY section is greater than the depth specified on the WINDOW keyword on the)BODY section panel statement.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: You can either delete some of the records in the)BODY section or create a scrollable area out of the information in the)BODY section.

ISPP356 **Panel 'aaaaaaa' error - Panel in window cannot exceed the current physical screen width.**

Explanation: The panel you are attempting to display is wider than the panel currently being displayed in the pop-up or is wider than the physical width of the screen.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Specify either the width of the widest panel to be displayed or the width of the widest physical display as the window width.

ISPP357 **Panel 'aaaaaaa' error - Number of pull-down choices is greater than screen depth - 2.**

Explanation: The number of pull-down choices defined in the panel is too large to display on the screen. The number must be less than or equal to the depth of the screen, less 2.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

You might be able to make the panel display if you change to a display device that has more lines per screen.

Programmer Response: Reduce the number of

ISPF Messages

pull-down choices for the action bar in which they appear.

ISPP358 **Panel 'aaaaaaaa' error - Panel exit name to load must be literal or dialog variable.**

Explanation: The name of the panel exit is not valid. The panel exit name, specified on the PANEXIT statement, must be a dialog variable or a literal.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Specify a dialog variable or literal after LOAD on the PANEXIT statement.

ISPP359 **Panel 'aaaaaaaa' error - Load of panel exit routine failed.**

Explanation: ISPF attempted to load the panel exit named, but received an error and could not continue.

User Response: There was a programming error running the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

It is possible that you do not have all of the data sets allocated that the application expects. In this case, contact your system administrator.

Programmer Response: It is possible that you are not allocating all of the data sets that are required for your application. If you think you should be able to load the exit, then you might be specifying the name of the module incorrectly on the PANEXIT statement.

ISPP360 **Panel 'aaaaaaaa' error - VER statement syntax error on LISTV keyword parameter. Specification of the varlist subparameter is invalid or missing.**

Explanation: The LISTV keyword was specified on a VER statement, but the variable that defines the list of values (the "varlist") is missing or specified incorrectly.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correctly specify the "varlist".

The varlist is the name of a variable, preceded with an ampersand, that contains a list of values that will be compared to the value contained in the verify variable.

ISPP361 **Panel 'aaaaaaaa' error - Specification error found for VER statement LISTV keyword parameter. The dialog variable specified in the varlist subparameter is undefined or cannot be accessed.**

Explanation: The dialog variable specified as the varlist on the LISTV keyword in the VER panel statement is undefined or cannot be accessed.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the specification. Perhaps the variable has not been defined to the dialog using VDEFINE.

ISPP362 **Panel 'aaaaaaaa' error - Specification error found for VER statement LISTV keyword parameter. The dialog variable specified in the varlist subparameter contains invalid data.**

Explanation: The dialog variable specified as the "varlist" on the LISTV keyword in the VER panel statement is has invalid data.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the definition of the varlist.

ISPP363 **Panel 'aaaaaaaa' error - Specification error found for VER statement LISTV keyword parameter. The dialog variable specified in the varlist subparameter contains more than 100 values.**

Explanation: Too many values were specified for a "varlist".

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Reduce the number of values in the varlist to 100 or less.

ISPP364 **Panel 'aaaaaaaa' error - VER statement syntax error on INCLUDE keyword parameter. Specification of the IMBLK and VALUEN subparameters are out of order.**

Explanation: The IMBLK optional positional subparameter must be specified before the VALUEN subparameters.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the error by specifying IMBLK before ALPHA, ALPHAB, or NUM on the VER statement.

ISPP365 **Panel 'aaaaaaaa' error - VER statement syntax error on INCLUDE keyword parameter. Subparameter 'value1' must be specified.**

Explanation: ALPHA, ALPHAB, or NUM were not specified after INCLUDE (or IMBLK) on the VER statement.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the error by specifying at least one of the following values: ALPHA, ALPHAB, or NUM.

ISPP366 **Panel 'aaaaaaaa' error - VER statement syntax error on INCLUDE keyword parameter. An invalid value has been specified for 'value1' and/or 'value2'.**

Explanation: The only valid values for INCLUDE are ALPAH, ALPHAB, and NUM.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the error by specifying ALPAH, ALPHAB, and/or NUM.

ISPP367 **Panel 'aaaaaaaa' error - VER statement syntax error on INCLUDE keyword parameter. More than two values have been specified.**

Explanation: Only two values may be specified on the INCLUDE keyword on the VER statement.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the error by specifying only two of the valid values: ALPHA, ALPHAB, or NUM.

ISPP368 **Panel 'aaaaaaaa' error - ALPHAB keyword invalid on VER statement. No pointer to translate table.**

Explanation: No translate table exists for the lowercase letters.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

System Programmer Response: Ensure that the translate tables for your language have been properly installed for ISPF.

ISPP370 **Must be alphabetic - Enter alphabetic characters only (A-Z or a-z).**

Explanation: Only alphabetic characters are accepted in the field where the error occurred. Letters A-Z and a-z are accepted, but blanks are not allowed.

User Response: Enter a response with valid characters.

ISPP371 **Invalid chars entered - Enter numeric and/or alphabetic characters (0-9, A-Z, a-z, #, \$, or @).**

Explanation: Only alphabetic and selected special characters are accepted in the field where the error occurred. Letters A-Z, a-z, #, \$, and @ are accepted, but blanks are not allowed.

User Response: Enter a response with valid characters.

ISPF Messages

ISPP372 **Invalid chars entered - Enter numeric and/or alphabetic characters only (0-9, A-Z, or a-z).**

Explanation: Only alphabetic and numeric characters are accepted in the field where the error occurred. Letters A-Z, a-z, and digits 0-9 are accepted, but blanks are not allowed.

User Response: Enter a response with valid characters.

ISPP373 **Must be alphabetic - Enter alphabetic characters (A-Z, a-z, #, \$, or @). The value entered may also contain blank characters.**

Explanation: Only alphabetic characters are accepted in the field where the error occurred. Letters A-Z, a-z, #, \$, and @ are accepted as well as blanks.

User Response: Enter a response with valid characters.

ISPP374 **Must be alphabetic - Enter alphabetic characters only (A-Z or a-z). The value entered may also contain blank characters.**

Explanation: Only alphabetic characters are accepted in the field where the error occurred. Letters A-Z and a-z are accepted as well as blanks.

User Response: Enter a response with valid characters.

ISPP375 **Must be numeric - Enter numeric characters (0-9). The value entered may also contain blank characters.**

Explanation: Only numeric characters are accepted in the field where the error occurred.

User Response: Enter a response with valid characters.

ISPP376 **Invalid chars entered - Enter numeric and/or alphabetic characters (0-9, A-Z, a-z, #, \$, or @). The value entered may also contain blank characters.**

Explanation: Only alphabetic and selected special characters are accepted in the field where the error occurred. Letters A-Z, a-z, #, \$, and @ are accepted as well as blanks.

User Response: Enter a response with valid characters.

ISPP377 **Invalid chars entered - Enter numeric and/or alphabetic characters only (0-9, A-Z, or a-z). The value entered may also contain blank characters.**

Explanation: Only alphabetic and numeric characters are accepted in the field where the error occurred. Letters A-Z, a-z, #, \$, @, and digits 0-9 are accepted as well as blanks.

User Response: Enter a response with valid characters.

ISPP378 **Unavailable choice - An unavailable choice was selected. Enter one of the available values.**

Explanation: An unavailable choice was selected.

User Response: Enter one of the available choices.

ISPP380 **Panel 'aaaaaaaa' error - COLOR, INTENS, or HILITE keywords cannot be specified on CUA panel element attributes.**

Explanation: Either COLOR, INTENS, or HILITE was specified on an attribute assignment that has a CUA panel element as a TYPE. This is not allowed.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Either remove the COLOR, INTENS, or HILITE keyword, or do not use a CUA panel element for the TYPE.

ISPP381 **Panel 'aaaaaaaa' error - The CAPS keyword value cannot be overridden on the CUA panel element attributes AB or RP.**

Explanation: Action bar and Reference phrase CUA panel element attributes cannot have the CAPS keyword specified in the)ATTR section.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Remove the CAPS keyword.

ISPP382 Panel 'aaaaaaa' error - TYPE(EЕ) valid for overrides on input fields only.

Explanation: The dialog attempted to override an attribute with an Error Emphasis (EE) CUA panel element TYPE. This is only valid when the field being overridden is an input field.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Do not override the attribute with TYPE(EE).

ISPP383 Panel 'aaaaaaa' error - Invalid label on GOTO statement.

Explanation: The label for a GOTO statement is syntactically incorrect. Labels can only be 1 to 8 characters long and must start with A-Z or a-z. The remaining characters can be A-Z, a-z, or 0-9.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Specify a correct label.

ISPP384 Panel 'aaaaaaa' error - GOTO label 'bbbbbbb' not found.

Explanation: The label specified on a GOTO statement was not found in the section in which the GOTO is specified. A label must be followed by a colon.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the label on the GOTO or the label itself.

ISPP385 Panel 'aaaaaaa' error - TYPE(RP) attribute valid only on a panel displayed by ISPF help.

Explanation: Reference Phrase CUA panel element attributes are only allowed on panels being displayed by ISPF Help (Tutorial).

User Response: There was a programming error

defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Do not use TYPE(RP) in panels that are not displayed by ISPF Help.

ISPP386 Panel 'aaaaaaa' error - TYPE(RP) attribute usage requires)HELP section definition.

Explanation: If a reference phrase attribute is used in the)BODY section, an accompanying statement in the)HELP section must exist to tell which panel is to be displayed.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Write a corresponding reference phrase statement in the)HELP section for each reference phrase field in the)BODY section.

ISPP387 Panel 'aaaaaaa' error - The RADIO keyword is only valid on CEF or SACR fields.

Explanation: The RADIO keyword is only valid on CEF or SACR fields, if the RADIO keyword is used for any other attribute types this error message will be displayed.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Only use the RADIO keyword for CEF or SACR attribute types.

ISPP388 Panel 'aaaaaaa' error - The 'bbbbbbb' keyword only allows numbers in the range 1-99.

Explanation: The CSRGRP keyword only allows numbers in the range 1-99, a CSRGRP value was used that was not in the range 1-99.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select

ISPF Messages

the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Change the CSRGRP value to be in the valid range from 1-99.

ISPP390 **Panel 'aaaaaaaa' error - Invalid)PANEL statement syntax. Keyword found not the KEYLIST keyword.**

Explanation: The only keyword that is valid after the)PANEL statement is KEYLIST. Anything else is an error.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct or remove the existing keyword on the)PANEL statement.

ISPP391 **Panel 'aaaaaaaa' error - Illegal)PANEL statement keylist-name parameter (must be a literal).**

Explanation: The keylist-name on the KEYLIST keyword on the)PANEL statement must be a literal.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the keylist-name.

ISPP392 **Panel 'aaaaaaaa' error - Invalid)PANEL statement syntax. The keylist-name parameter is missing.**

Explanation: The keylist-name on the KEYLIST keyword on the)PANEL statement was not specified. It is required.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Specify a keylist-name on the KEYLIST keyword, or remove the KEYLIST keyword and its parameters to use the default keylist.

ISPP393 **Panel 'aaaaaaaa' error - A keylist-name value must be 1-8 characters. The first character must be A-Z or a-z, and any remaining characters can be A-Z, a-z, or 0-9.**

Explanation: The keylist-name specified on the KEYLIST keyword on the)PANEL statement has an invalid character.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Specify a valid keylist-name on the KEYLIST keyword.

ISPP394 **Panel 'aaaaaaaa' error - Invalid)PANEL statement syntax. Missing expected right parenthesis.**

Explanation: The KEYLIST keyword requires a closing parenthesis that was not found.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Specify a closing parenthesis.

ISPP395 **Panel 'aaaaaaaa' error - Illegal)PANEL statement keylist-applid parameter (must be a literal).**

Explanation: The keylist-applid on the KEYLIST keyword on the)PANEL statement must be a literal.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the keylist-applid.

ISPP396 **Panel 'aaaaaaaa' error - A keylist-applid value must be 1-4 characters. The first character must be A-Z or a-z, and any remaining characters can be A-Z, a-z, or 0-9.**

Explanation: The keylist-applid specified on the KEYLIST keyword on the)PANEL statement has an invalid character.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Specify a valid keylist-applid on the KEYLIST keyword.

ISPP397 **Panel 'aaaaaaaa' error - Invalid)PANEL statement syntax. The KEYLIST keyword parameter is invalid.**

Explanation: The only keyword that is valid after the)PANEL statement is KEYLIST. Anything else is an error.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct or remove the existing keyword on the)PANEL statement.

ISPP400 **Panel 'aaaaaaaa' error - Invalid or missing keyword on)ABC section heading.**

Explanation: The only keyword allowed on the)ABC panel statement is DESC and it is required.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct or add the DESC keyword and its parameters to the)ABC panel statement.

ISPP401 **Panel 'aaaaaaaa' error -)ABCINIT section heading statement has an invalid format.**

Explanation: The)ABCINIT panel statement does not accept any keywords or parameters.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Only specify)ABCINIT on the panel statement.

ISPP402 **Panel 'aaaaaaaa' error -)ABCPROC section heading statement has an invalid format.**

Explanation: The)ABCPROC panel statement does not accept any keywords or parameters.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Only specify)ABCPROC on the panel statement.

ISPP403 **Panel 'aaaaaaaa' error - Invalid statement or keyword found within)ABC section.**

Explanation: A statement in the)ABC section was not a valid panel statement.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the panel statement.

ISPP404 **Panel 'aaaaaaaa' error - Invalid statement or keyword found within)ABCINIT section.**

Explanation: A statement or keyword in the)ABCINIT section was not a valid panel statement or keyword.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the panel statement.

ISPP405 **Panel 'aaaaaaaa' error - Invalid statement or keyword found within)ABCPROC section.**

Explanation: A statement or keyword in the)ABCPROC section was not a valid panel statement or keyword.

User Response: There was a programming error defining the panel that you attempted to display. If you

ISPF Messages

are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the panel statement.

ISPP406 **Panel 'aaaaaaa' error - Invalid value found for DESC keyword in section)ABC heading.**

Explanation: The value specified for the description text in the DESC keyword on the)ABC was not a literal.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the text on the DESC keyword.

ISPP407 **Panel 'aaaaaaa' error - Action bar field text in)BODY section not found in matching)ABC descriptive text keyword.**

Explanation: The text of the action bar in the)BODY section did not match the text in the DESC keyword on the)ABC panel statement. They must match exactly.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the text either in the)BODY section or in the)ABC section.

ISPP408 **Panel 'aaaaaaa' error - Action bar text field requires leading blank in)BODY section.**

Explanation: At least one blank must exist between the action bar attribute character and the text of the action bar in the)BODY section.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Add at least one blank

between the action bar attribute character and the text of the action bar.

ISPP409 **Panel 'aaaaaaa' error -)ABC text description keyword value does not match description value on)ABC heading.**

Explanation: The text of the action bar in the)BODY section did not match the text in the DESC keyword on the)ABC panel statement. They must match exactly.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the text in either the)BODY section or in the)ABC section.

ISPP410 **Panel 'aaaaaaa' error - An)ABC section must contain at least one statement.**

Explanation: An)ABC section must contain at least an ACTION statement.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Add at least an ACTION statement to the)ABC section.

ISPP411 **Panel 'aaaaaaa' error - An)ABCINIT section must contain at least one statement.**

Explanation: There must be at least one statement in the)ABCINIT section.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Add a statement to the)ABCINIT section.

ISPP412 Panel 'aaaaaaa' error - An)ABCPROC section must contain at least one statement.

Explanation: There must be at least one statement in the)ABCPROC section.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Add a statement to the)ABCINIT section.

ISPP413 Panel 'aaaaaaa' error - Invalid value for PDC name keyword found within)ABC section.

Explanation: The keyword specified on the PDC statement was not DESC. DESC is the only keyword accepted.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the PDC statement.

ISPP414 Panel 'aaaaaaa' error - Invalid value for PDC descriptive text keyword found within)ABC section.

Explanation: The value specified in parentheses following the DESC keyword is invalid. It must be no longer than 64 characters and, if the value contains blanks or special characters, it must be enclosed in single quotes.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the PDC statement.

ISPP415 Panel 'aaaaaaa' error - Invalid RUN() value found on ACTION statement.

Explanation: The value specified in the parentheses on the RUN keyword of the ACTION statement in the)ABC section is invalid. The command name must be 2 to 8 characters.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the ACTION statement.

ISPP416 Panel 'aaaaaaa' error - Invalid PARM() value found on ACTION statement.

Explanation: The value specified in parentheses on the PARM keyword of the ACTION statement in the)ABC section is invalid. If parameters contain special characters or blanks, they must be enclosed in quotes.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the ACTION statement.

ISPP417 Panel 'aaaaaaa' error - Maximum number of)ABC sections exceeded.

Explanation: A maximum of 40 action bars are allowed.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Limit the panel to 40 action bars.

ISPP418 Panel 'aaaaaaa' error - The action bar pull-down area is too long.

Explanation: Too many pull-downs have been defined to display the panel. The maximum number of pull-down choices is the depth of the screen less 2.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Reduce the number of pull-down choices for the action bar.

ISPF Messages

ISPP419 **Panel 'aaaaaaa' error - Multiple ACTION statements found after a PDC statement.**

Explanation: Only one action statement is allowed per PDC statement.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Specify only one ACTION statement per PDC statement.

ISPP420 **Panel 'aaaaaaa' error - Invalid 'ACC' keyword value - text must be less than bbbbbbb characters, and contain only 3 keys. If there are blanks between the key values and the plus sign (+), then the ACC value text string must be enclosed in single quotes.**

Explanation: The accelerator text specified as the ACC keyword value in the PDC statement is longer than the maximum allowed length, more than three keys were specified, or a string with intervening blanks is not enclosed in single quotes.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the accelerator text value in the ACC keyword on the PDC statement.

ISPP421 **Cursor not on choice - The cursor was not positioned on an action bar choice.**

Explanation: The cursor was not on an action bar choice when the Enter key was pressed. This usually occurs when the cursor is in the first row of the first column of the action bar or after the last action bar choice.

User Response: Move the cursor to the text of an action bar choice and press Enter.

ISPP422 **Select a choice - Select a choice by entering a value or positioning the cursor on the choice.**

Explanation: The cursor was not on a pull-down choice when the Enter key was pressed. The cursor was probably on the pull-down menu border.

User Response: Move the cursor to a pull-down selection and press Enter.

ISPP423 **Conflicting selection - Choice number entered and cursor positioned on different choice.**

Explanation: A pull-down choice was selected both by the selection field and by positioning the cursor on a pull-down choice. You can only select a pull-down choice using one of these methods at a time.

User Response: Select a pull-down choice by either entering a number in the select field or by positioning the cursor and pressing Enter, not both.

ISPP425 **Choice value error - The pull-down choice value length is not between 1 and 8 characters.**

Explanation: The selection for the pull-down choice was invalid. It cannot be more than 8 digits.

User Response: Enter a valid pull-down choice selection.

ISPP426 **Choice value error - The pull-down choice value must be numeric.**

Explanation: A non-numeric value was entered for the pull-down choice. The value must be a number.

User Response: Enter a valid pull-down choice selection.

ISPP427 **Choice value error - The pull-down choice value must equal an available choice number.**

Explanation: The only values that are acceptable for a pull-down choice are those listed in the pull-down menu.

User Response: Enter a valid pull-down choice selection.

ISPP428 **Panel 'aaaaaaa' error - Invalid UNAVAIL variable name found on PDC statement.**

Explanation: The UNAVAIL variable name is not a valid dialog variable name.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose to not override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the dialog variable name for the UNAVAIL keyword.

ISPP429 **Panel 'aaaaaaaa' error - Invalid 'MNEM' keyword value - must be between 1 and bbbbbbbb..**

Explanation: The MNEM keyword value must be a position within the action bar or pull-down choice text.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the value for the mnemonic position in the MNEM keyword.

ISPP430 **Panel 'aaaaaaaa' error - Invalid or missing parameter on TOG statement.**

Explanation: A syntax error was found on the TOG statement.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the TOG statement.

ISPP431 **Panel 'aaaaaaaa' error - Too many tokens given on TOG statement.**

Explanation: Too many parameters were specified on the TOG statement.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the TOG statement.

ISPP432 **Panel 'aaaaaaaa' error - No dialog variable specified on TOG statement.**

Explanation: The third parameter, the dialog variable, was omitted from the TOG statement.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the TOG statement.

ISPP433 **Panel 'aaaaaaaa' error - No mode specified on TOG statement.**

Explanation: The first parameter, the mode, was omitted from the TOG statement.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the TOG statement. The mode, field name, and dialog variable are all required parameters.

ISPP434 **Panel 'aaaaaaaa' error - No field specified on TOG statement.**

Explanation: The second parameter, the field, was omitted from the TOG statement.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the TOG statement. The mode, field name, and dialog variable are all required parameters.

ISPP435 **Panel 'aaaaaaaa' error - Field specified on TOG statement is not a valid field.**

Explanation: The field specified on the TOG statement does not exist in the panel definition.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the TOG statement by specifying a field that exists.

ISPP436 **Panel 'aaaaaaaa' error - Mode must be S or M.**

Explanation: The only valid values for the mode are S (single) and M (multiple).

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the

ISPF Messages

error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the TOG statement by specifying S or M for the mode.

ISPP437 **Panel 'aaaaaaaa' error - Multiple choice TOG valid only in)PROC section.**

Explanation: The multiple choice (M) mode of the TOG statement is only allowed in the)PROC section.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Either use the S mode of the TOG command or move the TOG statement to the)PROC section.

ISPP438 **Panel 'aaaaaaaa' error - TOG statement valid only in)PROC or)ABCPROC section.**

Explanation: The TOG statement was found in a section other than the)PROC or)ABCPROC sections. It is only valid in these two sections.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Move the TOG statement to the)PROC section or an)ABCPROC section.

ISPP439 **Panel 'aaaaaaaa' error - Invalid value found on the PDSEP keyword. Valid values are ON and OFF.**

Explanation: The PDSEP keyword on the PDC statement must be followed with a valid value of ON or OFF.

Programmer Response: Code a valid value on the PDSEP keyword.

ISPP440 **Panel 'aaaaaaaa' error - Invalid FIELD() value in)HELP section.**

Explanation: The FIELD keyword requires the name of a field on the panel. The field value must be a literal.

User Response: There was a programming error

defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Specify a literal that is the name of a field on the panel within the parentheses of the FIELD keyword.

ISPP441 **Panel 'aaaaaaaa' error - Invalid PANEL() value in)HELP section.**

Explanation: The PANEL keyword requires the name of a panel to be displayed. The panel value must be a literal.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Specify a literal that is the name of a panel within the parentheses of the PANEL keyword.

ISPP442 **Panel 'aaaaaaaa' error - Exceeded maximum number of entries in)HELP section.**

Explanation: More than the maximum of 25 field level helps have been coded.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Reduce the number of field level helps coded in the)HELP section.

ISPP444 **Panel 'aaaaaaaa' error - Duplicate field name found in)HELP section.**

Explanation: A field was specified more than once in the)HELP section. Only one field level help per field is allowed.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Delete the duplicate FIELD keywords.

ISPP445 Panel 'aaaaaaaa' error - Missing FIELD() keyword in)HELP section.

Explanation: The FIELD keyword is required for field level help statements.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Add the FIELD keyword along with the field name to the field level help statement.

ISPP446 Panel 'aaaaaaaa' error - Missing PANEL() keyword in)HELP section.

Explanation: The PANEL keyword, required on the field level Help statement, was not found.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Add the PANEL keyword with the name of the panel to be displayed on the field level Help statement.

ISPP447 Panel 'aaaaaaaa' error - Invalid keyword found in)HELP section.

Explanation: The only valid keywords on a field level Help statement are FIELD and PANEL.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the field level Help statement.

ISPP450 Panel 'aaaaaaaa' error -)ABCINIT section of panel not found when expected.

Explanation: The)ABCINIT section should appear after the)ABC section and before the)ABCPROC section. It was out of order.

User Response: There was a programming error

defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Move the)ABCINIT section to the correct location.

ISPP451 Panel 'aaaaaaaa' error -)ABCPROC section of panel not found when expected.

Explanation: The)ABCPROC section should appear after the)ABCINIT section and before a new the)ABC section. It was out of order.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Move the)ABCPROC section to the correct location.

ISPP452 Panel 'aaaaaaaa' error - Missing descriptive text keyword on PDC statement.

Explanation: The DESC keyword is required for the PDC statement. It was not found.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Add a DESC keyword and text to the PDC statement.

ISPP453 Panel 'aaaaaaaa' error - Missing RUN() keyword on ACTION statement.

Explanation: The RUN keyword is required on the ACTION statement.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Add the RUN keyword to the ACTION statement.

ISPF Messages

ISPP454 Panel 'aaaaaaa' error - Duplicate action bar field text found in)BODY section.

Explanation: The text for the action bar coded in the)BODY section is repeated. Each action bar coded in the)BODY section must be unique for the panel.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Remove the duplicate action bar coded in the)BODY section, or correct the text to match an action bar choice.

ISPP455 Panel 'aaaaaaa' error - Invalid accelerator key, bbbbbbbb, found in the ACC value. Valid values are Ctrl, Shift, Alt, Backspace, Insert, Delete, F1-F12, A-Z, a-z, and 0-9.

Explanation: The text for an accelerator key with the ACC text value string is invalid. Valid keys are Ctrl, Shift, Alt, Backspace, Insert, Delete, F1 - F12, A-Z, a-z, and 0-9. Key combinations must be separated by a plus sign with no imbedded blanks.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Specify a valid accelerator key within the ACC text string.

ISPP456 Panel 'aaaaaaa' error - Invalid single accelerator key, bbbbbbbb, found in the ACC value. This key must be used in combination with some other valid key(s).

Explanation: The following single keys cannot be assigned as an accelerator key: Ctrl, Shift, Alt, A-Z, a-z, and 0-9. These must be used in combination with some other key(s).

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Add an additional accelerator key(s) within the ACC text string.

ISPP457 Panel 'aaaaaaa' error - Invalid key combination found in the ACC value. A single character cannot be used in combination with the "SHIFT" key.

Explanation: A single character 'A-Z', 'a-z', or '0-9' cannot be used in combination with the "SHIFT" key.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the key combination within the ACC text string.

ISPP458 Panel 'aaaaaaa' error - Invalid key combination found in the ACC value. If two keys are specified, one key must be Ctrl, Alt, or Shift, and the other must be Insert, Delete, Backspace, F1-F12, A-Z, a-z, or 0-9. If three keys are specified, two keys must be Ctrl, Alt, or Shift, and the other must be Insert, Delete, Backspace, F1-F12, A-Z, a-z, or 0-9. No two keys within the ACC text string can contain the same value.

Explanation: An invalid key combination has been found in the ACC value text string. If two keys are specified, one key must be Ctrl, Alt, or Shift, and the other must be Insert, Delete, Backspace, F1-F12, A-Z, a-z, or 0-9. If three keys are specified, two keys must be Ctrl, Alt, or Shift, and the other must be Insert, Delete, Backspace, F1-F12, A-Z, a-z, or 0-9. No two keys within the ACC text string can contain the same value.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the key combination within the ACC text string.

ISPP459 Panel 'aaaaaaa' error - Invalid key combination found in the ACC value. A single number '0-9' cannot be used in any combination with the "SHIFT" key.

Explanation: A single number '0-9' cannot be used in any combination with the "SHIFT" key.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or

you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the key combination within the ACC text string.

ISPP460 **Panel 'aaaaaaaa' error - Two consecutive field names without panel name in)HELP section.**

Explanation: The FIELD keyword appeared twice without an intervening PANEL keyword being specified. This is not allowed.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Specify a PANEL keyword between the two FIELD keywords, or remove one of the FIELD keywords.

ISPP461 **Panel 'aaaaaaaa' error - Two consecutive panel names without field name in)HELP section.**

Explanation: The PANEL keyword appeared twice without an intervening FIELD keyword specified. This is not allowed.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Specify a FIELD keyword between the two PANEL keywords, or remove one of the PANEL keywords.

ISPP462 **Panel 'aaaaaaaa' error - A dynamic area overlaps the boundary of a group box.**

Explanation: The dynamic area extends through a group box boundary.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Re-examine the defining group box. The width and depth may need to be adjusted. The dynamic area or the grpbox definition in

the body may need adjusting.

ISPP463 **Panel 'aaaaaaaa' error - A scrollable area overlaps the boundary of a group box.**

Explanation: The scrollable area extends through a group box boundary.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Re-examine the defining group box. The width and depth may need to be adjusted. The scrollable area or the grpbox definition in the body may need adjusting.

ISPP464 **Panel 'aaaaaaaa' error - A group box attribute character cannot be overridden with the .ATTRCHAR statement.**

Explanation: The width and depth of a group box attribute cannot be overridden with the .ATTRCHAR control variable. To override the width and depth of a group box, use the .ATTR(field), where "field" is the dialog variable name for the group box as specified in the)BODY section.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Check the)INIT,)PROC, and)REINIT sections for invalid use of an .ATTRCHAR control statement which overrides a group box type attribute.

ISPP465 **Panel error - An invalid keyword following the application id was found on the KEYLIST keyword of the)PANEL statement. The only valid keyword is SHARED.**

Explanation: The only valid parameter specified after the application id on the KEYLIST keyword on the)PANEL statement is SHARED. Anything other than SHARED will result in this error.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

ISPF Messages

Programmer Response: Either specify the SHARED keyword or do not.

ISPP466 **Panel 'aaaaaaa' error - A LISTBOX, DDLIST, or COMBO name is invalid. A LISTBOX, DDLIST, or COMBO name is composed of 1-8 characters. Alphanumeric characters A-Z, 0-9, #, \$, OR @ can be used in the name, but the first character cannot be numeric.**

Explanation: The LISTBOX, DDLIST, or COMBO name either exceeds the 8-character limit, contains an invalid character, or starts with a numeric character.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Verify your LISTBOX, DDLIST, or COMBO names are composed of 1-8 characters. Alphanumeric characters A-Z, 0-9, #, \$, or @ can be used in the name, but the first character cannot be numeric.

ISPP467 **Panel 'aaaaaaa' error - The name value for the LISTBOX, DDLIST, or COMBO attribute section keyword is valid only on input type fields.**

Explanation: The name value for LISTBOX, DDLIST or COMBO keyword specified in the)ATTR section has been coded on an output or text attribute type. The name value for the LISTBOX, DDLIST, or COMBO keyword is valid only on input type fields.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Check the panel attribute section for LISTBOX(name), DDLIST(name), or COMBO(name) specified on a text or output attribute type. LISTBOX(name), DDLIST(name), or COMBO(name) is not valid on text or output attribute types. The valid keyword values for LISTBOX or DDLIST on text or output attribute types are LISTBOX(ON/OFF) or DDLIST(ON/OFF).

ISPP468 **Panel 'aaaaaaa' error - The WIDTH and DEPTH keywords only allow numbers in the range 0-99.**

Explanation: The WIDTH and DEPTH keywords for group boxes, list boxes, and drop-down lists only allow

numbers in the range 0-99, a WIDTH or DEPTH value was used that was not in the range 0-99.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Verify the WIDTH or DEPTH value on any group boxes, list boxes, or drop down lists are within the valid range from 0-99. If a WIDTH or DEPTH value is out of this range, correct it.

ISPP470 **Panel 'aaaaaaa' error -)CCSID value must be 5 numeric digits.**

Explanation: The number specified on the NUMBER keyword on the)CCSID section statement must be five numeric digits, even if they are preceding zeros.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the)CCSID statement.

ISPP471 **Panel 'aaaaaaa' error - Illegal token in)CCSID section.**

Explanation: The only valid keyword on the)CCSID statement is NUMBER. A keyword other than NUMBER was found.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the)CCSID statement.

ISPP472 **Panel 'aaaaaaa' error - NUMBER keyword does not exist in the)CCSID section.**

Explanation: The NUMBER keyword is required on the)CCSID statement.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the)CCSID statement.

ISPP473 **Variable not found - Variable specified for VEDIT not found on panel.**

Explanation: A variable that exists on the panel must be specified on the VEDIT statement.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the VEDIT statement by adding a variable name that exists on the panel.

ISPP474 **Panel 'aaaaaaaa' error - The name parameter is missing from the)LIST statement.**

Explanation: The name parameter is required on the)LIST statement.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: The name parameter on the)LIST statement is required and should match the appropriate DDLIST(name), LISTBOX(name) or COMBO(name).

ISPP480 **Panel 'aaaaaaaa' error - A)PNTS' section statement contains two FIELD() keywords or the statement's VAR() or VAL() keyword is missing.**

Explanation: The)PNTS' statement contains invalid keywords.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the)PNTS' section statement, ensuring that the statement contains only one of each keyword FIELD(), VAR() and VAL(). The keywords must be in the following order: FIELD(field-name) VAR(variable-name) VAL(value).

ISPP481 **Panel 'aaaaaaaa' error - A)PNTS' section statement contains two VAR() keywords or the statement's VAL() keyword is missing.**

Explanation: The)PNTS' statement contains an invalid number of VAR() keywords or the VAL() keyword is missing.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the)PNTS' section statement, ensuring that the statement contains only one of each keyword FIELD(), VAR() and VAL(). The keywords must be in the following order: FIELD(field-name) VAR(variable-name) VAL(value).

ISPP482 **Panel 'aaaaaaaa' error - Invalid VAL(value) found in the)PNTS' section statement.**

Explanation: The VAL() keyword contains an invalid value.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the value contained in the VAL() keyword for the)PNTS' section statement. Check for the correct value and the correct spelling.

ISPP483 **Panel 'aaaaaaaa' error - Invalid FIELD() value found in the)PNTS' section statement.**

Explanation: The FIELD() keyword contains an invalid value.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the value contained in the FIELD() keyword for the)PNTS' section statement. Check for the correct value and the correct spelling.

ISPF Messages

**ISPP484 Panel 'aaaaaaa' error - Duplicate
FIELD(name) found in 'PNTS' section.**

Explanation: The 'PNTS' statement contains a valid FIELD(), VAR() and VAL() keyword followed by a duplication of the FIELD() keyword.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the 'PNTS' statement, ensuring that the statement contains only one of each keyword FIELD(), VAR() and VAL() per statement.

**ISPP485 Panel 'aaaaaaa' error - Invalid VAR()
value in 'PNTS' section.**

Explanation: The value for the VAR() keyword is invalid.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: The value for the VAR() keyword is incorrect. Ensure that the variable name conforms to ISPF variable naming conventions.

**ISPP486 Panel 'aaaaaaa' error - Invalid VAL()
value in 'PNTS' section.**

Explanation: The value for the VAL() keyword is invalid.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: The value for the VAL() keyword is incorrect. The value must be a dialog variable or a literal.

**ISPP487 Panel 'aaaaaaa' error - Invalid keyword
found in 'PNTS' section.**

Explanation: One of the keywords used in the 'PNTS' statement is incorrect.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the

error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the 'PNTS' statement, ensuring that the statement contains only one of each keyword FIELD(), VAR() and VAL() per statement. The keywords must be specified in the following order: FIELD(field-name) VAR(variable-name) VAL(value).

**ISPP488 Panel 'aaaaaaa' error - No FIELD()
field-name found in 'PNTS' section.**

Explanation: A)PNTS section entry is missing a FIELD() field-name.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the 'PNTS' statement, ensuring that the statement contains only one of each keyword FIELD(), VAR() and VAL() per statement. The keywords must be specified in the following order: FIELD(field-name) VAR(variable-name) VAL(value). Verify that the FIELD keyword has a field-name specified.

**ISPP489 Panel 'aaaaaaa' error - A 'PNTS' section
statement contains two VAL() keywords.**

Explanation: The point-and-shoot section of a panel definition can only have one VAL keyword.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the 'PNTS' statement, ensuring that the statement contains only one of each keyword FIELD(), VAR() and VAL() per statement. The keywords must be specified in the following order: FIELD(field-name) VAR(variable-name) VAL(value).

**ISPP490 Panel 'aaaaaaa' error - No VAR()
variable-name found in 'PNTS' section.**

Explanation: The VAR keyword variable-name was not found or was blank.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select

the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the ')PNTS' section entry to contain each of the following keywords in the order given here: FIELD(field-name) VAR(variable-name) VAL(value). Ensure that the variable-name is supplied.

ISPP491 Panel 'aaaaaaa' error - Keywords in ')PNTS' section missing or out of order.

Explanation: The keywords in the ')PNTS' section must be in the following order: FIELD(field-name) VAR(variable-name) VAL(value).

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the ')PNTS' section entry to contain each of the following keywords in the order given here: FIELD(field-name) VAR(variable-name) VAL(value).

ISPP492 Panel 'aaaaaaa' error - Invalid VAL() value found on ')PNTS' section entry.

Explanation: The length of the VAL(value) found in the ')PNTS' section is too large. If the value is a literal, the length must be less than 255.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the ')PNTS' section entry to contain the acceptable length for the value of the VAL keyword.

ISPP493 Panel 'aaaaaaa' error - Keywords in ')LIST' section missing or out of order.

Explanation: For drop-down lists and list boxes the keywords in the ')LIST' section must be in the following order: VAL(value) CHOICE(choice). For combination boxes only the CHOICE(choice) keyword is used.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: If working with list boxes or drop-down lists, correct the ')LIST' section entry to contain each of the following keywords in the order given here: VAL(value) CHOICE(choice). If working with combination boxes, correct the ')LIST' section entry to contain the following keyword: CHOICE(choice).

ISPP494 Panel 'aaaaaaa' error - Invalid CHOICE() value found in the ')LIST' section statement.

Explanation: The CHOICE() keyword contains an invalid choice value. The choice value can be a dialog variable or a literal. The error occurred while scanning the choice value.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the value contained in the CHOICE() keyword for the ')LIST' section statement. Check for the correct value and the correct spelling. The choice value can be a dialog variable or a literal.

ISPP495 Panel 'aaaaaaa' error - The list-name specified on this)LIST section is a duplicate of another)LIST section's list-name. Each)LIST section must have a unique list-name.

Explanation: The panel contains two)LIST sections that have the same list-name. Each)LIST section specified must have a unique list-name.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Check the)LIST sections for duplicate list-names. When the duplicate list-names are found, rename one of the list-names to a unique list-name.

ISPP496 Panel 'aaaaaaa' error - A list-name specified on this)LIST section has no corresponding list-name defined in the)ATTR section.

Explanation: The list-name on the)LIST section statement must have a corresponding name (either DDLIST(name), LISTBOX(name), or COMBO(name) defined.

ISPF Messages

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Check the)LIST sections for list-names that have no corresponding name defined with the LISTBOX, DDLIST, or COMBO keywords. Verify the spelling of the names on the keywords and on the)LIST section heading.

ISPP505 **Keys Help not available - Application has not set system variable ZKEYHELP.**

Explanation: No help panel was defined for the current keylist.

Programmer Response: Either identify a keys help panel in the keylist definition or set variable ZKEYHELP to an appropriate help panel.

ISPP506 **Extended Help panel is not defined for the application panel.**

Explanation: EXHELP was requested, but no extended help panel has been defined for the application panel displayed.

Programmer Response: Define a help panel with the .help variable if a help panel is desired.

ISPP507 **Extended Help panel is currently displayed.**

Explanation: EXHELP was requested, but the user was already in extended Help.

User Response: Do not request EXHELP once you are in extended Help.

ISPP508 **Keys Help panel is currently displayed.**

Explanation: KEYSHELP was requested while the KEYSHELP panel was displayed.

User Response: Do not issue the KEYSHELP command while in a Help panel for the current keylist.

ISPP509 **RP help not defined -)HELP section definition for reference phrase aaaaaaaa missing.**

Explanation: No Help panel was defined for a reference phrase field.

Programmer Response: Make sure an entry is coded in the)HELP section for the reference phrase field in question.

ISPP510 **Panel aaaaaaaa error — The DEPTH keyword in a)PNTS section statement is missing or out-of-order.**

Explanation: The DEPTH keyword must be coded before the TEXT, PLACE, IMAGE, and IMAGEP keywords and after the FIELD VAR and VAL keywords in a)PNTS section statement.

User Response: There is a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the)PNTS' section statement, ensuring that the DEPTH keyword immediately follows the () VAL keyword.

ISPP511 **Panel aaaaaaaa error — The image-name specified with the IMAGE or IMAGEP keyword contains an invalid character, or is greater than 8 characters.**

Explanation: An image-name must be 1-8 characters. The first character must be A-Z or a-z, and any remaining characters can be A-Z, a-z, or 0-9.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Specify a valid image-name for the IMAGE keyword. An image-name must be 1-8 characters. The first character must be A-Z or a-z, and any remaining characters can be A-Z, a-z, or 0-9.

ISPP512 **Panel 'aaaaaaa' error - Invalid)PNTS statement syntax. The image-name parameter is missing or defined as blank for the IMAGEP keyword.**

Explanation: The image-name for the IMAGEP keyword on the panel statement was not specified, or is blank. An image-name is required.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Specify an image-name for the IMAGEP keyword, or remove the IMAGEP keyword.

ISPP513 **Panel 'aaaaaaa' error - Invalid panel statement syntax. The image-name is not defined for the IMAGE keyword on a)PANEL statement or on a)PNTS statement.**

Explanation: The image-name for the IMAGE keyword on a)PANEL or)PNTS statement was not specified. An image-name is required.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Specify an image-name on the IMAGE keyword.

ISPP514 **Panel 'aaaaaaa' error - Invalid)PNTS statement syntax. The depth-value is incorrect on the DEPTH keyword. Valid values are 0 - 62 or a dialog variable containing one of these values.**

Explanation: The value for the DEPTH() keyword is not a value from 0 - 62 or a dialog variable containing one of these values.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: The value for the DEPTH() keyword is incorrect. Supply a correct numeric value or a dialog variable set to a correct numeric value.

ISPP515 **The image from the host is being down-loaded to the default path, where ISPF's client/server resides. To set an image path from ISPF's Settings panel, select the Workstation action bar choice, select the pulldown choice, GUI panel settings, and set an image path.**

Explanation: No explanation available at this time

ISPP516 **Panel 'aaaaaaa' error - Invalid)PNTS statement syntax. The place-value is incorrect on the PLACE keyword. Valid values are: A (above) B (below), L (left), R (right) or a dialog variable containing one of these values.**

Explanation: The value for the PLACE() keyword is incorrect.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: The value for the PLACE() keyword is incorrect. Valid values are: A (above), B (below) L (left) R (right) or a dialog variable containing one of these values.

ISPP517 **ISPILIB, the image data set, is not allocated. ISPILIB must be preallocated in order for ISPF to download images to your workstation. Images will not display on your panel unless they already exist on your workstation.**

Explanation: The image data set was not preallocated. You must preallocate the image data set with the ddname of ISPILIB. ISPF downloads the images to your workstation. Images will not display on your panel unless they already exist on your workstation.

User Response: The image dataset must be preallocated before attempting to display a panel with images.

Programmer Response: Preallocate the ISPILIB data set.

ISPP517A **The host member aaaaaaaa could not be found in any of the concatenated ISPILIB data sets.**

Explanation: The host member was not found in any of the image data sets associated with the ddname of ISPILIB.

Programmer Response: Put the missing member in the host data set associated with ddname, ISPILIB.

ISPP517B **An I/O error occurred while attempting to find a member of an image data set (ddname ISPILIB).**

Explanation: An I/O error occurred while attempting to find a member of an image data set.

Programmer Response: Check the allocation and data set specifications for the image library, ddname ISPILIB. The image data sets must be partitioned data sets.

ISPF Messages

ISPP517C **An attempt to download images from the host failed. ISPF has disabled "Download Images". To reactivate, select the pulldown choice "GUI panel settings" from the "Workstation" action bar choice on the Settings panel. Enable the "Download Images" checkbox and verify your "Path for images" is correctly specified and is available on the workstation. See the messages manual for other possible errors.**

Explanation: An attempt to download images from the host to the workstation failed. ISPF has disabled the "Download Images" checkbox on the GUI settings panel. To reset the disabled "Download Images" checkbox and verify the image path, select Settings, select the pulldown choice of GUI panel settings from the "Workstation" action bar choice. Verify your "Path for images" exists on the workstation and is correctly specified on the GUI settings panel and enable the "Download Images" checkbox. Other possible errors may be the target disk is read only, the target disk does not exist or the file could not be opened.

User Response: From Settings, select the workstation action bar choice, pulldown choice GUI panel settings, and verify your image path exists on the workstation and is correctly specified on the GUI settings panel. Enable the download image checkbox after you have verified the image path specified is valid. The target disk should not be read only and should exist.

ISPP517D **Enter image path field — When "Make Path for Images" has been selected, you must enter a workstation path in the "Path for Images" field. If you do not want an image path made, do not check "Make path for Images".**

Explanation: The user selected the option to make a workstation path for images, but failed to enter the path in the "Path for Images" field.

User Response: Enter the workstation path in the "Path for Images" field. If you do not want a path made, do not select the "Make Path for Images" checkbox, and leave the "Path for Images" field blank.

ISPP518 **Panel aaaaaaaa error — No text found following the TEXT keyword.**

Explanation: In the)PNTS section the TEXT keyword was used but no text was supplied.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Supply the the text required by the TEXT keyword. It must match the text for that particular point and shoot text field. Text of more than one word must be enclosed within single quotes. Text containing variables must allow room for expansion, if needed.

ISPP519 **Panel aaaaaaaa error — A 'PNTS' section statement contains a point-and-shoot text field with only the DEPTH keyword specified. If the DEPTH keyword is coded, the TEXT keyword must also be coded.**

Explanation: If the DEPTH keyword is used on a point-and-shoot text field, the TEXT keyword must also be coded.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the 'PNTS' statement, ensuring that the statement contains both a DEPTH and a TEXT keyword, or contains neither the DEPTH or the TEXT keyword.

ISPP600 **No window to move - There is no active pop-up window to move.**

Explanation: The WINDOW command was entered, but no pop-up window was displayed in the logical screen from which the command was entered.

User Response: Use the WINDOW command only when a pop-up window is displayed.

ISPP601 **Cannot move window - Pop-up window cannot be moved while pull-down is displayed.**

Explanation: The WINDOW command was entered while a pull-down menu was displayed. ISPF does not allow a pop-up window to be repositioned while a pull-down menu is displayed.

User Response: Close the pull-down window and then reposition the window.

ISPP602 **Invalid command - "WINDOW MOVE" is an invalid command in GUI mode.**

Explanation: The WINDOW command was entered while running in GUI mode. ISPF does not support this command on the workstation.

User Response: Using the mouse, click on the title bar of the window and drag the window to a new position.

ISPP603 **Invalid command - "PRINT", "PRINT-HI", "PRINTL", "PRINTLHI", and "PRINTG" are invalid commands in GUI mode.**

Explanation: One of the PRINT commands was entered while running in GUI mode. ISPF does not support these commands on the workstation.

ISPP604 **No connection - The "WS" command is only valid when a connection with the workstation has been established.**

Explanation: No connection to a workstation exists. The user must identify the workstation by specifying the GUI parameter on ISPSTART or by selecting the "Workstation connection" pull-down choice on the Workstation action bar on the ISPF Settings panel before using the WS command.

ISPP605 **No Connection - The SELECT WSCMD and SELECT WSCMDV services are only valid when a connection with the workstation has been established.**

Explanation: No connection to a workstation exists. The user must identify the workstation by specifying the GUI parameter on ISPSTART or by selecting the "Workstation connection" pull-down choice on the Workstation action bar on the ISPF Settings panel before using the SELECT WSCMD service.

ISPP606 **Select an ISPF screen to switch to by positioning the cursor to an input field and pressing Enter. A screen name may be assigned to a screen with the SCRNAME command. The "*" indicates the current logical screen. The "-" indicates the screen opposite the current logical screen.**

Explanation: No explanation available at this time.

ISPP607 **Select an ISPF screen to switch to by pointing to the pushbutton and selecting mouse button 1. A screen name may be assigned to a screen with the SCRNAME command. The * indicates the screen currently with the focus.**

Explanation: No explanation available at this time.

ISPP608 **No more screens - There are no more screens available. You have the maximum number of available screens.**

Explanation: There is a maximum of 32 logical screens in ISPF, or less if your installation has specified less. You must close a screen before attempting another SPLIT command.

User Response: You must close a screen first and then issue the SPLIT command.

ISPP609 **Not enough storage - There is not enough storage to safely start another screen. The SPLIT command is nullified.**

Explanation: ISPF requires more storage than is available in your region to perform the SPLIT request. Increasing your user region will provide additional storage.

User Response: Logon to TSO with a larger region size.

ISPP610 **Panel 'aaaaaaa' error - Width of line in the)AREA section is wider than allowed in the)BODY section definition.**

Explanation: The line shown in the error box is longer than the line in the)BODY section that marks the scrollable area.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Either shorten the line in the)AREA section, or increase the width of the definition of the scrollable area in the panel definition.

ISPP611 **Panel 'aaaaaaa' error - A scrollable area cannot be defined within an)AREA section.**

Explanation: An attempt was made to define a scrollable area within a scrollable area. This is not allowed.

User Response: There is a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: A scrollable area cannot have another scrollable area defined within it. You may move all but one of the scrollable areas to the)BODY section, but be aware that you can only define one area in the)BODY section with EXTEND(ON). This includes scrollable areas, dynamic areas, and graphic areas.

ISPF Messages

ISPP612 **Panel 'aaaaaaaa' error - A graphic area cannot be defined within an)AREA section.**

Explanation: An attempt was made to define a graphic area within a scrollable area. This is not allowed.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: A scrollable area cannot have a graphic area defined within it. Move either the scrollable areas or the graphic area to the)BODY section.

ISPP613 **Panel 'aaaaaaaa' error - An action bar cannot be defined within an)AREA section.**

Explanation: An attempt was made to define an action bar within a scrollable area. This is not allowed.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: A scrollable area cannot have an action bar defined within it. Move the action bar to the)BODY section.

ISPP614 **Panel 'aaaaaaaa' error - An area defined with SCROLL(ON) or EXTEND(ON) cannot be defined within an)AREA section.**

Explanation: An attempt was made to define an area with SCROLL(ON) or EXTEND(ON) within a scrollable area. This is not allowed.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: A panel with a scrollable area cannot have another area within it that has EXTEND(ON) or SCROLL(ON) specified. Change the EXTEND or SCROLL value to OFF.

ISPP615 **Panel 'aaaaaaaa' error -)AREA section defined out of order, It must appear after the)BODY section and before the)INIT,)REINIT,)PROC, or)HELP sections if coded.**

Explanation: An attempt was made to define a scrollable area, but the)AREA section was specified out of order in the panel definition.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Move the)AREA section after the)BODY section and before the)INIT,)REINIT,)PROC, or)HELP sections if they are coded in the panel definition.

ISPP617 **Panel 'aaaaaaaa' error -)AREA section is not defined for an area section defined in the)BODY or an empty)AREA section was defined.**

Explanation: The)BODY section contains a field with an attribute that indicates the field is scrollable, but no)AREA section exists or it has no lines defined in it.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: You must code an)AREA section for the field in the)BODY section that has the attribute AREA(SCRL). That area must contain at least one line.

ISPP618 **Panel 'aaaaaaaa' error - An)AREA section is defined without a section defined in the panel)BODY section.**

Explanation: The)BODY section contains a field with an attribute that indicates the field is scrollable, but no)AREA section exists with that field's name.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: You must code an)AREA section for the field in the)BODY section that has the attribute AREA(SCRL).

ISPP620 **Panel 'aaaaaaaa' error -)MODEL cannot be defined in an)AREA that has other information already defined.**

Explanation: A)MODEL statement cannot be specified in a scrollable area.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: A)MODEL section cannot be defined in an)AREA section. You could make the)MODEL section part of the)BODY section or use uniquely named variables instead of table variables and put them in the scrollable area.

ISPP621 **Panel 'aaaaaaaa' error - Area name must be 1 to 8 characters in length.**

Explanation: The name specified on the)AREA section panel statement is too long.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: The name on the)AREA section must exist and must be 8 characters or fewer in length.

ISPP623 **Panel 'aaaaaaaa' error - The depth must be specified as a number**

Explanation: The depth specified on the)AREA section panel statement contains a non-numeric character.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: The depth of the scrollable area specified on the DEPTH() parameter on the)AREA section panel statement must be numeric.

ISPP624 **Panel 'aaaaaaaa' error -)MODEL not allowed in)AREA section**

Explanation: A)MODEL statement cannot be specified in a scrollable area.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: A)MODEL section cannot be defined in an)AREA section. Make the)MODEL section part of the)BODY section or use uniquely named variables instead of table variables and put them in the scrollable area.

ISPP625 **Panel 'aaaaaaaa' error - Scrollable area must be defined at least 20 wide in the)BODY section definition.**

Explanation: The scrollable area as defined is too narrow.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: A scrollable area must be at least 20 characters wide, defined by the starting and ending scrollable attribute characters. The width includes the attribute characters.

ISPP626 **Panel 'aaaaaaaa' error - Depth defined on the area section must be less than or equal to the number of lines defined in the)AREA section.**

Explanation: For a scrollable area with EXTEND(ON) specified on the scrollable attribute, the depth specified on the DEPTH() parameter of the)AREA section panel statement must be less than or equal to the number of lines defined in the)AREA section.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Correct the specification in the DEPTH() parameter or change the number of lines in the)AREA section.

ISPF Messages

ISPP627 **Panel 'aaaaaaa' error - Depth defined on the area section must be equal to or greater than the number of lines defined for the scrollable area in the)BODY section.**

Explanation: The depth specified on the DEPTH() parameter must be equal to or greater than the number of lines defined for the scrollable area in the)BODY section.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: You must either change the number of lines defined in the panel section or change the depth specified in the DEPTH() parameter on the)AREA section panel statement. This number specifies the minimum number of lines in the scrollable area (not including the scroll indicator). It must be greater than or equal to the number of lines defined for the area in the)BODY section and less than or equal to the number of lines in the)AREA section.

ISPP628 **Panel 'aaaaaaa' error - Variable cannot be used for depth specification.**

Explanation: A variable was specified on the DEPTH() parameter of the)AREA section panel statement. This is not allowed.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: You must code a number for the depth of the scrollable area. This number specifies the minimum number of lines in the scrollable area (not including the scroll indicator). It must be greater than or equal to the number of lines defined for the area in the)BODY section and less than or equal to the number of lines in the)AREA section.

ISPP629 **Panel 'aaaaaaa' error - EXTEND(OFF) scrollable area must be a depth of at least 2 lines in the)BODY section definition.**

Explanation: When EXTEND(OFF) is specified for a scrollable area, the scrollable area defined in the)BODY section must have at least 2 lines. The scroll indicator takes one line and you must have at least one line of data to scroll.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: You must add a line to the scrollable area defined in the)BODY section or change the attribute of the scrollable area to EXTEND(ON).

ISPP650 **Panel 'aaaaaaa' error - Depth specified will not fit on the screen.**

Explanation: The depth specified on the DEPTH() parameter, added to the depth of the rest of the panel, is too large to fit on the display.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Try changing to a display device that has more lines per screen.

Programmer Response: Either reduce the depth specified on the DEPTH() parameter of the)AREA section panel statement or change the number of non-scrollable area lines defined in the)BODY section.

ISPP651 **The cursor must be within a scrollable area to perform the requested scroll.**

Explanation: The cursor was not in a scrollable area when a command to scroll the screen was received.

User Response: Place the cursor in the scrollable area you wish to scroll before pressing the scroll function key.

ISPP652 **End of data - There is no additional information below this line.**

Explanation: This is an informational message. You have scrolled to the end of the scrollable information.

ISPP653 **Top of data - There is no additional information above this line.**

Explanation: This is an informational message. You have scrolled to the beginning of the scrollable information.

ISPP654 **The scrollable area must be visible to perform the requested scroll.**

Explanation: There is a scrollable area defined on the panel, but it does not fit on the display.

User Response: There was a programming error defining the panel that you attempted to display. You might be able to make the scrollable area visible by using a display device with more lines per screen.

Programmer Response: Too many lines have been defined outside the scrollable area so that the scrollable area does not appear on the panel. Reduce the number of non-scrollable lines in the)BODY section or move some of them to the scrollable area.

ISPP655 **End of data - There is no additional information below this line. Press Enter or RIGHT again to display the next panel, if one has been defined.**

Explanation: This is an informational message. You have scrolled to the end of the scrollable information.

ISPP656 **Top of data - There is no additional information above this line. Press LEFT again to display the previous panel, if one has been defined.**

Explanation: This is an informational message. You have scrolled to the beginning of the scrollable information.

ISPP657 **Panel 'aaaaaaaa' error - A graphic area cannot be defined within a group box.**

Explanation: This is an informational message. Graphic areas are not supported within group boxes.

Programmer Response: There are three options: remove the group box definition from the panel, remove the graphic area from the group box, code the graphic area outside of the group box.

ISPP658 **Invalid screen name - A screen name must be more than one character, and all alphanumerics, and cannot be LIST, PREV or NEXT.**

Explanation: The screen name entered was invalid.

User Response: Specify a valid screen name.

ISPP900 **Panel 'aaaaaaaa' error - Invalid ADDSOSI value (not a dialog variable).**

Explanation: Only a dialog variable may be specified in the ADDSOSI built-in function.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the

error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Specify a dialog variable for the parameter to the ADDSOSI built-in function.

ISPP901 **Panel 'aaaaaaaa' error - Invalid DELSOSI value (not a literal or dialog variable).**

Explanation: Something other than a literal or a dialog variable was specified as a parameter on the DELSOSI built-in function; for example, omitting the parameter to the function.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Specify only a literal or a dialog variable on the DELSOSI built-in function.

ISPP902 **Panel 'aaaaaaaa' error - Invalid ONEBYTE value (not a dialog variable).**

Explanation: Something other than a literal or a dialog variable was specified as a parameter on the ONEBYTE built-in function; for example, omitting the parameter to the function.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Specify only a literal or a dialog variable on the ONEBYTE built-in function.

ISPP903 **Panel 'aaaaaaaa' error - Invalid TWOBYTE value (not a dialog variable).**

Explanation: Something other than a literal or a dialog variable was specified as a parameter on the TWOBYTE built-in function; for example, omitting the parameter to the function.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Specify only a literal or a dialog variable on the TWOBYTE built-in function.

ISPF Messages

ISPP904 **Panel 'aaaaaaaa' error - x'0E' or x'0F' is invalid as an attribute character.**

Explanation: A shift-in or shift-out character was used as an attribute character on the panel being displayed. They are not valid attribute characters on display devices that support the shift-in and shift-out characters.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Use any character other than X'00', X'0E', X'0F', X'40' (blank), or ampersand as an attribute character.

ISPP910 **Must be DBCS - Enter DBCS characters.**

Explanation: The field for which you are entering data requires DBCS (double-byte character set) characters.

User Response: Enter only double-byte characters in the field.

ISPP911 **Must be mixed - Enter correct mixed form characters.**

Explanation: The field for which you are entering data accepts both DBCS (double-byte character set) characters and EBCDIC (single-byte) characters. You must, therefore, enclose DBCS character strings in shift-out and shift-in characters.

User Response: Enter the double-byte characters strings in the field with shift-out and shift-in characters surrounding them.

ISPP912 **Must be EBCDIC - Enter EBCDIC characters.**

Explanation: The field for which you are entering data accepts only EBCDIC (single-byte) characters.

User Response: Enter only single-byte characters in the field.

ISPP913 **ADDOSI error - Invalid ADDOSI value (dialog var) found while INIT/PROC panel.**

Explanation: The variable name specified in the ADDOSI built-in function resolved to a value in the)INIT section or the)PROC section that cannot have shift-out and shift-in characters added.

Programmer Response: Verify the panel logic to ensure that valid data for the ADDOSI function is being passed. An example of data that could result in

this error is a solitary shift-out or shift-in character or unbalanced shift-out and shift-in characters in a DBCS or mixed string.

ISPP914 **DELSOSI error - Invalid DELSOSI value (dialog var) found while INIT/PROC panel.**

Explanation: The literal or variable name specified in the DELSOSI built-in function resolved to a value in the)INIT section or the)PROC section that cannot have shift-out and shift-in characters added.

Programmer Response: Verify the panel logic to ensure that valid data for the DELSOSI function is being passed. An example of data that could result in this error is data that does not contain a shift-out/shift-in character pair.

ISPP915 **TWOBYTE error - Invalid TWOBYTE value (dialog var) found while INIT/PROC panel.**

Explanation: The literal or variable name specified in the TWOBYTE built-in function resolved to a value in the)INIT section or the)PROC section that cannot have shift-out and shift-in characters added.

Programmer Response: Verify the panel logic to ensure that valid data for the TWOBYTE function is being passed. An example of data that could result in this error is a solitary shift-out or shift-in character or unbalanced shift-out and shift-in characters in a DBCS or mixed string.

ISPP916 **ONEBYTE error - Invalid ONEBYTE value (dialog var) found while INIT/PROC panel.**

Explanation: The literal or variable name specified in the ONEBYTE built-in function resolved to a value in the)INIT section or the)PROC section that cannot have shift-out and shift-in characters added.

Programmer Response: Verify the panel logic to ensure that valid data for the ONEBYTE function is being passed. An example of data that could result in this error is a solitary shift-out or shift-in character or unbalanced shift-out and shift-in characters in a DBCS or mixed string.

ISPP917 **Panel 'aaaaaaaa' error - Invalid attribute FORMAT change attempted in an attribute override statement.**

Explanation: The attribute override attempted to change the format from EBCDIC to DBCS or vice versa. This is not allowed.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or

you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: You cannot change the FORMAT in an attribute override statement.

ISPP918 **Panel 'aaaaaaaa' error - Exceeds maximum number of attributes allowed (127).**

Explanation: Only 127 attributes are allowed in the definition of a panel.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Reduce the number of attributes being used on the panel.

ISPP920 **Panel 'aaaaaaaa' error - The alternate command field name given is a DBCS format field.**

Explanation: The alternate command field (CMD()) on the)BODY section panel statement) cannot have a format of DBCS.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Change the FORMAT specification of the attribute being used to define the alternate command line field. A FORMAT(MIX) specification is recommended since FORMAT(EBCDIC) does not display DBCS characters properly.

ISPP921 **Panel 'aaaaaaaa' error - The alternate short or long message field name given is DBCS format.**

Explanation: The alternate short or long message field cannot have a format of DBCS.

User Response: There was a programming error defining the panel that you attempted to display. If you are running in TEST mode, you can either override the error and attempt to continue running the dialog, or you can choose not to override the error. If you select the latter, the dialog will end and you will be returned to the initial panel for the application.

Programmer Response: Change the FORMAT specification of the attribute being used to define the

short or long message field. A FORMAT(MIX) specification is recommended since FORMAT(EBCDIC) does not display DBCS characters properly.

ISPR000 **CONTROL service error - An unexpected error received from the CONTROL service (RC=aaaaaaaa).**

Explanation: The CONTROL service executed with a return code of aaaaaaaaaa.

User Response: If the error continues, contact your system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPR001 **Invalid specification - From and To data sets cannot be the same when all members specified.**

Explanation: ISPPREP does not allow the same data set name to be specified for both input and output when the "*" (asterisk) notation is used to process all members.

User Response: Change the name of the output data set.

ISPR002 **Parameters missing - The invocation parameters are required for batch execution.**

Explanation: A batch execution has been requested, but no invocation parameters were specified.

User Response: Correct the invocation syntax to specify the required parameters.

ISPR003 **Variable service error - An unexpected error received from variable services (RC=aaaaaaaa).**

Explanation: One of the variable services executed with a return code of aaaaaaaaaa.

User Response: If the error continues, contact your system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPR004 **Display service error - An unexpected error received from the display service (RC=aaaaaaaa).**

Explanation: The DISPLAY service executed with a return code of aaaaaaaaaa.

User Response: If the error continues, contact your system programmer.

ISPF Messages

ISPR006 **Member list error - An internal member list service error (RC=aaaaaaaa).**

Explanation: The member list function executed with a return code of aaaaaaaaa.

User Response: If the error continues, contact your system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPR008 **LIBDEF service error - An unexpected error was received from the LIBDEF service (RC=aaaaaaaa).**

Explanation: The LIBDEF service executed with a return code of aaaaaaaaa.

User Response: If the error continues, contact your system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPR009 **FIND service error - An unexpected error received from the FIND service (RC=aaaaaaaa).**

Explanation: The find function executed with a return code of aaaaaaaaa.

User Response: If the error continues, contact your system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPR010 **ENQUEUE service error - An unexpected error was received from the ENQUEUE service (RC=aaaaaaaa).**

Explanation: This message is self-explanatory.

User Response: If the error continues, contact your system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPR011 **Utility - ISPPREP - Panel 'aaaaaaaa' not converted. See previous log message.**

Explanation: The panel aaaaaaaaa could not be converted. The previous log message refers to the specific problem encountered.

User Response: Correct the reported problem and reprocess the panel.

ISPR012 **Panel not processed - Panel 'aaaaaaaa' not converted. See ISPF log for explanation.**

Explanation: The panel aaaaaaaaa could not be converted. Refer to the ISPF log for another message with the specific problem encountered.

User Response: Correct the reported problem and reprocess the panel.

ISPR013 **Utility - ISPPREP - Panel 'aaaaaaaa' in use by you or another user.**

Explanation: ISPPREP cannot process panel aaaaaaaaa because it is already in use by you or another user.

User Response: Free the aaaaaaaaa panel from use and reprocess it.

ISPR014 **Panel in use - Panel 'aaaaaaaa' in use by you or another user.**

Explanation: ISPPREP cannot process panel aaaaaaaaa because it is already in use by you or another user.

User Response: Free the aaaaaaaaa panel from use and reprocess it.

ISPR015 **DEQUEUE service error - An unexpected error was received from the DEQUEUE service (RC=aaaaaaaa).**

Explanation: This message is self-explanatory.

User Response: If the error continues, contact your system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPR016 **STOW service error - An unexpected error was received from the STOW service (RC=aaaaaaaa).**

Explanation: This message is self-explanatory.

User Response: If the error continues, contact your system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPR017 **I/O error on output - An unexpected error was received from the put service (RC=aaaaaaaa).**

Explanation: This message is self-explanatory.

User Response: If the error continues, contact your system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPR018 **Output service error - An unexpected error was received from the output service (RC=aaaaaaaa).**

Explanation: This message is self-explanatory.

User Response: If the error continues, contact your system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPR019 **Enter new member name - Member must be renamed when From and To data sets are the same.**

Explanation: ISPPREP does not allow the output member name to be the same as the input member name when the output data set name is the same as the input data set name.

User Response: Specify a different member name for the output member.

ISPR020 **Conversion of aaaaaaaa panels in progress - bbbbbbbb panels processed.**

Explanation: This is an informational message. This is a status message issued every 50 panels when more than 50 panels are processed in a single ISPPREP cycle.

ISPR021 **Utility - ISPPREP - Panel 'aaaaaaaa' already exists in output data set.**

Explanation: The output panel aaaaaaaa already exists in the output data set, and member replace was not specified.

User Response: Specify member replace, or choose a different output panel name.

ISPR022 **Panel not processed - Panel 'aaaaaaaa' already exists in output data set.**

Explanation: The output panel aaaaaaaa already exists in the output data set, and member replace was not specified.

User Response: Specify member replace, or choose a different output panel name.

ISPR023 **Conversion of aaaaaaaa panels in progress.**

Explanation: This is an informational message. This is a status message issued at the start of an ISPPREP processing cycle.

ISPR024 **Utility - ISPPREP - Data set "aaaaaaaa" contains no members.**

Explanation: The data set aaaaaaaa(44) specified as the input to ISPPREP has no members.

User Response: Verify the data set name.

ISPR025 **No members in data set - Data set "aaaaaaaa" contains no members.**

Explanation: The data set aaaaaaaa(44) specified as the input to ISPPREP has no members.

User Response: Verify the data set name.

ISPR026 **Utility - ISPPREP - Panel 'aaaaaaaa' was not found in the PDS directory.**

Explanation: ISPPREP could not find member aaaaaaaa in the input data set directory.

ISPR027 **Member not found - Panel 'aaaaaaaa' was not found in the PDS directory.**

Explanation: ISPPREP could not find member aaaaaaaa in the input data set directory.

ISPR028 **Invalid output LRECL - ISPPREP output data set has an invalid LRECL, valid LRECL is between 80 160 for FB and 84 and 164 for VB.**

Explanation: The record length of the output data set is not supported by ISPF.

User Response: Use an output data set with a record length between 80 and 160 for fixed blocked data sets, and 84 and 164 for variable blocked data sets.

ISPR030 **Utility - preprocess - Panel 'aaaaaaaa' has been successfully converted.**

Explanation: This is an informational message.

ISPR031 **Panel aaaaaaaa converted - Panel 'aaaaaaaa' has been successfully converted.**

Explanation: This is an informational message.

ISPR032 **Utility - preprocess - aaaaaaaa panels have been successfully converted.**

Explanation: This is an informational message.

ISPR033 **Panels converted - aaaaaaaa panels have been successfully converted.**

Explanation: This is an informational message.

ISPF Messages

ISPR034 **Utility - preprocess - Unable to convert**
aaaaaaaa **panels. Successfully converted**
bbbbbbbb **panels.**

Explanation: Some of the panels could not be converted.

User Response: Refer to previous ISPF log messages for information about the conversion failure for each panel not converted.

ISPR035 **Panels not converted - Unable to convert**
aaaaaaaa **panels. Successfully converted**
bbbbbbbb **panels.**

Explanation: Some of the panels could not be converted.

User Response: Refer to the ISPF log messages for information about the conversion failure for each panel not converted.

ISPR037 **From data set** *aaaaaaaa*

Explanation: This is an informational message. This is a part of the ISPF log messages written at the end of the ISPPREP conversion cycle.

ISPR038 **to data set** *aaaaaaaa*

Explanation: This is an informational message. This is a part of the ISPF log messages written at the end of the ISPPREP conversion cycle. This message is issued when either all members of the input data set have been converted, or a single member is converted and the output member name is the same as the input member name.

ISPR039 **to data set** *aaaaaaaa*, **newname =** *bbbbbbbb*

Explanation: This is an informational message. This is a part of the ISPF log messages written at the end of the ISPPREP conversion cycle. This message is issued in place of message ISPR038 when a single member is converted and the output member name is different from the input member name.

ISPR040 **Input parameter error - Required**
keyword parameter INPAN is missing.

Explanation: This message is self-explanatory.

User Response: Provide the INPAN keyword and input data set name.

ISPR041 **Input parameter error - The INPAN and**
OUTPAN data set names must be
unique.

Explanation: This message is self-explanatory.

User Response: Specify a different data set name for input and output.

ISPR042 **Input parameter error - Input string**
"aaaaaaaa" **contains syntax error or**
invalid keyword.

Explanation: This message is self-explanatory.

User Response: Correct the syntax *"aaaaaaaa"* and reprocess.

ISPR043 **Input parameter error - Input string**
"aaaaaaaa" **contains duplicate or**
conflicting keyword.

Explanation: This message is self-explanatory.

User Response: Correct the syntax *"aaaaaaaa"* and reprocess.

ISPR044 **Input parameter error - Output member**
name is invalid when entire input
library selected.

Explanation: This message is self-explanatory.

User Response: Remove the output member name.

ISPR045 **Input parameter error - Required**
keyword parameter OUTPAN is
missing.

Explanation: This message is self-explanatory.

User Response: Provide the OUTPAN keyword and the output data set name.

ISPS001 **Terminal output error - ** ISPF screen**
output error - code = *aaaaaaaa* ******

Explanation: There was an error in the screen display data stream.

User Response: If the error continues, contact the system programmer.

System Programmer Response: See *ISPF Dialog Developer's Guide and Reference* for a listing of the screen errors.

ISPS002 **Terminal input error - ** ISPF screen**
input error - code = *aaaaaaaa* ******

Explanation: There was an error in the screen display data stream.

User Response: If the error continues, contact the system programmer.

System Programmer Response: See *ISPF Dialog Developer's Guide and Reference* for a listing of the screen errors.

ISPS003 **Trace - TPUT - - Tldaaaaaaaa
length=bbbbbbb option=ccccccc last 4
bytes=ddddddd**

Explanation: This is an informational message.

ISPS004 **Trace - TGET - - Tldaaaaaaaa
length=bbbbbbb option=ccccccc**

Explanation: This is an informational message.

ISPS006 **Terminal TPUT error - ** ISPF screen
output error - code = aaaaaaaa - TPUT
RC = bbbbbbbb ****

Explanation: There was an error in the screen display data stream.

User Response: If the error continues, contact the system programmer.

System Programmer Response: See *ISPF Dialog Developer's Guide and Reference* for a listing of the screen errors.

ISPS007 **Terminal TGET error - ** ISPF screen
input error - code = aaaaaaaa - TGET RC
= bbbbbbbb ****

Explanation: There was an error in the screen display data stream.

User Response: If the error continues, contact the system programmer.

System Programmer Response: See *ISPF Dialog Developer's Guide and Reference* for a listing of the screen errors.

ISPS008 **Data: hex=aaaaaaaa, EBCDIC='bbbbbbb'**

Explanation: This is an informational message.

ISPS009 **Tutorial test line - aaaaaaaa Cur panel =
bbbbbbb Prev panel = ccccccc Last msg =
ddddddd**

Explanation: This is an informational message.

ISPS011 **32K not available for attach of PMD - **
Logical screen request failed -
insufficient storage.****

Explanation: Storage obtain failed.

User Response: Contact your system programmer.

System Programmer Response: Ensure that the user's region size satisfies the ISPF minimum storage requirement.

ISPS012 **User action for ISPS011 - ** Logon with
larger SIZE parameter ****

Explanation: This is an informational message.

ISPS013 **Attach of PMD failed - ** Logical screen
request failed - ATTACH RC= aaaaaaaa

Explanation: The task could not be processed.

User Response: Contact your system programmer.

Programmer Response: The ATTACH macro failed, contact IBM support.

ISPS014 **Immediate PMD termination after
ATTACH - ** Logical screen request
failed - abend aaaaaaaa ****

Explanation: The task could not be processed.

User Response: Contact your system programmer.

System Programmer Response: If the abend code is an ISPF user abend code, assume that the failure is caused by the user environment. If the abend is a system abend, take a subtask dump to determine the reason for the abend.

ISPS015 **User action for ISPS013 and ISPS014 - **
Contact your system programmer or
dialog developer.****

Explanation: This is an informational message.

ISPS016 **No abend recovery till P.O.M PROC
section processed ok - No dialog error
recovery until a primary option menu is
fully processed.**

Explanation: This is an informational message. ISPF error recovery is not available until you have processed an Enter on a primary option menu.

ISPS017 **Error before error-free primary option
menu known to DM - A dialog error has
occurred before the dialog manager is
initialized.**

Explanation: This is an informational message. ISPF error recovery is not available until you have processed an Enter on a primary option menu.

User Response: Contact the responsible programmer.

Programmer Response: Determine why the dialog fails. You may code a primary option menu to enable ISPF error recovery.

ISPF Messages

ISPS018 **Invalid ZISPFRC value ('aaaaaaa'), non-numeric character found.**

Explanation: The value in ZISPFRC must contain a numeric value.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that your dialog returns a numeric value to ZISPFRC.

ISPS019 **Invalid ZISPFRC value ('aaaaaaa'), out of allowable range.**

Explanation: The value returned to ZISPFRC exceeds 16777215.

User Response: Contact the responsible programmer.

Programmer Response: Correct the value returned to ZISPFRC.

ISPS100 **Invalid service name - 'aaaaaaa' exceeds the allowable length of 8.**

Explanation: The user invoked an ISPF service and the service name's length exceeded the 8-character limit.

User Response: Contact the responsible programmer.

Programmer Response: Correct the ISPF service name.

ISPS101 **Service name missing - No dialog service request name found.**

Explanation: ISPF does not know what service to execute.

User Response: Contact the responsible programmer.

Programmer Response: Correct the dialog to provide an ISPF service name.

ISPS102 **Invalid service name - 'aaaaaaa' is not a recognized dialog service name.**

Explanation: The ISPF service name is not valid.

User Response: Contact the responsible programmer.

Programmer Response: Correct the dialog to provide a valid ISPF service name.

ISPS103 **Too many parameters - Unexpected parameters were found on the dialog service statement.**

Explanation: The user invoked an ISPF service with too many parameters.

User Response: Contact the responsible programmer.

Programmer Response: Correct the parameters passed with the ISPF service.

ISPS104 **Error in subfield - An error was encountered in the subfield of the 'aaaaaaa' keyword.**

Explanation: An ISPF service was invoked and an error was found in the service keyword's numeric token.

User Response: Contact the responsible programmer.

Programmer Response: Correct the use of the ISPF service, the keyword (as displayed in the message), and the accompanying subfield.

ISPS105 **Invalid keyword - 'aaaaaaa' is not a valid keyword for this service.**

Explanation: An invalid keyword was used when invoking an ISPF service.

User Response: Contact the responsible programmer.

Programmer Response: Enter a keyword that is valid for this ISPF service.

ISPS106 **Subfield missing - 'aaaaaaa' requires a subfield. None found.**

Explanation: A keyword on an ISPF service call requires a subfield, but none was found.

User Response: Contact the responsible programmer.

Programmer Response: Provide the required subfield.

ISPS107 **Required parm missing - Not all required parameters were found for this service.**

Explanation: The ISPF service cannot run until all the required parameters are provided.

User Response: Contact the responsible programmer.

Programmer Response: Provide the parameters required for this service.

ISPS108 **Invalid length - Parameter 'aaaaaaa' exceeds the allowable length.**

Explanation: The ISPF service cannot be run because the parameter exceeds the length allowed for that service.

User Response: Contact the responsible programmer.

Programmer Response: Correct the length of the parameter.

ISPS109 **Unexpected list found - A list of names was found where a list was not expected.**

Explanation: The ISPF service cannot be run.

User Response: Contact the responsible programmer.

Programmer Response: Correct the syntax of the ISPF service that was being run.

ISPS110 Too many items in list - The number of names in the list exceeds aaaaaaaa.

Explanation: An ISPF service was invoked with a name-list parameter and the number of names in the list exceeds the value given in the message.

User Response: Contact the responsible programmer.

Programmer Response: Correct the syntax of the ISPF service.

ISPS111 Service string too long - Exceeds maximum length of 32767 bytes after variable substitution.

Explanation: The string to invoke the ISPF service exceeded the maximum buffer size of 32767 bytes after variable substitution.

User Response: Contact the responsible programmer.

Programmer Response: Correct the syntax of the ISPF service.

ISPS112 Var substitution error - Severe error while resolving symbolic variables in ISPEXEC statement.

Explanation: A variable on the ISPEXEC statement could not be resolved.

User Response: Contact the responsible programmer.

Programmer Response: Correct the ISPEXEC statement in the dialog.

ISPS113 Invalid name list - A name list must begin with a left parenthesis.

Explanation: An ISPF service's name-list parameter is missing a left parenthesis. If the ISPF service's name-list parameter consists of more than one name, it must be enclosed in parentheses.

User Response: Contact the responsible programmer.

Programmer Response: Correct the ISPEXEC statement in error.

ISPS114 Conflicting keywords - Keyword 'aaaaaaa' conflicts with a previously specified keyword.

Explanation: The ISPF service could not execute because of an error in the keyword coding.

User Response: Contact the responsible programmer.

Programmer Response: Correct the ISPEXEC statement in error.

ISPS115 Invalid keyword - 'aaaaaaa' is not valid in the specified parameter position.

Explanation: The ISPF service could not be executed because of a syntax problem.

User Response: Contact the responsible programmer.

Programmer Response: Correct the ISPEXEC statement in error.

ISPS116 PDF services unavailable - Insufficient storage to load the PDF component of ISPF.

Explanation: An error occurred attempting to load the PDF component of ISPF. The error indicates insufficient storage for the PDF component.

User Response: Contact the system programmer.

System Programmer Response: Verify that the user's region size meets the minimum requirements for ISPF. If the problem continues, contact IBM support.

ISPS117 Invalid service request - The 'aaaaaaa' service is not allowed via the ISPEXEC interface.

Explanation: Several services are not available when you use the ISPEXEC interface, but are available when you use the ISPLINK interface. The service given in the message is one that is not allowed with the ISPEXEC interface.

User Response: Contact the responsible programmer.

Programmer Response: Correct the dialog to use only valid ISPF services via the ISPEXEC interface.

ISPS119 INVALID SERVICE - 'aaaaaaa' service not supported in the batch environment.

Explanation: The service listed in the message is not supported in the batch environment.

User Response: Contact the responsible programmer.

Programmer Response: Correct the erroneous ISPEXEC statement.

ISPS190 No ADDPOP specified - The FRAME or BKGRND keyword was specified before an ADDPOP keyword was found on a SELECT statement.

Explanation: You must code an ADDPOP keyword before specifying FRAME or BKGRND.

Programmer Response: Correct the SELECT service parameters.

ISPF Messages

ISPS191 **Invalid frame type - An invalid FRAME value was specified on a SELECT service. The only valid values are STD, FIX or DLG.**

Explanation: The FRAME keyword only accepts the following values: FRAME(STD), FRAME(FIX), FRAME(DLG).

Programmer Response: Correct the SELECT service parameters.

ISPS192 **Invalid background - An invalid BKGRND value was specified on a SELECT service. The only valid values are STD or DLG.**

Explanation: The BKGRND keyword only accepts the following values: BKGRND(STD) or BKGRND(DLG).

Programmer Response: Correct the SELECT service parameters.

ISPS193 **Conflicting parameters - WSCMD conflicts with another keyword.**

Explanation: A keyword was found that is inconsistent with the WSCMD keyword. For example, WSCMD and PANEL cannot both be used in the same command.

Programmer Response: Check the usage of the WSCMD keyword and eliminate the conflict.

ISPS200 **SNAP macro error - SNAP macro error - aaaaaaaa ddname is not allocated.**

Explanation: The ddname must be allocated before the SNAP macro can execute.

User Response: The ddname selected for use during execution of the SNAP macro must be allocated.

ISPS201 **SNAP macro error - Error from SNAP macro, return code = aaaaaaaa**

Explanation: The SNAP macro was not executed successfully.

User Response: If the failure continues, contact the system programmer.

System Programmer Response: If the failure continues, contact IBM support.

ISPS202 **SNAP dump generated - A SNAP dump has been generated.**

Explanation: The MVS SNAP macro has been issued and has produced a dump of the incore terminal trace buffer.

ISPS203 **SNAP macro error - SNAP macro error - no ddname has been specified for the SNAP macro.**

Explanation: A ddname must be specified to allow a successful execution of the SNAP macro.

User Response: See the ENVIRON command in *ISPF Dialog Developer's Guide and Reference* for an explanation of how to specify the ddname.

ISPS204 **SNAP dump in progress - A SNAP dump is currently being processed.**

Explanation: This is an informational message.

ISPS290 **Conflicting parameters - WSCMD conflicts with another keyword.**

Explanation: A keyword was found that is inconsistent with the WSCMD keyword. For example, WSCMD and PANEL cannot both be used in the same command.

Programmer Response: Check the usage of the WSCMD keyword and eliminate the conflict.

ISPS291 **WSCMD string too long - The parameter specified on SELECT WSCMD is too long.**

Explanation: The text in the WSCMD parameter on the SELECT service is longer than the 255 maximum allowed.

Programmer Response: The text may fit if placed in a variable and the SELECT WSCMDV . parameter is used.

ISPS292 **WSCMDV variable error - The variable specified in the SELECT WSCMDV is either not defined or its contents are blank, or longer than 255 characters.**

Explanation: ISPF tried to resolve the variable specified in the SELECT WSCMDV service and encountered an error. The variable may not be defined. If the variable is defined, its contents may be blank or longer than the 255 character maximum allowed.

Programmer Response: Verify the contents of the variable and correct it.

ISPT001 **Internal table error - aaaaaaaa detected an invalid DTA or DTB control block.**

Explanation: ISPF detected an invalid table control block.

User Response: Contact the responsible programmer.

System Programmer Response: An internal table control block is invalid. This could be a possible

storage overlay problem. If this fails in a specific application, check that application for destructive move statements or other possible overlay problems. If the failure still continues, force a dump and contact IBM support.

ISPT002 Internal table error - aaaaaaaaa detected an invalid service request or RDA.

Explanation: ISPF detected an invalid table control block.

User Response: Contact the responsible programmer.

System Programmer Response: An internal table control block is invalid. This could be a possible storage overlay problem. If this fails in a specific application, check that application for destructive move statements or other possible overlay problems. If failure still continues, force a dump and contact IBM support.

ISPT003 Internal table error - Row data area not large enough to contain the updated row.

Explanation: The RDA control block is not large enough for the row being modified.

User Response: Contact the responsible programmer.

System Programmer Response: Try restoring the table from a backup and retry the application. If the problem still persists, contact IBM support.

ISPT004 Internal table error - aaaaaaaaa detected error during SAWA construction.

Explanation: An error was encountered building an internal table control block.

User Response: Contact the responsible programmer.

System Programmer Response: Try restoring the table from a backup and retry the application. If the problem still persists, contact IBM support.

ISPT005 Internal table error - aaaaaaaaa detected an invalid name value work area.

Explanation: An error was encountered with an internal table control block.

User Response: Contact the responsible programmer.

System Programmer Response: Try restoring the table from a backup and retry the application. If the problem still persists, contact IBM support.

ISPT006 Variable services error - aaaaaaaaa received return code bbbbbbbb from ISPDVCGT.

Explanation: An error occurred while trying to retrieve variable for a table row.

User Response: Contact your system programmer.

System Programmer Response: This error should not occur. It could be caused by a storage overlay situation. Contact IBM support.

ISPT007 Router service error - aaaaaaaaa is unknown table service.

Explanation: An invalid internal table service request was issued.

User Response: Contact your system programmer.

System Programmer Response: ISPF issued an invalid table service request through an internal interface. This should never occur. Obtain a dump at the time of the error and contact IBM support.

ISPT008 GETMAIN error - aaaaaaaaa received return code bbbbbbbb from GETMAIN.

Explanation: The GETMAIN macro failed.

User Response: Contact your system programmer.

System Programmer Response: Refer to the appropriate system documentation on the GETMAIN macro for the return code information.

ISPT009 FREEMAIN error - aaaaaaaaa received return code bbbbbbbb from FREEMAIN.

Explanation: The FREEMAIN macro failed.

User Response: Contact your system programmer.

System Programmer Response: Refer to the appropriate system documentation on the FREEMAIN macro for the return code information.

ISPT010 Internal table error - aaaaaaaaa detected an invalid name list work area.

Explanation: An error was encountered building an internal table control block.

User Response: Contact your system programmer.

System Programmer Response: Try restoring the table from a backup and then retry the application. If the problem persists, contact IBM support.

ISPT011 DEQUEUE error - aaaaaaaaa received return code bbbbbbbb from DEQUEUE.

Explanation: An error occurred on the DEQUEUE macro.

User Response: Contact your system programmer.

System Programmer Response: Refer to the appropriate system documentation on the DEQUEUE macro for the return code information.

ISPF Messages

ISPT012 **ENQUEUE error - aaaaaaaa received return code bbbbbbbb from ENQUEUE.**

Explanation: An error occurred on the ENQUEUE macro.

User Response: Contact your system programmer.

System Programmer Response: Refer to the appropriate system documentation on the ENQUEUE macro for the return code information.

ISPT013 **Internal table error - aaaaaaaa received return code bbbbbbbb from TFD build.**

Explanation: An error occurred while trying to build an internal control block.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPT014 **Error on RDJFCB - aaaaaaaa received return code bbbbbbbb from RDJFCB.**

Explanation: An error occurred on the RDJFCB macro.

User Response: Contact your system programmer.

System Programmer Response: Refer to the appropriate system documentation on the RDJFCB macro for the return code information.

ISPT015 **BLDL/FIND error - aaaaaaaa received return code bbbbbbbb from BLDL/FIND.**

Explanation: An error occurred on the BLDL/FIND macro

User Response: Contact your system programmer.

System Programmer Response: Refer to the appropriate system documentation on the BLDL/FIND macro for the return code information.

ISPT016 **I/O error on PUT - aaaaaaaa received I/O error indication from common PUT.**

Explanation: An I/O error occurred while trying to write a table member.

User Response: Contact your system programmer.

System Programmer Response: Check the ISPTABL, ISPPROF and any other appropriate table output libraries for the following possible causes:

- The table output library must not have concatenated libraries.
- A real I/O error may have occurred. Try to browse the table output library in PDF Browse to see if an I/O error occurs outside of table services.
- The table library allocation may have bad DCB parameters. The table library must be a partitioned data set with fixed block 80 byte records.

ISPT017 **I/O error on GET - aaaaaaaa received I/O error indication from common GET.**

Explanation: An I/O error occurred while trying to read a table member.

User Response: Contact your system programmer.

System Programmer Response: Check the ISPTLIB (or appropriate table input library) for the following possible causes:

- The table input library may have inconsistent DCB information for the concatenated data sets.
- A real I/O error may have occurred. Try to browse the table input library in PDF Browse to see if an I/O error occurs outside of table services.

ISPT018 **STOW error - aaaaaaaa received return code bbbbbbbb from STOW.**

Explanation: An error occurred on the STOW macro.

User Response: Contact your system programmer.

System Programmer Response: Refer to the appropriate system documentation on the STOW macro for the return code information.

ISPT019 **Internal table error - aaaaaaaa received return code bbbbbbbb from table delete.**

Explanation: An error occurred while removing the DTB control block from the active chain.

User Response: Contact your system programmer.

System Programmer Response: A possible storage overlay occurred. Examine any user programs for possible storage overlay problems and rerun the dialog. If the problem persists, contact IBM support.

ISPT021 **Parameter conflict - TBSKIP service request specifies row number and row ID.**

Explanation: Mutually exclusive parameters for the TBSKIP service were issued.

User Response: Contact your system programmer.

System Programmer Response: The parameter that causes the error is not an external parameter. This error message should only be generated as a result of an internal call that is in error. Determine the steps necessary to recreate the failure and contact IBM support.

ISPT022 **Unexpected EOF - Unexpected end-of-file received while reading table member.**

Explanation: The end of file was reached unexpectedly, while reading a table member. More records should have been in the table.

User Response: Contact your system programmer.

System Programmer Response: The table is unusable and needs to be restored from a backup.

ISPT023 **WRITE/NOWRITE conflict - TBOPEN for table aaaaaaaa specifies conflicting WRITE/NOWRITE option.**

Explanation: A table was being opened with the SHARE parameter, but the WRITE/NOWRITE option conflicted with the option already in use by the other screen.

User Response: Contact the responsible programmer.

Programmer Response: If the SHARE parameter is used with TBOPEN, the same WRITE/NOWRITE option must be used for each screen that shares the table. Ensure that dialogs that plan to share a table across split screens all use WRITE or all use NOWRITE for the same shared table.

ISPT024 **Error on input/output - Unexpected return code aaaaaaaa from CDG/CDP. RC=13 implies disk full.**

Explanation: An unexpected error occurred during I/O to a table member.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPT025 **Library format error - First table record read does not have TIR: as identifier.**

Explanation: The table member being read is missing a required header.

User Response: Contact your system programmer.

System Programmer Response: The table member is not usable. Restore the table member from a backup copy.

ISPT026 **ESTAE error - aaaaaaaa received return code bbbbbbbb from ESTAE.**

Explanation: An error occurred on the ESTAE macro.

User Response: Contact your system programmer.

System Programmer Response: Refer to the appropriate system documentation for the ESTAE macro to check the return code issued by the ESTAE macro.

ISPT027 **System abend aaaaaaaa - Abend aaaaaaaa encountered while processing table bbbbbbbb.**

Explanation: A system abend occurred while processing a table.

User Response: Refer to your system documentation to discover the cause of the problem, or contact your system programmer.

System Programmer Response: If the abend code indicates insufficient space in the table output data set, try either deleting unneeded members or compress the data set or both. If necessary, contact IBM support.

ISPT028 **Internal table error - aaaaaaaa detected an invalid scan argument work area.**

Explanation: An error occurred while trying to clean up an internal ISPF control block during the processing of a TBSAVE, TBEND, TBCLOSE, or TBCREATE (with REPLACE) service.

User Response: Contact your system programmer.

System Programmer Response: This is either a storage overlay problem caused by a user program, or an internal ISPF problem. If necessary, contact IBM support.

ISPT029 **Table not in write mode - TBSAVE issued for table aaaaaaaa that is not in write mode.**

Explanation: A TBSAVE was issued, but the NOWRITE parameter was used for the TBOPEN or TBCREATE that opened the table.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that a TBSAVE is not issued when the table is not open in write mode.

ISPT030 **Error opening aaaaaaaa - Error occurred attempting to open input table library.**

Explanation: An error occurred during the open for the input table library.

User Response: Contact your system programmer.

System Programmer Response: Check the table input library allocation for possible problems with the allocation. Ensure that a valid DCB is used if the code supplies its own DCB macro for a library pointed to by the LIBRARY parameter on the TBOPEN or TBCREATE, or pointed to by a LIBDEF service.

ISPT031 **Error opening aaaaaaaa - Error occurred attempting to open output table library.**

Explanation: An error occurred during the open for the table output library.

User Response: Contact your system programmer.

System Programmer Response: Check the table output library allocation for possible problems with the allocation. Check the ISPTABL allocation for a valid DCB. If a LIBDEF is used, check the DCB associated with the LIBDEF. Also, the LIBRARY parameter could

ISPF Messages

be used on the TBCREATE or TBOPEN to point to a different DDNAME. If so, then check that allocation.

ISPT032 **No scan arguments - No arguments established for TBSCAN of table**
aaaaaaaa.

Explanation: No scan argument has been established for the TBSCAN service.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that either a TBSARG has been issued for the table, or that an ARGLIST parameter is used with the TBSCAN service. The ARGLIST parameter on the TBSCAN service is optional, but if it is omitted then an argument must have been established by a previous TBSARG service.

ISPT033 **Table already open - aaaaaaaaa issued for table bbbbbbbb that is already open.**

Explanation: An attempt was made to open a table that is already open.

User Response: Contact the responsible programmer.

Programmer Response: Logic may be missing to close a table in error conditions. If the open error is expected then use CONTROL ERRORS RETURN to mask the error from the user.

ISPT034 **Table is not open - aaaaaaaaa issued for table bbbbbbbb that is not open.**

Explanation: A table service was issued for a table that was not open.

User Response: Contact the responsible programmer.

Programmer Response: Verify that the table is open before any table services are issued.

ISPT035 **Library not allocated - aaaaaaaaa library is not allocated.**

Explanation: A LIBRARY parameter was supplied for a table service such as TBOPEN, but the referenced ddname was not allocated.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that any ddnames referenced by the LIBRARY parameter on a table service have been allocated.

ISPT036 **Table in use - aaaaaaaaa issued for table bbbbbbbb that is in use, ENQUEUE failed.**

Explanation: The table has an an existing enqueue against it already. Another user may be updating the table at the same time.

User Response: Try again later or contact your system programmer.

System Programmer Response: The RNAME used for the enqueue is the first data set name in the ISPTLIB concatenation sequence padded to 44 characters with blanks, followed by the table name for 8 characters padded with blanks. Since the enqueue is done on the input library at open time, it may be desirable to put the data set pointed to by the table output library (normally ISPTABL) as the first data set in the ISPTLIB concatenation sequence.

ISPT037 **Library format error - Invalid record:**
Table=aaaaaaaa TTRN=bbbbbbbb
Offset=cccccccc.

Explanation: An invalid record was detected while reading the table.

User Response: Contact your system programmer.

System Programmer Response: The table is not usable. Try to restore the table member from a backup copy. If necessary, contact IBM support.

ISPT038 **Table structure error - aaaaaaaaa for table bbbbbbbb detected an invalid internal table structure.**

Explanation: An invalid table structure was detected by ISPF.

User Response: Contact the responsible programmer.

Programmer Response: A TBCREATE that specifies the same field in both the KEY and NAMES parameters will cause this error. Ensure that all variable names are specified for either the KEY or NAMES parameter, but not both. If this does not resolve the problem, the table is not usable and should be restored from a backup copy.

System Programmer Response: Restore the table member from a backup copy if necessary. (See programmer response above.)

ISPT039 **PAD value invalid - PAD value specified on aaaaaaaaa command is invalid.**

Explanation: The value specified in the PAD parameter is invalid.

User Response: Contact the responsible programmer.

Programmer Response: This error is probably caused by a bad value in the storage pointed to by the TBCLOSE parameters. The PAD parameter on a program call should be a fullword fixed binary integer.

ISPT050 **Table panel unavailable - Unable to process reinvoication. Enter HELP for more information.**

Explanation: The TBDISPL service was called without the panel name and the request could not be processed.

User Response: Contact the responsible programmer.

Programmer Response: The TBDISPL request could not be processed for one of the following reasons:

- TBDISPL has never been called with the panel-name parameter specified during the session for this application. To correct this, make sure that the first call to TBDISPL in the application uses the panel name.
- The last panel displayed was by a service other than TBDISPL and the CONTROL service was not used to save and restore the panel environment. The CONTROL service should be used to save and restore the panel environment when nesting display requests under the TBDISPL command. Use of the ADDPOP service performs the equivalent of a CONTROL DISPLAY SAVE prior to creating the pop-up window. The REMPOP service performs the equivalent of a CONTROL DISPLAY RESTORE after removing the current pop-up window. A dialog should not issue its own CONTROL DISPLAY SAVE/RESTORE around an ADDPOP/REMPop sequence.

ISPT051 **Panel "aaaaaaaa" error - The body of a TBDISPL panel must have a command field.**

Explanation: No command field was coded on the TBDISPL panel.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the TBDISPL panel has a command field coded in the)BODY section of the panel.

ISPT052 **Panel "aaaaaaaa" error - The model line(s) must contain 1 or more input/output fields.**

Explanation: No input or output fields were defined in the)model section.

User Response: Contact the responsible programmer.

Programmer Response: Correct the TBDISPL panel in question to have at least 1 input/output field defined in the model line(s).

ISPT053 **Invalid VARS value - Vars="aaaaaaaa" is invalid or missing.**

Explanation: The TBDISPL panel has an invalid or missing VARS variable. If Z variables are used as name placeholders in the model line(s), a .ZVARS or VARS variable must be defined so that the real variable names can be associated with the name placeholders. If neither variable is defined, this error occurs. This error can also occur if the VARS variable is null or has no names within a name list.

User Response: Contact the responsible programmer.

Programmer Response: Correct the TBDISPL panel to use .ZVARS to define the name list associated with the Z variables defined. VARS can be used due to compatibility with older releases of ISPF, but .ZVARS is recommended.

ISPT054 **Invalid VARS value - A "Z" variable replacement name within is a duplicate field name.**

Explanation: A duplicate name exists within the name list for the VARS variable value.

User Response: Contact the responsible programmer.

Programmer Response: Correct the TBDISPL panel so it does not specify duplicate names within the name list for the VARS variable value. If possible, use the .ZVARS control variable instead of the VARS variable.

ISPT056 **Invalid VARS value - The # of field names does not match # of "Z" in/out fields on model line(s)**

Explanation: The number of names in the name list for the VARS variable value does not match the number of Z variables. There should be a one to one correspondence between the field names in the VARS variable value and the Z variable placeholders.

User Response: Contact the responsible programmer.

Programmer Response: Correct the TBDISPL panel so that the VARS variable value match the Z variables. If possible, use the .ZVARS control variable instead of the VARS variable.

ISPT058 **Panel "aaaaaaaa" error - Table display panel must have ")MODEL" and 1-8 model lines**

Explanation: The TBDISPL panel is either missing model lines or has more than 8 model lines specified.

User Response: Contact the responsible programmer.

Programmer Response: Correct the TBDISPL panel to have at least 1 and no more than 8 model lines.

ISPT060 **Table display loop - No more selections to process (End key pressed or panel never given)**

Explanation: A TBDISPL service was issued with no panel name, but no selections remained to be processed.

User Response: Contact the responsible programmer.

Programmer Response: This error is a protection against a loop and should not normally occur. Check the dialog to see if CONTROL ERRORS RETURN is active. If so, check all error conditions that might cause this loop.

ISPF Messages

Problem Determination: Dialog Test can be used to set breakpoints on the TBDISPL as well as any services within the TBDISPL loop. The return codes can then be checked from the Breakpoint panel. Also, the Variables selection can be chosen from the Breakpoint panel to examine error conditions for return codes of 12 and higher. Variables ZERRMSG, ZERRSM, and ZERRLM would be the main variables to examine for error information.

ISPT061 Table "aaaaaaaa" error - Attempt to process a table row that no longer exists.

Explanation: The row selected for processing in a TBDISPL panel no longer exists. This could happen while processing a table display with multiple rows selected. An error could occur on a selected row which causes the table display panel to be redisplayed before all the selected rows have been processed. The display will reflect the table as it was prior to any updates. If a user reselects a row that was deleted, this error will occur.

User Response: Do not try to reprocess a deleted row.

ISPT062 Table display error - Scroll return variable ZTDSCRП does not exist in the function pool.

Explanation: Scrolling was attempted, but variable ZTDSCRП does not exist in the function pool.

User Response: Contact the responsible programmer.

Programmer Response: Make sure that variable ZTDSCRП is defined in the function pool if the dialog uses dynamic table display processing.

ISPT063 Table display error - The value of scroll return variable ZTDSCRП, 'aaaaaaaa', is invalid.

Explanation: The value of variable ZTDSCRП is invalid. This variable must be numeric.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that a numeric value is in variable ZTDSCRП. A length of zero or a value of all blanks is invalid.

ISPT066 Invalid parameter - AUTOSEL parameter was not YES, NO, or blank. It was "aaaaaaaa".

Explanation: An invalid AUTOSEL value was specified on the TBDISPL service.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the AUTOSEL parameter has a value of YES, NO, or blank. There should also be at least 1 trailing blank after the YES or NO value.

ISPT070 System abend aaaaaaaa - Abend aaaaaaaa encountered while processing table bbbbbbbb.. The table output library cccccccc is full.

Explanation: A system abend D37 occurred while processing the indicated table.

Programmer Response: Increase the size of the output table library and compress if necessary. If the abend continues to occur, check for a user error, such as a loop writing to the table output library.

Problem Determination: In the case of a possible user error (such as a loop), use Dialog Test to trace the table services such as TBADD, TBOPEN, and TBCLOSE. The dialog could be in a loop on these services causing the output library to grow larger until a space abend terminates the loop. Also, ensure that the TSO profile is set to WTPMSG and MSGID so that the system abend messages are seen for this error and additional information can then be obtained from system documentation.

ISPT071 System abend aaaaaaaa - Abend aaaaaaaa encountered while processing table bbbbbbbb.. The table output library cccccccc or the table output volume is full.

Explanation: A system abend B37 or E37 was encountered while processing the table output library.

Programmer Response: Refer to system documentation on these abend codes. Make sure the dialog is not in a loop causing the out of space condition. The data set may be out of extents and need a larger allocation. Also the pack may be full, leaving no room to write additional records.

System Programmer Response: Point to a different pack, or make space available on the existing pack if the pack is currently full.

Problem Determination: In the case of a possible user error (such as a loop), use Dialog Test to trace the table services, such as TBADD, TBOPEN, and TBCLOSE. The dialog could be in a loop on these services causing the output library to grow larger until a space abend terminates the loop. Also, ensure that the TSO profile is set to WTPMSG and MSGID so that the system abend messages are seen for this error. Additional information can then be obtained from system documentation.

ISPT072 Directory full - aaaaaaaa received return code bbbbbbbb from STOW. The table output library cccccccc directory is full.

Explanation: The table output library cccccccc directory is full.

Programmer Response: Increase the number of directory blocks for the table output library.

Problem Determination: If the problem persists after increasing the number of directory blocks, use Dialog Test to trace TBOPEN, TBCREATE, TBSAVE, and TBCLOSE. A loop may be occurring on these services causing the directory full condition.

ISPT101 **Storage release error - Error encountered during storage release by TBSORT service.**

Explanation: An error occurred on the FREEMAIN macro trying to release storage obtained by TBSORT.

System Programmer Response: Contact IBM support.

ISPT102 **No storage available - Insufficient storage available to perform TBSORT service.**

Explanation: The GETMAIN macro could not obtain the necessary storage to perform the TBSORT.

User Response: Contact your system programmer.

System Programmer Response: Ensure that the user's region is sufficient to run the failing dialog. If the error continues, contact IBM support.

ISPT103 **Invalid sort key - The name 'aaaaaaaa' is not a column name of this table.**

Explanation: The specified name is not a column name within the table being sorted.

Programmer Response: Specify a field name that is either a NAME or KEY field in the table.

ISPT104 **Invalid direction code - The given sort direction code of 'aaaaaaaa' must be an A or a D.**

Explanation: The sort direction code must be either A (ascending) or D (descending).

Programmer Response: Supply an A or D for the sort direction code.

ISPT105 **Invalid sort type 'aaaaaaaa' - The valid table sort types are B, C, N, or Y.**

Explanation: Only B for binary, C for character, or N for numeric are all owed as valid sort types.

Programmer Response: Enter B, C, or N for the sort type.

ISPT106 **Value too large - The sort field 'aaaaaaaa' was too large to convert to binary.**

Explanation: The sort field was too large for a numeric type sort. The largest value that can be sorted with type numeric is plus or minus 2 147 483 647.

Programmer Response: Ensure that none of the

variable values being sorted with type numeric exceed plus or minus 2 147 483 647.

ISPT107 **Invalid sort digit - The digit 'aaaaaaaa' found in the sort field cannot be converted.**

Explanation: A numeric type sort was specified and a value was found that was not numeric.

Programmer Response: Ensure that all variable values for the field being sorted are valid numeric (0-9) values if a numeric type sort is specified.

ISPT108 **Sort value too large - A string greater than 16 characters is too long to convert.**

Explanation: The numeric value being sorted cannot exceed a total of 16 characters. This length includes any plus or minus signs, blanks, or decimal points.

Programmer Response: Ensure that no variable values for the field being sorted exceed a total of 16 characters if a numeric type sort is specified.

ISPT109 **Invalid scan operator - The given operator 'aaaaaaaa' is not a valid scan operator.**

Explanation: An invalid operator was specified in the condition value list for the CONDLIST parameter of the TBSCAN service.

Programmer Response: Ensure that a valid operator is used in the condition value list. The valid operators are EQ, NE, LE, LT, GE, and GT.

ISPT200 **Invalid name-op pair - The given name 'aaaaaaaa' is not a valid search argument.**

Explanation: The given name does not match the name of a key field, name field, or name of an extension variable for the table.

Programmer Response: Specify a valid name in the TBSARG NAMECOND parameter.

ISPT201 **Too many operators - More operators than arguments were specified**

Explanation: The condition-value-list for the CONDLIST parameter has more operators than there are names in the name-list of the ARGLIST parameter.

Programmer Response: Compare the names in the ARGLIST parameter to the operators in the CONDLIST parameter. The CONDLIST operators correspond one-to-one with the names in the ARGLIST parameter. Extra operators cause the error. If there are fewer values in the CONDLIST than there are names, EQ is used as the default for the remaining names in the ARGLIST.

ISPF Messages

ISPT202 **Invalid number of rows - The number of rows must be a positive number less than 32768**

Explanation: The number of rows specified in the MULT parameter of the TBADD service is greater than or equal to 32 768.

Programmer Response: Specify a number for the MULT parameter that is less than 32 768.

ISPT203 **Table row too long - aaaaaaaaaa was requested for a row bbbbbbbb bytes long. Maximum length is 65536.**

Explanation: The requested table service request would cause the table row to exceed 65 536 bytes.

Programmer Response: Decrease the size of the table row.

Problem Determination: The length of a table row can be computed as follows:

Row size = $22 + 4a + b + 9c$

where:

- a** Total number of variables in the row, including extensions
 - b** Total length of variable data in the row
 - c** Total number of extension variables in the row
-

ISPT204 **Invalid LIBDEF usage - A LIBDEF definition for ISPTABL cannot be used for table input processing**

Explanation: A TBOPEN or TBCREATE was issued that used a LIBDEF definition for ISPTABL. ISPTABL is intended for output only.

Programmer Response: Do not use the ISPTABL LIBDEF definition for TBOPEN or TBCREATE. Use LIBDEF for ISPTLIB instead.

ISPT205 **Invalid LIBDEF usage - A LIBDEF definition for ISPTLIB cannot be used for table output processing**

Explanation: A TBSAVE, TBERASE, or TBCLOSE was issued that used a LIBDEF definition for ISPTLIB. ISPTLIB is intended for input only.

Programmer Response: Do not use the ISPTLIB libdef definition for table output processing. Use LIBDEF for ISPTABL instead.

ISPT206 **File recall failed - File 'aaaaaaaa' is migrated and implicit recall failed.**

Explanation: An FSREAD was issued for a table member in VM that resulted in a return code of 50 or 51. These return codes indicate that a file is migrated and recall failed.

ISPT207 **Invalid year offset - The year offset must be a value from 1 to 7.**

Explanation: The year sort only accepts a variable value with a maximum value of 8 characters where part of the value is a 2 digit year. Hence the offset to the beginning of the year can only be a value from 1 to 7.

Programmer Response: Specify a valid offset for the year parameter.

ISPU330 **Invalid command table - The command table has keys, and therefore cannot be processed.**

Explanation: The command table being read by the Command Table utility has variables defined as keys.

System Programmer Response: Check the ISPTLIB concatenation for the table being read. The table name is xxxxCMDS, where xxxx is the application ID entered by the user.

ISPF command tables should not have keys. This condition could occur if users created their own command tables with the TBCREATE service. The Display Status selection of Tables under Dialog Test can be used to get status information on the table, which may be helpful in determining how the invalid table was created.

ISPU331 **Input command error - Command entered is not recognized.**

Explanation: An invalid command was entered.

User Response: Enter a valid command, or erase the invalid command from the command line.

ISPU333 **Appl ID too long - Application IDs have a maximum length of four characters.**

Explanation: A user cannot enter more than 4 characters for the application ID field.

User Response: Enter no more than 4 characters for the application ID.

System Programmer Response: This error requires a user to have modified the supplied panel, ISPUCMA. The supplied panel has only 4 physical positions available. Check the panel source for ISPUCMA to see how the user could be entering more than 4 characters.

ISPU334 **Invalid line command - D, I, R, and E are the only valid line commands.**

Explanation: An invalid line command was entered.

User Response: Either correct the invalid line command, or blank it out.

ISPU335 Starter line substituted - To delete a table, delete all lines and enter END command.

Explanation: This message is issued if all lines in a command table are deleted. A dummy line is added to allow input if more commands are to be entered.

User Response: Enter END to delete the table, or add new entries as needed.

ISPU336 Verb too short - Command table verbs must be at least two characters long.

Explanation: The command verb must be from 2 to 8 characters long, and must begin with an alphabetic character.

User Response: Enter a valid name for the verb.

ISPU337 Illegal verb - Command table verbs must begin with an alphabetic character.

Explanation: The command verb must be from 2 to 8 characters long, and must begin with an alphabetic character.

User Response: Enter a valid name for the verb.

ISPU338 Illegal T or Trunc value - Command table truncation values must be within the length of the verb.

Explanation: A truncation value was specified that is greater than the length of the command verb.

User Response: Use a truncation value that is less than or equal to the verb length.

ISPU339 Illegal action field - Incorrect data entered for the action field.

Explanation: An invalid ACTION value was specified for the command verb.

User Response: Enter a valid ACTION value. See *ISPF Dialog Developer's Guide and Reference* for information on the valid actions allowed.

ISPU339A Severe error - A severe error occurred on the TBOPEN for the command table.

Explanation: A severe error occurred while processing the TBOPEN for the command table.

User Response: Contact your system programmer.

System Programmer Response: Check the ISPTLIB allocation for a possible allocation error.

ISPU340 Invalid appl ID - Enter up to 4 alphanumeric characters. The first must be alphabetic.

Explanation: An invalid value was entered for the application ID field. From 1 to 4 characters can be entered with the first position being alphabetic and the remaining positions alphanumeric.

User Response: Enter a valid value.

ISPU341 Table in use - The command table specified is already open and cannot be opened again.

Explanation: You have specified a command table that has already been specified for the Command Table Utility, and you have not exited from the utility yet. You may have specified the command table from another screen, or you may have hidden the utility from view by going to another function using the action bars.

User Response: Close the other invocation of the Command Table Utility for that command table.

ISPU342 Invalid line command - V is the only valid line command.

Explanation: An invalid line command was entered. D, I, E, and R are only valid on a table that can be updated.

User Response: Either correct the invalid line command, or blank it out.

ISPU343 Entry updated - The change to command was updated, but has not been saved in the command table yet. You must exit (save) from the Command Table Utility to make the change permanent.

Explanation: An entry in the command table was changed. It will be made permanent if the user exits from the Command Table Utility or will be ignored if the user cancels from the Command Table Utility.

ISPU344 Entry unchanged - The change to command was ignored.

Explanation: An entry in the command table was made, but cancelled.

ISPV000 Invalid variable name - Variable 'aaaaaaa' in list 'bbbbbbb' is syntactically incorrect.

Explanation: The dialog specified an invalid variable name.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that proper ISPF

ISPF Messages

naming conventions are followed for variable names. A dialog variable name is composed of 1 to 8 characters (6, for FORTRAN). Alphanumeric characters A-Z, 0-9, #, \$, or @ can be used in the name, but the first character cannot be numeric. APL variable names cannot contain #, \$, or @.

ISPV001 **Variable not modifiable - Variable 'aaaaaaaa' is reserved by the system.**

Explanation: An attempt was made to update a non-modifiable variable.

User Response: Contact the responsible programmer.

Programmer Response: Correct the dialog so it does not update the reserved ISPF variable.

ISPV002 **Insufficient storage - Not enough main storage was available to satisfy request.**

Explanation: Variable services needed more storage to process variable requests, but the system was unable to obtain more storage.

User Response: Log on with a larger region size.

Programmer Response: Make sure that any user programs are managing storage properly. Check VDEFINE requests for incorrect length values. Also, a loop on VDEFINE requests without a corresponding VDELETE could cause storage to grow.

ISPV004 **Descriptor already used - Variable 'aaaaaaaa' in list 'bbbbbbbb' is already defined.**

Explanation: An invalid variable control block was encountered. The variable control block chain had a duplicate entry which would have caused a loop.

User Response: Contact the responsible programmer.

Programmer Response: Check the VDEFINE in error for possible coding problems. Also, ensure that the use of Control Errors Return did not allow a previous error condition to be improperly handled or to go undetected. Use Dialog Test to trace ISPF services and set breakpoints on the appropriate services, such as VDEFINE and CONTROL. For further help, contact IBM support.

ISPV005 **Destructive move - Source and target overlap destructively. No data was moved.**

Explanation: An update of a variable would cause a destructive move. The target data overlaps the source data.

User Response: Contact the responsible programmer.

Programmer Response: Check for a VDEFINE with an incorrect length or an incorrect variable storage pointer.

Use Dialog Test to trace the VDEFINE service.

ISPV006 **Data truncation occurred - Data for aaaaaaaa format variable "bbbbbbbb" was too long.**

Explanation: The variable value being updated is longer than the length specified on the VDEFINE for the variable in question.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the correct length was specified on the VDEFINE service. The length should have been specified as a fullword binary value. If this variable is being updated from a panel, make sure that the field length on the panel is not larger than the length specified on the VDEFINE service. Dialog Test can be used to trace the variable and the VDEFINE service.

ISPV007 **Invalid data characters - Data for aaaaaaaa format variable "bbbbbbbb" was not aaaaaaaa characters.**

Explanation: Invalid data was supplied for the variable being updated. The data was not valid for the format specified on the VDEFINE for the variable. For example, a value other than 0 or 1 was supplied for a variable with a format of BIT specified on the VDEFINE service.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the data being used to update a variable is valid for the format specified on the VDEFINE for that variable.

ISPV008 **Invalid data length - Length of "aaaaaaaa" is bbbbbbbb - valid lengths are 0 to 32767.**

Explanation: An invalid length was encountered on a VREPLACE or VCOPY service. The length must be between 0 and 32 767.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that a valid length is specified on the VCOPY or VREPLACE service. Use Dialog Test to trace or set breakpoints on the VCOPY and VREPLACE service.

ISPV009 **Invalid variable name - Variable 'aaaaaaaa' is syntactically incorrect.**

Explanation: The dialog specified an invalid variable name.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that correct ISPF naming conventions are followed for variable names. A dialog variable name is composed of 1 to 8 characters

(6, for FORTRAN). Alphanumeric characters A-Z, 0-9, #, \$, or @ can be used in the name, but the first character cannot be numeric. APL variable names cannot contain #, \$, or @.

ISPV010 **Profile not loaded - Profile table 'aaaaaaaa' not read. Table service RC=bbbbbbbb.**

Explanation: An error occurred while trying to open a profile table for a new application.

User Response: Contact your system programmer.

System Programmer Response: Check out the ISPTLIB allocations for possible problems. Possible return codes are:

- 8 The profile table was not found. Check the ISPTLIB concatenation for allocation errors. ISPTLIB will be used for default profile tables when the profile table is not found in ISPPROF.
- 12 An enqueue error occurred. Check the ISPPROF and ISPTLIB allocations for contention problems.
- 20 A severe error was encountered. The user may have a bad profile table. Restore the table or delete the profile in question and retry.

ISPV011 **Profile table not found - Unable to access aaaaaaaa table for variable bbbbbbbb.**

Explanation: The variable cannot be accessed because the profile table is not found.

User Response: Contact your system programmer.

System Programmer Response: The active profile table can no longer be located. Check to make sure there are no prior errors causing the profile table to be closed prematurely. Check ISPF log for additional messages. Use dialog test to trace all ISPF services to get an idea of where the problem may be.

ISPV012 **Invalid VDEFINE keyword - 'aaaaaaaa' is not valid. Use COPY, NOBSCAN, or LIST.**

Explanation: An options-list parameter other than COPY, NOBSCAN, or LIST was specified.

Programmer Response: Specify a valid options-list parameter.

ISPV013 **Variable exit error - Exit routine at aaaaaaaa gave error code bbbbbbbb for cccccccc of dddddddd.**

Explanation: A variable service exit encountered an unexpected return code.

User Response: Contact your system programmer.

System Programmer Response: Check to see if a user defined exit is active for the VDEFINE service. If so, contact the owner of the exit for additional information. Dialog Test can be used to trace or breakpoint the VDEFINE service to see if a VDEFINE exit has been specified. If the variable exit is an ISPF exit, contact IBM support.

ISPV014 **Required parm missing - User-data block is required with USER format VDEFINES.**

Explanation: A VDEFINE format of USER was specified, but no user-data value was supplied.

Programmer Response: Correct the VDEFINE service in error.

ISPV015 **Profile full - Profile variable 'aaaaaaaa' not saved. 'bbbbbbbb' table is full.**

Explanation: The profile variable cannot be added because it will cause the profile table row to exceed 64K.

User Response: Contact your system programmer.

System Programmer Response: Make sure the variable being added does not have a length definition problem. The table could be fine, but the variable being added is toolarge. If the table is very full, the VERASE service should be used to clean up the profile by deleting variables that are not needed. Use dialog trace to trace the variable being added. An incorrect length on a VDEFINE or a loop on VPUT could cause this.

ISPV016 **R/O profile not loaded - R/O profile table 'aaaaaaaa' not read. Table service RC=bbbbbbbb.**

Explanation: Variable ZPROFAPP specified a read-only extension profile existed; however, the R/O table could not be read.

User Response: Contact your system programmer.

System Programmer Response: Check the ISPTLIB allocation. The following return codes may apply:

- 8 The table is not found. Either variable ZPROFAPP has a bad value or the ISPTLIB allocation does not point to the data set that contains this profile table.
- 20 A severe error occurred. The table may need to be restored from a backup copy.

ISPV017 **Invalid format - Invalid VDEFINE format 'aaaaaaaa' found for variable 'bbbbbbbb'.**

Explanation: The format parameter supplied on the VDEFINE service was not a valid value.

User Response: Contact the responsible programmer.

ISPF Messages

Programmer Response: Use a valid format with the VDEFINE service.

ISPV020 **Variable access invalid - A valid CLIST environment does not exist.**

Explanation: ISPF tried to access a variable through TSO, but a CLIST environment did not exist.

User Response: Contact the responsible programmer.

Programmer Response: This error is a result of a zero ECTIOWA value in the ECT. Check the dialog for any code that could affect the ECT control block. Contact the system programmer, if necessary.

System Programmer Response: Check for any code that could affect the ECT control block. Contact IBM support, if necessary.

ISPV021 **Invalid 'aaaaaaaa' request - Variable name 'bbbbbbbb' is not a valid REXX variable name.**

Explanation: An invalid variable name was passed to IKJCT441 to be processed as a result of an ISPF service request while in a REXX environment.

User Response: Contact the responsible programmer.

Programmer Response: Check the variable in question for valid syntax. Use the REXX trace command or Dialog Test to trace ISPF services.

ISPV023 **Data has been truncated - The maximum length of CLIST variable data is 32767 characters.**

Explanation: ISPF tried to retrieve a CLIST variable using IKJCT441 but the length of the variable was greater than 32 767.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that CLIST and REXX variables do not exceed 32 767 bytes in length.

ISPV024 **Invalid SET request - CLIST variable 'aaaaaaaa' is a system variable. Not modifiable.**

Explanation: ISPF was used to attempt to modify a TSO system variable.

User Response: Contact the responsible programmer.

Programmer Response: Do not use ISPF services to modify TSO system variables.

ISPV025 **Invalid SET request - CLIST variable 'aaaaaaaa' not updated because it is a label element.**

Explanation: ISPF attempted to update a variable that is a label element. This is not allowed through the IKJCT441 interface.

User Response: Contact the responsible programmer.

Programmer Response: Do not code variables that are label elements as variables that can be updated by ISPF. For example, do not use a variable that is a CLIST label element as an input field in an ISPF panel.

ISPV026 **Invalid GET request - CLIST variable 'aaaaaaaa' requires evaluation. Not supported.**

Explanation: The variable is a CLIST built-in function, such as &STR, that requires evaluation.

User Response: Contact the responsible programmer.

Programmer Response: Do not use CLIST built-in function variables within an ISPF service call such as VGET.

ISPV027 **Invalid GET request - CLIST variable 'aaaaaaaa' not retrieved because it is a label element.**

Explanation: The variable is a CLIST label and was not retrieved.

User Response: Contact the responsible programmer.

Programmer Response: Do not use CLIST variables defined as labels as ISPF variables as well.

ISPV028 **IKJCT441 interface error - The caller is not in a CLIST or REXX environment. Return code = 40. This could be a result of not having the function pool flag set in the ISPTCM table for the command being executed.**

Explanation: ISPF called IKJCT441 to process a CLIST/REXX variable and got a return code of 40. This normally means that there was an invalid environment.

User Response: Contact your system programmer.

System Programmer Response: The probable cause of this error is that a command was invoked with the SELECT service and the command was in the ISPTCM table with a flag byte X'02' instead of X'42'. Any command processor that is in the ISPTCM table that uses ISPF services should have the function pool flag set.

ISPV029 **IKJCT441 interface error - Severe error accessing CLIST variables. Return code = 'aaaaaaaa'.**

Explanation: A severe error occurred while processing CLIST variables. Refer to the appropriate TSO documentation for an explanation of the IKJCT441 error code.

System Programmer Response: Contact IBM support, if necessary.

ISPV040 **Invalid PACK(N) - N value of PACK(N) must be between 0 and 18.**

Explanation: The value of N must be greater than or equal to 0 and less than or equal to 18.

Programmer Response: Ensure a valid value is specified with the PACK keyword.

ISPV041 **Incompatible pack length - PACK(N) format specified requires a length greater than was specified.**

Explanation: The length specified on the VDEFINE service was not large enough to contain the number of digits to the right of the decimal point as specified by the N value.

Programmer Response: Ensure that the length specified with the VDEFINE service is large enough to contain the packed number. The value of N cannot be greater than twice the length minus one.

ISPV042 **Invalid VDEFINE syntax - A format of "*" must have an "*" in the corresponding name position in the VDEFINE parameters.**

Explanation: Using the LIST option, an "*" (asterisk) was found in the format field array and the corresponding entry in the variable name array was not an "*" (asterisk) also.

Programmer Response: Make sure that the format field array and name list array are paired properly.

ISPV043 **Invalid VDEFINE syntax - An "*" format must be specified with at least one other valid format and the list option specified.**

Explanation: A value of "*" (asterisk) is only valid with the LIST option. Also, there must be at least one valid format other than "*" (asterisk) in the format array.

Programmer Response: Do not code all values in the format array as "*" (asterisk).

ISPV044 **Invalid format data - Data contains invalid hex character for packed format**

Explanation: The data for a format of PACK must be a numeric value (0-9).

Programmer Response: Ensure that valid numeric data is supplied for a variable with a format of PACK.

ISPV045 **Invalid data length - Length of "aaaaaaaa" is bbbbbbbb - valid lengths are 4 and 8.**

Explanation: A variable with a format of FLOAT must have a length of either 4 or 8 bytes.

Programmer Response: Make sure that the length supplied on the VDEFINE service has a value of either 4 or 8 when the format value is FLOAT.

ISPV046 **Invalid data length - Length of "aaaaaaaa" is bbbbbbbb - valid lengths are 1 to 10.**

Explanation: A variable with a format of PACK must have a length from 1 to 10 bytes.

Programmer Response: Make sure that the length supplied on the VDEFINE service has a value from 1 to 10 when the format value is PACK.

ISPV047 **Invalid data length - Length of "aaaaaaaa" is bbbbbbbb - valid lengths are 2 to 32767.**

Explanation: A variable with a format of BINSTR must have a length greater than 1 and less than 32 768.

Programmer Response: Ensure that the length specified on the VDEFINE for a variable with a format of BINSTR is greater than 1 and less than 32 768.

ISPV048 **Invalid data string - Variable "aaaaaaaa" must contain a null terminator.**

Explanation: The last byte of a variable that has a format of BINSTR must be a null terminator (X'00').

Programmer Response: Ensure that the length supplied on the VDEFINE service for a BINSTR format variable allows for a null terminator (binary zero) to be placed in the last position of the variable value. ISPF will store up to "length - 1" of significant data and then place a null terminator in the last position.

ISPV050 **Invalid mask format - Format "aaaaaaaa" is not a valid mask format.**

Explanation: An invalid mask format was specified on the VMASK service.

User Response: Contact the responsible programmer.

ISPF Messages

Programmer Response: Check the VMASK service for valid mask formats.

ISPV051 Invalid mask length - Invalid length "aaaaaaaa" specified for the VMASK service

Explanation: An invalid length was specified for a USER format on the VMASK service.

User Response: Contact the responsible programmer.

Programmer Response: The length of the mask must be a fullword binary integer greater than 0 and less than or equal to 20.

ISPV052 Invalid variable mask - The specified mask contains invalid format characters.

Explanation: An invalid mask symbol was used in the mask parameter of the VMASK service with a USER type of mask.

User Response: Contact the responsible programmer.

Programmer Response: Correct the mask so it contains valid mask symbols as described by the VMASK service in *ISPF Services Guide*

ISPV053 Invalid variable data - The specified variable contains invalid data for the specified variable mask.

Explanation: The variable value had data that did not match the mask pattern. For example, if the mask pattern was AAA and numeric data was supplied, this error would occur.

User Response: Correct the variable value to fit the mask pattern.

ISPV054 Invalid variable length - The specified variable value is an invalid length.

Explanation: The length of the variable value does not match the length of the mask pattern.

User Response: Correct the variable value to match the mask pattern.

ISPV055 Variable not masked - The specified variable in the VEDIT is not a masked variable.

Explanation: A VEDIT was specified for a variable that did not have a VMASK associated with it.

User Response: Contact the responsible programmer.

Programmer Response: Make sure that any variable that has a VEDIT defined also has a VMASK associated with it.

ISPV056 Invalid variable format - The specified variable's VDEFINE format is invalid for the VMASK service.

Explanation: An invalid VDEFINE format was specified for the variable associated with VMASK. The VMASK service only supports a format of CHAR, FIXED, or PACK.

User Response: Contact the responsible programmer.

Programmer Response: Correct the code so it either uses the VDEFINE service with one of the supported formats for the VMASK service, or does not use the VMASK.

ISPV057 Invalid user mask - A mask should contain at least one of the following characters: A, 9, H, N, or X.

Explanation: The specified mask must contain at least one of the symbols A, 9, H, N, or X.

User Response: Contact the responsible programmer.

Programmer Response: Correct the code so it supplies a valid user mask.

ISPV058 Variable not VDEFINed - The specified variable has not been VDEFINed.

Explanation: A VDEFINE has not been issued for the variable associated with the VMASK.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that a VDEFINE is done for any variable that has a VMASK associated with it.

ISPV059 Invalid variable mask - "B" can only be imbedded. Blanks cannot begin or end a variable mask.

Explanation: A VMASK was issued with a B at the beginning or end of the mask pattern.

User Response: Contact the responsible programmer.

Programmer Response: Correct the code so it does not specify a mask pattern with a B in the first or last position of the mask.

ISPWS000 Invalid CODEPAGE and CHARSET values were specified on the WSCON service. Both parameters must be specified in order to be used.

Explanation: Invalid CODEPAGE and CHARSET values were specified on the WSCON service. Both parameters must be specified in order to be used.

User Response: If PANEL(YES) or PANEL(ONERROR) is specified, then the user should

enter the codepage and character set in the appropriate panel field.

Programmer Response: Correct the parameters specified on the WSCON service call.

ISPWS001 **A conflict in parameters was specified on the WSCON service. Only one of the following parameters can be specified: IP, LU, or FL.**

Explanation: Some type of conflict in parameters was specified in the WSCON service. For example, both an IP and LU address may have been specified..

Programmer Response: Correct the parameter specified on the WSCON service call.

ISPWS002 **Not connected — A request has been made to disconnect from the workstation, but there is currently no connection.**

Explanation: A request has been made to disconnect from the workstation, but there is currently no connection.

User Response: Only issue WSDISCON when you have a connection to the workstation.

ISPWS003 **Cannot disconnect — Your GUI session was invoked with GUISCRD and/or GUISCRW sizes different from your actual 3270 screen size. Therefore, you cannot disconnect and begin displaying screen in 3270 mode.**

Explanation: Cannot disconnect — Your GUI session was invoked with GUISCRD and/or GUISCRW sizes different from your actual 3270 screen size. Therefore, you cannot disconnect and begin displaying screen in 3270 mode.

User Response: Only issue WSDISCON when you are running an ISPF GUI session with the same screen size as your ISPF 3270 session.

ISPWS004 **The variable specified in the WSCON IP or LU parameter cannot be found or has a blank value. A value is required in order to make a connection to the workstation.**

Explanation: The variable specified in the WSCON IP or LU parameter cannot be found or has a blank value. A value is required in order to make a connection to the workstation.

User Response: If PANEL(YES) or PANEL(ONERROR) is specified, then the user should enter the workstation address in the appropriate panel field.

Programmer Response: Correct the variable name specified on the IP or LU parameter on the WSCON service call, or make sure the variable and value is available.

ISPWS005 **A conflict in parameters was specified on the WSCON service. Only one of the following parameters can be specified: IP, LU, or FL. Select the appropriate network protocol and specify the machine address where needed.**

Explanation: Some type of conflict in parameters was specified on the WSCON service. For example, both an IP and LU address may have been specified.

User Response: Select the appropriate network protocol and specify the machine address where needed.

Programmer Response: Correct the parameters specified on the WSCON service call.

ISPWS006 **The variable specified in the WSCON TITLE parameter cannot be found.**

Explanation: The variable specified to contain the TITLE for the GUI windows could not be found.

User Response: If PANEL(YES) or PANEL(ONERROR) is specified, then the user should enter a title in the appropriate panel field to be used when ZWINTTL and ZAPPTTL are not defined for the GUI window.

Programmer Response: Correct the variable name specified on the TITLE parameter on the WSCON service call, or make sure the variable is available.

ISPWS007 **No connection — The user hit end, exit, or cancel from the 'Initiate Workstation Connection' panel before attempting a connection.**

Explanation: The variable specified to contain the TITLE for the GUI windows*****check with cindy....does not look complete.....

ISPWS008 **An invalid value has been specified for the aaaaaaaa parameter on the WSCON service.**

Explanation: A value other than STD, FIX, or DLG was specified for the FRAME parameter or a value other than STD or DLG was specified for the BKGRND parameter on the WSCON service.

User Response: If PANEL(YES) or PANEL(ONERROR) is specified, then the user should select the appropriate GUI Window frame value or the Default Window Background color if the defaults from the system profile are not the preferred values.

ISPF Messages

Programmer Response: Correct the value specified for the FRAME parameter on the WSCON service call.

ISPWS009 **An invalid value has been specified for the aaaaaaaa parameter on the WSCON service. The panel field has been initialized with the value from the system profile. Select an appropriate value if this default is not the preferred value.**

Explanation: A value other than STD, FIX, or DLG was specified for the FRAME parameter or a value other than STD or DLG was specified for the BKGRND parameter on the WSCON service.

User Response: If PANEL(YES) or PANEL(ONERROR) is specified, then the user should select the appropriate GUI Window frame value or the Default Window Background color if the defaults from the system profile are not the preferred values.

Programmer Response: Correct the value specified for the FRAME or BKGRND parameter on the WSCON service call.

ISPWS010 **Cannot disconnect — You cannot disconnect from the workstation while running in batch GUI mode.**

Explanation: A request has been made to disconnect from the workstation, but you are running in batch mode. There is not 3270 session to return to.

User Response: User must continue running in GUI mode.

ISPWS011 **You must specify one of the parameters IP, LU, or FI, or make sure that there is a valid network protocol value saved in the system profile.**

Explanation: A request has been made to connect to the workstation, but your machine address was not specified or found in your system profile, or a valid network protocol value was not found in your system profile.

User Response: Make sure that you have specified your machine address and selected the appropriate network protocol when requesting a connection to the workstation.

ISPWS012 **An IP, LU, or FI parameter was not specified on the WSCON service and there was no valid network protocol value saved in the system profile. Select a network protocol and specify a valid machine address where appropriate.**

Explanation: A request has been made to connect to the workstation, but your machine address was not specified or found in your system profile, or a valid

network protocol value was not found in your system profile.

User Response: Make sure that you have specified your machine address and selected the appropriate network protocol when requesting a connection to the workstation.

ISPWS013 **Cannot disconnect — You cannot disconnect from the workstation while running the Workstation Tool Integration Configuration Program. Exit the tool first, and then invoke WSDISCON.**

Explanation: A request has been made to disconnect from the workstation, but you are currently running the Workstation Tool Integration Configuration Program. You must exit this tool first, and then invoke WSDISCON to disconnect from the workstation.

User Response: Exit the Workstation Tool Integration Configuration program and then invoke WSDISCON.

ISPWS014 **Not disconnected — You selected to not disconnect from the workstation at this time.**

Explanation: The user chose not to disconnect from the workstation at this time.

ISPWS015 **Disconnected — You have successfully disconnected from the workstation .**

Explanation: If you were running in GUI mode, you have been disconnected from the workstation and your ISPF session continues in 3270 mode. If you were running in 3270 mode, you have been disconnected from the workstation.

ISPWS020 **Cannot disconnect - You cannot disconnect from the ISP Application Server until your ISPF session terminates.**

Explanation: A request has been made to disconnect from the ISPF Application Service prior to terminating the ISPF session. This function is not supported.

User Response: Continue running connected to the ISPF Application server until the ISPF session terminates.

ISPWS021 **Cannot switch - Switching this logical screen to your 3270 emulator session while connected to the ISPF Application Server is not a supported function.**

Explanation: A request has been made to switch this logical screen to your 3270 emulator session. This is not a supported function while connected to the ISPF Application Server.

User Response: User must continue running this logical screen in GUI mode.

ISPW001 ADDPOP service error - ADDPOP service issued before first panel display.

Explanation: At least one panel must have been displayed before an ADDPOP can be issued.

Programmer Response: ISPF normally displays panel ISPBLANK as a dummy panel prior to an ADDPOP if no previous panel exists. Make sure that this panel is in the ISPLIB concatenation sequence to ensure that ADDPOP will work if the first panel to be displayed by ISPF is in a pop-up window.

ISPW002 ADDPOP service error - Consecutive ADDPOP services without a panel display.

Explanation: Two consecutive ADDPOP services have been issued without an intervening display.

Programmer Response: Make sure that a panel display is done in between ADDPOP requests.

ISPW003 REMPOP service error - There are no active pop-up windows at the current select level.

Explanation: A REMPOP service was issued, but there were no pop-ups active.

Programmer Response: Ensure that all POPUP and REMPOP services are paired properly. Use dialog test to trace the ADDPOP and REMPOP services.

Problem Determination: Use dialog test to trace the ADDPOP and REMPOP services.

ISPW005 Windowing error - Unable to ADDPOP due to previous panel display error.

Explanation: The ADDPOP request failed due to a previous display request error. The display request error could be something like a panel not found or an error in panel logic. This error will not normally be seen unless the user is using Control Errors Return in order to see and handle errors personally.

Programmer Response: Correct the error on the display request so that the ADDPOP request will be honored.

ISPW008 Windowing error - MSGLOC field "aaaaaaa" is not defined on the panel.

Explanation: A MSGLOC field name was specified, but the field is not defined on the panel.

Programmer Response: Specify a field name that exists on the panel.

ISPW009 Internal error - Service request to module ISPWIN specified invalid name.

Explanation: This is an internal service call and should not fail.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPX001 Internal error - Service request to module ISPXFR specified invalid name.

Explanation: This is an internal service call and should not fail.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISPX002 Transfer completed — Transfer of host data set to workstation completed successfully.

Explanation: Informational message.

ISPX007 Transfer error - The "HOST" or "WS" variable was not specified properly in the FILEXFER service.

Explanation: You must specify a "HOST" and a "WS" variable name for the FILEXFER service. The variable must be defined and the value in the variable must not be longer than 255 characters.

Programmer Response: Correct the specification of the "HOST" or "WS" variable on the FILEXFER service.

ISPX008 Transfer error - The "TO" direction on the FILEXFER service is not valid. The value must be "HOST" or "WS".

Explanation: The only valid values for the "TO" parameter are "HOST" and "WS".

Programmer Response: Correct the file specification on the FILEXFER service.

ISPX009 Transfer error - The host data set name is longer than 56 characters.

Explanation: The host data set name specified on the FILEXFER service is longer than the maximum of 56 characters.

Programmer Response: Correct the host data set specification on the FILEXFER service.

ISPX010 Transfer failed - The FILEXFER service failed because there is no connection to the workstation.

Explanation: You must be connected to a workstation before the file FILEXFER service will function.

ISPF Messages

User Response: Connect to a workstation from the ISPF Settings panel GUI pull-down or by specifying the GUI parameter on the ISPSTART command.

ISPX011 **Transfer failed - An error occurred while transferring the file with the FILEXFER service. The file was not transferred.**

Explanation: The file transfer failed. The FILEXFER service is syntactically correct, but the transfer did not complete. The host data set attribute had a null object handle.

Programmer Response: Make sure that the file names are properly specified in the variables.

ISPX012 **Transfer failed - An error occurred while transferring the file with the FILEXFER service. The file was not transferred. The user may have disallowed file transfer.**

Explanation: The file transfer failed. The FILEXFER service is syntactically correct, but the transfer did not complete. The user may have disallowed file transfer.

Programmer Response: Make sure that the file names are properly specified in the variables.

ISPX013 **Transfer failed - An error occurred while transferring the file with the FILEXFER service. The host data set or member could not be opened or found. The file was not transferred.**

Explanation: The file transfer failed. The FILEXFER service is syntactically correct, but the transfer did not complete. The host data set or member could not be opened or found.

Programmer Response: Make sure that the host data set or member exists.

ISPX014 **Transfer failed - An error occurred while transferring the file with the FILEXFER service. The workstation file could not be opened or found. The file may be specified wrong, the path may not exist, the target disk may be read-only, or the target drive may not exist. The file was not transferred.**

Explanation: The file transfer failed. The FILEXFER service is syntactically correct, but the transfer did not complete. The workstation file could not be opened or found. The file may be specified wrong, the target disk may be read-only, or the target drive may not exist.

Programmer Response: Make sure that the workstation file exists.

ISPX015 **Transfer failed - An error occurred while transferring the file with the FILEXFER service. There was an error reading the host data set or member. The file was not transferred.**

Explanation: The file transfer failed. The FILEXFER service is syntactically correct, but the transfer did not complete. There was an error reading the host data set or member.

Programmer Response: Make sure that the user has read access for the data set or member.

ISPX016 **Transfer failed - An error occurred while transferring the file with the FILEXFER service. There was an error reading the workstation file. The file was not transferred.**

Explanation: The file transfer failed. The FILEXFER service is syntactically correct, but the transfer did not complete. There was an error reading the workstation file.

User Response: Make sure that the workstation disk is able to be read.

Programmer Response: Make sure that target workstation disk is able to be read.

ISPX017 **Transfer failed - An error occurred while transferring the file with the FILEXFER service. There was an error writing the host data set or member. There may not be sufficient space to write the data set or member. The file was not transferred.**

Explanation: The file transfer failed. The FILEXFER service is syntactically correct, but the transfer did not complete. There was an error writing the host data set or member.

User Response: Make sure that you have write access to the data set to which you are transferring data and that there is sufficient space to write the data set or member.

Programmer Response: Make sure that the user has write access to the data set and that there is sufficient space to write the data set or member.

ISPX018 **Transfer failed - An error occurred while transferring the file with the FILEXFER service. There was an error writing the workstation file. The disk may be full. The file was not transferred.**

Explanation: The file transfer failed. The FILEXFER service is syntactically correct, but the transfer did not complete. There was an error writing the workstation file.

User Response: Make sure that you have write access to the disk to which you are transferring data and that the disk has enough space to write the file.

Programmer Response: Make sure that the user has write access to the disk and that there is sufficient space on the disk to write the file.

ISPX019 **Transfer failed – An error occurred while closing the host data set. The directory may be full. The file was not transferred.**

Explanation: The file transfer failed. ISPF was not able to close the data set. One of the possible causes is that the directory may be full.

User Response: Re-allocate the data set with more directory blocks.

ISPX020 **LMMSTATS failed – The file was successfully transferred, but ISPF was unable to create the statistics for the file.**

Explanation: There is not sufficient directory space to create statistics.

User Response: Re-allocate the data set with additional directory blocks.

ISPX021 **Transfer failed – An error occurred while closing the workstation file. The file was not transferred.**

Explanation: The file transfer failed. ISPF was not able to close the workstation file. The file may be locked by another process.

User Response: Make sure that no other processes are currently using the file you are attempting to transfer.

ISPX022 **Transfer rejected – The user refused file access when accepting the workstation connection.**

Explanation: When the user is presented with choice to accept or reject a workstation connection, he or she is allowed to grant access to files or not. In this case, the user accepted the connection, but refused file access.

User Response: End the ISPF session and start it again granting file access.

ISPX023 **File transfer error occurred while transferring the host image file from the data set allocated to DD ISPILIB. The host data set or member could not be opened or found. The file was not transferred.**

Explanation: The file transfer failed. The FILEXFER service is syntactically correct, but the transfer did not

complete. The host data set or member could not be opened or found.

Programmer Response: Make sure that the host data set or member exists.

ISPX024 **File transfer failed – A file transfer error occurred while attempting to transfer a workstation file to the host. The receiving host file is in use or is open.**

Explanation: The file transfer service could not complete the file transfer to the host. The receiving host file is in use or is open.

User Response: Wait for the host file to be available.

Programmer Response: The host file is enqueued. Wait for the host file to be available and then try the filexfer service.

Problem Determination: Check to see who has data set/member enqueued.

ISPX100 **FILESTAT failed - The FILESTAT service failed because there is no connection to the workstation.**

Explanation: You must be connected to a workstation before the file FILESTAT service will function.

User Response: Connect to a workstation from the ISPF Settings panel GUI pull-down or by specifying the GUI parameter on the ISPSTART command.

ISPX101 **FILESTAT error - The "file" variable was not specified properly in the FILESTAT service.**

Explanation: You must specify a "file" variable name for the FILESTAT service. The value in the variable must not be longer than 255 characters.

Programmer Response: Correct the specification of the "file" variable on the FILESTAT service.

ISPX102 **FILESTAT error - LRECL, DATE, or both LRECL and DATE must be specified on the FILESTAT service.**

Explanation: The FILESTAT service requires at least one of the following parameters be specified: LRECL or DATE.

Programmer Response: Correct the file specification on the FILESTAT service.

ISPX103 **Internal error - Service request to module ISPWFS specified invalid name.**

Explanation: This is an internal service call and should not fail.

User Response: Contact your system programmer.

ISPF Messages

System Programmer Response: Contact IBM support.

ISPYB011 **Command not recognized - Valid line commands are: I (insert), D (delete), R (repeat).**

Explanation: The following line commands are valid: Inn to insert nn lines, Dnn to delete nn lines, and Rnn to repeat nn lines.

User Response: Enter one of the following valid line commands: I (insert), D (delete), R (repeat).

ISPYB012 **Invalid service name - 'aaaaaaaa' is not a valid ISPF service.**

Explanation: Breakpoints are set before or after ISPF services. A valid ISPF service name is required to set a breakpoint.

User Response: Enter a valid ISPF service as defined in *ISPF Services Guide*

ISPYB013 **Invalid WHEN condition - WHEN not recognized, specify BEFORE, AFTER, or Rnn**

Explanation: The WHEN condition tells Dialog Test at what point to interrupt dialog execution. The valid conditions are: BEFORE to stop before the service receives control, AFTER to stop after the service completes, Rnn to stop after the service completes if the return code is the integer nn, and (blank) to stop both before and after the service.

ISPYB014 **Invalid function name - The function name specified does not follow ISPF naming convention.**

Explanation: The function name must follow ISPF naming conventions.

User Response: Enter a valid program or command name.

ISPYB015 **Invalid active status - Active status type not recognized. Specify YES or NO**

Explanation: The active status type field specifies whether the breakpoint is active or not.

User Response: To activate the breakpoint, specify YES. To deactivate the breakpoint, specify NO.

ISPYB017 **Invalid command - 'aaaaaaaa' is not a valid breakpoints command.**

Explanation: Valid commands are CANCEL, RESUME, QUAL, and LOCATE.

User Response: Enter a valid breakpoints command.

ISPYB018 **'aaaaaaaa' not found - The service name does not exist in the breakpoints list.**

Explanation: The LOCATE command was unable to locate the requested service.

User Response: Enter a valid service name.

ISPYB019 **'aaaaaaaa' found - Service name was located, and appears on the first line.**

Explanation: This is an informational message.

ISPYB021 **aaaaaaaa failed - bbbbbbbb request is not recognized by aaaaaaaa service routine.**

Explanation: There was a failure in the breakpoint routines.

Programmer Response: This is possibly an internal error caused by either a system error or mixed levels of ISPF code. If the error continues, contact the system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPYB022 **aaaaaaaa failed - Breakpoint not set, bbbbbbbb is not a valid dialog management service name.**

Explanation: There was a failure in the breakpoint routines.

Programmer Response: This is possibly an internal error caused by either a system error or mixed levels of ISPF code. If the error continues, contact the system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPYB023 **ISPYBI failed - aaaaaaaa returned rc(bbbbbbbb) request(cccccccc failed during setup)**

Explanation: There was a failure in the breakpoint routines.

Programmer Response: This is possibly an internal error caused by either a system error or mixed levels of ISPF code. If the error continues, contact the system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPYB024 **ISPYBI failed - aaaaaaaa returned rc(bbbbbbbb) request(cccccccc failed during create table)**

Explanation: There was an error in creating the breakpoint table.

Programmer Response: If the error continues, contact the system programmer.

System Programmer Response: An internal TBCREATE failed. If the failure continues, contact IBM support.

ISPYB025 **ISPYBI failed - aaaaaaaa returned rc(bbbbbbbb) request(cccccccc failed during initialize table)**

Explanation: The breakpoint routines failed while initializing the table.

Programmer Response: This is possibly an internal error caused by either a system error or mixed levels of ISPF code. If the error continues, contact the system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPYB026 **ISPYBI failed - aaaaaaaa returned rc(bbbbbbbb) request(cccccccc failed during edit control)**

Explanation: The breakpoint routines failed while the tables were being initialized for editing.

Programmer Response: This is possibly an internal error caused by either a system error or mixed levels of ISPF code. If the error continues, contact the system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPYB027 **ISPYBI failed - aaaaaaaa returned rc(bbbbbbbb) request(cccccccc failed during build chain)**

Explanation: There was a failure while building the breakpoint chain.

Programmer Response: This is possibly an internal error caused by either a system error or mixed levels of ISPF code. If the error continues, contact the system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPYB028 **aaaaaaa failed - Breakpoint not set, function 'bbbbbbb' is not a valid function name.**

Explanation: There was a failure in the breakpoint routines.

Programmer Response: This is possibly an internal error caused by either a system error or mixed levels of ISPF code. If the error continues, contact the system programmer.

System Programmer Response: If you do not have

mixed levels of ISPF code, contact IBM support.

ISPYB029 **aaaaaaa failed - Breakpoint not set, 'bbbbbbb' is not a valid WHEN condition.**

Explanation: There was failure in the breakpoint routines.

Programmer Response: This is possibly an internal error caused by either a system error or mixed levels of ISPF code. If the error continues, contact the system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPYB031 **Service name not entered - The service name is required to establish a breakpoint.**

Explanation: ISPF breakpoints occur at ISPF service invocation or exit. A service name is required to establish a breakpoint.

Programmer Response: Enter a valid ISPF service name.

ISPYB032 **Command conflict - 'aaaaaaa' is within range of the D command. Correct either one.**

Explanation: The second line command would be deleted because it is within the range of the D (DELETE) command.

Programmer Response: Correct the conflicting line commands.

ISPYB033 **Too many parameters - No parameters are defined for this command.**

Explanation: Parameters are not allowed with this command.

Programmer Response: The data following the command must be removed from the command line.

ISPYB034 **Enter service name - Enter the name of the service to be located.**

Explanation: The LOCATE command requires the ISPF service name that you want to locate.

Programmer Response: Enter an ISPF service with the LOCATE command.

ISPF Messages

ISPYB035 Too many parameters - A service name is the only valid parameter for the LOCATE command.

Explanation: There should not be any data following the ISPF service name when a LOCATE command is entered.

Programmer Response: Clear the command line of the data that follows the LOCATE command and the ISPF service name.

ISPYB036 Invalid service name - A service name must not be longer than 8 characters.

Explanation: The ISPF service name following the LOCATE command is longer than allowed.

Programmer Response: Correct the ISPF service name used with the LOCATE command.

ISPYB037 Test mode not active - You must be running an application from Dialog Test, but not in Dialog Test to issue the DTEST command.

Explanation: The DTEST command was issued while not under Dialog Test or while in Dialog Test, but not running an application (Dialog Test option 1).

User Response: The DTEST command is only valid while running an application invoked from option 1 in Dialog Test (Functions).

ISPYB038 Invalid parameter - You specified an invalid parameter on the DTEST command. The only valid parameters are 1 through 8.

Explanation: The user entered an invalid parameter on the DTEST command. The valid parameters are a number 1 through 8 corresponding to the Dialog Test options.

User Response: The user should specify a valid parameter.

ISPYB039 Switch to Test failed - ISPF was not able to switch from the user's environment to the Dialog Test environment.

Explanation: When running the DTEST command, ISPF needs to switch from the user's environment to the Dialog Test environment. This switch failed and therefore ISPF cannot continue processing the DTEST command.

Programmer Response: Try establishing the test environment again and issue the DTEST command again or try logging onto TSO with a large region size and then try establishing the test environment again and issue the DTEST command again. If problem persists, contact IBM service.

ISPYF010 aaaaaaaa failed - bbbbbbbb returned return code cccccc request(dddddddd).

Explanation: The dialog failed; the message defines the failing function.

User Response: Contact the responsible programmer.

Programmer Response: This is either a system error or an ISPF internal error. If the error continues, contact the system programmer.

System Programmer Response: If you do not have mixed code, contact IBM support.

ISPYF011 Enter function name - The name of a panel, command, or program must be entered.

Explanation: This message is self-explanatory.

Programmer Response: Enter a function such as a panel, command, or program.

ISPYF012 Panel select complete - Select of the requested panel is complete.

Explanation: This is an informational message.

ISPYF013 Function rc = aaaaaaaa - The specified function completed with a return code of aaaaaaaa.

Explanation: This is an informational message.

ISPYF014 Invalid value - Enter YES or NO at the cursor position.

Explanation: When NEWAPPL is selected, the PASSLIB field must have an entry.

Programmer Response: Enter YES or NO in the field that contains the cursor.

ISPYF015 Enter one name only - More than one name was entered for a panel, command, program, or request.

Explanation: This panel allows execution of a panel, a command, program, or a request. Only one name can be entered for processing.

Programmer Response: Enter only one panel, command, program name, or request for processing.

ISPYF016 Language invalid - Language must be APL, CREX, or blank.

Explanation: When entering a command for processing, set the LANG field to APL, CREX, or blank.

Programmer Response: Correct the LANG field.

ISPYF018 MODE invalid - MODE must be either LINE, FSCR, or blank.

Explanation: Enter LINE for line mode, FSCR for full screen mode, or blank.

Programmer Response: Correct the entry for the MODE field.

ISPYF019 Conflicting values - Selecting PASSLIB is valid only when NEWAPPL is also specified.

Explanation: This message is self-explanatory.

Programmer Response: Enter the correct value for the PASSLIB and NEWAPPL fields.

ISPYL011 ISPYLI failed - ISPYXEM returned rc(aaaaaaaa) request(entry failed).

Explanation: There was an error on an internal ISPF call.

User Response: Contact your system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPYL012 ISPYLI failed - ISPYLS returned rc(aaaaaaaa), more details precede this message in the log.

Explanation: There was a failure in the browse log routine.

User Response: Contact your system programmer.

System Programmer Response: If you have preallocated your log data set, verify that it is allocated correctly. A preallocated log data set with a disposition of new or old cannot be browsed. If the disposition is correct, this error could be caused by mixed levels of ISPF code. If you do not have mixed levels of ISPF code, contact IBM support.

ISPYL013 Log data set empty - Log data is empty. Browse cannot be performed.

Explanation: This is an informational message. There are no entries in the log.

ISPYL014 I/O error - An I/O error was encountered reading the first record requested.

Explanation: There was an error reading the log data set.

User Response: If the error continues, contact the system programmer.

System Programmer Response: This may be a DASD problem. Attempt to delete the log data set and then

try to recreate the log entry. If the error continues, contact IBM support.

ISPYL015 Insufficient storage - Not enough storage is available for browse to proceed.

Explanation: There was an error while attempting to browse the log data set.

User Response: Terminate ISPF and allocate more region storage before running ISPF again. If the error still occurs, contact the system programmer.

System Programmer Response: If the region size satisfies the ISPF requirements, contact IBM support.

ISPYL016 Invalid browse panel - Panel ISPYLP1 is invalid. Contact the system programmer.

Explanation: The ISPYLP1 panel being referenced cannot be used by the BROWSE service. Contact your system programmer.

System Programmer Response: Correct the problem with ISPYLP1. If you cannot determine the error in the panel, contact IBM support.

ISPYL017 Recursion error - Recursive use of ISPF functions (in this case browse) is not allowed.

Explanation: BROWSE is already active, you cannot activate BROWSE again.

User Response: End one of the BROWSE sessions.

ISPYL018 Browse severe error - Severe error occurred in module ISRCBR.

Explanation: Browse has returned an RC=20. Contact your system programmer.

System Programmer Response: If BROWSE functions correctly using the BROWSE option, contact IBM support.

ISPYP011 Parameter missing - Either panel name or message must be entered.

Explanation: This panel requires either a panel name or message ID.

Programmer Response: Enter a panel name or message ID.

ISPYP012 aaaaaaaaa failed - bbbbbbbb returned return code ccccccc request(dddddddd)

Explanation: There was an internal ISPF error. Contact the system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPF Messages

ISPYP013 **.RESP=ENTER reset - The panel contained a .RESP=ENTER statement. The value has been ignored for this display request.**

Explanation: This is an informational message. When displaying a panel from option 2 of Dialog Test, a .RESP=ENTER statement will cause an infinite loop. To avoid this looping situation, ISPF will ignore the .RESP=ENTER for the display from this option.

ISPYP014 **.RESP=ENTER changed - The panel contained a .RESP=ENTER statement. This value was overridden in order to exit this display request.**

Explanation: This is an informational message. When displaying a panel from option 2 of Dialog Test, a .RESP=ENTER statement will cause an infinite loop. To avoid this looping situation, ISPF will alter a .RESP=ENTER in the)PROC or)REINIT section to .RESP=END in order to exit the display request.

ISPYR011 **Command not recognized - Valid line commands are: I (insert), D (delete), R (repeat).**

Explanation: An invalid line command was entered.

Programmer Response: Enter one of the correct line commands.

ISPYR012 **Command conflict - 'aaaaaaaa' is within range of the D command. Correct either one.**

Explanation: There is a line command that is within the range of the D command. The delete routine would delete the line when the DELETE completed.

Programmer Response: Correct the line commands.

ISPYR013 **Invalid active status - Active status type not recognized, specify YES or NO.**

Explanation: The Active field must be YES or NO.

Programmer Response: Correct the Active field status to YES or NO.

ISPYR014 **Too many parameters - No parameters are defined for this command.**

Explanation: Parameters are allowed with this command.

Programmer Response: Correct the command. Parameters are only allowed with the LOCATE command.

ISPYR015 **Invalid command - 'aaaaaaaa' is not a valid trace command.**

Explanation: The command used is not valid for the trace function.

Programmer Response: Use the HELP command if you are not sure what commands are valid for the trace function.

ISPYR016 **Invalid function name - The function name specified does not follow ISPF naming convention.**

Explanation: The function name entered is invalid.

Programmer Response: Enter a correct function name.

ISPYR022 **ISPYRFI failed - aaaaaaaa returned rc (bbbbbbbb) request (cccccccc failed during setup).**

Explanation: The function failed to initialize properly.

Programmer Response: This is a system error or an ISPF internal error. If the error continues, contact the system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPYR023 **ISPYRFI failed - aaaaaaaa returned rc (bbbbbbbb) request (cccccccc failed during create table).**

Explanation: The table used for the trace could not be created.

Programmer Response: If the error continues, contact the system programmer.

System Programmer Response: Verify that the TBCREATE works outside of the dialog test option. If the TBCREATE only fails in dialog test, and you do not have mixed levels of ISPF code, contact IBM support.

ISPYR024 **ISPYRFI failed - aaaaaaaa returned rc (bbbbbbbb) request (cccccccc failed during initialize table).**

Explanation: The trace function did not initialize.

Programmer Response: If the problem continues, contact the system programmer.

System Programmer Response: This could be a system error or an ISPF internal error. If you do not have mixed levels of ISPF code, contact IBM support.

ISPYR025 **ISPYRFI failed - aaaaaaaa returned rc (bbbbbbbb) request (cccccccc failed during edit control).**

Explanation: The trace routines failed while the tables were being initialized for editing.

Programmer Response: This is possibly an internal error caused by either a system error or mixed levels of ISPF code. If the error continues, contact the system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPYR026 **ISPYRFI failed - aaaaaaaa returned rc (bbbbbbbb) request (cccccccc failed during build chain).**

Explanation: There was a failure while building the breakpoint chain.

Programmer Response: This is possibly an internal error caused by either a system error or mixed levels of ISPF code. If the error continues, contact the system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPYR031 **Function name required - Enter a function name or ALL for all functions.**

Explanation: A function name is required.

Programmer Response: Either enter a function name or enter HELP for additional information.

ISPYR032 **Invalid service name - 'aaaaaaa' is not a valid dialog management service.**

Explanation: The service name entered is invalid.

Programmer Response: Enter a valid ISPF service name.

ISPYR033 **Invalid service name - A service name must not be longer than 8 characters.**

Explanation: The service name exceeds 8 characters.

Programmer Response: Enter a valid ISPF service name.

ISPYR034 **'aaaaaaa' not found - The function name does not exist in the trace list.**

Explanation: The function name entered with the LOCATE command does not exist.

Programmer Response: Enter another function name with the LOCATE command.

ISPYR035 **'aaaaaaa' found - Function name was located, and appears on the first line.**

Explanation: This is an informational message.

ISPYR037 **Enter function name - Enter the name of the function to be located.**

Explanation: A function name must be entered with the LOCATE command.

Programmer Response: Enter a function name to be used with the LOCATE command.

ISPYR038 **Too many parameters - A function name is the only valid parameter for the LOCATE command.**

Explanation: Data was entered beyond the function name when the LOCATE command was entered.

Programmer Response: Remove any data following the function name.

ISPYR039 **Invalid function name - A function name must not be longer than 8 characters.**

Explanation: The function name exceeds 8 characters.

Programmer Response: Enter a valid function name with the LOCATE command.

ISPYR041 **Variable name required - Enter a variable name or ALL for all variables.**

Explanation: The TRACE panel requires a variable name or ALL for tracing.

Programmer Response: Enter ALL or a variable name in the variable field.

ISPYR042 **Enter variable name - Enter the name of the variable to be located.**

Explanation: No variable name was entered with the LOCATE command.

Programmer Response: Enter a variable name with the LOCATE command.

ISPYR043 **Too many parameters - A variable name is the only valid parameter for the LOCATE command.**

Explanation: The LOCATE command does not allow data after the variable name.

Programmer Response: Remove the data following the variable name.

ISPF Messages

ISPYR044 **Invalid variable name - A variable name must not be longer than 8 characters.**

Explanation: The variable name exceeds 8 characters.

Programmer Response: Correct the variable name.

ISPYR045 **Invalid operation - Valid operations are GET, PUT, CHG, or ALL.**

Explanation: Valid entries for the Operation field are GET, PUT, CHG, or ALL.

Programmer Response: Correct the entry in the Operation field.

ISPYR046 **Invalid pool specified - Enter F (function), S (shared), P (profile).**

Explanation: The entry in the Pool field must be F, S, or P.

Programmer Response: Correct the entry in the Pool field.

ISPYR047 **'aaaaaaa' not found - The variable name does not exist in the trace list.**

Explanation: The variable was not found in the trace list.

Programmer Response: Enter another variable name with the LOCATE command.

ISPYR048 **'aaaaaaa' found - Variable name was located, and appears on the first line.**

Explanation: This is an informational message.

ISPYR049 **Invalid variable syntax - Variable name must be alphanumeric and the first character cannot be numeric.**

Explanation: There is a syntax violation in the variable name.

Programmer Response: Correct the variable name.

ISPYS011 **Enter dialog service - The desired dialog service and its parameters must be entered.**

Explanation: You must enter an ISPF service and any required parameters.

Programmer Response: Enter an ISPF service and any required parameters.

ISPYS012 **Service rc = aaaaaaaa - The specified dialog service completed with a return code of aaaaaaaa.**

Explanation: This is an informational message.

ISPYS013 **CONTROL not allowed - The dialog CONTROL service cannot be invoked from this panel.**

Explanation: This message is self-explanatory.

Programmer Response: Do not attempt to invoke ISPF CONTROL service from this panel.

ISPYS014 **aaaaaaa failed - bbbbbbbb returned return code cccccc request (ddddddd).**

Explanation: The requested function has failed with a severe error.

Programmer Response: Verify that the requested function will work correctly outside of Dialog Test before contacting IBM support.

ISPYS015 **Data will be saved - Data entered on this screen will be saved upon exit.**

Explanation: This is an informational message. Data that the user enters on this panel will be saved when the user exits the panel.

ISPYS016 **Data will be cleared - Data entered on this screen will not be saved upon exit.**

Explanation: This is an informational message. Data that the user enters on this panel will not be saved when the user exits the panel.

ISPYT010 **Table is not open - Function requires an open table, open via option 6.**

Explanation: The table must be open using Dialog Test option 6 before you can perform the requested function against the table.

User Response: Contact the responsible programmer.

Programmer Response: Use Dialog Test option 6 and the TBOPEN service to open the table.

ISPYT011 **Table not found - The specified table could not be found.**

Explanation: The table could not be found in the ISPTLIB allocations.

User Response: Contact the responsible programmer.

Programmer Response: Correct the allocations to ISPTLIB, or create the table.

ISPYT012 **Invalid command - 'aaaaaaaa' is not a valid command for this table operation.**

Explanation: The command entered is invalid for this panel.

User Response: Contact the responsible programmer.

Programmer Response: Enter a valid command, such as LOCATE.

ISPYT013 **'aaaaaaaa' not found - The key or name 'bbbbbbbb' was not found in the table.**

Explanation: This is an informational message.

ISPYT014 **'aaaaaaaa' was found - The key or name 'bbbbbbbb' was found in the table.**

Explanation: This is an informational message.

ISPYT015 **Table in use - The specified table is in use by another user, it cannot be opened.**

Explanation: This table is being used by another user and cannot be used by you now.

Programmer Response: The other user must close the table before you can use it.

ISPYT016 **Library not allocated - The input table library is not allocated.**

Explanation: The library that contains the table has not been allocated.

User Response: Contact the responsible programmer.

Programmer Response: If the table is required, the library must be allocated.

ISPYT017 **Enter table name - The name of the table is required.**

Explanation: You must enter a table name.

User Response: Contact the responsible programmer.

Programmer Response: Enter a table name to continue.

ISPYT018 **Enter option - A valid option must be entered.**

Explanation: One of the listed options must be entered.

Programmer Response: Enter one of the numerical options that is listed.

ISPYT019 **Invalid option - Your selection is not valid.**

Explanation: You must enter one of the numeric options that is listed.

Programmer Response: Enter one of the numeric options that is listed.

ISPYT020 **Name too long - Variable names are eight characters maximum.**

Explanation: The variable name is too long.

Programmer Response: Correct the variable name.

ISPYT021 **Row not added - Blank row was not added, operation was cancelled.**

Explanation: This is an informational message. The operation was cancelled; the blank row was not added.

ISPYT022 **Invalid hex data - Enter valid hex characters in multiples of two.**

Explanation: Hexadecimal characters must be entered in multiples of two.

Programmer Response: Correct the hexadecimal entry.

ISPYT024 **Table aaaaaaaaa opened - Table aaaaaaaaa opened in bbbbbbbb mode by dialog test.**

Explanation: This is an informational message.

ISPYT025 **Table aaaaaaaaa closed - Table aaaaaaaaa closed by dialog test.**

Explanation: This is an informational message.

ISPYT031 **No argument specified - A search argument is necessary for the LOCATE command.**

Explanation: Before the LOCATE command can be run, a value to be searched for must be entered.

Programmer Response: Enter a value following the LOCATE command.

ISPYT032 **Row number invalid - Row number must be greater than zero.**

Explanation: This message is self-explanatory.

ISPYT033 **'aaaaaaaa' was found - Variable 'aaaaaaaa' was found in the row.**

Explanation: This is an informational message.

ISPF Messages

ISPYT034 **'aaaaaaaa' not found - Variable 'aaaaaaaa' was not found in the row.**

Explanation: This is an informational message.

ISPYT035 **Command conflict - A line command is within the range of the D command. Correct either one.**

Explanation: There is a line command that would not be processed because that line would be deleted when the DELETE line command is completed.

Programmer Response: Correct the conflicting line commands.

ISPYT036 **Invalid name - Variable name characters/syntax is not valid.**

Explanation: The variable name syntax is in error.

Programmer Response: Correct the variable name.

ISPYT037 **Too many parameters - No parameters are defined for the 'CANCEL' command.**

Explanation: The CANCEL command does not allow parameters.

Programmer Response: Remove the data following the CANCEL command.

ISPYT038 **Too many parameters - Only one argument may be entered with the LOCATE command.**

Explanation: Only one name can be used with the LOCATE command.

Programmer Response: Correct the LOCATE command.

ISPYT039 **Use TOP - Use TOP for adding row 1.**

Explanation: Enter TOP to add a new row as the first row.

Programmer Response: Enter TOP for row number.

ISPYT040 **Key/name protected - Key and name variables may not be deleted.**

Explanation: The DELETE command is not allowed on key and name variables.

Programmer Response: Do not attempt to delete protected variables.

ISPYT041 **Row exceeds table size - The specified row number is greater than the table size.**

Explanation: The row number entered exceeds the number of rows in the table.

Programmer Response: Display the structure to determine the number of rows, or enter a correct row number.

ISPYT042 **Invalid row identity - The table row must be specified as a number.**

Explanation: This message is self-explanatory.

ISPYT043 **Row not identified - Enter a search argument or a row number.**

Explanation: This option requires a row number or a search argument.

Programmer Response: Enter a row number or search argument.

ISPYT044 **Function invalid - The function code is not valid.**

Explanation: The function code is invalid.

Programmer Response: If a valid option was entered, this could be an internal error. Contact your system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPYT045 **Row not found - No row matches the search argument.**

Explanation: This message is self-explanatory.

ISPYT046 **Row found - A row matching the search argument was found.**

Explanation: This is an informational message.

ISPYT047 **Row not deleted - The specified row was not deleted from the table.**

Explanation: This is an informational message. END was entered, and the DELETE command was ignored.

ISPYT048 **Row aaaaaaaa deleted - Row aaaaaaaa was deleted from the table.**

Explanation: This is an informational message.

ISPYT049 **Row not deleted - No match searching keyed table, or CRP was at top.**

Explanation: The row could not be deleted because no match was found.

Programmer Response: Enter another search argument for the DELETE command.

ISPYT050 **Key/name not modifiable - Key and name variables may not be changed.**

Explanation: The key and names variable names cannot be changed.

Programmer Response: Do not attempt to change key or names variable names.

ISPYT051 **Keys are not unique - Another row in the table has the same key values.**

Explanation: You cannot have two key variables with the same value.

Programmer Response: Provide another value for the key variable.

ISPYT052 **Row modified - The specified row has been modified.**

Explanation: This is an informational message.

ISPYT053 **Row added - A new row has been added following the current row.**

Explanation: This is an informational message.

ISPYT054 **Operation cancelled - No rows have been added or modified.**

Explanation: This is an informational message.

ISPYT055 **Row not added - A row has not been added to the table.**

Explanation: This is an informational message.

ISPYT056 **Table is at top - Display, modify and CANCEL are not valid when the table is at top.**

Explanation: This message is self-explanatory.

Programmer Response: Use a row number when the table is at top.

ISPYT057 **Invalid line command - Valid table commands are I (insert), R (repeat), and D (delete).**

Explanation: An invalid line command was used.

Programmer Response: Use only valid line commands.

ISPYT058 **Top is not valid - Top is only valid for adding a row.**

Explanation: This message is self-explanatory.

ISPYT060 **Enter WRITE or NOWRITE - Save option is specified as WRITE or NOWRITE.**

Explanation: This message is self-explanatory.

User Response: Enter WRITE or NOWRITE.

ISPYT070 **Windowed panel - The panel or panels for the selected option will appear in a pop-up window.**

Explanation: This is an informational message. The user selected a pull-down menu that changed the display of an option from a full screen display to a windowed display.

ISPYT071 **Full screen panel - The panel or panels for the selected option will appear in a full screen display.**

Explanation: This is an informational message. The user selected a pull-down menu that changed the display of an option from a windowed display to a full screen display.

ISPYT072 **Retrieved - The command has been retrieved.**

Explanation: This is an informational message. The command in the retrieve area of the panel has been retrieved to the command area.

ISPYV001 **Invalid pool specified - Enter F, I, S, or P.**

Explanation: An incorrect variable pool was entered.

Programmer Response: Enter one of the correct variable pools.

ISPF Messages

ISPYV002 **Command not recognized - The valid line commands are I (insert) and D (delete).**

Explanation: An incorrect line command was entered.

Programmer Response: Enter one of the correct line commands.

ISPYV003 **Duplicate variable - Variables within each pool must have unique names.**

Explanation: The variable name already exists within the pool. Variable names must be unique.

Programmer Response: Enter a unique variable name.

ISPYV004 **Invalid command - The command entered is not a valid variables command.**

Explanation: An invalid command was entered.

Programmer Response: Enter a valid command, or enter HELP for a list of valid commands.

ISPYV005 **No argument specified - A search argument is necessary for the LOCATE command.**

Explanation: The LOCATE command requires that you enter the data to use for the search.

Programmer Response: Enter a search argument with the LOCATE command.

ISPYV006 **Variable name found - The specified variable appears at the top of the display.**

Explanation: This is an informational message.

ISPYV007 **Variable name not found - The specified variable was not found in the variables list.**

Explanation: The specified variable does not exist in the variables list.

Programmer Response: Enter another variable, or enter HELP for additional information.

ISPYV008 **Non-modifiable variable - This is a system variable and may not be altered/deleted by the user.**

Explanation: This is an informational message. Type Z system variables may not be altered or deleted.

ISPYV009 **Variable name required - A variable name is required if data is entered for pool or value.**

Explanation: Variable pool information or a variable value was entered, but the variable name was not entered.

Programmer Response: Enter a variable name.

ISPYV011 **Invalid hex data - Enter valid hex characters in multiples of two.**

Explanation: Hexadecimal characters must be entered in multiples of two.

Programmer Response: Correct the hexadecimal character entry.

ISPYV012 *aaaaaaaa failed - bbbbbbbb returned return code cccccccc request (dddddddd).*

Explanation: The above service and request did not complete processing.

Programmer Response: If the error continues, contact the system programmer.

System Programmer Response: This could be an internal error or a system error. If you do not have mixed levels of ISPF code, contact IBM support.

ISPYV013 **Invalid variable syntax - Variable name must be alphanumeric and the first character cannot be numeric.**

Explanation: The variable name violates variable name syntax.

Programmer Response: Enter a valid variable name.

ISPYV014 **Delete not allowed - The indicated line may not be deleted.**

Explanation: The DELETE command is not valid for this line.

Programmer Response: Do not attempt to delete variables that are not modifiable.

ISPYV015 **Delete not allowed - Multiple DELETE line command not allowed.**

Explanation: The DELETE line command is limited to one line for each D.

Programmer Response: Enter a D for each line to be deleted.

ISPYV301 **Internal test error - Unable to** *aaaaaaaa*
storage for variable *bbbbbbbb*.

Explanation: A storage problem prevented the function from ending.

Programmer Response: If the problem continues, contact the system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPYV303 **Invalid variable name - Variable name**
aaaaaaaa **is syntactically incorrect.**

Explanation: The variable name failed the ISPF syntax check.

Programmer Response: Correct the variable name.

ISPYV304 **Invalid function request - Request**
aaaaaaaa **is undefined.**

Explanation: The request is not valid in ISPF, and did not complete processing.

Programmer Response: If the problem continues, contact the system programmer.

System Programmer Response: This is a system or internal error. If you do not have mixed levels of ISPF code, contact IBM support.

ISPYV305 **Invalid pool name - Variable pool**
aaaaaaaa **is undefined.**

Explanation: The variable pool that was entered is invalid.

Programmer Response: Enter a valid variable pool, or enter HELP for additional information.

ISPYV306 **Invalid hex data - Variable** (*aaaaaaaa*)
value (*bbbbbbbb*).

Explanation: The hexadecimal data could not be converted.

Programmer Response: Correct the hexadecimal data. If the error continues, contact IBM support.

ISPYV307 **End quote missing - Variable** (*aaaaaaaa*)
value (*bbbbbbbb*).

Explanation: This message is self-explanatory.

ISPYX001 **Test severe error - Details precede this**
message in the ISPF log.

Explanation: The function failed to complete.

Programmer Response: Check the ISPF log for additional information about this error.

ISPYX002 **Recursive Dialog Test - Dialog Test may**
only be entered once in each screen.

Explanation: You attempted to enter Dialog Test for a second time in one screen. You may only enter Dialog Test once per screen.

User Response: Either split the screen and enter Dialog Test from the new screen or back out of the panels being displayed in the current screen until you reach Dialog Test again.

ISPYX200 **Dialog trace ----- -**
Application(*aaaaaaaa*.) **Function**(*bbbbbbbb*.)
Screen(*cccccccc*.)

Explanation: This is an informational message.

ISPYX201 *aaaaaaaa bbbbbbbb ... cccccccc - dddddddd*

Explanation: This is an informational message.

ISPYX202 *aaaaaaaa*

Explanation: This is an informational message.

ISPYX203 **..Return code** (*aaaaaaaa*.) - *bbbbbbbb*

Explanation: This is an informational message.

ISPYX211 *aaaaaaaa* **Pool** (*bbbbbbbb*.) *cccccccc -*
dddddddd

Explanation: This is an informational message.

ISPYX212 *..aaaaaaaa* **by** *bbbbbbbb* - *ccccccc*

Explanation: This is an informational message.

ISPYX213 *..aaaaaaaa - bbbbbbbb*

Explanation: This is an informational message.

ISPYX301 *aaaaaaaa* **failed - bbbbbbbb returned return**
code *ccccccc*. **Request** (*dddddddd*).

Explanation: The function did not complete.

Programmer Response: If the error continues, contact the system programmer.

System Programmer Response: This is a system error or internal error. Verify that the user's region is large enough for ISPF minimum requirements. If the error continues, contact IBM support.

ISPYX302 *aaaaaaaa* **failed - bbbbbbbb returned return**
code *ccccccc*. **Request** (**Get test common**
area).

Explanation: There is an error in storage management. The function was not completed.

ISPF Messages

Programmer Response: If the error continues, contact the system programmer.

System Programmer Response: This is a system error or internal error. Verify that the user's region size is large enough for ISPF minimum requirements. If the error continues, contact IBM support.

ISPYX321 **Dialog Test recursion - Invocation of the Dialog Test option may not occur while in that option.**

Explanation: This message is self-explanatory.

ISPYX322 **Not in Dialog Test - The Dialog Test option must be used to select a Test suboption.**

Explanation: You cannot directly call the Dialog Test suboptions. The Dialog Test option must be entered before Test suboptions can be selected.

Programmer Response: Do not attempt to select Test suboptions outside of the Dialog Test option.

ISPYX323 **Not in Test mode - A Dialog Test suboption may not be selected in user mode.**

Explanation: A Dialog Test suboption was selected while in user mode. User mode is entered when a breakpoint returns control to the user.

Programmer Response: Do not attempt to enter Dialog Test mode or select Test suboptions while in user mode.

ISPYX351 **Internal test error - Invalid test chain manager aaaaaaaaa request bbbbbbbb.**

Explanation: There was an error while the test chain manager was processing.

Programmer Response: If the error continues, contact the system programmer.

System Programmer Response: A system or internal error has occurred. Contact IBM support.

ISPYX352 **Internal test error - Unable to free test chain aaaaaaaa.**

Explanation: An error occurred while the test chain manager was attempting to free some event areas.

Programmer Response: If the error continues, contact the system programmer.

System Programmer Response: A system or internal error has occurred. Contact IBM support.

ISPYX353 **Internal test error - Unable to get block for test chain aaaaaaaa.**

Explanation: An error has occurred while attempting to get storage for the test chain manager.

Programmer Response: If the error continues, contact the system programmer.

System Programmer Response: If the region size meets ISPF minimum requirements, contact IBM support.

ISPYX361 **Internal test error - Invalid test trace routine caller aaaaaaaa.**

Explanation: The function was not completed because of an ISPF internal error.

Programmer Response: Contact your system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPYX371 **Internal test error - Invalid test main routine caller aaaaaaaa.**

Explanation: The function was not completed because of an ISPF internal error.

Programmer Response: Contact your system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPYX381 **Internal test error - Invalid test environment manager request aaaaaaaa.**

Explanation: The function could not be completed.

Programmer Response: This may be an ISPF internal error. Contact your system programmer.

System Programmer Response: If you do not have mixed levels of ISPF code, contact IBM support.

ISPYX401 **aaaaaaaa has no effect - Select an option and press the Enter key to leave this panel.**

Explanation: This message is self-explanatory.

ISPZZ100 **Row aaaaaaaa of bbbbbbbb**

Explanation: This is an informational message. This is the text used for the top-row-displayed indicator on table display panels with CUA Mode set to OFF.

ISPZZ101 *aaaaaaaa*

Explanation: This is an informational message. This is a null message used for the top-row-displayed indicator on table display panels when no rows are being displayed.

ISPZZ102 **Row** *aaaaaaaa* **to** *bbbbbbbb* **of** *ccccccc*

Explanation: This is an informational message. This is the text used for the top-row-displayed indicator on table display panels with CUA Mode set to ON and ROWS set to ALL in the panel model section.

ISPZZ103 **Row** *aaaaaaaa* **from** *bbbbbbbb*

Explanation: This is an informational message. This is the text used for the top-row-displayed indicator on table display panels with CUA Mode set to ON and Rows set to SCAN in the panel model section.

ISPZ000 *aaaaaaaa - bbbbbbbb*

Explanation: This is an informational message.

ISPZ001 **Invalid command -** *aaaaaaaa* **is undefined.**

Explanation: An invalid command was entered on the panel.

User Response: Enter a command that is valid for the corresponding panel.

ISPZ002 **Invalid command -** *aaaaaaaa bbbbbbbb* **is undefined.**

Explanation: The command entered is not defined.

User Response: Enter a command that is valid for the corresponding panel.

Programmer Response: Ensure that the proper commands are in the command table under the correct application ID.

Chapter 2. PDF Messages

ISRB000 **Parameter missing – BROWSE service requires either DATASET or DATAID parameter.**

Explanation: The BROWSE service requires either the DATASET or DATAID parameter.

Programmer Response: Include either the DATASET or DATAID parameter on the BROWSE service.

ISRB001 **Data ID not found – Data ID parameter passed to browse is not defined. Use LMINIT.**

Explanation: The DATAID specified on the BROWSE service has not been initialized using LMINIT.

Programmer Response: Use LMINIT to initialize the dataid prior to issuing the BROWSE service.

ISRB002 **Invalid parameter - BROWSE service parameters are specified in an invalid combination.**

Explanation: An invalid combination of parameters was specified on the BROWSE service. MEMBER or DATAID cannot be used with DATASET. VOLUME or PASSWORD cannot be used with DATAID.

Programmer Response: Correct the BROWSE service parameters.

ISRB003 **OPEN error – An error occurred while trying to open the PDS.**

Explanation: An error occurred opening the partitioned data set for input.

User Response: Try the operation again. If the error reoccurs, contact your system programmer for assistance.

System Programmer Response: Determine why the input data set cannot be opened and correct the problem.

ISRB004 **I/O error - I/O error while trying to build the member list.**

Explanation: An I/O error occurred while reading the partitioned data set directory.

User Response: Try the operation again. If the error recurs, contact your system programmer for assistance.

System Programmer Response: Determine why the partitioned data set is getting I/O errors and correct the problem.

ISRB005 **Incomplete string - Put a quote to indicate the end of the string.**

Explanation: A quotation mark was found indicating the beginning of a quoted string but no matching quotation mark was found to indicate the end of the string.

User Response: Use a quotation mark to end the quoted string.

ISRB006 **Insufficient storage - BROWSE will continue, using as much of the display screen as possible.**

Explanation: There is insufficient virtual storage to read the entire data set into storage. Browse will continue, displaying as much of the data as will fit into virtual storage.

ISRB007 **Member not found - The requested member was not found in the PDS directory(s).**

Explanation: This is an informational message.

ISRB008 **BLDL error - I/O error, insufficient virtual storage, or other BLDL error.**

Explanation: An I/O error, insufficient virtual storage to process the BLDL, or other problems were encountered processing a BLDL.

User Response: Try the operation again. If the error recurs, contact your system programmer for assistance.

System Programmer Response: Determine what is wrong with the data set and correct the problem.

ISRB009 **No members in data set - The PDS specified contains no members.**

Explanation: This is an informational message.

ISRB010 **Invalid command - The command entered is not valid for BROWSE.**

Explanation: You entered something that is not a valid command for BROWSE.

User Response: Enter a valid command. Valid primary commands in BROWSE are BROWSE, COLUMNS, DISPLAY, FIND, HEX, LOCATE, RESET, SUBMIT, EDIT, and VIEW.

PDF Messages

ISRB011 Severe error - Unexpected return code from ISRCBR.

Explanation: An unexpected return code was received from module ISRCBR.

User Response: Retry the operation. If the error recurs, contact your system programmer for assistance.

System Programmer Response: Record what the user was doing when the error occurred. Try to reproduce the error using a different userid and data set. If the error persists, contact IBM support.

ISRB012 Bad directory - Directory block size exceeds maximum of 256.

Explanation: The partitioned data set directory has an incorrect blocksize.

User Response: Contact your system programmer.

System Programmer Response: Reproduce the partitioned data set with a directory blocksize of 256.

ISRB013 Enter label or number - Enter the line number or the label of the line to be displayed.

Explanation: The LOCATE command was entered with no parameter.

User Response: Enter the LOCATE command followed by either a relative line number or a previously defined label.

ISRB014 Invalid parameter - A number or label (.xxxx) is the only valid parameter.

Explanation: The LOCATE command was entered with an invalid parameter. A valid parameter is either a previously defined label or a relative line number. The maximum length of the parameter is 8 characters.

User Response: Enter the LOCATE command with a valid parameter.

ISRB015 Label not defined - The label specified has not yet been defined.

Explanation: The LOCATE command was entered with a label that has not been defined.

User Response: Use a previously defined label or a relative line number as the parameter for the LOCATE command.

ISRB016 Invalid label - A label must be 1 to 8 chars long including the initial period.

Explanation: The LOCATE command was entered with a label that is greater than 8 characters long.

User Response: Enter the LOCATE command with a

valid label or a relative line number as the parameter.

ISRB017 Label 'aaaaaaaa' located - Label 'aaaaaaaa' (line bbbbbbbb) was located.

Explanation: This is an informational message.

ISRB018 Label 'aaaaaaaa' assigned - Label 'aaaaaaaa' is assigned to line bbbbbbbb.

Explanation: This is an informational message.

ISRB019 Label 'aaaaaaaa' reassigned - Label 'aaaaaaaa' is reassigned to line bbbbbbbb.

Explanation: This is an informational message.

ISRB100 Panel error - The data display panel to be used does not exist or is not usable.

Explanation: The panel specified for use to display the data does not exist or is unusable.

Programmer Response: Correct the BROWSE or BRIF service to use a valid data display panel.

ISRB101 Enter character string - Enter the string of characters to be displayed.

Explanation: You entered the FIND command with no character string to find.

User Response: Enter the FIND command followed by the string of characters that you want to find.

ISRB102 Invalid keyword - Check spelling of keywords used with the FIND command.

Explanation: The FIND command has an unrecognizable keyword parameter. You may have entered a FIND command with quotes that do not correctly delimit the string that you want to find and BROWSE is attempting to interpret the remainder of the string as a keyword.

User Response: Correct the spelling of the FIND keywords, or correct the use of quotes to delimit the string.

ISRB103 Enter a FIND command - The RFIND key works only after a FIND character string is entered.

Explanation: This is an informational message.

ISRB104 **Put string in quotes - Put quotes (' ') around the string of characters to be displayed.**

Explanation: The FIND command was entered followed by two or more words (strings of characters delimited by blanks) that are not recognized keywords of FIND. To find these words, you must enclose them in single quotation marks to indicate that they are a single string.

User Response: Enclose the string for FIND in single quotation marks.

ISRB105 *aaaaaaaa bbbbbbbb cccccccc - bbbbbbbb dddddddd found aaaaaaaaa times within cols eeeeeeee to ffffffff.*

Explanation: This is an informational message.

ISRB106 *aaaaaaaa bbbbbbbb found - Search for aaaaaaaaa cccccccc in cols dddddddd to eeeeeeee was successful.*

Explanation: This is an informational message.

ISRB107 **Empty data set or member - Empty PDS member or sequential data set has been requested.**

Explanation: This is an informational message.

ISRB108 **I/O error - An I/O error was encountered reading the first record requested.**

Explanation: An I/O error occurred reading the first record of the data set.

User Response: Retry the operation. If the error recurs, contact your system programmer for assistance.

System Programmer Response: Determine why the data set is getting I/O errors and correct the problem.

ISRB109 **Insufficient storage - Not enough storage is available for BROWSE to proceed.**

Explanation: There is insufficient virtual storage for BROWSE to continue processing.

User Response: Reduce your use of virtual storage by ending panels that you are not using, such as recursive BROWSE or EDIT sessions or other ISPF panels that you are using in pull-downs and so forth. Retry the operation.

ISRB110 **Invalid data set - Data set for SUBMIT command must be fixed 80.**

Explanation: The record format or LRECL of the data set you are browsing is not fixed 80. Only fixed 80 data sets can be processed by the SUBMIT command.

ISRB111 **SUBMIT not supported - SUBMIT command is not supported for BRIF service**

Explanation: This is an informational message.

ISRB112 **Packed data error - Invalid packed data format. Data set possibly corrupted.**

Explanation: The data set that you are attempting to Browse or Edit has data that appears to be packed but is not in the format that is valid for ISPF packed data. The data set may be corrupted.

System Programmer Response: Determine whether the data set should be ISPF packed or not. Investigate possible corruption of the data set.

ISRB113 **Multivolume managed ds - Multivolume managed data sets are not supported in BROWSE.**

Explanation: This is an informational message.

ISRB114 **Partial data displayed - This is a multivolume data set. If you did not specify a volume, the data on all volumes will be displayed. Otherwise, only the data on the volume that you specified will be displayed.**

Explanation: This is an informational message.

ISRB115 **Invalid data set - Data set for SUBMIT command cannot contain packed data.**

Explanation: This is an informational message.

ISRB116 **SUBMIT not allowed - Your installation does not allow the SUBMIT command from Browse.**

Explanation: Your installation has indicated in the configuration table that the Browse SUBMIT command should be disabled.

ISRB117 **SUBMIT not executed - The member you are browsing has changed. If you exit from Browse and reenter, you will see the changes that have been made.**

Explanation: The Browse SUBMIT command is not allowed if the member being browsed has been modified by another user since the start of the browse session.

User Response: Exit the browse session for that member and reenter. You will then be browsing the member as it currently exists and can determine if it should be submitted.

PDF Messages

ISRB118 **SUBMIT not allowed - Your installation does not allow the SUBMIT command from View.**

Explanation: Your installation has indicated in the configuration table that the View SUBMIT command should be disabled.

ISRB150 **FIND string too long - The FIND string cannot be longer than 40 characters in browse.**

Explanation: The FIND string must be less than or equal to 40 characters in length.

User Response: Enter a FIND string of 40 characters or less.

ISRB151 **Invalid character string - The FIND string cannot be a null (") string.**

Explanation: The FIND string cannot be a null string.

User Response: Enter a valid FIND string.

ISRB152 **Invalid character - Invalid special character for a picture (P'xxx') string.**

Explanation: The value entered is invalid for P'xxx' is invalid as a picture string.

User Response: Enter a valid FIND string.

ISRB153 **Put string in quotes - Put quotes (' ') around the string of characters to be displayed.**

Explanation: A string of characters was entered that must be enclosed in single quotation marks to specify it as a string to be found.

User Response: Enclose the string in single quotation marks.

ISRB154 **Invalid keyword - The keywords 'aaaaaaaa' and 'bbbbbbbb' cannot both be used. Delete one.**

Explanation: Two mutually exclusive keywords were entered.

User Response: Use only one of the keywords.

ISRB155 **Invalid parameter - The string will not fit within columns aaaaaaaa and bbbbbbbb.**

Explanation: The string that was entered to be found is longer than the LRECL of the data set or will not fit between the columns specified.

User Response: Enter a FIND string that is shorter than or equal in length to the LRECL of the data set, or correct the columns specified.

ISRB157 **Invalid boundary number - Only two numbers (left and right bounds) can be part of a FIND command.**

Explanation: More than two numbers were entered as part of a FIND command. Only two numbers (left and right bounds) are allowed as parameters for the FIND command.

ISRB158 **Invalid left boundary - The left boundary exceeds the record length (LRECL).**

Explanation: The left boundary used in the FIND command cannot exceed the record length (LRECL) of the data set.

ISRB159 **Invalid boundary number - The left boundary must come first and must be smaller than the right.**

Explanation: The boundary parameters of the FIND command must be specified with the left boundary first and the left boundary must be smaller than the right boundary.

ISRB161 **Enter character string - A character string for FIND has not been entered (so * is invalid).**

Explanation: A character string must be entered as a parameter to the FIND command.

User Response: Enter the character string that you want to find in the displayed file.

ISRB162 **Invalid hex string - The hex string must have an even number of hex digits.**

Explanation: A hex string entered as a parameter to the FIND command must have an even number of digits.

User Response: Correct the hex FIND string.

ISRB163 **No aaaaaaaa bbbbbbbb found - aaaaaaaa bbbbbbbb - not found within cols cccccccc to dddddddd.**

Explanation: No occurrence of the FIND string was found within the boundaries specified on the FIND command.

ISRB164 **Invalid hex string - The hex string must contain only hex digits (0-9, A-F).**

Explanation: Only hex digits (0-9, A-F) are valid when specifying a hex FIND string (x'nnnn').

User Response: Correct the FIND string.

ISRB165 *** Top of data reached * - aaaaaaaa
bbbbbbbb not found. Press RFIND key to
continue from bottom.**

Explanation: No occurrence of the FIND string was found from the point of the beginning of the search to the beginning of the data.

User Response: Press RFIND to continue the FIND from the end of the data.

ISRB166 ***Bottom of data reached* - aaaaaaaa
bbbbbbbb not found. Press RFIND key to
continue from top.**

Explanation: No occurrence of the FIND string was found from the point of the beginning of the search to the end of the data.

User Response: Press RFIND to continue the search from the beginning of the data.

ISRB167 **I/O error encountered - I/O error was
detected while performing the FIND
command.**

Explanation: An I/O error occurred while reading data to process the FIND command.

User Response: Try the operation again. If the error recurs, contact your system programmer for assistance.

System Programmer Response: Determine the cause of the I/O error, and correct the problem.

ISRB168 **BROWSE terminated - I/O error was
detected while processing a BROWSE
command.**

Explanation: An I/O error occurred while reading data to process the BROWSE command.

User Response: Try the operation again. If the error recurs, contact your system programmer for assistance.

System Programmer Response: Determine the cause of the I/O error, and correct the problem.

ISRB169 **STAE macro error - Unable to obtain
storage for STAE macro, subpool 0 full.**

Explanation: ISPF was unable to obtain storage for the STAE macro. Storage subpool 0 is full.

User Response: Retry the operation. If the error recurs, contact your system programmer for assistance.

Programmer Response: Determine why subpool 0 storage is full and correct the problem.

ISRB180 **Invalid BROWSE parameter - Member
name "aaaaaaa" must be alphanumeric
chars, starting with alpha.**

Explanation: ISPF requires a member name that consists of alphanumeric characters with the first character being alpha.

User Response: Enter a valid member name.

ISRB181 **Invalid member name - "aaaaaaa"
exceeds 8-character allowable member
name length.**

Explanation: Member names cannot be greater than 8 characters in length.

User Response: Enter a valid member name.

ISRB182 **Member name invalid - A member
name cannot be specified when
browsing sequential data set.**

Explanation: Sequential data sets do not contain members.

User Response: Enter only the data set name in order to browse a sequential data set. Do not enter a member name.

ISRB183 **Recursion error - Recursive use of
BROWSE is not allowed while browsing
the ISPF log.**

Explanation: Recursive BROWSE is not allowed when browsing the ISPF log data set.

User Response: Do not use the BROWSE primary command when browsing the ISPF log.

ISRB184 **Invalid mixed mode - Specify either
YES or NO for the mixed mode.**

Explanation: YES and NO are the only valid entries for mixed mode.

User Response: Enter either YES or NO for the mixed mode.

ISRB185 **Invalid format name - Specified format
name contains invalid characters.**

Explanation: The format name entered contains invalid characters. Format names must be alphanumeric with the first character alpha.

User Response: Use a valid format name.

PDF Messages

ISRB186 **Invalid parameter - Extraneous or invalid parameter specified with this command.**

Explanation: Too many parameters or an invalid parameter was entered.

User Response: Correct the parameters.

ISRB500 **Too many parameters - For the 'aaaaaaa' command.**

Explanation: Too many parameters were entered for the command.

User Response: Correct the parameters.

ISRB501 **Invalid parameter - 'aaaaaaa' is not a valid parameter for the 'bbbbbbb' command.**

Explanation: An invalid parameter was entered for this command.

User Response: Correct the parameters.

ISRB502 **Inconsistent parameters - 'aaaaaaa' and 'bbbbbbb' are inconsistent with 'ccccccc' command.**

Explanation: The parameters entered were inconsistent or conflicting.

User Response: Correct the parameters.

ISRB503 **String too long - The invalid character for the DISPLAY command can only be a length of one.**

Explanation: The "character" parameter of the DISPLAY command can only be one character in length.

User Response: Correct the parameter.

ISRB504 **Inconsistent parameters - A single character and/or (CC or NOCC) are the only parameters allowed.**

Explanation: The DISPLAY command accepts parameters of only a single character (the character for non-displayable codes) and CC or NOCC to designate whether or not to show carriage control characters.

User Response: Correct the parameters.

ISRB505 **Too many parameters - A single character and/or (CC or NOCC) are the only parameters allowed. One is required.**

Explanation: The DISPLAY command accepts parameters of only a single character (the character for

non-displayable codes) and CC or NOCC to designate whether or not to show carriage control characters. You must enter at least one parameter.

User Response: Correct the parameters.

ISRB506 **Data set FREE error - An error was encountered trying to free the data set(s) being browsed**

Explanation: An error prevented freeing the allocation for the data set being browsed. This data set may still be allocated to your user ID. The allocation will be freed when you log off.

User Response: If the allocation interferes with the use of the data set by other users, log off and log back on.

ISRB507 **Parameter missing - A single character and/or (CC or NOCC) are the only parameters allowed. One is required.**

Explanation: The DISPLAY command accepts parameters of only a single character (the character for non-displayable codes) and CC or NOCC to designate whether or not to show carriage control characters. You must enter at least one parameter.

User Response: Correct the parameters.

ISRB600 **Command not supported - BROWSE command not supported by the dialog supplied command routine.**

Explanation: The command routine used by your dialog does not support BROWSE as a command.

ISRB601 **Invalid record format - Record format must be F, FA, FM, V, VA, VM, or U. If the record format is other than U it may also be blocked (FB, VBA, etc.).**

Explanation: The data set selected for browsing has an unsupported record format. You cannot browse this data set.

ISRB602 **Record length too large - Maximum record length is 32760.**

Explanation: The data set selected for browsing has a record length greater than 32 760. You cannot browse this data set.

ISRB603 **No data to browse - Empty data file has been requested.**

Explanation: The data set you are attempting to BROWSE contains no data.

ISRB604 **Severe error - Unexpected return code from ISRCBR or dialog supplied routine.**

Explanation: An unexpected return code was received from ISRCBR or from a dialog supplied routine.

User Response: If the error recurs, contact the programmer for assistance.

Programmer Response: Determine what return codes are being returned by dialog supplied routines. Correct them to return only the expected, documented return codes.

ISRB605 **Member name not allowed - A member name cannot be specified when browsing with BRIF service.**

Explanation: The BRIF service does not allow the use of a member name.

Programmer Response: Invoke the BRIF service without a member name.

ISRB606 **Severe error - Severe error occurred in ISRCBR or dialog supplied routine.**

Explanation: A return code 20 was received from ISRCBR or a dialog supplied routine.

User Response: If the error recurs, contact the programmer for assistance.

Programmer Response: Determine what return codes are being returned by dialog supplied routines. If a return code 20 is being returned, determine the cause of the return code 20 and correct the problem. Consider modifying the dialog supplied routine to issue an informational message describing the cause of the failure.

ISRB607 **Invalid data format - Browse is not allowed on a packed multivolume data set.**

Explanation: Browse does not handle packed multivolume data sets.

User Response: Enter a volume name.

ISRB608 **Browse successful - Not enough storage was available to edit or view the data. Data browsed successfully.**

Explanation: When not enough storage is available to edit or view a data set, browse is automatically substituted. Data was browsed successfully.

ISRB609 **Browse failed - Not enough storage was available to edit or view the data. Browse was attempted, but failed.**

Explanation: When not enough storage is available to edit or view a data set, browse is automatically substituted. Data was not browsed successfully.

User Response: Attempt to browse the data set using Browse, instead of View or Edit, to determine if there is a problem with the data. Check the ISPF log for any errors.

ISRCP000 **Invalid command - Module ISRCINVC received an invalid command as a parameter.**

Explanation: The command passed to ISRCINVC is not BROWSE, EDIT, or VIEW.

User Response: Contact your system programmer.

System Programmer Response: This is a programming error. Contact IBM support.

ISRCP001 **Command completed - The EDIT command completed successfully.**

Explanation: This is an informational message.

ISRCP002 **Invalid data set name - The data set name has too many characters.**

Explanation: The data set name parameter exceeds 44 characters.

User Response: If this error is the result of input to a dialog, enter a valid data set name. Otherwise, see the dialog developer.

Programmer Response: Correct the data set name.

ISRCP003 **Invalid member name. - The member name has too many characters.**

Explanation: The member name parameter imbedded within the data set name exceeds 8 characters.

User Response: If this error is the result of input to a dialog, enter a valid data set name. Otherwise, see the dialog developer.

Programmer Response: Correct the member name.

ISRCP004 **Command completed - The VIEW command completed successfully.**

Explanation: This is an informational message.

PDF Messages

ISRCP005 **Command completed - The BROWSE command completed successfully.**

Explanation: This is an informational message.

ISRCP006 **Invalid parameter - Module ISRCPREC received an invalid parameter.**

Explanation: The parameter passed to ISRCPREC is not EDIT or VIEW.

User Response: Contact your system programmer.

System Programmer Response: This is a programming error. Contact IBM support.

ISRCP007 **Recovery successful - VIEW recovery completed successfully.**

Explanation: This is an informational message.

ISRCP008 **Recovery successful - Edit recovery completed successfully.**

Explanation: This is an informational message.

ISRCS000 **Invalid INTENS - Invalid INTENS - Enter HIGH, LOW, or NON.**

Explanation: An invalid INTENS value has been entered.

User Response: Enter HIGH, LOW, or NON for INTENS value.

ISRCS001 **Invalid COLOR - Invalid COLOR - Enter - BLUE, GREEN, TURQ, YELLOW, RED, PINK, or WHITE.**

Explanation: An invalid COLOR has been entered.

User Response: Enter BLUE, GREEN, TURQ, YELLOW, RED, PINK, or WHITE for color value.

ISRCS002 **Invalid HILITE - Invalid HILITE - Enter - REVERSE, USCORE, BLINK, or NONE.**

Explanation: An invalid HILITE has been entered.

User Response: Enter REVERSE, USCORE, BLINK, or NONE for Hilite value.

ISRCS003 **The pull-down choice you have selected is unavailable.**

Explanation: The user attempted to select a choice that is unavailable.

User Response: Select an available choice.

ISRCS004 **List not found - Shared personal list not found in library ISPTLIB. Defaulting to private list in library ISPPROF. Shared personal list tables ISRPLSHR (personal data set lists) or ISRLLSHR (personal library lists), was not found in library ISPTLIB.**

Explanation: This is an informational message. The shared personal list was not found in library ISPTLIB. Referral list will default to user profile data set.

User Response: Contact your systems programmer.

Programmer Response: Create a common personal list that is concatenated to the users ISPTLIB library.

ISRCS005 **List selection error - Mark a list with a "/" and then select a file action.**

Explanation: This is an informational message.

User Response: Mark a list, then select a file action.

ISRCS006 **Required parm missing - Required personal list name is blank or invalid. A personal list name is required for this action. The list name must begin with an alphabetic character followed by any valid alphanumeric character for a total length of up to eight characters.**

Explanation: An invalid command was entered for this function.

User Response: Enter a personal list name as a parameter for command.

ISRCS007 **Reference list inactive - A reference list has not been created yet. Enter command REFLISTx, where "x" is either an "L" for library, or a "D" for data set reference list. To set list to update mode, select action "update on" from action bar "List". Data sets and libraries that are referenced in your ISPF session will now be added to the reference list.**

Explanation: There is no reference list active for this user.

User Response: Activate reference list via the list pull-down on the Reflist main panel.

ISRCS008 **List updated - The most recently referenced data set/library in the reference list has been successfully added to your personal list.**

Explanation: This is an informational message. Personal list was updated successfully with the most recent Reference List entry.

ISRCS009 **Invalid routing request - A call to program ISRRCL passed an invalid parameter. This is most likely the result of a panel that has an action bar choice defined with ACTION(ISRRROUTE) and an invalid parameter.**

Explanation: The most likely explanation for this message is that a panel was created with an action bar choice which has an ACTION RUN(ISRRROUTE) statement but which specifies an invalid action on the run statement. ISPF uses a set of predefined parameters, but a SELECT statement may also be used as a parameter. An example of a SELECT statement that can be coded on an action bar is:

```
PDC DESC('User List...')
  ACTION RUN(ISRRCL)
  PARM('SELECT PGM(USERLIST)
  NEWAPPL(USR)')
```

Programmer Response: If the problem occurs using an unmodified copy of an IBM supplied panel, contact IBM support. Otherwise, check the value of the PARM keyword in the PDC section of the panel to ensure that it is a valid SELECT statement.

ISRCS010 **No connection - Browse/View/Edit host data set on workstation is only valid when a connection with the workstation has been established.**

Explanation: No connection to a workstation exists. The user must identify the workstation by specifying the GUI parameter on ISPSTART or by selecting the "Start GUI" pull-down choice on the GUI action bar on the ISPF Settings panel before trying to Browse/View/Edit host data set on workstation.

ISRCS011 **No connection - Browse/View/Edit workstation file on host is only valid when a connection with the workstation has been established.**

Explanation: No connection to a workstation exists. The user must identify the workstation by specifying the GUI parameter on ISPSTART or by selecting the "Start GUI" pull-down choice on the GUI action bar on the ISPF Settings panel before trying to Browse/View/Edit workstation file on host.

ISRCS012 **No connection - Browse/View/Edit workstation file on workstation is only valid when a connection with the workstation has been established.**

Explanation: No connection to a workstation exists. The user must identify the workstation by specifying the GUI parameter on ISPSTART or by selecting the "Start GUI" pull-down choice on the GUI action bar on the ISPF Settings panel before trying to Browse/View/Edit workstation file on workstation.

ISRCS013 **Not logged on - File transfer failed. Invalid userid or password.**

Explanation: No explanation available at this time.

ISRCS014 **File not found - File transfer failed. File not found or no access.**

Explanation: No explanation available at this time.

ISRCS015 **Directory not found - File transfer failed. Workstation current working directory not found.**

Explanation: No explanation available at this time.

ISRCS016 **File transfer failed - Severe error in file transfer.**

Explanation: No explanation available at this time.

ISRCV000 **Invalid DSN - quotes - Data set name contains unbalanced apostrophes; reenter dsname.**

Explanation: A data set was specified that did not both start and end with an apostrophe.

User Response: If the data set is a fully-qualified MVS data set, place an apostrophe at both the beginning and end of the name. If the data set is an unqualified data set, remove all apostrophes.

ISRCV001 **Invalid DSN - length - Dsname must be 1-44 chars in length, including prefix. Reenter dsname.**

Explanation: The data set name entered was either:

- A fully-qualified MVS data set name that contained more than 44 characters.
- An unqualified MVS data set name that, when combined with your TSO prefix, results in a name greater than 44 characters.

User Response: Correct the data set name and reenter it.

ISRCV002 **Invalid DSN - member - The name of a data set member must be 1-8 chars and enclosed in ().**

Explanation: When specifying a data set and member, the member name must be 1 to 8 characters in length, and must be contained within parentheses. For example:

```
'USER1.PRIVATE.SOURCE(MEMBER1)'
```

User Response: Correct the data set name or member name or both, and reenter.

PDF Messages

ISRCV003 Invalid DSN - member - Member name contains invalid characters.

Explanation: A member name must:

- Be 1-8 characters in length
- Start with an alphabetic or special character
- Contain only alphabetic, numeric, or special characters.

User Response: Correct the member name and reenter it.

ISRCV004 Invalid DSN - syntax - Dsname must not end with a period. Reenter dsname.

Explanation: An MVS data set name uses periods to separate its qualifiers, but it cannot start or end with a period.

User Response: Correct the data set name and reenter it.

ISRCV005 Invalid DSN - syntax - Dsname contains imbedded blanks, parentheses, or apostrophes. Reenter.

Explanation: A data set name may not:

- Contain imbedded blanks
- Contain imbedded parentheses unless they are being used to specify a member name
- Contain apostrophes unless they are being used to indicate a fully-qualified MVS data set.

User Response: Correct the data set name and reenter it.

ISRCV006 Invalid DSN - qualifier - A data set name qualifier must contain from 1-8 characters. Reenter.

Explanation: A data set name was entered having one or more qualifiers that contained more than 8 characters or that contained no characters. Each qualifier of an MVS data set must:

- Be 1-8 characters in length
- Start with an alphabetic or special character.
- Contain only alphabetic, numeric, special, dash, or left brace characters.

User Response: Correct the data set name and reenter it.

ISRCV007 Invalid DSN - qualifier - Each qualifier must be 1-8 alphanumeric characters, the first alphabetic.

Explanation: A data set name was entered that contained an invalid qualifier. Each qualifier of an MVS data set must:

- Be 1-8 characters
- Start with an alphabetic or special character.
- Contain only alphabetic, numeric, special, dash, or left brace characters.

User Response: Correct the data set name and reenter it.

ISRCV008 Selected entry blank - The Reflist data set entry must be defined before it can be selected.

Explanation: A Reflist data set entry was selected, but the entry does not contain a data set name.

User Response: Correct the data set entry and reselect it.

ISRCV009 Selected entry blank - The Reflist library entry must have the Project, Group, and Type defined before it can be selected.

Explanation: The Reflist library entry was selected, but the entry does not contain either a Project, Group, or Type.

User Response: Correct the library entry and reselect it.

ISRC600 Command not allowed - Recursive entry to ISPF is not permitted.

Explanation: A second ISPF session may not be started while an ISPF session is active.

User Response: Use the current ISPF session, or use ISPF split screen to start another ISPF session.

ISRC602 Enter TSO command - Enter command in TSO format.

Explanation: A TSO command is required as input on the TSO COMMAND PROCESSOR panel.

User Response: Enter a TSO command.

ISRC603 Parameter missing - A parameter is required with the TSO command.

Explanation: It is invalid to specify TSO without following it with a valid TSO command.

User Response: Enter a valid TSO command after the word TSO.

ISRC605 Invalid password - The password field contains invalid characters. Valid characters are (0-9, A-Z, #, \$, or @).

Explanation: A password was entered that contained invalid characters. An MVS password must:

- Be 1-8 characters in length
- Contain only alphabetic, numeric, and special characters.

User Response: Correct the password and reenter. If you did not specify a password on this panel and this

is a recurring problem, you may have a variable in your ISPF profile pool that is being used by ISPF. If you suspect this is the case, you should do one of the following:

- Enter the Dialog Test Variables option (ISPF option 7.3) and issue "LOCATE xxx" from the command line. If the variable is found, use the D line command to delete the variable.
- Use the VERASE service to remove the variable by invoking a CLIST or REXX exec that contains the command "ISPEXEC VERASE xxx BOTH".

The variable names used by PDF (symbolized by xxx above) are PSWD2, SCENP, SCEOP, SF4SPSW, ZCRPSWD, ZECPSWD, ZMCPSWD, ZPSWD, ZQPSWD2, ZSSCNPSW, ZSSCOPSW, and ZSSFNPSW

ISRC608 **Command not allowed - This command is not intended to be executed from option 6.**

Explanation: Commands containing the ISPF NONDISPL keyword cannot be executed from option 6.

User Response: Correct the command and then reenter.

ISRC609 **Invalid password - The password field contains invalid characters. Valid characters are (0-9, A-Z, #, \$, or @). If you did not enter a password, and if this is a recurring problem, you may have a variable called PSWD in your profile variable pool. You can use the dialog test "Variables" option (ISPF option 7.3) or the VERASE service to delete the variable from your profile pool.**

Explanation: A password was entered that contained invalid characters. An MVS password must:

- Be 1-8 characters in length
- Contain only alphabetic and numeric characters.

User Response: Correct the password and reenter. If you did not specify a password on this panel and this is a recurring problem, you may have a variable named PSWD in your ISPF profile pool that is being used by ISPF. If you suspect this is the case, you should do one of the following:

- Enter the Dialog Test Variables option (ISPF option 7.3) and issue "LOCATE PSWD" from the command line. If the variable is found, use the D line command to delete the variable.
- Use the VERASE service to remove the variable by invoking a CLIST or REXX exec that contains the command "ISPEXEC VERASE PSWD BOTH".

ISRDS000 **Save As canceled - The name you entered already exists as a personal list name.**

Explanation: A save-as list name already exists as a current list.

User Response: Enter a list name that is not a duplicate.

ISRDS001 **New list - This list is temporary until Save or Save As action is performed. If you enter any data, you will be prompted to save it when you exit this panel.**

Explanation: The currently displayed list is not permanent until a save action is performed.

User Response: Issue a save request if the list is to be defined.

ISRDS002 **Personal list added - Reference list copy has been added to your personal list table.**

Explanation: This is an informational message.

ISRDS003 **List entry retrieved - Personal list entry has been successfully retrieved.**

Explanation: This is an informational message.

ISRDS004 **Error adding reference list to personal data set list.**

Explanation: An error was encountered while saving a personal data set list. Contact IBM service.

User Response: Retry the operation. If it continues to fail, contact IBM service.

System Programmer Response: Contact IBM support.

ISRDS005 **Select an action - Select an action to continue, EXIT or CANCEL to leave Reflist.**

Explanation: A choice was selected that does not contain a data set entry.

User Response: Select a choice with a data set name entry.

ISRDS006 **Multiple list actions - Only a single list can be processed. Multiple lists cannot be selected for updates or actions.**

Explanation: Multiple lists were selected by the user.

User Response: Select a single list from the name list.

PDF Messages

ISRDS007 **Delete not allowed - The currently active list cannot be deleted unless it is first opened. Perform an Open action and then select action "D" to delete the currently active list.**

Explanation: A list that is active cannot be deleted.

User Response: Select a list and use the file action Delete to delete list.

ISRDS008 **Personal list saved - The personal list has been successfully saved in your personal table.**

Explanation: This is an informational message. A save action has been completed successfully.

ISRDS009 **Invalid action - The command or action requested is invalid.**

Explanation: An invalid primary command/action was detected.

User Response: Correct the command and retry the operation.

ISRDS013 **Retrieved from 'aaaaaaaa' — The Library names were retrieved from the personal library list named 'aaaaaaaa' . Use the REFOPENL or REFACTL command if you want to change the current personal library list.**

Explanation: The NRETRIEV command retrieved a library name from the personal library list named aaaaaaaa.. If you want to use a different personal list, use the REFOPEND command and open the personal list which you would like the NRETRIEV command to use when retrieving library names.

ISRDS014 **Retrieved from 'aaaaaaaa' — The data set name (and possibly volume) was retrieved from the personal library list named 'aaaaaaaa' . Use the REFOPENL or REFACTL command if you want to change the current personal library list.**

Explanation: The NRETRIEV command retrieved a data set name from the personal data set list named aaaaaaaa.. If you want to use a different personal list, use the REFOPEND command and open the personal list which you would like the NRETRIEV command to use when retrieving data set names.

ISRSD000 **Dialog selection error - Invalid parameters were passed to routine ISRALTDI. See system programmer.**

Explanation: The PDF Alternate Dialog processor (ISRALTDI) detected an invalid input parameter.

User Response: If you were attempting to invoke a selection under PDF option 9, contact your system programmer to have the problem reported to IBM support. If you are using a locally written dialog, contact the dialog owner to report the problem.

Programmer Response: Examine the parameters your dialog is passing to program ISRALTDI and compare them to the parameters listed in *ISPF Planning and Customizing* under "IBM Products Option".

System Programmer Response: If the IBM Products Option panel (PDF option 9, panel ISRDIIS) has been customized, examine the parameters that are being passed to program ISRALTDI and compare them to the parameters listed in *ISPF Planning and Customizing* under "IBM Products Option". If the option 9 panel has not been customized, contact IBM support.

ISRSD001 **Dialog selection error - The alternate dialog selection processor could not find panels 'aaaaaaaa' or 'bbbbbbbb'.**

Explanation: The PDF Alternate Dialog Processor was invoked specifying panels aaaaaaaa and bbbbbbbb as the primary and secondary panels to be used, but neither panel could be found in the ISPLLIB concatenation.

User Response: Check to make sure your ISPLLIB concatenation contains the specified panels. If not, change your ISPLLIB allocation to include the proper data sets. If you need assistance in modifying your ISPLLIB concatenation, do the following:

- If you are using a locally written dialog, contact the dialog owner to report the problem.
- If you are attempting to invoke a selection under PDF option 9, contact your system programmer to have the problem reported to IBM support.

Programmer Response: Verify that the specified panels are in the proper library, and that the library is specified in the ISPLLIB concatenation either through a setup clist, LIBDEF or LOGON PROC.

System Programmer Response: If the IBM Products Option panel (PDF option 9, panel ISRDIIS) has been customized, verify that the specified panels are in the proper library, and that the library is specified in the ISPLLIB concatenation either through a setup CLIST, LIBDEF, or LOGON PROC. If the option 9 panel has not been customized, verify the proper product libraries for the option selected are specified in the ISPLLIB concatenation. If the ISPLLIB concatenation appears to be correct, contact IBM support.

ISRSD002 **Dialog selection error - The alternate dialog selection processor could not find panel 'aaaaaaaa'.**

Explanation: The PDF Alternate Dialog Processor was invoked specifying that alternate panel aaaaaaaa was to be used, but the panel could not be found in the ISPLLIB concatenation.

User Response: Check to make sure your ISPLIB concatenation contains the specified panel. If not, change your ISPLIB allocation to include the proper data set. If you need assistance in modifying your ISPLIB concatenation, do the following:

- If you are using a locally written dialog, contact the dialog owner to report the problem.
- If you are attempting to invoke a selection under PDF option 9, contact your system programmer to have the problem reported to IBM support.

Programmer Response: Verify that the specified panel is in the proper library, and that the library is specified in the ISPLIB concatenation either through a setup clist, LIBDEF or LOGON PROC.

System Programmer Response: If the IBM Products Option panel (PDF option 9, panel ISRDIIS) has been customized, verify that the specified panel is in the proper library, and that the library is specified in the ISPLIB concatenation either through a setup CLIST, LIBDEF, or LOGON PROC. If the option 9 panel has not been customized, verify that the proper product libraries for the option selected are specified in the ISPLIB concatenation. If the ISPLIB concatenation appears to be correct, contact IBM support.

ISRD003 Max displays exceeded - Panel 'aaaaaaaa' may be forcing non-display mode.

Explanation: The PDF Alternate Dialog processor detected a loop in the display of input panel *aaaaaaaa*, and stopped after 120 calls to the ISPF DISPLAY service. The panel may be forcing non-display mode by having .RESP=ENTER coded in its JINIT section.

User Response: If you are attempting to invoke a selection under PDF option 9, contact your system programmer to have the problem reported to IBM support. If you are using a locally written dialog, contact the dialog owner to report the problem.

Programmer Response: Examine the panel to see if .RESP=ENTER is coded in the JINIT section and, if so, ensure there is proper logic to bypass it when the proper conditions are met. Also, examine the dialog invoked to ensure that when the proper condition is met, it is communicated back to the panel through the appropriate ISPF dialog variables.

System Programmer Response: If the IBM Products Option (PDF option 9) has been customized, examine the new and changed panels to see if .RESP=ENTER is coded in the JINIT section and, if so, ensure there is proper logic to bypass it when the proper conditions are met. Also, examine the dialog invoked to ensure that when the proper condition is met, it is communicated back to the panel through the appropriate ISPF dialog variables. If the option 9 panel has not been customized, contact IBM support.

ISRD005 Catalog or VTOC error - I/O, insufficient storage, or unrecoverable error. RC=aaaa.

Explanation: PDF received a return code of *aaaa* from the LOCATE macro.

User Response: Contact your system programmer for assistance.

System Programmer Response: Consult the appropriate DFP documentation for problem determination.

ISRD007 Data set in use - Data set is being updated by you.

Explanation: The PDF Data Set List utility could not get an exclusive ENQ on the target data set for the SAVE command (userid.list-id.DATASETS) because you are currently using it.

User Response: If you are using the data set on another logical screen through a PDF function or local dialog, exit the function or dialog to free the data set. If you cannot determine why the data set is in use, exit and reenter ISPF and retry the function. If this doesn't work, log off, log back on, and retry.

ISRD008 Invalid SVC99 req. code - Module ISRSVCBD was passed a request code of aaaa. Contact IBM support.

Explanation: The PDF SVC99 interface module (ISRSVCBD) was invoked with an invalid DAIR request code of *aaaa*.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRD010 File name in use - File name (ddname) 'aaaaaaaa' is allocated to another data set.

Explanation: PDF attempted to allocate a data set to ddname *aaaaaaaa*, but the ddname was already allocated.

User Response: Free the existing allocation using the TSO FREE FI(ddname) command.

ISRD011 Data set not allocated - 'aaa(44)' was not allocated like 'bbb(44)'. The return code from SVC 99 was 'cccccccc'.

Explanation: The data set being moved/copied to could not be allocated like the data set being moved/copied from.

System Programmer Response: Contact IBM support.

PDF Messages

ISRD014 **Data set not cataloged - 'aaa(44)' was not found in catalog.**

Explanation: PDF received a return code 4, error code X'1708' from SVC 99 indicating that the data set *aaa(44)* specified does not exist.

User Response: If the data set name was supplied to PDF by you, correct the name and retry. If you were running a local dialog, contact the responsible programmer for assistance.

Programmer Response: If the data set name was supplied to PDF by you, correct the name and retry. If further help is needed, contact the system programmer.

System Programmer Response: Contact IBM support.

ISRD016 **Duplicate data set name - Data set 'aaa(44)' already exists.**

Explanation: PDF received a return code 4, error code X'4704' from SVC 99 indicating that the data set *aaa(44)* specified for creation already exists.

User Response: If the data set name was supplied to PDF by you, choose a new name and retry. If you were running a local dialog, contact the responsible programmer for assistance.

Programmer Response: If the data set name was supplied to PDF by you, choose a new name and retry. If further help is needed, contact the system programmer.

System Programmer Response: Contact IBM support.

ISRD019 **Catalog error - Already cataloged, VSAM protected, or other - 'aaa(44)'.**

Explanation: PDF received a return code 4, error code X'5708' from SVC 99 indicating that a return code 8 was received from the CATALOG macro during processing of data set *aaa(44)*.

User Response: Contact your system programmer.

System Programmer Response: Refer to system message IDC3009I for assistance.

ISRD020 **Data set is open - The ddname or dsname specified is associated with an open data set.**

Explanation: PDF received a return code 4, error code X'0420' from SVC 99 indicating that the data you are trying to process is currently open by you or another user.

User Response: Contact your system programmer for assistance in determining who has the data set open. The data set must be closed before you can successfully complete the function you requested.

System Programmer Response: Contact IBM support.

ISRD021 **Unit is undefined - Unit name 'aaaaaaaa' is not defined.**

Explanation: PDF received a return code 4, error code X'021C' from SVC 99 indicating that the unit name specified (*aaaaaaaa*) is not defined to your MVS system.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRD022 **Volume error - Error obtaining the device name for the data set or volume entered, for one of the following reasons: volume not mounted, device table not found, device table empty, or the UCB for the volume could not be found.**

Explanation: There is an error in obtaining the data set volume that was entered. The volume entered was not mounted, the device table was not found, the device table was empty or the UCB for the volume could not be found.

User Response: Contact your system programmer.

System Programmer Response: Check the volume to see if it has been mounted, or verify the the device table to see if it exists.

ISRD023 **Tape not supported - ISPF does not support data sets on tape.**

Explanation: The data set specified as input to a PDF function or service resides on TAPE, not on DASD. PDF does not support the processing of TAPE data sets.

User Response: Specify a different data set (one that does not reside on TAPE), or use an alternate method to process the data set. If the data set name was not specified by you but by a dialog, contact the responsible programmer.

Programmer Response: Have your tool or dialog specify a different data set (one that does not reside on TAPE).

System Programmer Response: If the data in the TAPE data set needs to be processed by PDF, copy the data set to DASD using IEBCOPY, then process the DASD copy.

ISRD024 **Request failed - Allocation/deallocation failed. Press Help for more information.**

Explanation: PDF received an SVC 99 return code/error code combination for which there is no specific PDF message. Entering the HELP command when this message is displayed will provide a tutorial panel with the error messages generated by the system, as well as the SVC 99 return code, error code, and information code.

User Response: Read the detailed message provided via the tutorial, and address the problems indicated.

ISRD026 Invalid index structure - Dsname 'aaa(44)' index conflict.

Explanation: PDF received a return code 12 or 16 from the LOCATE macro, indicating a problem with the index or generation data group specified (*aaa(44)*).

User Response: Contact your system programmer.

System Programmer Response: Refer to the proper DFP documentation for information on debugging catalog problems.

ISRD027 Invalid data set name - Syntax error in data set name 'aaa(44)'.

Explanation: PDF received a return code 20 from the LOCATE macro indicating the data set name specified (*aaa(44)*) was syntactically incorrect.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRD028 Data set not cataloged - 'aaa(44)' was not found in catalog.

Explanation: PDF received a return code 8 from the LOCATE macro indicating the data set specified was not found in the catalog.

User Response: If the data set name was mistyped, correct the name and retry the function. If the data set name is specified by a dialog, contact the dialog author for assistance. If the data set name is correctly entered, have your system programmer contact IBM support.

Programmer Response: Check the data set name specified and correct it if necessary. If the data set name is correctly entered, have your system programmer contact IBM support.

System Programmer Response: If the data set name specified is correct, contact IBM support.

ISRD029 Uncatalog error - 'aaa(44)' could not be uncataloged.

Explanation: PDF received a non-zero return code when attempting to uncatalog a data set (*aaa(44)*) during a data set deletion request.

User Response: You may not have authority to uncatalog the data set. Contact your system programmer to determine your RACF authority level, or have someone with higher authority uncatalog the data set using PDF option 3.2.U.

System Programmer Response: Determine whether the user has the proper RACF authority to perform the uncatalog request. If yes, there may be a problem with the catalog itself and you should refer to the

appropriate DFP manuals for assistance in problem determination. If the user does not have the proper RACF authority, you can raise the RACF level (if appropriate) or have someone with the proper authority level uncatalog the data set using PDF option 3.2.U.

ISRD030 No space available - Insufficient space for data set 'aaa(44)'.

Explanation: PDF received a return code 4, error code X'4714' from SVC 99 indicating that there is insufficient space for the data set specified (*aaa(44)*) on the volume selected by the system.

User Response: Retry the allocation. The system may pick a different volume that has sufficient space to satisfy the request. If you know of a specific volume that has enough space, you may specify that volume name on the Allocate New Data Set panel in PDF option 3.2.

ISRD032 Data set not found - 'aaa(44)' not on volume 'bbbbbb'.

Explanation: PDF received a return code 8 from the OBTAIN macro, indicating that data set *aaa(44)* does not exist on volume *bbbbbb*.

User Response: If you specified both the data set name and the volume, determine the correct volume for the data set and retry the request. If you did not supply a volume, the data set is not on the volume indicated by the catalog. This may indicate that there is a catalog entry only but no data set, or it may indicate a catalog error. Contact your system programmer for assistance in determining the correct action to take.

System Programmer Response: Consult the appropriate DFP documentation for problem determination.

ISRD033 Catalog or VTOC error - I/O, insufficient storage, or unrecoverable error with volume aaaaaa.

Explanation: PDF received one of the following return codes while processing volume *aaaaaa*, indicating an error in processing the VTOC for that volume, or the catalog:

- Return code > 8 from the OBTAIN macro
- Return code 24 from the LOCATE macro
- Return code 12 from DADSM allocate.

User Response: Contact your system programmer for assistance in problem determination.

System Programmer Response: Refer to the appropriate IBM manuals for problem determination.

PDF Messages

ISRD034 **Volume not available - Volume 'aaaaaa' not mounted or not authorized for your use.**

Explanation: PDF received one of the following return codes while processing volume *aaaaaa*, indicating that the volume specified is not available for your use:

- Return code 4 from the OBTAIN macro
- SVC 99 return code 4 with one of the following error codes: X'0214', X'0218', X'0220', X'0248', X'0498', X'049C', or X'6704'.

User Response: Verify that the correct data set name and volume were specified to PDF, and correct them if necessary. If the data specified looks correct, contact your system programmer.

ISRD035 **Data set in use - Data set 'aaa(44)' in use by another user, try later or enter HELP for a list of jobs and users allocated to 'aaa(44)'.**

Explanation: PDF received a return code 4, error code X'020C' or X'0210' from SVC 99 indicating data set *aaa(44)* is currently allocated to another job or user and is, therefore, unavailable to satisfy your request.

User Response: If the data set is in use by another job, wait for that job to finish, or have the submitter of the job cancel it, then retry your request. If the data set is in use by another user, have that user free it, then retry the request.

ISRD036 **VTOC full on vol 'aaaaaa' - No room in volume table of contents for more data sets.**

Explanation: PDF received a return code 4, error code X'4708' (return code 8 from DADSM allocate) indicating that the volume table of contents for volume *aaaaaa* is full; therefore, the entry needed to satisfy your request cannot be added.

User Response: If you are attempting to create a data set, reissue the request and the system may choose a different volume as the target for the create, or you can specify a specific volume on the Allocate New Data Set panel in PDF option 3.2. If the problem persists, contact your system programmer.

ISRD037 **No space on vol 'aaaaaa' - Insufficient space for data set 'bbb(44)'.**

Explanation: PDF received a return code 4, error code X'4714' (return code 20 from DADSM allocate) indicating that volume *aaaaaa* does not have sufficient space available to satisfy your create request for data set *bbb(44)*.

User Response: Specify a different volume on the Allocate New Data Set panel, or leave the volume field blank to take the system default. If the problem

persists, contact your system programmer.

ISRD220 **Too many parameters - No parameters are defined for the UNDO command.**

Explanation: Parameters were entered on the UNDO edit primary command. The UNDO command does not accept any parameters.

User Response: Remove the parameters from the UNDO command and try the command again.

ISRD222 **UNDO not allowed - UNDO is not allowed when line commands are pending.**

Explanation: The UNDO command was issued while there were pending line commands. The UNDO command cannot proceed because it is unclear exactly what is to be undone.

User Response: Remove the UNDO command from the command line and press Enter to process the pending changes. You may need to issue the RESET primary command to clear any pending line commands. After the changes have been processed by the editor, try the UNDO command again.

ISRD223 **UNDO not allowed - UNDO is not allowed when data changes are pending.**

Explanation: The UNDO command was issued while there were changes in the data area that the editor has not yet processed. The UNDO command cannot proceed because it is unclear exactly what is to be undone.

User Response: Remove the UNDO command from the command line and press Enter to process the pending changes. You may also need to issue the RESET primary command to clear any pending line commands. After the changes have been processed by the editor, try the UNDO command again.

ISRD226 **UNDO not available - UNDO is not available when Edit Recovery is OFF.**

Explanation: The UNDO command is not available because you do not have Edit Recovery turned on and your site has not installed the storage recovery function.

User Response: Turn Recovery on using the RECOVERY primary command.

System Programmer Response: If you want to enable the storage edit recovery option, you must modify the PDF Configuration table.

ISRD227 **No more to UNDO - There are no interactions to be undone.**

Explanation: This is an informational message. Either no changes have been made to the data since the beginning of the session or since the data was last saved, or all of the changes have already been undone.

ISRD228 **UNDO not available - UNDO is not available when Edit Recovery is suspended.**

Explanation: The UNDO function is not available because Edit Recovery has been suspended.

User Response: Turn Recovery off and back on. If Edit Recovery is suspended again, you may be able to use recovery from storage instead of the recovery file. This is done by issuing the SETUNDO STORAGE command.

ISRD23x **-Warning- The UNDO command is not available until you change your edit profile using the command RECOVERY ON.**

Explanation: Messages ISRD230 and ISRD231 are two halves of the same warning message. You cannot use the UNDO command until you set your edit profile to RECOVERY ON.

User Response: If you want to use the UNDO command, set your profile to RECOVERY ON.

ISREI001 **Missing record format - Specify the record format F or V for EDIF.**

Explanation: The required record format parameter for the EDIF is not specified.

User Response: Contact the responsible programmer.

Programmer Response: Specify either F or V for the record format parameter for the EDIF service.

ISREI002 **Missing record length - Specify the record length with value between 10 and 255 for EDIF.**

Explanation: The required record length parameter for the EDIF service is not specified.

User Response: Contact the responsible programmer.

Programmer Response: Specify the record length with a value between 10 and 255 for the EDIF service.

ISREI003 **Missing profile name - Specify the profile name for EDIF.**

Explanation: The required profile name parameter for the EDIF service is not specified.

User Response: Contact the responsible programmer.

Programmer Response: Specify the profile name for the EDIF service.

ISREI004 **Invalid aaaaaaaa name - The name must be 1 to 8 alphanumeric characters starting with an alphabetic character.**

Explanation: An invalid format name is specified for the EDIF service.

User Response: Contact the responsible programmer.

Programmer Response: Specify a format name with 1 to 8 alphanumeric characters starting with an alphabetic character for the EDIF service.

ISREI005 **Invalid mixed mode - Specify either YES or NO for the mixed mode parameter.**

Explanation: An invalid mixed mode is specified for the EDIF service.

User Response: Contact the responsible programmer.

Programmer Response: Specify either YES or NO for the mixed mode parameter for the EDIF service.

ISREI006 **Invalid record format - Specify either F or V for the record format parameter.**

Explanation: An invalid record format is specified for the EDIF service.

User Response: Contact the responsible programmer.

Programmer Response: Specify either F or V for the record format parameter for the EDIF service.

ISREI007 **Invalid edit length - The value of data to be edited length must be between 10 and 255.**

Explanation: An invalid edit length is specified for the EDIF service.

User Response: Contact the responsible programmer.

Programmer Response: Specify the edit length with a value between 10 and 255 for the EDIF service.

ISREI008 **aaaaaaa name not allowed - aaaaaaaa name not allowed when processing Edit Recovery.**

Explanation: aaaaaaaa name is specified for the EDIF service. This is not allowed when processing Edit Recovery.

User Response: Contact the responsible programmer.

Programmer Response: Blank out the aaaaaaaa name from the EDIREC service.

PDF Messages

ISREI009 **Mixed mode not allowed - Mixed mode not allowed when processing Edit Recovery.**

Explanation: Mixed mode is specified for the EDIF service. This is not allowed when processing edit recovery.

User Response: Contact the responsible programmer.

Programmer Response: Blank out mixed mode from the EDIREC service.

ISREI010 **Edit length not allowed - Data to be edited length not allowed when processing Edit Recovery.**

Explanation: Edit length is specified for the EDIF service. This is not allowed when processing edit recovery.

User Response: Contact the responsible programmer.

Programmer Response: Blank out the edit length from the EDIREC service.

ISREI011 **Invalid recovery option - Specify either YES or NO for the recovery option.**

Explanation: An invalid recovery option is specified for the EDIF service

User Response: Contact the responsible programmer.

Programmer Response: Specify either YES or NO for the recovery option.

ISREI012 **Invalid edit length - The edit length must be less than or equal to the record length.**

Explanation: An invalid edit length is specified for the EDIF service.

User Response: Contact the responsible programmer.

Programmer Response: Specify an edit length less than or equal to the record length.

ISREI013 **Conflicting options used - The edit length and the format are mutually exclusive.**

Explanation: Conflicting options are specified for the EDIF service. The edit length and the format cannot be used simultaneously.

User Response: Contact the responsible programmer.

Programmer Response: Blank out one of the conflicting options.

ISREI020 **Invalid EDIREC option - Only one of the following options allowed : QUERY, CANCEL, DEFER or INIT.**

Explanation: An invalid option is specified for the EDIREC service.

User Response: Contact the responsible programmer.

Programmer Response: Specify one of the allowed options (QUERY, CANCEL, DEFER, or INIT) for the EDIREC service.

ISREI021 **Invalid EDIREC parameter - The COMMAND parameter may only be specified with the INIT option.**

Explanation: An invalid parameter is specified for the EDIREC service. The COMMAND parameter may only be specified with the INIT option.

User Response: Contact the responsible programmer.

Programmer Response: Either correct the option to INIT or blank out the COMMAND parameter out.

ISREI022 **EDIREC service error - EDIREC CANCEL or DEFER issued, but recovery is not pending.**

Explanation: The CANCEL or DEFER option is specified for the EDIREC service, but recovery is not pending.

User Response: Contact the responsible programmer.

Programmer Response: Use the QUERY option for the EDIREC service to scan the EDIF recovery table for an entry containing a recovery pending condition.

ISREI023 **EDIREC service error - EDIREC QUERY or INIT is not allowed because recovery is pending.**

Explanation: The QUERY or INIT option for the EDIREC service is not allowed when recovery is pending.

User Response: Contact the responsible programmer.

Programmer Response: Invoke the EDIF service with recovery-request = YES to recover the data, or invoke the EDIREC service with the CANCEL or DEFER options to dispose of the pending recovery condition.

ISREI024 **Invalid CANCEL request - EDIREC CANCEL request issued before query for recovery pending.**

Explanation: An invalid CANCEL request is issued for the EDIREC service before the query for recovery pending.

User Response: Contact the responsible programmer.

Programmer Response: Use the QUERY option for the EDIREC service before issuing a CANCEL request to scan the EDIF recovery table for an entry containing a recovery pending condition.

ISREI025 Data in use - Data is being updated by another user or on other logical screen.

Explanation: The data set requested is being updated by another user or by you on another logical screen.

User Response: Check the data set name, find out if another user is using the the data set, or release the data set on another logical screen.

ISREI026 Recovery is not pending - The edit recovery cannot proceed when recovery is not pending.

Explanation: An edit recovery is requested while recovery is not pending.

User Response: Contact the responsible programmer.

Programmer Response: Correct the recovery-request option for the EDIF service.

ISREV000 Browse substituted - Browse was substituted for View or Edit, since not enough storage was available.

Explanation: This is an informational message. There was not enough storage available for the VIEW or EDIT command to process correctly. Therefore Browse was substituted.

ISREV001 Browse substituted - Browse was substituted for View or Edit, since neither data sets with a record length less than 10 nor data sets with RECFM=U can be Viewed or Edited.

Explanation: This is an informational message. You can only edit or view data that has certain record formats and record lengths. If Edit cannot process the data, Browse is substituted.

ISREV002 Return ignored - The return command was preempted to allow the View Warning panel to display.

Explanation: This is an informational message. Changes were made from within a view session. In order to inform users that the changes will not be saved, the RETURN command has been preempted.

ISREV003 Browse substituted - Browse was substituted for View or Edit, because the amount of storage required to read the data set exceeded the maximum value allowed by your ISPF system configuration (aaaaaaaa.Kb).

Explanation: The amount of storage required to read in the data to be edited or viewed exceeds the amount allowed by the PDF configuration table. When the amount of storage needed to edit a data set exceeds the system defined limits, browse is substituted for edit or view.

User Response: If you need to have this value increased, contact your system programmer.

System Programmer Response: To increase the amount of storage allowed for the initial loading of data into edit or view, modify the value of EDITSTOR in the PDF configuration table.

ISREV004 VSAM editor rc = aaaaaaaaa. - A VSAM editor ended with return code aaaaaaaaa. It was substituted for Edit because of configuration table settings.

Explanation: If you try to edit a VSAM data set and a VSAM editor has been specified in the configuration table, the VSAM editor is automatically invoked by ISPF.

ISREV005 VSAM browse rc = aaaaaaaaa. - A VSAM browser ended with return code aaaaaaaaa. It was substituted for Browse because of configuration table settings.

Explanation: If you try to browse a VSAM data set and a VSAM browser has been specified in the configuration table, the VSAM browser is automatically invoked by ISPF.

ISREV006 VSAM View rc = aaaaaaaaa.. - A VSAM viewer ended with return code aaaaaaaaa. It was substituted for View because of configuration table settings.

Explanation: If you try to view a VSAM data set and a VSAM viewer has been specified in the configuration table, the VSAM viewer is automatically invoked by ISPF.

ISREV007 VSAM rc = aaaaaaaaa. - ISPF attempted to invoke a VSAM processor on bbbbbbbb. The VSAM editor, viewer, or browser exited with return code aaaaaaaaa.

Explanation: If you try to edit, view, or browse a VSAM data set, ISPF looks at the configuration table to determine if there is a VSAM editor, viewer, or browser requested. If so, it is automatically invoked by ISPF. The return code variable is the value returned by the

PDF Messages

processor, or the return code for the select service.

System Programmer Response: Install the VSAM processor on your system, or change the configuration table values to correctly invoke the VSAM processor.

ISREV008 VSAM processing unavail. - aaaaaaaa is a VSAM data set. An attempt was made to invoke a VSAM editor, viewer, or browser, but it is not allowed, due to configuration table settings.

Explanation: If you try to edit, view, or browse a VSAM data set, ISPF looks at the configuration table to determine if the VSAM data set is allowed to be processed.

System Programmer Response: Determine if this user should be allowed to change this data set. If so, update the configuration table.

ISREV009 Config. table error - The list of data sets to disallow for VSAM processing has an invalid data set name pattern.

Explanation: The configuration table list of data set names has a data set name or pattern that is not allowed. Possible reasons are that the qualifier is more than 8 characters, the qualifier is less than 1 character, and there are invalid characters.

System Programmer Response: Update the configuration table to have valid data set name or pattern.

ISREV010 Session not canceled - The Cancel command was not confirmed.

Explanation: This is an informational message. The Confirm Cancel panel was displayed at the user's request. The user chose not to cancel the edit session by entering the END command.

ISREV011 Data changes cannot be saved in a View session. Use Edit if you want to be able to save your changes. Using REPLACE command to write data from a VIEW session can overwrite changes which were made to the data set after the VIEW session began because VIEW does not provide ENQ protection at the beginning of the VIEW session.

Explanation: The user is in a VIEW session but has changed data. The .SAVE command is unavailable in VIEW. If the changes are intended to be saved then Edit should be used. VIEW does not ENQ the data set or member during the session. Therefore, the file may be changed by another user or on another split screen after the VIEW session starts. If the data is saved using the REPLACE command from within the VIEW,

changes made to the data set after the VIEW session began will be overwritten.

ISRE000 Invalid profile name - The profile name must be blank, or be valid as part of a data set name.

Explanation: The profile name entered is not a valid data set group name.

User Response: Correct the profile name and retry.

ISRE001 View disabled - The View function has been disabled via the configuration table.

Explanation: Your system programmer has disabled the View function through the ISPF Configuration table.

ISRE002 Invalid hex character - The character at the cursor is not a valid hex digit (0123456789ABCDEF).

Explanation: You have typed an invalid hex character into the hex portion of the edit session display.

User Response: Correct the character at the cursor position.

ISRE003 Invalid reason code - The reason code must be blank, '--', or two alphanumeric characters.

Explanation: This message is self-explanatory.

User Response: Correct the reason code and retry.

ISRE004 Enter valid reason code - The reason code must be blank, '--', or two alphanumeric characters.

Explanation: This message is self-explanatory.

User Response: Correct the reason code and retry.

ISRE005 Enter text - Enter text paragraphs using continuous typing. SCROLL UP to continue.

Explanation: You are in text-entry mode. You may type text without regard to end-of-line considerations. Press Enter to return to normal edit mode.

ISRE006 Edit - Save - aaaaaaaa(bbbbbbbb) - member saved.

Explanation: This is an informational message.

ISRE007 **Edit - Save - aaaaaaaa - data set saved.**

Explanation: This is an informational message.

ISRE008 **Edit - Create - aaaaaaaa(bbbbbbbb) - member created.**

Explanation: This is an informational message.

ISRE009 **Edit - Replace - aaaaaaaa(bbbbbbbb) - member replaced.**

Explanation: This is an informational message.

ISRE010 **Edit - Move - aaaaaaaa(bbbbbbbb) - member deleted.**

Explanation: This is an informational message.

ISRE011 **Edit - Move - aaaaaaaa deleted.**

Explanation: This is an informational message.

ISRE012 **Member aaaaaaaa exists - aaaaaaaa already exists. The CREATE command will not replace a member.**

Explanation: The member the user is trying to create already exists in the TO library.

User Response: Enter a new CREATE member name.

ISRE013 **aaaaaaa not deleted - Member aaaaaaaa was not deleted by move because of I/O errors.**

Explanation: An I/O error was encountered during a move operation. The FROM member was not deleted.

System Programmer Response: Verify that the data set is functional.

ISRE014 **aaaaaaa not deleted - Member aaaaaaaa was not in the first library of the concatenation sequence.**

Explanation: The FROM member was not deleted. MOVE will not delete the FROM member unless it is the first library in the concatenation.

User Response: In order to delete the member from a data set at a higher level in the concatenation, use the delete ("D") function of the data set utility (option 3.2).

ISRE015 **Edit - Replace - aaaaaaaa replaced.**

Explanation: This is an informational message.

ISRE016 **Member aaaaaaaa saved - aaaaaaaa was saved in bbbbbbbb.**

Explanation: This is an informational message.

ISRE017 **Data set saved - aaaaaaaa was replaced.**

Explanation: This is an informational message.

ISRE018 **Member aaaaaaaa created - aaaaaaaa was added to bbbbbbbb**

Explanation: This is an informational message.

ISRE019 **Member aaaaaaaa replaced - aaaaaaaa was replaced in bbbbbbbb**

Explanation: This is an informational message.

ISRE020 **Data saved - The data has been saved.**

Explanation: This is an informational message. Data saved from the EDIF session.

ISRE021 **Member aaaaaaaa bbbbbbbb - Member aaaaaaaa was bbbbbbbb and cccccc exists in library.**

Explanation: This is an informational message. The requested MOVE or COPY action was completed successfully.

ISRE022 **Data changed-SAVE/CANCEL - To save changes enter SAVE then END commands otherwise enter CANCEL.**

Explanation: AUTOSAVE mode has been turned to AUTOSAVE OFF PROMPT.

User Response: A request was made to end the edit session while AUTOSAVE was set to AUTOSAVE OFF PROMPT. Please respond SAVE or END to this prompt.

ISRE023 **Duplicate member created - aaaaaaaa also exists in a higher level library.**

Explanation: WARNING: A member has been created in the first library in the ISPF library concatenation that has the same name as a member in one of the other groups in the concatenation. The data in the members is NOT necessarily the same.

User Response: Compare the members that have the same name in the two groups and decide if one needs to be deleted.

PDF Messages

ISRE025 **RESERVE failed - A RESERVE has been issued for a volume for which a RESERVE has already been issued.**

Explanation: In order to write out data, PDF edit attempted to issue a RESERVE on a volume that already had a RESERVE issued against it.

User Response: Contact your system programmer. Report the name of the data set being edited and the volume it resides on.

System Programmer Response: Determine what job or user has a RESERVE on the volume, and take the appropriate action to ensure the pack is released.

ISRE025A **A RESERVE failed when attempting to save *aaaaaaaa bbbbbbbb*. Edit will retry a maximum 4 times.'**

Explanation: This is an informational message.

ISRE026 **Recovery suspended - after data compression, the combined length of the MASK and TABS lines exceeds the record length of the recovery file. Turn Recovery off to continue editing.**

Explanation: The MASK and TABS lines together are longer than the record length of the recovery file.

User Response: Turn Recovery off to continue editing, or delete part of the data MASK or TABS lines or both.

ISRE027 **Recovery suspended - After data compression, at least one data line is too large to save in the recovery file. Turn Recovery off to continue editing.**

Explanation: At least one data line is too large to save in the recovery file.

User Response: Turn Recovery off to continue editing.

ISRE028 **Invalid LRECL - Data length must be greater than 9 and less than 32761 for fixed record length data sets and less than 32757 for variable length data sets.**

Explanation: The ISPF editor only supports data lengths from 10 to 32 760 for fixed length data sets (Record format F or FB) and from 10 to 32 756 for variable length data sets (Record format V or VB) inclusive.

User Response: You may want to copy the data from the data set you are trying to edit into a data set that has a logical record length supported by ISPF edit. Edit the temporary copy, then copy the temporary data set back into the original data set.

ISRE029 **Truncation error - The combined length of the TABS and MASK lines is too large.**

Explanation: This is an informational message. A USER_STATE edit macro command was issued but the combined length of the TABS and MASK lines is too large to save so they have been truncated.

ISRE030 **SUBMIT failed - SUBMIT abended or gave non-zero return code, or attention occurred.**

Explanation: SUBMIT processing ended abnormally.

User Response: Contact your system programmer.

System Programmer Response: Verify that the data set is functional.

ISRE031 **SUBMIT failed - Unable to allocate temporary CNTL data set used to contain JCL.**

Explanation: The temporary control file used to contain the submit job could not be allocated.

User Response: Contact your system programmer.

System Programmer Response: Verify that the data set is functional.

ISRE032 **SUBMIT failed - I/O error writing JCL to temp CNTL data set.**

Explanation: An I/O error was encountered while writing to the temporary control data set.

User Response: Contact your system programmer.

System Programmer Response: Verify that the data set is functional.

ISRE033 **Job not submitted - No lines were found to submit.**

Explanation: This is an informational message. The temporary JCL data set was empty.

ISRE035 **Invalid left bound - Left bound was invalid as entered and was reset to its default column.**

Explanation: The left bound entered was invalid. A valid left boundary is usually 1, 7, or 9 depending on the type of sequence numbering in effect and the record format of the data set being edited.

User Response: Enter a valid left bound.

ISRE036 **Invalid right bound - Right bound was invalid as entered and was reset to its default column.**

Explanation: The right bound entered was invalid.

User Response: Enter a valid right bound. A valid right boundary is usually the record length or the record length minus 8, depending on the type of sequence numbering in effect and the record format of the data set being edited.

ISRE037 **Some input data ignored - Data typed into number fields is ignored while numbering mode is on.**

Explanation: The data entered into the number field is ignored.

User Response: Reenter the data on a new line.

ISRE038 **Some input data ignored - Data to be moved outside of the data area of the record was ignored.**

Explanation: The data entered outside the record field is ignored.

User Response: Reenter the data within the bounds of the data area.

ISRE039 **Invalid/undefined label - Label *aaaaaaaa* used in SUBMIT range is undefined or has bad syntax.**

Explanation: An undefined label was used.

User Response: Reenter a defined label.

ISRE040 **Block command incomplete - Enter a matching *aaaaaaaa* command to complete the block command pair.**

Explanation: An incomplete block command was found.

User Response: Enter a matching *aaaaaaaa* line command to complete the block command pair.

ISRE041 **Command not recognized - *aaaaaaaa* is not a valid line command. Correct it or blank it out.**

Explanation: *aaaaaaaa* is not a valid line command.

User Response: Correct the *aaaaaaaa* line command or blank it out.

ISRE042 **Number is invalid - A number is not allowed with the *aaaaaaaa* line command. Blank it out.**

Explanation: A number was found with the *aaaaaaaa* line command.

User Response: Blank out the number.

ISRE043 **Invalid on this line - *aaaaaaaa* is not valid on the line that it was entered. Blank it out.**

Explanation: The *aaaaaaaa* line command entered is not valid on the line where it was entered.

User Response: Blank out the *aaaaaaaa* line command.

ISRE044 **Command conflict - *aaaaaaaa* conflicts with *bbbbbbbb* range specification. Blank it out.**

Explanation: The *aaaaaaaa* line command conflicts with the *bbbbbbbb* range specification for the CREATE/REPLACE macro command.

User Response: Blank out the *aaaaaaaa* line command.

ISRE045 **Command conflict - *aaaaaaaa* is within the range of the *bbbbbbbb* command. Correct one.**

Explanation: The *aaaaaaaa* line command is within the range of the *bbbbbbbb* line command.

User Response: Blank out one of the conflicting line commands.

ISRE046 **Command conflict - *aaaaaaaa* conflicts with a previous *bbbbbbbb* command. Delete one.**

Explanation: Both of the edit *aaaaaaaa* and *bbbbbbbb* line commands require a destination command. They cannot be used simultaneously.

User Response: Blank out one of the conflicting line commands.

ISRE047 **Command conflict - Macro *aaaaaaaa* conflicts with the *bbbbbbbb* line command. Delete one.**

Explanation: The *aaaaaaaa* command conflicts with the *bbbbbbbb* line command.

User Response: Blank out one of the conflicting commands.

PDF Messages

ISRE048 **Command conflict - "aaaaaaaa" command conflicts with prior "bbbbbbbb" specification. Delete one.**

Explanation: Two destination line commands have been specified.

User Response: Blank out one of the conflicting destination line commands.

ISRE049 **Command conflict - "aaaaaaaa" is within the range of the "bbbbbbbb" command. Correct one.**

Explanation: The aaaaaaaa line command is within the range of the bbbbbbbb line command.

User Response: Blank out one of the conflicting line commands.

ISRE050 **Command conflict - A text entry area is within the range of the aaaaaaaa command.**

Explanation: A TE line command was issued along with another line command, such as Dn. The number of lines affected by the second line command overlapped the text entry area.

User Response: Remove the offending line command.

ISRE051 **MOVE/COPY is pending - Enter A, B, or O line command, or a CREATE or REPLACE command**

Explanation: A C, CC, M, or MM line command was entered without a destination (A, B, or O) line command or a CREATE or REPLACE primary command.

User Response: Enter an A, B, or O line command, or a CREATE or REPLACE primary command.

ISRE052 **MOVE/COPY is pending - Enter M, C, MM, or CC line commands, or COPY or MOVE**

Explanation: An A or B destination line command was entered without a corresponding MOVE/COPY line or primary command.

User Response: Enter an M, C, MM, or CC line command, or a COPY or MOVE primary command.

ISRE053 **Data shifting incomplete - Data shifting was incomplete on aaaaaaaa line(s) (marked with =ERR=>).**

Explanation: The requested data shift was not completed.

User Response: Check to make sure that the requested

data shift did not go beyond the LRECL or boundaries of the data set or member.

ISRE054 **Command conflict - A text entry area is within the range of the "aaaaaaaa" block command.**

Explanation: Text entry was begun (that is, a TE line command was issued), but one half of a block command (such as CC) was entered while the TE was in effect.

User Response: Remove the offending block line command or enter the RESET command.

ISRE055 **Move/copy is pending - Enter M, C, MM, or CC line commands**

Explanation: An O destination line command was entered without a corresponding MOVE/COPY line command.

User Response: Enter an M, C, MM, or CC line command.

ISRE056 **aaaaaaaa is pending - An M, C, a set of MM or CC commands, or a label range is missing**

Explanation: A CREATE or REPLACE command was entered with no MOVE/COPY line command(s) or label range.

User Response: Enter an M or C line command, a pair of MM or CC line commands, or a label range.

ISRE057 **Conflicting numbers - Different numbers modify the pair of "aaaaaaaa" block line commands.**

Explanation: A pair of block line commands that allow numbers (such as ')n') was entered with different numbers modifying each member of the pair.

User Response: Remove the number from one member of the pair or make both numbers the same.

ISRE058 **CREATE not allowed - Cannot CREATE a sequential data set. REPLACE may be used.**

Explanation: While in Edit, a CREATE command was issued. The target data set indicated on panel ISRECRA1 was a sequential data set. The target data set for a CREATE must be a PDS or a PDSE. If the target data set is intended to be sequential, Replace must be used instead.

User Response: Use Replace or choose another target data set.

ISRE059 **Specified data in use - Specified data is being updated by you or another user. Enter HELP for a list of users using the data.**

Explanation: Someone (you or another user) is using the data set specified as the target data set in a MOVE, COPY, CREATE, or REPLACE command.

User Response: Either choose another data set as the target or wait until the data set is not being used by someone.

ISRE060 **Incomplete string - Put an ending quote at the end of the string.**

Explanation: An end quotation mark is missing at the end of the string.

User Response: Put an end quotation mark at the end of the string.

ISRE061 **Too many parameters - LOCATE to a line using a label or line number or keywords with range.**

Explanation: Too many parameters were entered for the LOCATE primary command.

User Response: Specify either a label, a line number, or keywords with range for the LOCATE command.

ISRE062 **Line not located - LOCATE unsuccessful for the aaaaaaaa bbbbbbbb line.**

Explanation: This is an informational message. The line was not located.

ISRE063 **Invalid parameter - The parameter must be a relative line number (6 digits or fewer).**

Explanation: The relative line number specified for the LOCATE macro command must be a number with 6 digits or fewer.

User Response: Correct the relative line number.

ISRE064 **Enter LOCATE parameter - Enter either a line number, label, or keyword: X/CMD/SPECIAL/ERR/CHG/LABEL.**

Explanation: The LOCATE command is expecting a parameter.

User Response: Enter either a line number, label, or one of the keywords.

ISRE065 **Invalid parameter - The parameter must be a line number (8 digits or fewer).**

Explanation: The line number specified for the LOCATE primary command must be a number with 8 digits or fewer.

User Response: Correct the line number parameter for the LOCATE primary command.

ISRE066 **Invalid parameter - Invalid line number or label or LOCATE keyword.**

Explanation: An invalid parameter was specified for the LOCATE command.

User Response: Correct the invalid parameter. For further information on the LOCATE command, refer to *ISPF Edit and Edit Macros*

ISRE067 **Invalid parameter - The parameter must be a COBOL line number (6 digits or fewer).**

Explanation: The COBOL line number specified for the LOCATE primary command must be a number with 6 digits or fewer.

User Response: Correct the line number.

ISRE068 **Insufficient storage - Insufficient storage to perform the TF line command that was entered.**

Explanation: The TF line command requires more storage than is currently available.

User Response: Try to log on with a bigger region size.

ISRE069 **COBOL renumbered - COBOL numbers were reset to keep them synchronized with standard numbers**

Explanation: This is an informational message.

ISRE070 **Invalid macro name - "aaaaaaa" macro was not found. Define was not done.**

Explanation: The macro name aaaaaaaa specified in the DEFINE primary command was not found.

User Response: Correct the macro name.

ISRE071 **Invalid command - 'aaaaaaa' is not a valid edit command.**

Explanation: The command name aaaaaaaa specified in the DEFINE primary command is not a valid edit command.

User Response: Correct the command name.

PDF Messages

ISRE072 **Too many parameters - ON and OFF are the only valid parameters for the SCAN command.**

Explanation: Too many parameters are specified for the SCAN macro command.

User Response: Specify either the ON or OFF parameter for the SCAN macro command.

ISRE073 **Invalid parameter - ON and OFF are the only valid parameters for the SCAN command.**

Explanation: An invalid parameter is specified for the SCAN macro command.

User Response: Specify either the ON or OFF parameter for the SCAN macro command.

ISRE074 **Inconsistent parameters - "aaaaaaaa" and "bbbbbbbb" cannot both be entered with SCAN command.**

Explanation: Inconsistent parameters are specified for the SCAN macro command.

User Response: Specify either the *aaaaaaaa* or *bbbbbbbb* parameter.

ISRE075 **Parameter unrecognized - ON and OFF are the only valid parameters for the SCAN command.**

Explanation: An invalid parameter is specified for the SCAN macro command.

User Response: Specify either the ON or OFF parameter for the SCAN macro command.

ISRE076 ***aaaaaaaa* pending - An A or B line command or a valid label has not been specified.**

Explanation: Destination for the MOVE or COPY command is missing.

User Response: Use an A or B line command or a valid label to specify the destination for the MOVE or COPY command.

ISRE077 **Macro does not exist - Initial or recovery macro "*aaaaaaaa*" could not be executed.**

Explanation: Initial or recovery macro *aaaaaaaa* could not be executed because it does not exist.

User Response: Correct the name of the macro.

ISRE078 **ESTAE macro error - ESTAE macro failed during 'SUBMIT'.**

Explanation: An internal error has occurred in the ESTAE macro during the SUBMIT command.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRE079 **Too many parameters - Invoke the end command without any parameters**

Explanation: The END command was invoked with too many parameters.

User Response: Invoke the END command without any parameters.

ISRE082 **Line not deleted - MOVE changed to COPY. Data on receiving line(s) prevented complete move.**

Explanation: A non-blank character(s) was found in the overlay lines. The MOVE operation was changed to COPY so that the source line would not be deleted.

User Response: Correct the source or the target lines so that they do not overlap each other.

ISRE083 **Lines not deleted - MOVE changed to COPY. Data on receiving line(s) prevented complete move.**

Explanation: A non-blank character(s) was found in the overlay lines. The MOVE operation was changed to COPY so that the source lines would not be deleted.

User Response: Correct the source or the target lines so that they do not overlap each other.

ISRE084 **Line not deleted - MOVE changed to COPY. Source line has data outside of the bounds.**

Explanation: Data outside the bounds was found in the move lines. The MOVE operation was changed to COPY so that the source line would not be deleted.

User Response: Correct either the line to be moved or the bounds.

ISRE085 **Lines not deleted - MOVE changed to COPY. Source lines have data outside of the bounds.**

Explanation: Data outside the bounds was found in the lines to be moved. The MOVE operation was changed to COPY so that the source lines would not be deleted.

User Response: Correct either the source lines or the bounds and try the MOVE operation again.

ISRE086 **Not all data copied - There were more COPY lines than OVERLAY lines. Extra lines were ignored.**

Explanation: There were more lines to be copied than lines to be overlaid. Extra lines were ignored.

User Response: Specify the same number of lines to be copied as lines to be overlaid.

ISRE087 **Not all data moved - There were more COPY lines than OVERLAY lines. Extra lines were ignored.**

Explanation: There were more lines to be moved than lines to be overlaid. Extra lines were ignored.

User Response: Specify the same number of lines to be moved as lines to be overlaid.

ISRE088 **Workstation file saved - aaaaaaaa was saved on workstation.**

Explanation: This is an informational message.

ISRE089 **Edit - Save - aaaaaaaa - file saved on workstation.**

Explanation: This is an informational message.

ISRE090 **Invalid member name - Member name aaaaaaaa not valid for partitioned data sets.**

Explanation: The member name aaaaaaaa specified is not valid for partitioned data sets.

User Response: Specify a member name that does not exceed 8 characters, begins with an alphabetic or national character, and contains only alphanumeric or national characters.

ISRE091 **Data set in use - Data set is being updated by you or another user. Enter HELP for a list of users using the data set.**

Explanation: The data set specified is being updated by another user or by you on another logical screen. Enter HELP for a list of users using the data set.

User Response: Find out if the data set is in use by another user, or release the data set from another logical screen.

ISRE092 **BLDL error - I/O error, insufficient virtual storage, or other BLDL error.**

Explanation: A severe error has occurred.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRE093 **Member in use - Member is being updated by you or another user. Enter HELP for a list of users using the data set.**

Explanation: The member specified is being updated by you on another logical screen or by another user. Enter HELP for a list of users using the member.

User Response: Find out if the member is in use by another user, or release the member from another logical screen.

ISRE094 **Vol serial not allowed - Use "Other data set name" field when specifying volume serial.**

Explanation: The volume serial is only allowed along with a data set name in the Other data set name field.

User Response: Blank out the volume serial, or enter a data set name in the Other data set name field.

ISRE095 **Severe error - Error processing edit recovery table (ISREDRT). ISREBQ RC ^ = 0,4.**

Explanation: There was an error in processing the edit recovery table. The edit recovery table may be corrupted.

User Response: Contact your system programmer.

System Programmer Response: Check the integrity of the edit recovery table. An edit recovery table from an earlier version may not be compatible with the current version. Refer to the Program Directory for restrictions.

ISRE095A **Old style recovery file - A recovery file from an old release of PDF cannot be processed.**

Explanation: A recovery file from an old release of PDF cannot be processed.

User Response: Contact your system programmer.

System Programmer Response: An edit recovery table from an earlier version may not be compatible with the current version. Refer to the Program Directory for restrictions.

ISRE096 **Severe error - DSORG is not PO or PS. This message should never occur.**

Explanation: A severe internal error has occurred.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

PDF Messages

ISRE097 **Severe error - VDEFINE returned unexpected return code to ISREDS.**

Explanation: A severe internal error has occurred. An unexpected return code from VDEFINE service has been received by ISREDS.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRE098 **Bad directory - Directory block size exceeds maximum of 256.**

Explanation: Directory block size exceeding 256 bytes is not supported. The data set may be corrupted.

User Response: Contact your system programmer.

System Programmer Response: Check the integrity of the data set. Reallocate the data set if the data set is corrupted.

ISRE099 **Severe error - Display service return code was not 0 or 8.**

Explanation: A severe internal error has occurred. An unexpected return code from the display service has been received.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRE103 **Enter a FIND command - The RFIND key works only after a FIND character string is entered.**

Explanation: The user pressed a function key defined as RFIND before entering a FIND command.

User Response: Enter a FIND command before attempting to use RFIND.

ISRE105 *aaaaaaaa bbbbbbbb ccccccc - bbbbbbbb ccccccc - found aaaaaaaa times within columns dddddddd to eeeeeeee.*

Explanation: This is an informational message. A FIND ALL command was issued with columns specified. This message tells the user how many occurrences of the string were found.

ISRE106 *aaaaaaaa bbbbbbbb found - Search for aaaaaaaa ccccccc in columns dddddddd to eeeeeeee was successful.*

Explanation: This is an informational message. This message tells the user the string was found.

ISRE110 **Recovery failed - Unable to allocate backup data set aaaaaaaa.**

Explanation: The attempt to allocate the backup data set aaaaaaaa. was unsuccessful. The data set may have been deleted, or the volume on which it resides may be offline. Another user may have an exclusive enqueue on the data set.

User Response: If the data set has been deleted, you will not be able to recover the changes made since the last SAVE of the interrupted edit session. If the volume is offline, contact your system support personnel to have the volume made available. If another user has exclusive use of the data set, try again later.

ISRE111 **Recovery failed - Unable to open backup data set aaaaaaaa.**

Explanation: An attempt to open backup data set aaaaaaaa was unsuccessful.

User Response: Contact your system programmer.

System Programmer Response: Determine why data set aaaaaaaa cannot be opened. Correct the problem.

ISRE112 **Recovery failed - Error reading backup data set aaaaaaaa.**

Explanation: An unrecoverable error occurred while reading backup data set aaaaaaaa.

User Response: Contact your system programmer.

System Programmer Response: Determine the cause of the read error, and correct the problem.

ISRE113 **Recovery failed - Unable to allocate target data set aaaaaaaa.**

Explanation: The attempt to allocate the target data set &ZEDBDN. was unsuccessful. The data set may have been deleted, or the volume on which it resides may be offline. Another user may have an exclusive enqueue on the data set.

User Response: If the volume is offline, contact your system support personnel to have the volume made available. If another user has exclusive use of the data set, try again later.

ISRE114 **Recovery failed - Backup data set information and target data set attributes conflict.**

Explanation: The attributes (LRECL, record format, and so on) of the target and backup data sets are not the same. It is probable that the target data set has been deleted or renamed and reallocated using different attributes.

User Response: Determine why the attributes of the target data set have changed. Rename the target data

set, recreate the target using the attributes of the backup data set, and retry recovery.

ISRE115 Recovery failed - Unexpected return code from ISREBP.

Explanation: An expected return code was received from module ISREBP.

User Response: Retry the operation. If the failure continues, contact your system programmer for assistance.

System Programmer Response: Contact IBM support.

ISRE116 Severe error - Data ID specified in EDIT or VIEW service is undefined.

Explanation: The EDIT or VIEW service was requested using a data ID but the data ID was not previously defined using LMINIT.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that LMINIT successfully establishes the data ID prior to requesting the EDIT or VIEW service.

ISRE117 Edit failed - Edit or View target data set has unsupported DSORG, RECFM, LRECL, or BLKSIZE. ISPF attempted to substitute Browse for Edit/View, but either an error was encountered, or the target data set or member is empty.

Explanation: The data set that you are attempting to Edit or View has attributes that are not supported by ISPF.

ISRE118 Open error - Unable to open edit or view target data set.

Explanation: An attempt to open the edit or view target data set was unsuccessful.

User Response: Contact your system programmer.

System Programmer Response: Determine why the data set cannot be opened, and correct the problem.

ISRE119 Severe error - ISREAL returned unexpected return code.

Explanation: An unexpected return code was received from module ISREAL.

User Response: Retry the operation. If the failure continues, contact your system programmer for assistance.

System Programmer Response: Contact IBM support.

ISRE120 Invalid command format - This command only returns information: "ISREDIT (var) = aaaaaaaa".

Explanation: The command specification is syntactically incorrect. The only valid form is (variable) = keyword

User Response: Consult *ISPF Edit and Edit Macros* for the correct command syntax, correct the command, and retry.

ISRE121 Invalid variable name - Name may be 1-8 alphanumeric characters long; first character not numeric.

Explanation: All variables must be from 1 to 8 characters long.

User Response: Correct the variable name and retry.

ISRE122 Keyphrase syntax error - A value that is not a variable name precedes "=" on aaaaaaaa get statement.

Explanation: The value to the left of the = sign must be a variable.

User Response: Consult *ISPF Edit and Edit Macros* for the correct keyphrase syntax, correct the syntax, and retry.

ISRE123 Too many variable names - aaaaaaaa has a maximum of bbbbbbbb var names. cccccccc parms preceded "=".

Explanation: You have specified an excess number of variable names to the left of an assignment statement.

User Response: Consult *ISPF Edit and Edit Macros*, correct the statement, and retry.

ISRE124 Invalid command syntax - Command keyword not found. Missing "=" preceding command name.

Explanation: The command specification is syntactically incorrect. The only valid form is (variable) = keyword

The equal sign (=) is missing.

User Response: Consult *ISPF Edit and Edit Macros*, correct the syntax, and retry.

ISRE125 Too many keyphrase words - Macro get assignment statement has too many words after the keyphrase.

Explanation: The command specification is syntactically incorrect. The only valid form is (variable) = keyword <els>

User Response: Consult *ISPF Edit and Edit Macros*,

PDF Messages

correct the command syntax, and retry.

ISRE126 **Bad keyphrase syntax - Get assignment statement must use syntax "ISREDIT (var) = aaaaaaaa".**

Explanation: The command specification is syntactically incorrect. The only valid form is (variable) = keyword

User Response: Consult *ISPF Edit and Edit Macros* , correct the syntax, and retry.

ISRE127 **Bad keyphrase syntax - Get assignment stmt must use syntax "ISREDIT (var) = aaaaaaaa lptr".**

Explanation: The command specification is syntactically incorrect.

User Response: Consult *ISPF Edit and Edit Macros* , correct the syntax, and retry.

ISRE128 **Invalid template format - Template data incomplete: column number is not followed by data.**

Explanation: The command specification is syntactically incorrect. The template must be in the form
<col,string>

User Response: Consult *ISPF Edit and Edit Macros* , correct the syntax, and retry.

ISRE129 **Label name is invalid - aaaaaaaa is an invalid label in keyphrase: "bbbbbbb aaaaaaaa".**

Explanation: The command specification is syntactically incorrect. Labels must start with a period and be from 1 to 8 alphabetic characters in length, the first of which must not be Z.

User Response: Consult *ISPF Edit and Edit Macros* , correct the syntax, and retry.

ISRE130 **aaaaaaa label invalid - Label aaaaaaaa is not currently assigned to a line.**

Explanation: The label specified in the command cannot be found.

User Response: Specify a label that is currently assigned.

ISRE131 **Variable name invalid - Variable name "aaaaaaa" has a length greater than 8 or a 0 length.**

Explanation: All variable names must be 1 to 8 characters long.

User Response: Specify a variable name that is 1 to 8 characters long.

ISRE132 **Invalid variable format - The ending ")" was not found for a variable name format.**

Explanation: The command requires that variables be enclosed in parentheses.

User Response: Add the closing parenthesis at the end of the variable string.

ISRE133 **Invalid variable format - The ending ")" for a variable name is missing within a template phrase.**

Explanation: Variable names within a template must be enclosed in parentheses.

User Response: Add the closing parenthesis after the variable name.

ISRE134 **Invalid template format - The ending ">" to indicate the end of a template was not found.**

Explanation: A template must be enclosed by less than (<) and greater than (>) signs.

User Response: Add the greater than sign at the end of the template.

ISRE135 **Invalid template format - A template number was not found when expected.**

Explanation: A column number is needed to indicate where the variable or string is to be substituted.

ISRE136 **Invalid aaaaaaaa - The requested line was not found.**

Explanation: The line indicated in the line pointer could not be found.

User Response: Correct the line pointer.

ISRE137 **No variable name coded - No variable name found between starting "(" and ending ")"**

Explanation: A variable name is needed between the parentheses.

User Response: Add a variable name between the parentheses.

ISRE138 **Invalid reset parameter - Enter a aaaaaaaa range and/or X, ERR, CHG, CMD, SPE, FIND, LAB.**

Explanation: Either a partial range was entered, or a range was entered with an invalid type of lines to reset.

User Response: If you have specified a partial range, then enter the beginning or ending range value. If you have specified a type of line to reset, be sure it is a valid type for the reset command.

ISRE139 **Inconsistent parameters - NOTE command has one parameter: Specify either ON or OFF.**

Explanation: The only valid parameters for the NOTE command are ON or OFF.

User Response: Specify the NOTE command with either ON or OFF.

ISRE140 **Invalid/too many parms - ON or OFF are the only valid parameters on the NOTE command.**

Explanation: The NOTE command requires only one parameter. ON or OFF are the only valid parameters.

User Response: Correct the parameter on the NOTE command.

ISRE141 **Syntax is incorrect - Assignment statement must use syntax "ISREDIT aaaaaaaa = value".**

Explanation: This assignment statement is a single value phrase.

User Response: Correct the assignment statement.

ISRE142 **Syntax is incorrect - Assignment stmt must use syntax "ISREDIT aaaaaaaa lptr = value".**

Explanation: This assignment statement requires a line pointer argument.

User Response: Correct the assignment statement.

ISRE143 **Invalid "=" in command - 'aaaaaaa' keyphrase name is invalid as a set assignment command.**

Explanation: The string specified and the keyphrase are invalid in this SET assignment command.

User Response: Correct the command.

ISRE144 **Invalid GET command - 'aaaaaaa' keyphrase name is invalid as a GET value assignment command.**

Explanation: The string specified and the keyphrase name are invalid in this GET assignment command.

User Response: Correct the command.

ISRE145 **Deactivated command - 'aaaaaaa' command name has been deactivated.**

Explanation: This is an informational message. The command name specified in the message has been defined as not operational (NOP).

ISRE146 **Invalid "=" in command - aaaaaaaa keyphrase name is invalid from terminal, only allowed in a macro.**

Explanation: The equal sign is not valid in a command issued from the command line of an edit session. It is only valid in an edit macro.

User Response: Correct the command.

ISRE147 **Reset range is invalid - A aaaaaaaa is invalid, two are required to specify a range for reset.**

Explanation: In order to reset a range of lines, two pointers are required. Specify a line pointer for both the beginning line and the ending line.

User Response: Specify a second line pointer.

ISRE148 **Inconsistent keywords - Both aaaaaaaa and bbbbbbbb cannot be specified with LOCATE. Eliminate one.**

Explanation: Two keywords were specified for the LOCATE command where only one is valid. An example would be LOCATE FIRST LAST CMD.

User Response: Select a single keyword.

ISRE149 **Too many parameters - Reset allows a aaaaaaaa range with X, CMD, CHG, ERR, SPE, and LAB keywords.**

Explanation: Only use ranges with one of the reset keywords. Using a range for more than one keyword is invalid.

User Response: Remove one of the keywords from the reset command.

ISRE150 **Too many parameters - Too many parameters were specified for "aaaaaaa" command.**

Explanation: There are too many parameters specified for the edit command.

User Response: Eliminate unneeded parameters.

ISRE151 **Invalid character string - The first string in a FIND command cannot be a null (") string.**

Explanation: A quoted string that contains no characters was entered with a FIND command.

PDF Messages

User Response: Enter the string of characters to be found.

ISRE152 **DEFINE is not allowed - 'aaaaaaaa' command name has been disabled.**

Explanation: This is an informational message. Once you have defined a command as disabled, you cannot define the command as MACRO, ALIAS, or NOP.

ISRE154 *** Top of range reached * - aaaaaaaaa bbbbbbbb - not found from cccccccc to dddddddd. Press RFIND to continue.**

Explanation: The find previous string entered was not found in the range of lines specified.

User Response: Use the RFIND command to continue searching.

ISRE155 ***** Bottom of range *** - aaaaaaaaa bbbbbbbb - not found from cccccccc to dddddddd. Press RFIND to continue.**

Explanation: The find string entered was not found in the range of lines specified.

User Response: Use the RFIND command to continue searching.

ISRE156 **No lines searched - No aaaaaaaaa lines from bbbbbbbb-ccccccc were found for the FIND command to search.**

Explanation: This message is issued when you try to find a string in either excluded or non-excluded lines in an empty data set or member.

User Response: Enter data before using the FIND command.

ISRE157 **No aaaaaaaaa bbbbbbbb found - aaaaaaaaa bbbbbbbb - not found on any cccccccc lines from dddddddd to eeeeeeee.**

Explanation: The find string was not found on any excluded or non-excluded lines between the specified labels.

User Response: Use RFIND to search other areas for the string.

ISRE158 **Invalid left boundary - aaaaaaaaa (left bound) + bbbbbbbb (string size) greater than cccccccc (LRECL).**

Explanation: The left boundary plus the size of the find string exceeds the record length.

User Response: Change the left boundary.

ISRE159 **Invalid column range - The aaaaaaaaa column range attempts a search beyond the last data column.**

Explanation: This message is issued when a FIND, CHANGE, or SEEK command is used in an edit macro and the column range is greater than the last column of data.

User Response: Correct the column range.

ISRE160 **Disabled command - 'aaaaaaaa' command name has been disabled.**

Explanation: The command called aaaaaaaa has been disabled by the DEFINE aaaaaaaa DISABLED command. Most likely this was done in order to prevent you from causing damage to some application data. You cannot enable the aaaaaaaa command.

User Response: If you feel that you received this message in error, contact the authors of macros you are using, or your system administrator.

Attempt to execute the aaaaaaaa command in a new edit session before issuing any commands. If it is disabled, check for an initial macro to see if the command is disabled there. Otherwise, check other macros you are using for the DEFINE aaaaaaaa DISABLED command.

ISRE161 **Enter character string - A character string for FIND has not been entered (so * is invalid).**

Explanation: A FIND command was entered using an asterisk ("*") as the first string operand (the FROM string), but no previous FIND, CHANGE, SEEK, or EXCLUDE command was issued during this edit session.

User Response: Reissue the FIND command with a valid FROM string. If you are trying to find an asterisk character, put the asterisk in quotation marks.

ISRE162 **No lines searched - No aaaaaaaaa lines were found for the FIND command to search.**

Explanation: No excluded or unexcluded lines exist in the file for the FIND command to search.

User Response: Change the FIND command to remove the X or NX specification.

ISRE163 **Invalid character - Invalid special character for a picture (P'xxx') string.**

Explanation: An invalid character exists in a picture string specification on a FIND command. The character may be an unusual hexadecimal code such as X'01' if the command is issued from a macro.

User Response: Change the FIND command to specify

valid picture string characters.

ISRE164 **No aaaaaaaa bbbbbbbb found - aaaaaaaa bbbbbbbb - not found on any cccccccc lines (cols dddd to eeee).**

Explanation: The search string was not found by the FIND command on any excluded or non-excluded lines between columns dddd and eeee.

User Response: No action is required, but you may want to check the string you are specifying, the current bounds, or the column numbers on the command for accuracy.

ISRE165 ***Bottom of data reached* - aaaaa bbbbbbbb - not found. Press RFIND key to continue from top.**

Explanation: The search string was not found by the FIND command on any excluded or non-excluded lines, but part of the file has not been searched.

User Response: Press RFIND to search the beginning of the file. You may want to check the string you are specifying, the current bounds, or the column numbers on the command for accuracy.

ISRE166 *** Top of data reached * - aaaaaaaa bbbbbbbb - not found. Press RFIND key to continue from bottom.**

Explanation: The search string was not found by the FIND PREVIOUS command on any excluded or non-excluded lines, but part of the file has not been searched.

User Response: Press RFIND to search from the end of the file. You may want to check the string you are specifying, the current bounds, or the column numbers on the command for accuracy.

ISRE167 **Invalid parameters - The string will not fit between the specified columns.**

Explanation: A string was specified on a FIND command that would not fit between the specified boundary columns.

User Response: Reissue the FIND command with a new string or different boundaries.

ISRE168 **Invalid hex string - The hex string must have an even number of hex digits.**

Explanation: A hexadecimal string was specified on a FIND command that did not have an even number of hexadecimal digits (0-9, A-F).

User Response: Reissue the FIND command with a valid hexadecimal string.

ISRE169 **Invalid hex string - The hex string must contain only hex digits (0-9,A-F).**

Explanation: A hexadecimal string was specified on a FIND command that contained an invalid hexadecimal digit.

User Response: Reissue the FIND command with a valid hexadecimal string. Valid hexadecimal digits are 0-9 and A-F.

ISRE170 **No members in data set - The PDS specified contains no members.**

Explanation: There are no members in the PDS specified, so a member list cannot be displayed.

User Response: Select another data set to edit or specify a member name.

ISRE171 **I/O error - An I/O error occurred while reading the PDS directory.**

Explanation: An I/O error occurred while reading the PDS directory to build a member list. The member list cannot be built.

User Response: Contact your system programmer.

ISRE172 **Open error - Open failed during member list processing.**

Explanation: There was an error opening the PDS directory.

User Response: Contact your system programmer.

ISRE173 **Invalid EDIT/VIEW parm - When data set parameter is specified, do not code DATAID, member or workstation file name.**

Explanation: To invoke the EDIT or VIEW service, you can specify either a data set name, DATAID, or workstation file name. If a data set parameter is used, a member name can be specified in the data set name. If a DATAID is specified, the member parameter is used to specify a member name.

User Response: Specify either data set, DATAID, or workstation file.

ISRE174 **Invalid EDREC option - EDREC option is invalid.**

Explanation: Valid options for the EDREC service are INIT, QUERY, PROCESS, CANCEL, and DEFER.

User Response: Specify a valid option for the EDREC service.

PDF Messages

ISRE175 **Invalid CANCEL request - EDREC CANCEL request issued before query for recovery pending.**

Explanation: The EDREC service must be invoked with the QUERY option before being invoked with the CANCEL option.

User Response: Invoke EDREC with the QUERY option before invoking EDREC with the CANCEL option.

ISRE176 **Invalid command - Command aaaaaaaa is undefined.**

Explanation: There are no valid commands from this panel.

User Response: Correct the command specified.

ISRE177 **Missing EDIT/VIEW parm - Either data set, DATAID or workstation file parameter is required.**

Explanation: The EDIT or VIEW service was invoked without a data set, DATAID, or workstation file parameter.

User Response: Specify either a data set, DATAID, or workstation file parameter.

ISRE178 **Invalid EDIT/VIEW parm - VOLUME parameter is invalid for DATAID request.**

Explanation: You may specify a volume for the EDIT or VIEW service only if you use the data set parameter. For a request with a DATAID, the volume is specified on the LMINIT service.

User Response: Remove the volume parameter.

ISRE179 **Invalid EDREC parameter - EDREC option specified contains conflicting parameter.**

Explanation: The CMD parameter is only valid with INIT; password and DATAID are only valid with PROCESS.

User Response: Correct the EDREC request.

ISRE180 **Too many parameters - Too many parameters specified for LINE_AFTER command. Is data quoted?**

Explanation: The valid parameters for the LINE_AFTER command are: the line pointer, the line type, the data for the line, or a label or pointer to a line to be placed after the line pointed to by the line pointer. If the data for a line is not in quotation marks, the data may be considered to be extra parameters.

User Response: Contact the responsible programmer.

Programmer Response: Correct the LINE_AFTER command.

ISRE181 **Invalid parameter - Extraneous or invalid parameter was specified for LINE_AFTER command.**

Explanation: This is an informational message. An incorrect line type may have been specified.

User Response: Contact the responsible programmer.

Programmer Response: Correct the LINE_AFTER command.

ISRE182 **Invalid parameter - Extraneous or invalid parameter was specified for LINE_AFTER command.**

Explanation: Either an extra parameter or an invalid parameter was specified for the LINE_AFTER command.

User Response: Contact the responsible programmer.

Programmer Response: Correct the LINE_AFTER command.

ISRE183 **Line number omitted - Required relative line number not specified (correctly) for LINE_AFTER command.**

Explanation: A line number or a label must be specified as the target for a LINE_AFTER command.

User Response: Contact the responsible programmer.

Programmer Response: Correct the line number or label.

ISRE184 **Data value is omitted - You must specify non-blank data for the LINE_AFTER command.**

Explanation: The LINE_AFTER command requires that data be specified for the line being added.

User Response: Contact the responsible programmer.

Programmer Response: Specify the data to be inserted by the LINE_AFTER command.

ISRE185 **Data value is invalid - A line pointer must follow line keyword to set aaaaaaaa from a data line.**

Explanation: When the LINE keyword is used with the MASKLINE or TABSLINE command, a line pointer must follow the LINE keyword.

User Response: Contact the responsible programmer.

Programmer Response: Add a line pointer to the command.

ISRE186 **Invalid *aaaaaaaa* - The *aaaaaaaa* specified in the line command does not exist.**

Explanation: The line pointed to by the line pointer does not exist in the data.

User Response: Contact the responsible programmer.

Programmer Response: Correct the line pointer.

ISRE187 ***aaaaaaaa* cmd failure - *aaaaaaaa* command could not continue due to invalid input. Check data length.**

Explanation: The data pointer or length is invalid for the LINE, ADDLINE, MASKLINE, or TABSLINE command.

User Response: Contact the responsible programmer.

Programmer Response: Correct the pointer or length of the data.

ISRE188 **Variable process error - Error occurred processing a variable in the *aaaaaaaa* assignment command.**

Explanation: An error occurred while processing a variable in the assignment statement specified in the error message.

User Response: Contact the responsible programmer.

Programmer Response: Correct the variable in the assignment statement.

ISRE189 **Inconsistent parameter - Inconsistent parameters specified for the '*aaaaaaaa*' command.**

Explanation: Inconsistent parameters were specified for the given commands.

User Response: Contact the responsible programmer.

Programmer Response: Correct the parameter(s).

ISRE190 **Too many parameters - Too many parameters specified for LINE_BEFORE command. Is data quoted?**

Explanation: The valid parameters for the LINE_BEFORE command are: the line pointer, the line type, the data for the line, or a label or pointer to a line to be placed after the line pointed to by the line pointer. If the data for a line is not in quotes, the data may be considered to be extra parameters.

User Response: Contact the responsible programmer.

Programmer Response: Correct the parameter or put the data in quotes.

ISRE191 **Invalid parameter - Extraneous or invalid parameter was specified for LINE_BEFORE command.**

Explanation: This is an informational message. An incorrect line type may have been specified.

User Response: Contact the responsible programmer.

Programmer Response: Correct the LINE_BEFORE command.

ISRE192 **Invalid parameter - Extraneous or invalid parameter was specified for LINE_BEFORE command.**

Explanation: Either an extra parameter or an invalid parameter was specified for the LINE_BEFORE command.

User Response: Contact the responsible programmer.

Programmer Response: Correct the LINE_BEFORE command.

ISRE193 **Line number omitted - Required relative line number not specified (correctly) for LINE_BEFORE command.**

Explanation: A line number or a label must be specified as the target for a LINE_BEFORE command.

User Response: Contact the responsible programmer.

Programmer Response: Correct the line number or label.

ISRE194 **Data parm omitted - You must specify a non-blank data parameter for the LINE_BEFORE command.**

Explanation: The LINE_BEFORE command requires that non-blank data be specified for the line being added.

User Response: Contact the responsible programmer.

Programmer Response: Specify the data to be inserted by the LINE_BEFORE command.

ISRE195 **Too many parameters - Too many parameters specified for the EXCLUDE command.**

Explanation: The EXCLUDE command can contain one string, one direction keyword, and one type keyword.

User Response: Remove extraneous EXCLUDE parameters.

PDF Messages

ISRE196 **Inconsistent parameters - Inconsistent keyword parameters specified for the EXCLUDE command.**

Explanation: Two directional or two type keywords were specified.

User Response: Remove one of the keywords.

ISRE197 **Invalid parameter - Check for misspelled keywords or too many bounds (numeric) parameters.**

Explanation: An invalid parameter has been entered for the EXCLUDE command. Check the parameters.

User Response: Correct the command.

ISRE198 **Put string in quotes - Put quotes (' ') around the string of characters sought for exclusion.**

Explanation: The EXCLUDE command contains more than one string. Put the string in quotes.

User Response: Enclose the string in single or double quotation marks.

ISRE199 **Required string missing - The EXCLUDE command requires the specification of a target string.**

Explanation: A string was not specified for the EXCLUDE command.

User Response: Add a target string to the EXCLUDE command.

ISRE200 **LMF Lock set - LMF Lock has been set to aaaaaaaa.**

Explanation: No explanation available at this time.

ISRE205 **Enter 'to' string - Enter the replacement string of characters.**

Explanation: A FROM string was entered for the CHANGE command but no TO string was entered.

User Response: Enter the TO string.

ISRE206 **Enter a CHANGE command - The RCHANGE command only works when you have already used the CHANGE command or when you have a CHANGE command on the command line.**

Explanation: The RCHANGE command can only be used after a CHANGE command has been entered or when a CHANGE command is on the command line.

User Response: Enter a CHANGE command.

ISRE207 **Enter a CHANGE command - Command with a 'to' string must be entered before using the RCHANGE command.**

Explanation: The RCHANGE command has been used following a FIND command. Enter a CHANGE command with a TO string to use the RCHANGE command.

User Response: Enter a CHANGE command.

ISRE210 **COMPARE unavailable - The COMPARE command is not available from edit sessions created by the EDIF and EDIREC services.**

Explanation: The COMPARE edit command was issued from an edit session which was initiated through the EDIF or EDIREC service. The COMPARE command is not supported from this environment because the EDIF interface edits data in storage, and the compare program requires a physical data set and a cataloged data set name.

User Response: If you want to compare the data, use the CREATE or REPLACE primary commands to save the data to a real data set and use the compare utility (SuperC) to compare the data.

ISRE211 *aaaaaaaa bbbbbbbb changed - aaaaaaaaa
bbbbbbbb - changed to ccccccc dddddddd
times on eeeeeee line(s).*

Explanation: This is an informational message.

ISRE212 *aaaaaaaa bbbbbbbb changed - aaaaaaaaa
bbbbbbbb - changed to ccccccc.*

Explanation: This is an informational message.

ISRE213 **Invalid 'to' string - The 'to' string must be specific or equal length generic string; not text.**

Explanation: When using the CHANGE edit command and specifying a special string (picture (p')), hex (x'), text (t') or character (c')) as the source (or 'from') string, the target (or 'to') string cannot be a text (t') string of a different length. For example, the command

CHANGE P'###' T'ABCD'

is invalid because the target text string (T'ABCD') is not the same length as the source picture string.

User Response: If you need to change the length of the string, use a generic string as the target string, such as:

CHANGE P'###' 'ABCD'

ISRE214 **Invalid 'to' string - The 'to' picture string must be the same length as the 'from' string.**

Explanation: When using the edit CHANGE command and specifying a picture (p'') string as both the source (or 'from') and target (or 'to') string, the two strings must be of the same length.

User Response: Modify the CHANGE command to specify source and target strings of equal length, and retry the command.

ISRE215 *aaaaaaaa bbbbbbbb cccccccc - bbbbbbbb dddddddd - found aaaaaaaa times within range eeeeeeee to fffffff.*

Explanation: This is an informational message.

ISRE216 *aaaaaaaa bbbbbbbb found - Search for aaaaaaaa cccccccc from dddddddd to eeeeeeee was successful.*

Explanation: This is an informational message.

ISRE217 *aaaaaaaa bbbbbbbb changed - aaaaaaaa cccccccc - changed to dddddddd eeeeeeee times from fffffff to gggggggg.*

Explanation: This is an informational message.

ISRE218 *aaaaaaaa bbbbbbbb changed - aaaaaaaa cccccccc - changed to dddddddd from eeeeeeee to fffffff.*

Explanation: This is an informational message.

ISRE219 **Too many parameters - The COMPARE command only allows a name or NEXT and the EXCLUDE, SAVE, and SYSIN parameters.**

Explanation: A COMPARE edit primary command was entered which had too many parameters. The COMPARE command can specify a member name or NEXT when you are editing a partitioned data set, or a data set name. Additional parameters may be SYSIN, EXCLUDE, or SAVE.

User Response: Insure that there are not extra or invalid parameters on the COMPARE command and issue the command again.

ISRE220 *aaaaaaaa bbbbbbbb cccccccc - bbbbbbbb dddddddd - excluded aaaaaaaa times within columns eeeeeeee to fffffff.*

Explanation: This is an informational message.

ISRE221 **Error - aaaaaaaa bbbbbbbb - aaaaaaaa cccccccc could not be changed dddddddd times on eeeeeeee line(s).**

Explanation: This is an informational message.

ISRE222 **Error - aaaaaaaa bbbbbbbb - aaaaaaaa cccccccc could not be changed to dddddddd.**

Explanation: This is an informational message.

ISRE223 **Invalid left boundary - 'aaaaaaaa' is the first column that is not part of a sequence number.**

Explanation: An edit CHANGE command was entered that specified a left boundary within the range of the edit line numbers. A CHANGE command cannot be used to change the sequence numbers of a file. The minimum value that can be used as the left boundary is aaaaaaaa.

User Response: Correct the left boundary specified on the CHANGE command and retry the request.

ISRE224 **Invalid right boundary - 'aaaaaaaa' is the last column that is not part of a sequence number.**

Explanation: An edit CHANGE command was entered that specified a right boundary within the range of the edit line numbers. A CHANGE command cannot be used to change the sequence numbers of a file. The maximum value that can be used as the right boundary is &ZLBND.

User Response: Correct the right boundary specified on the CHANGE command, and retry the request.

ISRE225 **Error - aaaaaaaa bbbbbbbb - aaaaaaaa cccccccc could not be changed dddddddd times from eeeeeeee to fffffff.**

Explanation: This is an informational message.

ISRE226 **Error - aaaaaaaa bbbbbbbb - aaaaaaaa cccccccc could not be changed to dddddddd from eeeeeeee to fffffff.**

Explanation: This is an informational message.

ISRE227 *aaaaaaaa bbbbbbbb cccccccc - bbbbbbbb dddddddd - excluded aaaaaaaa times within range eeeeeeee to fffffff.*

Explanation: This is an informational message.

PDF Messages

ISRE228 *aaaaaaaa bbbbbbbb excluded - Successfully excluded of aaaaaaaaa cccccccc in range dddddd to eeeeeee.*

Explanation: This is an informational message.

ISRE229 *aaaaaaaa bbbbbbbb excluded - Successfully excluded aaaaaaaaa cccccccc in columns dddddd to eeeeeee.*

Explanation: This is an informational message.

ISRE230 **Too many parameters - Too many parameters specified for MASKLINE command. Is data quoted?**

Explanation: An invalid MASKLINE command was entered.

User Response: Review documentation for the MASKLINE command in *ISPF Edit and Edit Macros*

ISRE231 **Invalid parameter - Extraneous or invalid parameter was specified for MASKLINE command.**

Explanation: An invalid MASKLINE command was entered.

User Response: Review documentation for the MASKLINE command in *ISPF Edit and Edit Macros*

ISRE232 **Invalid parameter - Extraneous or invalid parameter was specified for MASKLINE command.**

Explanation: An invalid MASKLINE command was entered.

User Response: Review documentation for the MASKLINE command in *ISPF Edit and Edit Macros*

ISRE233 **Data parm omitted - Required data parameter not specified for the MASKLINE command.**

Explanation: An invalid MASKLINE command was entered.

User Response: Review documentation for the MASKLINE command in *ISPF Edit and Edit Macros*

ISRE234 **Too many parameters - Too many parameters specified for TABSLINE command. Is data quoted?**

Explanation: An invalid TABSLINE command was entered.

User Response: Review documentation for the TABSLINE command in *ISPF Edit and Edit Macros*

ISRE235 **Invalid parameter - Extraneous or invalid parameter was specified for TABSLINE command.**

Explanation: An invalid TABSLINE command was entered.

User Response: Review documentation for the TABSLINE command in *ISPF Edit and Edit Macros*

ISRE236 **Invalid parameter – Extraneous or invalid parameter was specified for TABSLINE command.**

Explanation: An invalid TABSLINE command was entered.

User Response: Review documentation for the TABSLINE command in *ISPF Edit and Edit Macros*

ISRE237 **Data parm omitted – Required data parameter not specified for the TABSLINE command.**

Explanation: An invalid TABSLINE command was entered.

User Response: Review documentation for the TABSLINE command in *ISPF Edit and Edit Macros*

ISRE238 **Profile overridden — At least one profile attribute was overridden by the site-wide defaults which were established when ISPF was installed.**

Explanation: Some edit profile attributes can be forced to values by settings in the ISPF configuration table. These values include RECOVERY, the recovery warning message, PACK, STATS, and SETUNDO.

User Response: If you need to have these settings changed, contact your system programmer.

System Programmer Response: Review the settings in ISRCONFIG to see if they should be changed. This message does not necessarily indicate an error. There are legitimate reasons for setting the 'force' attribute on for some edit profile settings.

ISRE239 **Data set created - aaaaaaaaa created with specified data.**

Explanation: This is an informational message. The data set is sequential and has been created using the data that was specified.

ISRE240 **Too many parameters – Too many parameters specified for INSERT command.**

Explanation: An invalid INSERT command was entered.

User Response: Review documentation for the INSERT command in *ISPF Edit and Edit Macros*

ISRE241 **Invalid parameter – Extraneous or invalid parameter was specified for INSERT command.**

Explanation: An invalid INSERT command was entered.

User Response: Review documentation for the INSERT command in *ISPF Edit and Edit Macros*

ISRE242 **Invalid parameter – Extraneous or invalid parameter was specified for INSERT command.**

Explanation: An invalid INSERT command was entered.

User Response: Review documentation for the INSERT command in *ISPF Edit and Edit Macros*

ISRE243 **Required parm omitted – Required line pointer parameter not specified for the INSERT command.**

Explanation: An invalid INSERT command was entered.

User Response: Review documentation for the INSERT command in *ISPF Edit and Edit Macros*

ISRE244 **Invalid line pointer – The line pointer given to the INSERT command is invalid.**

Explanation: An invalid INSERT command was entered.

User Response: Review documentation for the INSERT command in *ISPF Edit and Edit Macros*

ISRE245 **Too many parameters – Too many parameters specified for TENTER command.**

Explanation: An invalid TENTER command was entered.

User Response: Review documentation for the TENTER command in *ISPF Edit and Edit Macros*

ISRE246 **Invalid parameter – Extraneous or invalid parameter was specified for TENTER command.**

Explanation: An invalid TENTER command was entered.

User Response: Review documentation for the TENTER command in *ISPF Edit and Edit Macros*

ISRE247 **Invalid parameter – Extraneous or invalid parameter was specified for TENTER command.**

Explanation: An invalid TENTER command was entered.

User Response: Review documentation for the TENTER command in *ISPF Edit and Edit Macros*

ISRE248 **Line pointer omitted - Required line pointer parameter not specified for the TENTER command.**

Explanation: An invalid TENTER command was entered.

User Response: Review documentation for the TENTER command in *ISPF Edit and Edit Macros*

ISRE249 **Invalid line pointer – The line pointer given to the TENTER command is invalid.**

Explanation: An invalid TENTER command was entered.

User Response: Review documentation for the TENTER command in *ISPF Edit and Edit Macros*

ISRE251 **Invalid character string – The first string in a CHANGE command cannot be a null (") string.**

Explanation: An invalid CHANGE command was entered.

User Response: Review documentation for the CHANGE command in *ISPF Edit and Edit Macros*

ISRE253 **Put string in quotes – Put quotes (' ') around the string of characters to be displayed.**

Explanation: The command requires you to put single quotation marks around the characters to be displayed.

User Response: Add single quotation marks and retry the command.

ISRE254 *** Top of range reached * – aaaaaaaa
bbbbbbbb - not found in range. (cccccccc)
Press RCHANGE to continue.**

Explanation: This is an informational message.

ISRE255 ***** Bottom of range *** – aaaaaaaa
bbbbbbbb - not found in range. (cccccccc)
Press RCHANGE to continue.**

Explanation: This is an informational message.

PDF Messages

ISRE256 **No lines searched – No aaaaaaaa lines in range bbbbbbbb were found for the CHANGE command to search.**

Explanation: This is an informational message.

ISRE257 **No aaaaaaaa bbbbbbbb found – aaaaaaaa bbbbbbbb - not found on any cccccccc lines in range dddddddd.**

Explanation: This is an informational message.

ISRE258 **Invalid left boundary – aaaaaaaa (left bound) + bbbbbbbb (string size) greater than cccccccc (LRECL).**

Explanation: A command specifying an invalid left boundary has been entered.

User Response: Reissue the command using a valid left boundary.

ISRE259 **Invalid column range - The aaaaaaaa column range attempts a search beyond the last data column.**

Explanation: A command with an invalid column range has been entered.

User Response: Reissue the command using a valid column range.

ISRE260 **String too long - FIND, CHANGE, SEEK, and EXCLUDE strings cannot be longer than 256 bytes.**

Explanation: An edit FIND, CHANGE, SEEK, or EXCLUDE was attempted with a string longer than 256 characters. The maximum length for the strings on these commands is 256.

User Response: Since this can only be done with an edit macro, contact the macro author.

Programmer Response: Ensure that the edit macro issuing the FIND, CHANGE, SEEK, or EXCLUDE is not using strings greater than 256 bytes (not including quotes and the type identifier, such as X, P, C, or T).

ISRE261 **Enter character string - A character string for CHANGE does not exist (the '*' is invalid).**

Explanation: A CHANGE command was entered using an asterisk (*) as the first string operand (the FROM string), but no previous FIND, CHANGE, SEEK, or EXCLUDE command was issued during this edit session.

User Response: Reissue the CHANGE command with a valid FROM string. If you are trying to find an asterisk character, put the asterisk in quotation marks.

ISRE262 **No lines searched - No aaaaaaaa lines were found for the CHANGE command to search.**

Explanation: No excluded or unexcluded lines exist in the file for the change command to search.

User Response: Change the CHANGE command to remove the X or NX specification.

ISRE263 **Invalid character - Invalid special character for a picture string.**

Explanation: An invalid character exists in a picture string specification on a CHANGE command. The character may be an unusual hexadecimal code such as X'01' if the command is issued from a macro.

User Response: Change the CHANGE command to specify valid picture string characters.

ISRE264 **No aaaaaaaa bbbbbb found - aaaaaaaa bbbbbb - not found on any cccccccc lines (cols ddddd to eeeee).**

Explanation: The search string was not found by the CHANGE command on any excluded or non-excluded lines between columns ddddd and eeeee.

User Response: No action is required, but you may want to check the string you are specifying, the current bounds, or the column numbers on the command for accuracy.

ISRE265 ***Bottom of data reached* - aaaaaa bbbbbbbb - not found. Press RCHANGE key to continue from top.**

Explanation: The search string was not found by the CHANGE command on any excluded or non-excluded lines, but part of the file has not been searched.

User Response: Press RCHANGE to search the beginning of the file. You may want to check the string you are specifying, the current bounds, or the column numbers on the command for accuracy.

ISRE266 *** Top of data reached * - aaaaaa bbbbbbbb - not found. Press RCHANGE key to continue from bottom.**

Explanation: The search string was not found by the CHANGE PREVIOUS command on any excluded or non-excluded lines, but part of the file has not been searched.

User Response: Press RCHANGE to search from the end of the file. You may want to check the string you are specifying, the current bounds, or the column numbers on the command for accuracy.

ISRE267 **Inconsistent parameters - The string to be found will not fit between the specified columns.**

Explanation: A string was specified on a CHANGE command that would not fit between the specified boundary columns.

User Response: Reissue the CHANGE command with a new string, or different boundaries.

ISRE268 **Invalid hex string - The hex string does not contain an even number of hex digits.**

Explanation: A hexadecimal string was specified on a CHANGE command that did not have an even number of hexadecimal digits (0-9, A-F).

User Response: Reissue the CHANGE command with a valid hexadecimal string.

ISRE269 **Invalid hex string - The hex string contains invalid characters (only hex digits allowed).**

Explanation: A hexadecimal string was specified on a CHANGE command that contained an invalid hexadecimal digit.

User Response: Reissue the CHANGE command with a valid hexadecimal string. Valid hexadecimal digits are 0-9 and A-F.

ISRE270 **Too many parameters - Too many parameters were specified for the MOVE command**

Explanation: An invalid MOVE command was entered.

User Response: Review documentation for the MOVE command in *ISPF Edit and Edit Macros*

ISRE271 **Parameter unrecognized - An extraneous or invalid parameter was specified for the MOVE command.**

Explanation: An invalid MOVE command was entered.

User Response: Review documentation for the MOVE command in *ISPF Edit and Edit Macros*

ISRE272 **Invalid parameter - An extraneous or invalid parameter was specified for the MOVE command.**

Explanation: An invalid MOVE command was entered.

User Response: Review documentation for the MOVE command in *ISPF Edit and Edit Macros*

ISRE273 **Too many parameters - Too many parameters specified for the LINENUM command.**

Explanation: An invalid LINENUM command was entered.

User Response: Review documentation for the LINENUM command in *ISPF Edit and Edit Macros*

ISRE274 **Invalid line number - Relative line number specified in "aaaaaaaa" command does not exist.**

Explanation: The command could not be executed because the line number entered is invalid.

User Response: Enter the command with a valid line number.

ISRE275 **Invalid aaaaaaaa - Specification for LINENUM command exceeds actual length of member.**

Explanation: An invalid LINENUM command was entered.

User Response: Review documentation for the LINENUM command in *ISPF Edit and Edit Macros*

ISRE276 **Edit not allowed - Edit not allowed on members of SCLM controlled data sets.**

Explanation: The member you are trying to edit is SCLM controlled.

User Response: Edit the member using the SCLM editor.

ISRE277 **Recovery failed - Invalid file format, possibly created by a previous version of PDF.**

Explanation: The editor was unable to process a pending edit recovery because the format of the recovery data set is incorrect. The most likely explanation for this condition is that you are trying to process a recovery data set created during an edit session run on a previous release of ISPF.

User Response: If you recently converted to a new release of ISPF, try to process the recovery using the old release. If this does not work, contact your system programmer.

System Programmer Response: Contact IBM support.

ISRE280 **Too many parameters - Too many parameters specified for the CREATE command.**

Explanation: An invalid CREATE command was entered.

PDF Messages

User Response: Review documentation for the CREATE command in *ISPF Edit and Edit Macros*

ISRE281 **Parameter unrecognized - Extraneous or invalid parameter was specified for the CREATE command.**

Explanation: An invalid CREATE command was entered.

User Response: Review documentation for the CREATE command in *ISPF Edit and Edit Macros*

ISRE282 **Invalid parameter - Extraneous or invalid parameter was specified for the CREATE command.**

Explanation: An invalid CREATE command was entered.

User Response: Review documentation for the CREATE command in *ISPF Edit and Edit Macros*

ISRE283 **Too many parameters - Too many parameters specified for the LINE command. Is data quoted?**

Explanation: An invalid LINE command was entered.

User Response: Review documentation for the LINE command in *ISPF Edit and Edit Macros*

ISRE284 **Unrecognized parameter - Extraneous or invalid parameter was specified for the LINE command.**

Explanation: An invalid LINE command was entered.

User Response: Review documentation for the LINE command in *ISPF Edit and Edit Macros*

ISRE285 **Invalid parameter - Extraneous or invalid parameter was specified for the LINE command.**

Explanation: An invalid LINE command was entered.

User Response: Review documentation for the LINE command in *ISPF Edit and Edit Macros*

ISRE286 **Line pointer invalid - Required line pointer not correctly specified for LINE command**

Explanation: An invalid LINE command was entered.

User Response: Review documentation for the LINE command in *ISPF Edit and Edit Macros*

ISRE287 **Data parm omitted - Required data parameter not specified for LINE command.**

Explanation: An invalid LINE command was entered.

User Response: Review documentation for the LINE command in *ISPF Edit and Edit Macros*

ISRE290 **Too many parameters - Too many parameters specified for the CHANGE command.**

Explanation: An invalid CHANGE command was entered.

ISRE291 **Inconsistent parameters - 'aaaaaaa' and 'bbbbbbb' cannot both be specified for CHANGE command.**

Explanation: An invalid CHANGE command was entered.

User Response: Review documentation for the CHANGE command in *ISPF Edit and Edit Macros*

ISRE292 **Invalid parameter - Check for misspelled keywords or too many bounds (numeric) parameters.**

Explanation: An invalid parameter has been entered.

User Response: Correct the invalid parameter.

ISRE293 **Put string in quotes - Put quotes (' ') around the source and target character strings.**

Explanation: In order for the command to run, the source and target character strings must be enclosed in single quotation marks.

User Response: Enclose both the source and target character strings in single quotation marks.

ISRE294 **Required string missing - The CHANGE command requires the specification of a target string.**

Explanation: An invalid CHANGE command was entered.

User Response: Review documentation for the CHANGE command in *ISPF Edit and Edit Macros*

ISRE295 **Required string missing - The CHANGE command requires a second string of source data.**

Explanation: An invalid CHANGE command was entered.

User Response: Review documentation for the

CHANGE command in *ISPF Edit and Edit Macros*

ISRE296 **Too many parameters - You may specify: COPY member name or data set name AFTER aaaaaaaa**

Explanation: An invalid command has been entered.

User Response: Review documentation for the command entered in *ISPF Edit and Edit Macros*.

ISRE297 **Missing label - You must specify a label after the BEFORE or AFTER keyword.**

Explanation: The command entered requires a label.

User Response: Reissue the command with a label.

ISRE298 **Invalid parameter - An extraneous or invalid parameter was specified for the copy command.**

Explanation: An invalid COPY command was entered.

User Response: Review documentation for the COPY command in *ISPF Edit and Edit Macros*

ISRE302 **Edit - Recovery - Of aaaaaaaa completed from bbbbbbbb**

Explanation: This is an informational message. This message is sent to the user's log data set when the user presses Enter from panel ISREDM02 (the Edit Automatic Recovery panel) to continue editing the data set.

ISRE304 **Recovery failed - Read of the backup data set failed, recovery of data cancelled.**

Explanation: PDF was unable to open the recovery data set.

User Response: CANCEL will cancel recovery of the data set and allow you to proceed. However, if you want to report this problem to your system programmer, do so BEFORE you enter CANCEL so that the appropriate diagnostics may be taken.

System Programmer Response: Check the user's ISPF log for the recovery data set name and make a copy of:

- The data set being edited.
- The recovery data set.
- Any ISPF log entries relating to the failed edit session.
- Make note of all information given under OPT32 "I" for the data set being edited.

ISRE305 **Edit - Recovery - Of aaaaaaaa failed from bbbbbbbb**

Explanation: This informational message appears in the user's ISPF log data set when PDF is unable to open the recovery data set. Message ISRE304 will also appear on the user's terminal.

User Response: CANCEL will cancel recovery of the data set and allow you to proceed. However, if you want to report this problem to your system programmer, do so BEFORE you enter CANCEL so that the appropriate diagnostics may be taken.

System Programmer Response: Check the user's ISPF log for the recovery data set name and make a copy of:

- The data set being edited.
- The recovery data set.
- Any SPF log entries relating to the failed edit session.
- Take note of all information given under OPT32 "I" for the data set being edited.

ISRE306 **Recovery error - Initialization of backup data set failed, recovery suspended.**

Explanation: PDF was unable to process the recovery data set. Suspend code = X'02'

User Response: CANCEL will cancel recovery of the data set and allow you to proceed. However, if you want to report this problem to your system programmer, do so BEFORE you enter CANCEL so the appropriate diagnostics may be taken.

System Programmer Response: Check the user's ISPF log for the recovery data set name and make a copy of:

- The data set being edited.
- The recovery data set.
- Any ISPF log entries relating to the failed edit session.
- Take note of all information given under OPT32 "I" for the data set being edited.

ISRE307 **Recovery error - Write to backup data set failed or data set too small, recovery suspended.**

Explanation: PDF was unable to write to the recovery data set. Suspend code = X'00' or X'03'.

User Response: Either turn Recovery off and continue editing, or end the edit session and reenter edit to create a new recovery file.

ISRE309 **Recovery suspended - Turn recovery off to continue editing.**

Explanation: An error occurred while trying to write to the recovery data set.

User Response: Either turn Recovery off and continue editing, or end the edit session and reenter edit to create a new recovery file.

PDF Messages

ISRE310 **Initial macro error - The macro command entered is not allowed from an initial macro.**

Explanation: An edit macro command that cannot be used in an initial macro was used in an initial macro. Commands referencing display values (DISPLAY_COLS, DISPLAY_LINES, DOWN, LEFT, RIGHT, UP, LOCATE) are invalid in an initial macro because no data has been displayed.

User Response: Contact the responsible programmer.

Programmer Response: Change the initial macro specification to use another macro, or remove the invalid command from the macro.

ISRE311 **UNDO recycled - UNDO will be available after the next data change.**

Explanation: This is an informational message. Not enough storage was available for the editor to save the current transaction in storage. The record of edit changes has been reset so that subsequent changes may be undone; however, changes made before this message is displayed cannot be undone.

ISRE312 **UNDO suspended - There is not enough storage to save the current copy.**

Explanation: There is not enough storage available for the editor to retain a complete original copy of the data set or member being edited. UNDO from storage is no longer available.

User Response: If you reduce the size of the data being edited, you may be able to restart UNDO with the SETUNDO STORAGE edit primary command.

ISRE313 **UNDO from recovery - UNDO is still available, but will use the recovery file.**

Explanation: There is not enough storage available for the editor to retain a complete original copy of the data set or member being edited. UNDO from storage is not available. However, since recovery is active, UNDO will continue to be available from the recovery file.

User Response: If you reduce the size of the data being edited, you may be able to restart UNDO from storage with the SETUNDO STORAGE edit primary command.

ISRE314 **UNDO not available - UNDO is suspended. Type SETUNDO ON to reinitialize it.**

Explanation: There is not enough storage available for the editor to retain a complete original copy of the data set or member being edited. UNDO from storage is no longer available.

User Response: If you reduce the size of the data

being edited, you may be able to restart UNDO with the SETUNDO STORAGE edit primary command.

ISRE316 **Recovery suspended-error - Init of backup ds aaaaaaaaa failed - invalid attributes**

Explanation: The edit backup data set, also called the recovery file, has been allocated incorrectly and cannot be used for saving edit session changes.

User Response: Delete the file aaaaaaaaa and try recovery again. If the message occurs again, contact the person responsible for installing PDF.

System Programmer Response: Change the edit backup data set allocation parameters in the ISPF/PDF configuration table.

ISRE317 **No more to UNDO - There are no interactions to be undone due to one of the following reasons: No changes have been made since the data was last saved, UNDO has recycled, UNDO has been suspended or all changes have already been undone.**

Explanation: An UNDO command was entered but there are no more interactions to be undone. This can be for any of the following reasons:

- No changes were made since the data was last saved.
- No changes were made since the beginning of the edit session.
- UNDO is suspended.
- UNDO recycled after the last change was made.
- All recorded edit interactions have already been undone.

ISRE318 **RENUM recommended - RENUM is recommended to avoid excessive automatic renumbering.**

Explanation: The editor has been forced to renumber a large number of records and the sequence numbers of successive records are so close that future changes may cause excessive renumbering of the data.

User Response: Issue the RENUM command.

ISRE319 **UNDO not available - UNDO not available when both SETUNDO and RECOVERY are OFF or suspended.**

Explanation: The UNDO command is not available because both SETUNDO STORAGE and RECOVERY are off or suspended.

User Response: Turn Recovery or Setundo on (RECOVERY ON or SETUNDO STORAGE). If they are already on, turn them off and back on again.

ISRE320 Too many parameters - Too many parameters specified for the SHIFT command.

Explanation: A SHIFT edit macro command was issued with too many parameters. A maximum of 3 parameters is allowed: shift type, line pointer, and shift amount.

Programmer Response: Change the SHIFT command in the macro to have a maximum of three parameters (shift type, line pointer and shift amount).

ISRE321 Invalid parameter - An invalid parameter was specified for the SHIFT command.

Explanation: A SHIFT edit macro command was issued with at least one invalid parameter. The shift type and a line pointer must be specified. A shift amount is optional.

Programmer Response: Change the SHIFT command in the macro to have a maximum of three parameters (shift type, line pointer and shift amount).

ISRE322 Invalid parameter - An invalid parameter was specified for the SHIFT command.

Explanation: A SHIFT edit macro command was issued with at least one invalid parameter. The shift type and a line pointer must be specified. A shift amount is optional.

Programmer Response: Change the SHIFT command in the macro to have a maximum of three parameters (shift type, line pointer and shift amount).

ISRE323 Line pointer required - A line pointer parameter must be specified for the SHIFT command.

Explanation: A SHIFT edit macro command was issued without a line pointer value. The shift type and a line pointer must be specified, a shift amount is optional.

Programmer Response: Change the SHIFT command in the macro to include a line pointer.

ISRE324 Shift type required - '('-cols left; ')' -cols right; '<' -data left; or '>' -data right

Explanation: A SHIFT edit macro command was issued without a shift type. The shift type, (,), <, or >, and a line pointer must be specified; a shift amount is optional.

Programmer Response: Change the SHIFT command in the macro to include a shift type. Valid shift types are:

(Left column shift

) Right column shift
< Left data shift
> Right data shift.

ISRE325 Invalid line pointer - The line pointer given to the SHIFT command is invalid.

Explanation: A SHIFT edit macro command was issued an invalid line pointer. The line pointer must be a valid, existing line number, or a valid, existing label.

User Response: Correct the SHIFT command in the macro to reference a valid line. The line pointer can be either a label or a relative line number.

Verify that the line number or label exists. It is possible that deletions or label changes have caused the line that is referenced by the macro to be logically renumbered or relabeled.

ISRE327 Probable label error - "aaaaaaaa" recognized as invalid or undefined label in "bbbbbbb" cmd.

Explanation: The bbbbbbbb command has an operand that looks like a label, but either the label does not exist in the file, or it is syntactically incorrect.

Programmer Response: Correct the command or the macro to insure that it is using a valid, existing label. Labels may not have numbers or non-alphabetic characters in them except for the period at the beginning.

ISRE328 System table error - Unknown parameter type defined in edit command definition table (TED).

Explanation: An error has occurred due to an incorrectly defined internal PDF table.

User Response: If this problem is reproducible, contact IBM support.

ISRE329 System table error - A message ID is missing from the edit command definition table (TED).

Explanation: An error has occurred due to an incorrectly defined internal PDF table.

User Response: If this problem is reproducible, contact IBM support.

ISRE330 Too many parameters - Too many parameters specified for the USER_STATE command.

Explanation: An edit macro issued the USER_STATE command with too many parameters. The user state command allows only a variable name as a parameter.

User Response: Contact the responsible programmer.

PDF Messages

Programmer Response: Correct the USER_STATE command to include only the name of a variable in parentheses.

ISRE331 Invalid parameter - An invalid parameter was specified for the USER_STATE command.

Explanation: An edit macro issued the USER_STATE command with an invalid parameter. The user state command allows only a variable name as a parameter.

User Response: Contact the responsible programmer.

Programmer Response: Correct the USER_STATE command to include only the name of a variable in parentheses.

ISRE333 Invalid USER_STATE var - The variable specified for a USER_STATE restore contains invalid data.

Explanation: An edit macro statement issued a USER_STATE = (var) assignment statement using a variable that contained invalid data. The variable must be set with data saved from a previous (var) = USER_STATE command.

User Response: Contact the responsible programmer.

Programmer Response: Correct the USER_STATE command to use a variable that was set by a previous USER_STATE command.

ISRE335 Parm must be variable - To restore edit environment, the command form is: USER_STATE = (var)

Explanation: An edit macro issued a USER_STATE command with an invalid parameter or invalid syntax.

User Response: Contact the responsible programmer.

Programmer Response: Correct the USER_STATE command to use a valid variable name in parentheses.

ISRE336 Required parm missing - In command form: USER_STATE = (var), parameter (var) is required.

Explanation: An edit macro issued a USER_STATE command with no parameters. A variable name is required.

User Response: Contact the responsible programmer.

Programmer Response: Correct the USER_STATE command to use a valid variable name in parentheses.

ISRE337 aaaaa requires name - The aaaaa operand of COMPARE is only valid when a data set name or NEXT is also specified.

Explanation: The SAVE and SYSIN operands of the COMPARE command may only be used when a compare data set or member name is also supplied on the COMPARE command. The SAVE operand saves the SuperC listing to a data set named prefix.ISPFEDIT.COMPARE.LIST. The SYSIN operand allows SuperC to obtain Process Statements from an existing allocation to DD name SYSIN. If SYSIN is not specified, the DD name SYSIN is freed before SuperC is invoked.

User Response: Specify a compare data set name when using the SAVE or SYSIN operands on the edit COMPARE command.

ISRE351 Invalid character string - The first string in a EXCLUDE command cannot be a null (") string.

Explanation: An EXCLUDE command was issued that had a null string as the string to be excluded.

User Response: Change the EXCLUDE command to specify a string that has at least one character.

ISRE353 Put string in quotes - Put quotes (' ') around the string of characters to be excluded.

Explanation: The string to be excluded by an EXCLUDE command could not be determined from the command. This usually occurs when the string is a valid keyword on the command, or the string is a comma.

User Response: Change the EXCLUDE command by placing the string to be excluded in single or double quotes.

ISRE354 * Top of range reached * - aaaaaaaaa bbbbbbbb - not found in range. Press RFIND to continue.

Explanation: The string to be excluded by an EXCLUDE command was not found between the labels specified on the EXCLUDE command. The original EXCLUDE command specified that the search be from the bottom of the range to the top of the range. The top of the range was reached without finding the string.

User Response: Press RFIND to continue the search from the bottom of the range, or change the string or label range on the EXCLUDE command.

ISRE355 ***** Bottom of range *** - aaaaaaaa
bbbbbbbb - not found in range. Press
RFIND to continue.**

Explanation: The string to be excluded by an EXCLUDE command was not found between the labels specified on the EXCLUDE command. The original EXCLUDE command specified that the search be from the top of the range to the bottom of the range. The top of the range was reached without finding the string.

User Response: Press RFIND to continue the search from the top of the range, or change the string or label range on the EXCLUDE command.

ISRE358 **Invalid left boundary - aaaaaaaa (left
bound) + bbbbbbbb (string size) greater
than cccccccc(LRECL)**

Explanation: The left boundary plus the size of the exclude string exceeds the record length.

User Response: Change the string or boundary conditions so that the string fits within the specified bounds.

ISRE359 **Invalid column range - The aaaaaaaa
column range attempts a search beyond
the last data column.**

Explanation: An EXCLUDE command in an edit macro attempted to find a string outside of the current data columns.

Programmer Response: Change the boundary conditions so that the string fits within the specified bounds. Use the DATA_WIDTH command to search the maximum data column.

ISRE361 **Enter character string - A char string for
FIND/EXCLUDE has not been entered
(so * is invalid).**

Explanation: A FIND or EXCLUDE command was entered using an asterisk (*) as the first string operand (the FROM string), but no previous FIND, CHANGE, SEEK, or EXCLUDE command was issued during this edit session.

User Response: Reissue the FIND or EXCLUDE command with a valid FROM string. If you are trying to find or exclude an asterisk character, put the asterisk in quotation marks.

ISRE362 **No lines searched - No aaaaaaaa lines
were found for the EXCLUDE command
to search.**

Explanation: No excluded or unexcluded lines exist in the file for the FIND command to search.

User Response: Change the FIND command to remove the X or NX specification.

ISRE363 **Invalid character - Invalid special
character for a picture (P'xxx') string.**

Explanation: An invalid character exists in a picture string specification on a FIND command. The character may be an unusual hex code such as X'01' if the command is issued from a macro.

User Response: Change the FIND command to specify valid picture string characters.

ISRE364 **No aaaaaaaa bbbbbbbb found - aaaaaaaa
bbbbbbbb - not found on any cccccccc lines
(cols dddd to eeee).**

Explanation: The search string was not found by the FIND or EXCLUDE command on any excluded or non-excluded lines between columns dddd and eeee.

User Response: No action is required, but you may want to check the string you are specifying, the current bounds, or the column numbers on the command for accuracy.

ISRE365 ***Bottom of data reached* - aaaaa bbbbbbbb
- not found. Press RFIND key to
continue from top.**

Explanation: The search string was not found by the FIND or EXCLUDE command on any excluded or non-excluded lines, but part of the file has not been searched.

User Response: Press RFIND to search the beginning of the file. You may want to check the string you are specifying, the current bounds, or the column numbers on the command for accuracy.

ISRE366 *** Top of data reached * - aaaaa bbbbbbbb -
not found. Press RFIND key to continue
from bottom.**

Explanation: The search string was not found by the FIND PREVIOUS or EXCLUDE PREVIOUS command on any excluded or non-excluded lines, but part of the file has not been searched.

User Response: Press RFIND to search from the end of the file. You may want to check the string you are specifying, the current bounds, or the column numbers on the command for accuracy.

ISRE367 **Inconsistent parameters - The string will
not fit between the specified columns.**

Explanation: A string was specified on a FIND or EXCLUDE command that would not fit between the specified boundary columns.

User Response: Reissue the FIND or EXCLUDE command with a new string or different boundaries.

PDF Messages

ISRE368 **Invalid hex string - The hex string must have an even number of hex digits.**

Explanation: A hexadecimal string was specified on a FIND or EXCLUDE command that did not have an even number of hexadecimal digits (0-9, A-F).

User Response: Reissue the FIND or EXCLUDE command with a valid hexadecimal string.

ISRE369 **Invalid hex string - The hex string must contain only hex digits (0-9,A-F).**

Explanation: A hexadecimal string was specified on a FIND or EXCLUDE command that contained an invalid hexadecimal digit.

User Response: Reissue the FIND or EXCLUDE command with a valid hexadecimal string. Valid hexadecimal digits are 0-9 and A-F.

ISRE370 **Too many parameters - Too many parameters specified for TFLOW command.**

Explanation: An ISREDIT TFLOW edit macro command was incorrectly issued from an edit macro. The TFLOW command allows only 2 parameters: a line pointer and a column number.

User Response: Contact the responsible programmer.

Programmer Response: Correct the ISREDIT TFLOW command to have only a line pointer and, optionally, a column number.

ISRE371 **Invalid parameter - Extraneous or invalid parameter was specified for TFLOW command.**

Explanation: An ISREDIT TFLOW edit macro command was incorrectly issued from an edit macro. Possibly the line pointer was correctly specified, but the column number was invalid.

User Response: Contact the responsible programmer.

Programmer Response: Correct the ISREDIT TFLOW command to have a line pointer and, optionally, a valid column number.

ISRE373 **Required parm omitted - Required aaaaaaaa parm omitted or invalid for the TFLOW command.**

Explanation: An ISREDIT TFLOW edit macro command was incorrectly issued from an edit macro. Most likely, the line pointer operand is invalid.

User Response: Contact the responsible programmer.

Programmer Response: Correct the ISREDIT TFLOW command to have a valid line pointer and, optionally, a valid column number.

ISRE374 **Invalid aaaaaaaa - The aaaaaaaa given to the TFLOW command is invalid.**

Explanation: An ISREDIT TFLOW edit macro command was incorrectly issued from an edit macro. The line pointer references a line that does not exist in the edit data.

User Response: Contact the responsible programmer.

Programmer Response: Correct the edit macro to insure that the line number exists in the edit data before it issues the TFLOW command.

ISRE375 **Too many parameters - Too many parameters specified for TSPLIT command.**

Explanation: An ISREDIT TSPLIT edit macro command was incorrectly issued from an edit macro. The TSPLIT command allows only 2 parameters: a line pointer and a column number.

User Response: Contact the responsible programmer.

Programmer Response: Correct the ISREDIT TSPLIT command to have only a line pointer and a column number.

ISRE376 **Invalid parameter - Extraneous or invalid parameter was specified for TSPLIT command.**

Explanation: An ISREDIT TSPLIT edit macro command was incorrectly issued from an edit macro. The line pointer or column number is invalid.

User Response: Contact the responsible programmer.

Programmer Response: Correct the ISREDIT TSPLIT command to a valid line pointer and column number.

ISRE377 **Invalid aaaaaaaa - The aaaaaaaa given to the TSPLIT command is invalid.**

Explanation: An ISREDIT TSPLIT edit macro command was incorrectly issued from an edit macro. The line pointer refers to a line that is not in the edit data.

User Response: Contact the responsible programmer.

Programmer Response: Correct the ISREDIT TSPLIT command to insure the line pointer refers to an existing line before issuing the TSPLIT command.

ISRE378 **Invalid TSPLIT parms - Specify two parameters or no parameters for the TSPLIT command.**

Explanation: An ISREDIT TSPLIT edit macro command was incorrectly issued from an edit macro. Only one parameter was specified.

User Response: Contact the responsible programmer.

Programmer Response: Correct the ISREDIT TSPLIT command to have either no parameters or to have a line pointer and a column number.

ISRE380 Too many parameters - Too many parameters specified for XSTATUS command.

Explanation: The edit macro command XSTATUS was issued with too many parameters.

Programmer Response: Correct the XSTATUS command using the syntax
ISREDIT XSTATUS line-pointer = status-indicator

or

ISREDIT (var) = XSTATUS line-pointer.

ISRE381 Invalid parameter - Extraneous or invalid parameter was specified for XSTATUS command.

Explanation: The edit macro command XSTATUS was issued with invalid parameters.

Programmer Response: Correct the XSTATUS command using the syntax
ISREDIT XSTATUS line-pointer = status-indicator

or

ISREDIT (var) = XSTATUS line-pointer.

ISRE382 Required parm omitted - Required line number parm omitted or invalid for the XSTATUS command.

Explanation: The edit macro command XSTATUS was issued without a line number parameter.

Programmer Response: Correct the XSTATUS command using the syntax
ISREDIT XSTATUS line-pointer = status-indicator

or

ISRE383 Required parm omitted - Status indicator X or NX is required for XSTATUS command.

Explanation: The edit macro command XSTATUS was issued without a status indicator.

Programmer Response: Correct the XSTATUS command using the syntax
ISREDIT XSTATUS line-pointer = status-indicator

or

ISREDIT (var) = XSTATUS line-pointer.

ISRE384 Invalid line number - The relative line number given to the XSTATUS command is invalid.

Explanation: The edit macro command XSTATUS was issued with an invalid line number. In this case, the line number is a type of line-pointer. The relative line number may not exist in the file.

Programmer Response: Correct the XSTATUS command using the syntax
ISREDIT XSTATUS line-pointer = status-indicator

or

ISREDIT (var) = XSTATUS line-pointer.

Also check to see that the line number you are passing exists in the file. You may want to use the LINENUM command to get the relative line number of the last line (.ZLAST).

ISRE385 Error freeing data ID - An error was encountered in LMFREE service, trying to free a generated data ID.

Explanation: An internal error occurred trying to free a data ID for edit macro execution.

System Programmer Response: Contact IBM support.

ISRE386 DISPLAY_LINES cmd failed - The "DISPLAY_LINES" command was issued before any data was displayed.

Explanation: The DISPLAY_LINES edit macro command was used in an initial macro. DISPLAY_LINES cannot be used until the data is actually displayed at least once, and, therefore, cannot be used in an initial macro.

User Response: If the macro must be run without change, issue it manually after the first display, rather than using it as an initial macro.

Programmer Response: Remove the DISPLAY_LINES command from the initial macro.

ISRE387 Error creating data ID - An error was encountered in LMINIT service, trying to generate a data ID.

Explanation: An internal error occurred trying to create a data ID for edit macro execution.

System Programmer Response: Contact IBM support.

ISRE388 Too many parameters - Too many parameters specified for the (scroll) UP command.

Explanation: The UP command was specified with too many parameters.

User Response: Reissue the UP command using only

PDF Messages

one parameter (MAX, DATA, HALF, PAGE, CSR, or a number).

ISRE389 **Inconsistent parameters - "aaaaaaaa" and "bbbbbbbb" cannot both be specified for (scroll) UP command.**

Explanation: The UP command was specified with invalid parameters.

User Response: Reissue the UP command using only one parameter (MAX, DATA, HALF, PAGE, CSR, or a number).

ISRE390 **Invalid parameter - Extraneous or invalid parameter was specified for (scroll) UP command.**

Explanation: An invalid parameter was used with the UP command.

User Response: Review documentation for the UP command. For further information on the UP command, refer to *ISPF Edit and Edit Macros*

ISRE391 **Too many parameters - Too many parameters specified for the (scroll) RIGHT command.**

Explanation: There were too many parameters specified for the RIGHT command.

User Response: Review documentation for the RIGHT command. For further information on the RIGHT command, refer to *ISPF Edit and Edit Macros*

ISRE392 **Inconsistent parameters - "aaaaaaaa" and "bbbbbbbb" cannot both be specified for (scroll) RIGHT command.**

Explanation: Both parameters cannot be specified for the RIGHT command.

User Response: Review documentation for the RIGHT command. For further information on the RIGHT command, refer to *ISPF Edit and Edit Macros*

ISRE393 **Invalid parameter - Extraneous or invalid parameter was specified for (scroll) RIGHT command.**

Explanation: An incorrect parameter was specified for the RIGHT command.

User Response: Review documentation for the RIGHT command. For further information on the RIGHT command, refer to *ISPF Edit and Edit Macros*

ISRE394 **Too many parameters - Too many parameters specified for the (scroll) LEFT command.**

Explanation: Too many parameters were specified for the LEFT command.

User Response: Review documentation for the LEFT command. For further information on the LEFT command, refer to *ISPF Edit and Edit Macros*

ISRE395 **Inconsistent parameters - "aaaaaaaa" and "bbbbbbbb" cannot both be specified for (scroll) LEFT command.**

Explanation: Both parameters cannot be specified for the LEFT command.

User Response: Review documentation for the LEFT command. For further information on the LEFT command, refer to *ISPF Edit and Edit Macros*

ISRE396 **Invalid parameter - Extraneous or invalid parameter was specified for (scroll) LEFT command.**

Explanation: A parameter was incorrect for the LEFT command.

User Response: Review documentation for the LEFT command. For further information on the LEFT command, refer to *ISPF Edit and Edit Macros*

ISRE397 **Too many parameters - Too many parameters specified for the (scroll) DOWN command.**

Explanation: Too many parameters were specified for the DOWN command.

User Response: Review documentation for the DOWN command. For further information on the DOWN command, refer to *ISPF Edit and Edit Macros*

ISRE398 **Inconsistent parameters - "aaaaaaaa" and "bbbbbbbb" cannot both be specified for (scroll) DOWN command.**

Explanation: Both parameters cannot be specified for the DOWN command.

User Response: Review documentation for the DOWN command. For further information on the DOWN command, refer to *ISPF Edit and Edit Macros*

ISRE399 **Invalid parameter - Extraneous or invalid parameter was specified for (scroll) DOWN command.**

Explanation: An incorrect parameter was specified for the DOWN command.

User Response: Review documentation for the DOWN

command. For further information on the DOWN command, refer to *ISPF Edit and Edit Macros*

ISRE400 **Last line not found - End-of-file encountered before requested "last line" (aaaaaaaa).**

Explanation: The requested last line was not found for the extended copy command. The end-of-file was reached before the copy was completed.

User Response: Verify the last line number that you specified for the extended copy command.

ISRE401 **Enter member name - Enter a member name or end.**

Explanation: A member list is not supported with the COPY command. A member name must be provided.

User Response: Enter the member name for the COPY command. For further information on the COPY command, refer to *ISPF Edit and Edit Macros*

ISRE402 **Member aaaaaaaaa bbbbbbbb - Member aaaaaaaaa was bbbbbbbb and ccccccc exists in library.**

Explanation: This is an informational message. The data from the member selected was copied. The member the data was copied from still exists.

ISRE403 **Data set aaaaaaaaa - Data set was aaaaaaaaa.. Data set bbbbbbbb exists.**

Explanation: This is an informational message. The data from a sequential data set was either copied or moved into the member of a partitioned data set. The data that was copied still exists, but the data that was moved no longer exists in the sequential data set.

ISRE404 **Data set aaaaaaaaa - Data set was aaaaaaaaa.. Data set bbbbbbbb exists.**

Explanation: This is an informational message. The data set was copied or moved. The data in the data set that the data was copied from still exists, or the data set that the data was moved from no longer exists.

ISRE405 **Enter parameter - If any line number parameter is entered, all three must be entered.**

Explanation: Using the extended copy command and setting any of the line number parameters (First line, Last line or Number type) requires that all three parameters are set.

User Response: Set all three line number parameters when using the extended copy command and have selected the line number parameters.

ISRE406 **Invalid number type - Enter one of the indicated number types.**

Explanation: The number type entered is incorrect.

User Response: Enter one of the listed number types adjacent to the number type field on the extended copy panel.

ISRE407 **First greater than last - The first line number is greater than the last line number.**

Explanation: The value entered in the first line number field is greater than the value entered in the last line number field on the extended copy panel.

User Response: Correct the first line number field value so that it is less than the last line number value.

ISRE408 **Invalid line number - Only decimal integers greater than zero are valid for line numbers.**

Explanation: One of the values entered for the first line or last line number is not a positive decimal number greater than zero on the extended copy panel.

User Response: Correct the value that was entered into the first line or last line number field. This value must be a positive decimal number greater than zero.

ISRE409 **First line not found - End-of-file encountered before requested "first line" (aaaaaaaa).**

Explanation: The first line number entered on the extended copy panel is not valid. The data set the data was to be copied from does not contain a record for that line. The end-of-file was reached in the from data set.

User Response: Verify the number of lines in the FROM data set and correct the value for the first line number.

ISRE410 **Requested line(s) copied - Lines aaaaaaaaa - bbbbbbbb of member ccccccc were copied.**

Explanation: This is an informational message. The requested lines were copied.

ISRE411 **Requested line(s) copied - Lines aaaaaaaaa through bbbbbbbb of data set were copied.**

Explanation: This is an informational message. The requested lines were copied.

PDF Messages

ISRE412 **Requested line(s) copied - Lines** *aaaaaaaa* **through** *bbbbbbbb* **of data set were copied.**

Explanation: This is an informational message. The requested lines were copied.

ISRE413 **Requested line(s) copied - Lines** *aaaaaaaa* **-** *bbbbbbbb* **of member** *cccccccc* **were copied.**

Explanation: This is an informational message. The requested lines were copied.

ISRE414 **No lines found in range - No lines were found within the specified range of sequence numbers.**

Explanation: The range specified contained no lines for the COPY command.

User Response: Verify the range for the lines and reenter the command.

ISRE415 **Enter member name - A member list is not supported with the** *aaaaaaaa* **command.**

Explanation: This is an informational message. A member list is not supported for this command.

ISRE416 *aaaaaaaa* **not printed -** *aaaaaaaa* *bbbbbbbb* **but error encountered opening DCB for input for printing.**

Explanation: The member was not printed due to an error in opening the DCB for print.

User Response: Contact your system programmer.

System Programmer Response: Check the data set member to see why the DCB did not open.

ISRE417 **Data set replaced -** *aaaaaaaa* **replaced by specified data.**

Explanation: This is an informational message. The data set is sequential and has been replaced by the data that was specified.

ISRE418 **File attributes changed - Reallocation after abend revealed different file attributes. Data not saved.**

Explanation: The data set file attributes have changed and no data has been saved.

User Response: Check for a cause for the abend and the data set attributes.

Problem Determination: An abend occurred and the reallocation of the data set contains different file attributes.

ISRE419 **Data set in use - Reallocation after abend failed. Cancel the edit session or use the extended CREATE or REPLACE command to save the member to another data set.**

Explanation: The data set is still in use after the abend. To save the data, use the extended CREATE or REPLACE command to save the data into another data set. If you do not want to save the data, cancel the edit session.

User Response: Either cancel the edit session (which will not save your data), or use the extended CREATE or REPLACE command to save the data.

ISRE420 **Missing parameter - Variable name parameter required for the DATAID command.**

Explanation: The DATAID assignment statement is missing the required variable name for the data set currently allocated for editing.

User Response: Correct the DATAID assignment statement so that it includes the required variable name for the data set currently allocated for editing.

ISRE421 **Missing parameter - Variable name parameter required for MEMBER command.**

Explanation: The Member assignment statement is missing the required variable name for the member currently being edited.

User Response: Correct the Member assignment statement so that it includes the required variable name for the member currently being edited.

ISRE422 **Missing parameter - Variable name parameter required for LRECL command.**

Explanation: The LRECL assignment statement is missing the required variable name for the maximum space in bytes available for data.

User Response: Correct the LRECL assignment statement to include the required variable name for the maximum space allowed in bytes for data.

ISRE423 **Missing parameter - At least one variable name parameter required for FLOW_COUNTS command.**

Explanation: The FLOW_COUNTS assignment statement is missing a variable name for the most recently entered TFLOW command. At least one FLOW_COUNTS assignment statement variable must be coded.

User Response: Correct the FLOW_COUNTS

assignment statement so that it contains at least one variable name parameter.

ISRE424 **Missing parameter - At least one variable name parameter required for EXCLUDE_COUNTS command.**

Explanation: The EXCLUDE_COUNTS assignment statement is missing a variable name for the most recently processed EXCLUDE command. At least one EXCLUDE_COUNTS assignment statement variable must be coded.

User Response: Correct the EXCLUDE_COUNTS assignment statement so that it contains at least one variable name parameter.

ISRE425 **Invalid specification - GET assignment type unrecognized for the DATAID command.**

Explanation: Either the DATAID assignment statement contains an invalid variable name or a parameter is missing.

User Response: Verify that the DATAID assignment statement contains no syntax errors or missing parameters.

ISRE426 **Invalid specification - GET assignment type unrecognized for the MEMBER command.**

Explanation: Either the MEMBER assignment statement contains an invalid variable name or a parameter is missing.

User Response: Verify that the MEMBER assignment statement contains no syntax errors or missing parameters.

ISRE427 **Invalid specification - GET assignment type unrecognized for the LRECL command.**

Explanation: Either the LRECL assignment statement contains an invalid variable name or a parameter is missing.

User Response: Verify that the LRECL assignment statement contains no syntax errors or missing parameters.

ISRE428 **Invalid specification - GET assignment type unrecognized for the FLOW_COUNTS command.**

Explanation: Either the FLOW_COUNTS assignment statement contains an invalid variable name or a parameter is missing.

User Response: Verify that the FLOW_COUNTS

assignment statement contains no syntax errors or missing parameters.

ISRE429 **Invalid specification - GET assignment type unrecognized for the EXCLUDE_COUNTS command.**

Explanation: Either the EXCLUDE_COUNTS assignment statement contains an invalid variable name or a parameter is missing.

User Response: Verify that the EXCLUDE_COUNTS assignment statement contains no syntax errors or missing parameters.

ISRE430 **Invalid keyword - Either X (excluded) or NX (non-excluded) can be specified.**

Explanation: The SORT command only allows X or NX to be specified. You cannot use both in the same command.

User Response: Change the SORT command to use either X (excluded) or NX (non-excluded).

ISRE431 **Invalid SORT parameter - The only valid parameters are X, NX, A, D and/or aaaaaaaa range.**

Explanation: The SORT parameter that was entered is invalid.

User Response: Correct the SORT parameter. The valid SORT parameters are X, NX, A, D, or a valid label range.

ISRE432 **Too many sort fields - A maximum of 5 sort fields may be specified.**

Explanation: Too many sort field parameters have been entered. SORT allows a maximum of five sort fields.

User Response: Change the number of sort fields to less than or equal to five.

ISRE433 **Invalid column - Sort columns must be between the left and right bounds (aaaaaaaa-bbbbbbbb)**

Explanation: One of the sort columns entered is not within the left or right data boundaries.

User Response: Change the sort boundary that is not within the data bounds.

ISRE434 **Too many sort fields - A maximum of 5 sort fields may be specified.**

Explanation: Too many sort field parameters have been entered. SORT allows a maximum of five sort fields.

PDF Messages

User Response: Change the number of sort fields to less than or equal to five.

ISRE435 **Col 1 less than col 2 - Sort columns must be in pairs with the start column first.**

Explanation: The starting column number is greater than the ending column number for the SORT command. The starting column number must be less than the ending column number.

User Response: Change the starting column number so that it is less than the ending column number for the SORT command.

ISRE436 **Invalid SORT parameters - Specify A or D for all fields (or for none of the fields.)**

Explanation: The SORT command accepts either A (ascending), D (descending), or blank (default ascending). You cannot specify Ascending and blank or Descending and blank in the same SORT command.

User Response: Change the sort column fields to use either Ascending, Descending, or Blank, but not a combination of all three.

ISRE437 **Invalid SORT parameters - Specify A or D for all fields (or for none of the fields.)**

Explanation: The SORT command accepts either A (ascending), D (descending), or blank (default ascending). You cannot specify Ascending and blank or Descending and blank in the same SORT command.

User Response: Change the sort column fields to use either Ascending, Descending, or Blank, but not a combination of all three.

ISRE438 **Enter start and end cols - Both start and end cols must be specified for all sort fields.**

Explanation: The SORT command requires a starting column field and an ending column field. Both must be specified.

User Response: Change the SORT command to include both the starting column and ending column range.

ISRE439 **Columns overlap - Sort field columns must not overlap.**

Explanation: One of the sort column fields that was entered overlaps with another of the sort column fields.

User Response: Change the sort column fields so that none of the column fields overlap.

ISRE440 **Columns overlap - Sort field columns must not overlap.**

Explanation: The columns specified for the SORT command overlap. The columns cannot overlap for the Sort command.

User Response: Change the columns that have been specified for the SORT command so that they do not overlap.

ISRE441 **Insufficient storage - Not enough storage to perform sort.**

Explanation: There is not enough storage available for the SORT command as you have it specified.

User Response: Change the SORT command fields to sort a smaller area, contact your system programmer to give you more available storage, or find out why you are running out of storage.

System Programmer Response: Either give the user more personal storage or find out why the user is running out of storage.

ISRE442 **No records to sort - No records were found to sort.**

Explanation: The SORT command was given a range but no records were found to sort.

User Response: Verify your sort range for the SORT command.

ISRE443 **Records in sort order - No data was moved because records were already in order.**

Explanation: The SORT command was given a range and sort order to sort by, but the data was already in the correct sort order.

User Response: Verify the sort range that you provided to order the data.

ISRE444 **Invalid label specified - Label aaaaaaaaa specified in SORT command does not exist.**

Explanation: The SORT command was given a label that does not exist.

User Response: Correct the sort label to a label that exists.

ISRE445 **Sort label range invalid - Specify exactly two labels to indicate the range of lines to sort.**

Explanation: One of the label ranges that was entered does not exist or is invalid.

User Response: Verify that the labels being used for

the SORT command exist. Correct the label that is invalid.

ISRE446 **Inconsistent parameters - 'aaaaaaaa' and 'bbbbbbbb' cannot both be specified for the HILITE command.**

Explanation: The HILITE command was specified with an invalid combination of parameters. You may not specify ON and OFF together, and you may not specify LOGIC, IFLOGIC, and DOLOGIC together.

User Response: Remove the incorrect parameter and reissue the HILITE command.

ISRE447 **Invalid parameter - Valid parameters for the HILITE command are: ON, OFF, PAREN, LOGIC, IFLOGIC, DOLOGIC, SEARCH, CURSOR, FIND, RESET, AUTO, DISABLED or a valid language name.**

Explanation: The valid HILITE parameters are listed above. To change the HILITE settings through a menu interface, enter the HILITE command with no parameters.

User Response: Reissue the HILITE command with valid parameters.

ISRE448 **Search not allowed - HILITE SEARCH is only allowed when HILITE is on and the language is not DEFAULT.**

Explanation: HILITE SEARCH is only supported when highlighting is on and the language being edited is not DEFAULT.

User Response: Use HILITE SEARCH ON to turn highlighting on and use the SEARCH operand. If this is unsuccessful, use the PROFILE command to determine the language being used by the edit highlighting. If the language is DEFAULT, use the HILITE command to specify a specific language.

ISRE449 **LOGIC not supported - HILITE LOGIC is only supported for languages BOOK, C, DTL, OTHER, PASCAL, PLI, REXX, and SKEL.**

Explanation: HILITE LOGIC is only supported for languages BOOK, C, DTL, OTHER, PASCAL, PLI, REXX, and SKEL. The current language does not support logic highlighting and thus does not allow the LOGIC operand on the HILITE command.

ISRE450 **DEFINE name invalid - The name specified in the DEFINE command is greater than 8 characters.**

Explanation: A name was specified on the DEFINE command that was too long. Names on the DEFINE

command can be no longer than 8 characters.

User Response: Reissue the DEFINE command with a valid name.

ISRE451 **DEFINE syntax invalid - Specify: DEFINE new-alias-name ALIAS alias-of-name.**

Explanation: Invalid syntax was detected on an edit macro DEFINE command that was issued to define an alias. The correct syntax is:

DEFINE new-alias-name ALIAS alias-of-name.

User Response: Reissue the command using the syntax described above.

ISRE452 **DEFINE is invalid - A macro may not be defined to override macro only commands.**

Explanation: An edit macro tried to override a macro only command. The DEFINE edit macro command cannot be used in a macro to override commands that are edit macro commands and not interactive primary commands.

Programmer Response: Remove or change the DEFINE command. If you want to define a macro name, choose another name for the macro.

ISRE453 **Command not found - "aaaaaaaa" is not an edit command or macro.**

Explanation: A command was issued in the editor that is not a valid edit command. Valid edit commands may be:

- Built-in edit commands
- Macro only commands (valid only in edit macros)
- CLISTs in SYSPROC
- REXX EXECs in SYSPROC or SYSEXEC
- Program macros.

CLISTs and EXECs can also reside in libraries specified with the TSO ALTLIB command.

ISRE454 **Command name is invalid - The name 'aaaaaaaa' is invalid. Not an edit command / macro name.**

Explanation: The command aaaaaaaa is not valid for a macro name. Valid macro names have 8 characters or fewer, start with an alphabetic or national character, and may have alphabetic characters, national characters, or numeric digits after the first character. In addition, program macros may be preceded by an exclamation point.

User Response: Retype the command using a valid name for an edit command.

PDF Messages

ISRE455 **DEFINE name not found - aaaaaaaa was not previously defined for NOP or DISABLED request.**

Explanation: The *aaaaaaa* command is not currently known to the editor as a built-in or defined command, and therefore cannot be disabled.

User Response: If the command to disable was mistyped, reissue the DEFINE command specifying the correct command name to disable.

ISRE457 **DEFINE alias-to name - The alias-to name was omitted, it is a required value.**

Explanation: Invalid syntax was detected on an edit macro DEFINE command that was issued to define an alias. The correct syntax is:

DEFINE new-alias-name ALIAS alias-of-name.

User Response: Reissue the command using the syntax described above.

ISRE458 **DEFINE too many parms - DEFINE MACRO/NOP/RESET/DISABLED command has unrecognized parameter: aaaaaaaa**

Explanation: The DEFINE command was issued with an unrecognized parameter.

User Response: Reissue the define command with correct syntax. For a description of DEFINE command syntax, enter the HELP command after this message is displayed.

ISRE459 **BLDL error - I/O error, insufficient virtual storage, or other BLDL error.**

Explanation: An error occurred while trying to access the directory of a PDS or PDSE.

User Response: If the problem recurs, log off, log back on, and try the operation again. If the error still occurs, try another program such as IEBCOPY to see if there is a permanent problem with the data set. For further assistance, contact the system programmer.

ISRE460 **Too many parameters - The DEFINE command can have a maximum of three parameters.**

Explanation: The DEFINE macro command contains too many parameters. The DEFINE macro command can use up to three parameters, but the number of parameters has been exceeded.

User Response: Change the DEFINE command to use three or fewer parameters.

ISRE461 **Inconsistent keywords - Only one of the keywords allowed: MACRO, ALIAS, NOP, RESET or DISABLED.**

Explanation: The DEFINE macro command allows the use of only one of the following keywords: MACRO, ALIAS, NOP, RESET, or DISABLED.

User Response: Correct your macro to use only one of the DEFINE macro keywords.

ISRE462 **Invalid parameter - A parameter is invalid on the DEFINE command.**

Explanation: The DEFINE macro command allows the use of only one of the following keywords: MACRO, ALIAS, NOP, RESET, or DISABLED. Your DEFINE macro is using an invalid keyword.

User Response: Correct your macro so that it uses only one of the DEFINE macro keywords.

ISRE463 **Specify required keyword - Specify only one of these keywords: MACRO, ALIAS, NOP, RESET or DISABLED.**

Explanation: The DEFINE macro command requires one of the following keywords: MACRO, ALIAS, NOP, RESET, or DISABLED.

User Response: Correct the DEFINE macro so that it uses one of the required keywords.

ISRE464 **DEFINE name is required - Specify command name to be defined as a MACRO, ALIAS, NOP, RESET DISABLED.**

Explanation: The DEFINE macro command requires one of the following keywords: MACRO, ALIAS, NOP, RESET, or DISABLED.

User Response: Use the DEFINE macro with one of the required keywords.

ISRE465 **Range is required - aaaaaaaa requires a range to be specified when command issued from a macro.**

Explanation: The command that was issued requires a range to be specified when used.

User Response: Set the necessary range when using the macro command that is being used.

ISRE466 **Invalid parameter - An extra or invalid parameter was specified for the Process command.**

Explanation: The PROCESS macro command passed either an invalid parameter or an extra parameter while being used.

User Response: Either change the PROCESS macro command to use the correct parameters, or check the parameters to verify that the correct number of parameters is being passed.

ISRE467 **Too many parameters - Process may have keywords dest and range. Range is followed by 1 or 2 names.**

Explanation: The PROCESS macro command keywords RANGE and DEST are using too many parameters in their syntax. The DEST keyword allows one parameter and the RANGE keyword allows up to two parameters.

User Response: Correct the PROCESS macro command so that it uses the correct number of parameters for the keywords DEST or RANGE.

ISRE468 **Invalid BUILTIN command - Name following BUILTIN does not resolve to a built-in edit command.**

Explanation: The BUILTIN macro command being used has a command name that does not resolve to a built-in edit command.

User Response: Correct the BUILTIN macro command to use or resolve a built-in edit command.

ISRE470 **Assignment command error - Assignment type (GET/SET) unrecognized for the CURSOR command.**

Explanation: A severe error (return code 20) has been received using the CURSOR macro command. The label that you attempted to use has not been assigned.

User Response: Correct the edit macro so that all line labels are correctly set before using them as a parameter to the CURSOR command.

ISRE471 **Assignment command error - Assignment type (GET/SET) unrecognized for the AUTOLIST command.**

Explanation: A severe error (return code 20) has been received using the AUTOLIST macro command. The assignment type used with the AUTOLIST command is invalid.

User Response: Correct the edit macro so that it uses the correct assignment type for the AUTOLIST command.

ISRE472 **Assignment command error - Assignment type (GET/SET) unrecognized for the AUTONUM command.**

Explanation: A severe error (return code 20) has been received using the AUTONUM macro command. The assignment type used with the AUTONUM command is invalid.

User Response: Correct the edit macro so that it uses the correct assignment type for the AUTONUM command.

ISRE473 **Assignment command error - Assignment type (GET/SET) unrecognized for the BOUNDS command.**

Explanation: A severe error (return code 20) has been received using the BOUNDS macro command. The assignment type used with the BOUNDS command is invalid.

User Response: Correct the edit macro so that it uses the correct assignment type for the BOUNDS command.

ISRE474 **Assignment command error - Assignment type (GET/SET) unrecognized for the CAPS command.**

Explanation: A severe error (return code 20) has been received using the CAPS macro command. The assignment type used with the CAPS command is invalid.

User Response: Correct the edit macro so that it uses the correct assignment type for the CAPS command.

ISRE475 **Assignment command error - Assignment type (GET/SET) unrecognized for the USER_STATE command.**

Explanation: A severe error (return code 20) has been received using the USER_STATE macro command. The assignment variable used with the command is invalid.

User Response: Correct the edit macro so that it uses the correct assignment variable for the USER_STATE command.

ISRE476 **Assignment command error - Assignment type (GET/SET) unrecognized for the HEX command.**

Explanation: A severe error (return code 20) has been received using the HEX macro command. The assignment type used with the command is invalid.

User Response: Correct the edit macro so that it uses the correct assignment type for the HEX command.

PDF Messages

ISRE477 **Assignment command error -
Assignment type (GET/SET)
unrecognized for the LINE command.**

Explanation: A severe error (return code 20) has been received using the LINE macro command. The assignment type used with the command is invalid.

User Response: Correct the edit macro so that it uses the correct assignment type for the LINE command.

ISRE478 **Assignment command error -
Assignment type (GET/SET)
unrecognized for the LINENUM
command.**

Explanation: A severe error (return code 20) has been received using the LINENUM macro command. The assignment type used with the command is invalid.

User Response: Correct the edit macro so that it uses the correct assignment type for the LINENUM command.

ISRE479 **Assignment command error -
Assignment type (GET/SET)
unrecognized for the SETUNDO
command.**

Explanation: A severe error (return code 20) has been received using the SETUNDO macro command. The assignment type used with the command is invalid.

User Response: Correct the edit macro so that it uses the correct assignment type for the SETUNDO command.

ISRE480 **Assignment command error -
Assignment type (GET/SET)
unrecognized for the MASKLINE
command.**

Explanation: The PDF editor encountered an edit macro statement involving the command MASKLINE, but the editor could not determine whether the statement was intended to be a GET type request (a request for PDF to get the value for a current editor setting and place it into a dialog-specified variable) or a SET type request (a request for the editor to change a value for an editor setting based on a dialog specified value).

User Response: Contact the responsible programmer.

Programmer Response: Change the MASKLINE command to specify the proper parameters. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE481 **Assignment command error -
Assignment type (GET/SET)
unrecognized for the NULLS command.**

Explanation: The PDF editor encountered an edit macro statement involving the command NULLS, but the editor could not determine whether the statement was intended to be a GET type request (a request for PDF to get the value for a current editor setting and place it into a dialog-specified variable) or a SET type request (a request for the editor to change a value for an editor setting based on a dialog specified value).

User Response: Contact the responsible programmer.

Programmer Response: Change the NULLS command to specify the proper parameters. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE482 **Assignment command error -
Assignment type (GET/SET)
unrecognized for the NUMBER
command.**

Explanation: The PDF editor encountered an edit macro statement involving the command NUMBER, but the editor could not determine whether the statement was intended to be a GET type request (a request for PDF to get the value for a current editor setting and place it into a dialog-specified variable) or a SET type request (a request for the editor to change a value for an editor setting based on a dialog specified value).

User Response: Contact the responsible programmer.

Programmer Response: Change the NUMBER command to specify the proper parameters. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE483 **Assignment command error -
Assignment type (GET/SET)
unrecognized for the RECOVERY
command.**

Explanation: The PDF editor encountered an edit macro statement involving the command RECOVERY, but the editor could not determine whether the statement was intended to be a GET type request (a request for PDF to get the value for a current editor setting and place it into a dialog-specified variable) or a SET type request (a request for the editor to change a value for an editor setting based on a dialog specified value).

User Response: Contact the responsible programmer.

Programmer Response: Change the RECOVERY command to specify the proper parameters. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE484 **Assignment command error -
Assignment type (GET/SET)
unrecognized for the STATUS
command.**

Explanation: The PDF editor encountered an edit macro statement involving the command STATUS, but the editor could not determine whether the statement was intended to be a GET type request (a request for PDF to get the value for a current editor setting and place it into a dialog-specified variable) or a SET type request (a request for the editor to change a value for an editor setting based on a dialog specified value).

User Response: Contact the responsible programmer.

Programmer Response: Change the STATUS command to specify the proper parameters. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE485 **Assignment command error -
Assignment type (GET/SET)
unrecognized for the STATS command.**

Explanation: The PDF editor encountered an edit macro statement involving the command STATS, but the editor could not determine whether the statement was intended to be a GET type request (a request for PDF to get the value for a current editor setting and place it into a dialog-specified variable) or a SET type request (a request for the editor to change a value for an editor setting based on a dialog specified value).

User Response: Contact the responsible programmer.

Programmer Response: Change the STATS command to specify the proper parameters. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE486 **Assignment command error -
Assignment type (GET/SET)
unrecognized for the TABS command.**

Explanation: The PDF editor encountered an edit macro statement involving the command TABS, but the editor could not determine whether the statement was intended to be a GET type request (a request for PDF to get the value for a current editor setting and place it into a dialog-specified variable) or a SET type request (a request for the editor to change a value for an editor setting based on a dialog specified value).

User Response: Contact the responsible programmer.

Programmer Response: Change the TABS command to specify the proper parameters. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE487 **Assignment command error -
Assignment type (GET/SET)
unrecognized for the TABSLINE
command.**

Explanation: The PDF editor encountered an edit macro statement involving the command TABSLINE, but the editor could not determine whether the statement was intended to be a GET type request (a request for PDF to get the value for a current editor setting and place it into a dialog-specified variable) or a SET type request (a request for the editor to change a value for an editor setting based on a dialog specified value).

User Response: Contact the responsible programmer.

Programmer Response: Change the TABSLINE command to specify the proper parameters. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE488 **NEXT is invalid - NEXT is not allowed
when editing or viewing a sequential
data set.**

Explanation: NEXT was specified on the COMPARE command while editing or viewing sequential data set. NEXT is only supported for concatenated partitioned data sets.

User Response: Issue the command using an explicit data set name.

ISRE489 **Member not found - Member aaaaaaaa
could not be found at a higher level of
the hierarchy of data sets which was
used to invoke this edit or view session.**

Explanation: NEXT was specified on the COMPARE command but a member of the same name does not exist at a higher level of the edit or view hierarchy. If this is an SCLM session, you should be aware that the editor may not be able to allocate all of the groups in the SCLM hierarchy at one time.

User Response: Determine the name of the data set to which you want to compare the current member and issue the COMPARE command using the explicit data set name.

ISRE490 **Missing parameter - Variable name
parameter required for the RECFM
command.**

Explanation: The RECFM edit macro command was invoked, but no variable name was specified to indicate where the editor should put the value of the current setting.

User Response: Contact the responsible programmer.

Programmer Response: Change the RECFM command to specify the proper parameters. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

PDF Messages

ISRE491 **Missing parameter - Variable name parameter required for MACRO_LEVEL command.**

Explanation: The MACRO_LEVEL edit macro command was invoked, but no variable name was specified to indicate where the editor should put the value of the current setting.

User Response: Contact the responsible programmer.

Programmer Response: Change the MACRO_LEVEL command to specify the proper parameters. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE492 **Missing parameter - Variable name parameter required for RANGE_CMD command.**

Explanation: The RANGE_CMD edit macro command was invoked, but no variable name was specified to indicate where the editor should put the value of the current setting.

User Response: Contact the responsible programmer.

Programmer Response: Change the RANGE_CMD command to specify the proper parameters. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE493 **Missing parameter - Variable name parameter required for DATA_CHANGED command.**

Explanation: The DATA_CHANGED edit macro command was invoked, but no variable name was specified to indicate where the editor should put the value of the current setting.

User Response: Contact the responsible programmer.

Programmer Response: Change the DATA_CHANGED command to specify the proper parameters. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE495 **Invalid specification - GET assignment type unrecognized for the RECFM command.**

Explanation: The PDF editor encountered an edit macro statement involving the command RECFM, but the editor could not recognize the statement as a GET type request (a request for PDF to get the value for a current editor setting and place it into a dialog-specified variable). A GET type request is the only valid request type for the RECFM macro command.

User Response: Contact the responsible programmer.

Programmer Response: Change the RECFM command to specify the proper parameters. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE496 **Invalid specification - GET assignment type unrecognized for the MACRO_LEVEL command.**

Explanation: The PDF editor encountered an edit macro statement involving the command MACRO_LEVEL, but the editor could not recognize the statement as a GET type request (a request for PDF to get the value for a current editor setting and place it into a dialog-specified variable). A GET type request is the only valid request type for the MACRO_LEVEL macro command.

User Response: Contact the responsible programmer.

Programmer Response: Change the MACRO_LEVEL command to specify the proper parameters. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE497 **Invalid specification - GET assignment type unrecognized for the RANGE_CMD command.**

Explanation: The PDF editor encountered an edit macro statement involving the command RANGE_CMD, but the editor could not recognize the statement as a GET type request (a request for PDF to get the value for a current editor setting and place it into a dialog-specified variable). A GET type request is the only valid request type for the RANGE_CMD macro command.

User Response: Contact the responsible programmer.

Programmer Response: Change the RANGE_CMD command to specify the proper parameters. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE498 **Invalid specification - GET assignment type unrecognized for the DATA_CHANGED command.**

Explanation: The PDF editor encountered an edit macro statement involving the command DATA_CHANGED, but the editor could not recognize the statement as a GET type request (a request for PDF to get the value for a current editor setting and place it into a dialog-specified variable). A GET type request is the only valid request type for the DATA_CHANGED macro command.

User Response: Contact the responsible programmer.

Programmer Response: Change the DATA_CHANGED command to specify the proper parameters. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE500 **Too many parameters - No parameters are defined for the ASIS command (see CAPS OFF)**

Explanation: The ASIS edit command was invoked with a parameter specified. The ASIS command

(equivalent to the CAPS OFF command) does not take any parameters.

User Response: Remove any parameters from the ASIS command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to remove any parameters from the ASIS command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE501 Parameter missing - Line number and/or column number must be specified on the SET CURSOR command.

Explanation: When invoking the PDF edit macro command CURSOR to set the cursor position, you must specify either a row value or a column value (or both).

User Response: Contact the system programmer.

Programmer Response: Change the CURSOR command to specify the proper parameters. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE502 Invalid parameter - ON or OFF are the only valid parameters for the AUTONUM command.

Explanation: The PDF edit AUTONUM command was invoked with a parameter other than ON or OFF.

User Response: Change the command to specify the proper parameters for the AUTONUM command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameter for the AUTONUM command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE503 Too many parameters - ON or OFF are the only valid parameters for the AUTONUM command.

Explanation: The PDF edit AUTONUM command was invoked with more than one parameter. Only one parameter (either ON or OFF) may be specified for the AUTONUM command.

User Response: Change the command to specify the proper parameters for the AUTONUM command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify

the proper parameter for the AUTONUM command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE504 Line number invalid - Specification of relative line number 0 is invalid in the CURSOR command.

Explanation: When invoking the PDF edit macro CURSOR command, the minimum value allowed for the row number is 1, the maximum value allowed for the row number is the relative line number of the last line of your data.

Programmer Response: Change the CURSOR command to specify a valid value for the row. Refer to *ISPF Edit and Edit Macros* for the proper invocation of the CURSOR macro command.

ISRE505 Invalid specification - The specified line/column number for CURSOR command exceeds data length.

Explanation: When invoking the PDF edit macro CURSOR command, the maximum value allowed for the row number is the relative line number of the last line of your data. The maximum value allowed for the column number is the logical record length of your data.

User Response: Contact the system programmer.

Programmer Response: Change the CURSOR command to specify a valid value for the row or the cursor or both. Refer to *ISPF Edit and Edit Macros* for the proper invocation of the CURSOR macro command.

ISRE506 Too many parameters - No parameters are defined for the CANCEL command.

Explanation: The CANCEL edit command was invoked with a parameter specified. The CANCEL command does not take any parameters.

User Response: Remove any parameters from the CANCEL command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to remove any parameters from the CANCEL command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE507 Line number invalid - Specification of relative line number beyond the data, invalid for CURSOR command.

Explanation: When invoking the PDF edit macro CURSOR command, the minimum value allowed for the row number is 1, the maximum value allowed for

PDF Messages

the row number is the relative line number of the last line of your data.

User Response: Contact the system programmer.

Programmer Response: Change the CURSOR command to specify a valid value for the row. Refer to *ISPF Edit and Edit Macros* for the proper invocation of the CURSOR macro command.

ISRE510 **Too many parameters - ON/OFF are the only valid parameters for the CAPS command.**

Explanation: The PDF edit CAPS command was invoked with more than one parameter. Only one parameter (either ON or OFF) may be specified for the CAPS command.

User Response: Change the command to specify the proper parameters for the CAPS command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameter for the CAPS command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE511 **Invalid parameter - ON/OFF are the only valid parameters for the CAPS command.**

Explanation: The PDF edit CAPS command was invoked with a parameter other than ON or OFF.

User Response: Change the command to specify the proper parameters for the CAPS command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameter for the CAPS command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE512 **Inconsistent parameters - "aaaaaaaa" and "bbbbbbbb" cannot both be entered with CAPS command.**

Explanation: Mutually exclusive parameters (aaaaaaaa and bbbbbbbb) were specified on invocation of the CAPS command.

User Response: Change the command to specify the proper parameters for the CAPS command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify

the proper parameter for the CAPS command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE513 **Too many parameters - ON/OFF, VERT/DATA are the only valid HEX command parameters.**

Explanation: Too many parameters were specified on invocation of the edit HEX command.

User Response: Change the command to specify the proper parameters for the hex command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameters for the hex command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE514 **Invalid parameter - ON/OFF, VERT/DATA are the only valid HEX command parameters.**

Explanation: An invalid parameter was specified on invocation of the edit hex command.

User Response: Change the command to specify the proper parameters for the HEX command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameters for the hex command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE515 **Inconsistent parameters - "aaaaaaaa" and "bbbbbbbb" cannot both be entered with HEX command.**

Explanation: Mutually exclusive parameters (aaaaaaaa and bbbbbbbb) were specified on invocation of the HEX command.

User Response: Change the command to specify the proper parameters for the HEX command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameter for the HEX command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE516 Too many parameters - No parameters are defined for the NONULLS command. (see NULLS OFF).

Explanation: The NONULLS edit command was invoked with a parameter specified. The NONULLS command (equivalent to the NULLS OFF command) does not take any parameters.

User Response: Remove any parameters from the NONULLS command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to remove any parameters from the NONULLS command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE517 System abend 'aaaa' - SUBMIT failed due to abend'aaaa' on 'bbb(44)'

Explanation: A system abend code of *aaaa* was encountered while attempting to process the edit SUBMIT command for data set *bbb(44)*. This indicates that insufficient data set or volume space exists to create the temporary data set used by edit to submit the data from your edit session.

User Response: Contact your system programmer for assistance in freeing sufficient space to submit the data set. You may be able to resubmit the request successfully, depending on normal space usage on your system.

ISRE519 Parameter unrecognized - ON/OFF are the only valid parameters for the CAPS command.

Explanation: The PDF edit CAPS command was invoked with a parameter other than ON or OFF.

User Response: Change the command to specify the proper parameters for the CAPS command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameter for the CAPS command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE520 Too many parameters - No parameters are defined for the NONUM command. (see NUM OFF)

Explanation: The NONUM edit command was invoked with a parameter specified. The NONUM command (equivalent to the NUM OFF command) does not take any parameters.

User Response: Remove any parameters from the NONUM command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to remove any parameters from the NONUM command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE523 Too many parameters - No parameters are defined for the NOTABS command. (see TABS OFF)

Explanation: The NOTABS edit command was invoked with a parameter specified. The NOTABS command (equivalent to the TABS OFF command) does not take any parameters.

User Response: Remove any parameters from the NOTABS command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to remove any parameters from the NOTABS command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE524 Too many parameters - Too many parameters specified for the PROFILE command.

Explanation: The PROFILE edit command was invoked with more parameters than the allowed maximum.

User Response: Remove any extra parameters from the PROFILE command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to remove any extra parameters from the PROFILE command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE525 Inconsistent parameters - "aaaaaaaa" and "bbbbbbbb" cannot both be specified for PROFILE command.

Explanation: Mutually exclusive parameters (*aaaaaaaa* and *bbbbbbbb*) were specified on invocation of the PROFILE command.

User Response: Change the command to specify the proper parameter for the PROFILE command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer

PDF Messages

for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameters to the PROFILE command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE526 **Too many parameters - ON/OFF, STD/ALL are the only valid NULLS command parms**

Explanation: Too many parameters were specified on invocation of the edit NULLS command.

User Response: Change the command to specify the proper parameters for the NULLS command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameters to the NULLS command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE527 **Invalid parameter - ON/OFF, STD/ALL are the only valid NULLS command parms**

Explanation: An invalid parameter was specified on invocation of the edit NULLS command.

User Response: Change the command to specify the proper parameters for the NULLS command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameters to the NULLS command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE528 **Inconsistent parameters - 'aaaaaaaa' and 'bbbbbbbb' cannot both be specified for NULLS command.**

Explanation: Mutually exclusive parameters (aaaaaaaa and bbbbbbbb) were specified on invocation of the NULLS command.

User Response: Change the command to specify the proper parameter for the NULLS command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameters to the NULLS command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE529 **Parameter usage invalid - An invalid parm or combination of parms was specified for TABS command.**

Explanation: Two parameters were passed to the PDF edit command TABS, but ON was not one of them. There are no valid 2 parameter combinations to TABS that do not include ON.

User Response: Change the command to specify the proper parameters for the TABS command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameters to the TABS command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE530 **Too many NUMBER parms - Too many parameters were specified for the NUMBER command.**

Explanation: The NUMBER edit command was invoked with more parameters than the allowed maximum.

User Response: Remove any extra parameters from the NUMBER command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to remove any extra parameters from the NUMBER command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE531 **Invalid NUMBER cmd parm - Valid NUMBER parms: ON/OFF, STD/NOSTD, NOCOB/COBOL, NODISPL/DISPLAY**

Explanation: A parameter was specified to the edit command NUMBER other than one of the allowed values (ON, OFF, STD, NOSTD, COBOL, NOCOB, NODISPL and DISPLAY).

User Response: Correct the parameters to the NUMBER command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to correct the parameters to the NUMBER command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE532 Inconsistent parameters - "aaaaaaa" and "bbbbbbb" cannot both be specified for NUMBER command.

Explanation: Mutually exclusive parameters (aaaaaaa and bbbbbbb) were specified on invocation of the NUMBER command.

User Response: Change the command to specify the proper parameter for the NUMBER command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameters to the NUMBER command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE533 Too many parameters - ON or OFF are the only valid parameters for the AUTOLIST command.

Explanation: The AUTOLIST edit command was invoked with more than one parameter.

User Response: Correct the parameters to the AUTOLIST command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to correct the parameters to the AUTOLIST command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE534 Invalid parameter - ON or OFF are the only valid parameters for the AUTOLIST command.

Explanation: The AUTOLIST edit command was invoked with a parameter other than ON or OFF.

User Response: Correct the parameters to the AUTOLIST command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to correct the parameters to the AUTOLIST command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE536 Too many parameters - Only ON, OFF, WARN and NOWARN are valid for the RECOVERY command.

Explanation: More parameters were specified to the edit command RECOVERY than the allowed maximum.

User Response: Correct the parameters to the

RECOVERY command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to correct the parameters to the RECOVERY command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE537 Invalid parameter - Only ON, OFF, WARN and NOWARN are valid for the RECOVERY command.

Explanation: A parameter was specified to the edit command RECOVERY other than one of the allowed values (ON, OFF, WARN, and NOWARN).

User Response: Correct the parameters to the RECOVERY command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to correct the parameters to the RECOVERY command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE538 Inconsistent parameters - "aaaaaaa" and "bbbbbbb" cannot both be specified for RECOVERY command.

Explanation: Mutually exclusive parameters (aaaaaaa and bbbbbbb) were specified on invocation of the RECOVERY command.

User Response: Change the command to specify the proper parameter for the RECOVERY command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameters to the RECOVERY command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE540 Too many parameters - ON, DISPLAY, STD, COBOL are the only valid RENUM parameters.

Explanation: Too many parameters were specified on invocation of the edit RENUM command.

User Response: Change the command to specify the proper parameters for the RENUM command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify

PDF Messages

the proper parameters for the RENUM command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE541 **Invalid parameter - ON, DISPLAY, STD, COBOL are the only valid RENUM parameters.**

Explanation: The PDF edit RENUM command was invoked with a parameter other than ON, DISPLAY, STD, or COBOL.

User Response: Change the command to specify the proper parameters for the RENUM command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameters for the RENUM command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE542 **Inconsistent parameters - "aaaaaaaa" and "bbbbbbbb" cannot both be entered with the RENUM command.**

Explanation: Mutually exclusive parameters (aaaaaaaa and bbbbbbbb) were specified on invocation of the RENUM command.

User Response: Change the command to specify the proper parameters for the RENUM command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameter for the RENUM command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE543 **No data lines exist - There are no standard lines for the DELETE command to process.**

Explanation: The edit command DELETE was entered, but no lines were found within the scope of the command that were eligible for deletion.

User Response: Verify any line labels or X/NX keywords that were entered are correct and rerun the macro. If all parameters were specified as you wanted, then no lines meeting your criteria exist. Either change your criteria or continue on with the next logical step in your edit session.

ISRE544 **aaaa lines deleted - aaaa lines were deleted as a result of the DELETE command.**

Explanation: This is an informational message. An edit command DELETE was issued for which the editor found aaaa lines meeting the criteria specified. All such lines were successfully deleted.

ISRE545 **LRECL not large enough - LRECL is not large enough for COBOL and standard numbers.**

Explanation: The Edit command equivalent to NUMBER ON STD COBOL was entered, which requests that the editor maintain both standard line numbers and COBOL line numbers. This requires that the record length of the data set be at least 15. The data set you are editing is less than 15 bytes wide, making it impossible for the editor to maintain both types of line numbers. The editor will maintain COBOL line numbers only.

User Response: If COBOL line numbers only are sufficient for your needs, no action is required. If not, issue the NUM ON STD, NUM OFF, or UNNUM command to set the line numbering to meet your needs.

ISRE546 **Too many parameters - No parameters are defined for the SAVE command.**

Explanation: The SAVE edit command was invoked with a parameter specified. The SAVE command does not take any parameters.

User Response: Remove any parameters from the SAVE command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to remove any parameters from the SAVE command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE550 **Too many parameters - ON and OFF are the only valid "STATS" command parameters.**

Explanation: The PDF edit STATS command was invoked with more than one parameter. Only one parameter (either ON or OFF) can be specified for the STATS command.

User Response: Change the command to specify the proper parameters for the STATS command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameter for the STATS command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE551 Invalid parameter - ON and OFF are the only valid "STATS" command parameters.

Explanation: The PDF edit STATS command was invoked with a parameter other than ON or OFF.

User Response: Change the command to specify the proper parameters for the STATS command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameter for the STATS command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE552 Inconsistent parameters - "aaaaaaaa" and "bbbbbbbb" cannot both be specified for "STATS" command.

Explanation: Mutually exclusive parameters (*aaaaaaaa* and *bbbbbbbb*) were specified on invocation of the STATS command.

User Response: Change the command to specify the proper parameters for the STATS command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameter for the STATS command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE553 Too many parameters - Range values are the only parameters defined for the "SUBMIT" command.

Explanation: The PDF edit SUBMIT command was invoked with more than 2 parameters. Only 2 parameters (the labels marking the beginning and end of the range of line to be submitted) can be specified for the SUBMIT command.

User Response: Change the command to specify the proper parameters for the SUBMIT command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameter for the SUBMIT command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE554 Invalid "SUBMIT" parm - Probable invalid/undefined label or other range specification error.

Explanation: The PDF edit SUBMIT command was invoked specifying a line label or line number that does not exist within the current edit session.

User Response: Change the command to specify the proper line range for the SUBMIT command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper line range for the SUBMIT command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE555 Invalid parameter - Range values are the only parameters defined for the "SUBMIT" command.

Explanation: The PDF edit SUBMIT command was invoked specifying a parameter other than a valid line label or line number. The only valid parameters for the SUBMIT command are a beginning and ending line label or line number that specifies that range of lines to be submitted.

User Response: Change the command to specify the proper range for the SUBMIT command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper line range for the SUBMIT command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE556 Too many parameters - No parameters are defined for the UNNUM command.

Explanation: The UNNUM edit command was invoked with a parameter specified. The UNNUM command does not take any parameters.

User Response: Remove any parameters from the UNNUM command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to remove any parameters from the UNNUM command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

PDF Messages

ISRE557 **System abend 'aaaa' - SUBMIT failed due to abend.**

Explanation: A system abend code of *aaaa* was encountered attempting to process the edit SUBMIT command.

User Response: Refer to *MVS/ESA System Codes* for debugging information on the abend or contact your system programmer for assistance.

Programmer Response: Refer to *MVS/ESA System Codes* for debugging information on the abend, or contact your system programmer for assistance.

ISRE558 **Range incomplete - A single-label range specification is invalid for the SUBMIT command.**

Explanation: The PDF edit SUBMIT command was invoked with only one line label or line number. Either 2 labels or line numbers (marking the beginning and end of the range of lines to be submitted) must be specified to submit a range of lines, or no parameters specified to submit all lines from the edit session.

User Response: Change the command to specify the proper parameters for the SUBMIT command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameter for the SUBMIT command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE559 **Range invalid - An invalid line pointer (label) was specified for the SUBMIT command.**

Explanation: One of the 2 line labels specified for the edit SUBMIT command was invalid.

User Response: Change the command to specify the proper parameters for the SUBMIT command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameter for the SUBMIT command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE560 **Invalid parameters - The COMPARE command only allows a name or NEXT in addition to SAVE, SYSIN, and EXCLUDE. Use COMPARE with no operands to change options.**

Explanation: A COMPARE edit primary command was entered that had too many parameters. You can supply a data set name or member name, NEXT, EXCLUDE, SYSIN, and SAVE. SAVE and SYSIN are only valid when a member name, data set name, or NEXT is also specified. You can enter the COMPARE command with no parameters to change the label, exclude, and comparison settings.

User Response: Insure that there are not extra parameters on the COMPARE command and issue the command again.

ISRE561 **Invalid member name - A member name must not be longer than 8 characters.**

Explanation: A member name longer than 8 characters was passed to the edit MOVE, COPY, CREATE, or REPLACE command.

User Response: Correct the member name to 8 characters or fewer and reissue the command.

ISRE562 **Too many parameters - Valid format: COPY member-name line #1 line #2 AFTER line pointer".**

Explanation: The PDF edit COPY command was invoked with more than the allowed maximum number of parameters.

User Response: Change the command to specify the proper parameters for the COPY command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameter for the COPY command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE563 **Invalid line range - Only one aaaaaaaa was specified, bbbbbbbb requires two for range.**

Explanation: A PDF edit command (*bbbbbbbb*) was invoked with only one line label or line number. Either two labels or line numbers (marking the beginning and end of the range of lines to be submitted) must be specified to process a range of lines, or no parameters specified to process all lines from the edit session.

User Response: Change the command to specify the proper parameters for the command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro

was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameter for the command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE564 **Member name not allowed - Do not specify only a member name when editing a sequential data set.**

Explanation: Only a member name was provided to the COMPARE command while editing a sequential data set. When comparing a sequential data set, specify an explicit data set and, if needed, a member name.

User Response: Specify an explicit data set and, if needed, a member name.

ISRE565 **Member not found - Member aaaaaaaaa cannot be found in this data set or concatenation.**

Explanation: A member name was specified on the COMPARE command, but the member cannot be found in the edit concatenation.

User Response: Issue the COMPARE command with an explicit data set name or use the name of a member that does exist in the concatenation.

ISRE566 **Undefined aaaaaaaaa - The keywords AFTER or BEFORE must be followed by a valid aaaaaaaaa.**

Explanation: When using the AFTER or BEFORE keywords to indicate to the editor where it should place data, you must specify a valid line pointer or line number following AFTER or BEFORE.

User Response: Change the command to specify the proper parameters for the command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameter for the command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE567 **Member name required - When comparing sequential to partitioned, specify member name.**

Explanation: A partitioned data set name was passed to the COMPARE command while editing a sequential data set. You must supply a member name.

User Response: To compare a sequential data set to a member of a partitioned data set, issue the COMPARE command with a data set name and member name.

ISRE568 **Member name not allowed - Do not specify a member name when comparing to a sequential data set.**

Explanation: The name of a sequential data set was passed to the COMPARE command but a member name was also specified.

User Response: Remove the member name from the operand and issue the COMPARE command again.

ISRE569 **aaaa invalid - The specified aaaa does not exist in member bbbbbbbb.**

Explanation: An edit command was invoked specifying a line label or line number as a destination for the command, but that label or line number does not exist in the edit data.

User Response: Change the command to specify the proper parameters for the command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameter for the command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRE570 **Invalid parameters given - LOCK/UNLOCK parameter is mutually exclusive with profile name or number.**

Explanation: The LOCK or UNLOCK parameters cannot be specified at the same time as a profile name or number on the PROFILE command.

User Response: Use separate commands to specify the LOCK or UNLOCK parameters and the name or number parameters.

ISRE573 **Too many parameters - ON/OFF, STD/ALL/? are the only valid TABS command parms.**

Explanation: A maximum of 2 parameters can be specified on the TABS command. The first parameter is either ON or OFF; the second parameter is either STD, ALL, or a tab character.

User Response: Specify the correct number of parameters for the TABS command.

ISRE574 **Invalid parameter - ON/OFF, STD/ALL(any)/? are the only valid TABS command parms.**

Explanation: An invalid parameter was specified on the TABS command.

User Response: Specify valid parameters for the TABS command. The first parameter is either ON or OFF; the

PDF Messages

second parameter is either STD, ALL, or a tab character.

ISRE575 **Inconsistent parameters - 'aaaaaaaa' and 'bbbbbbbb' cannot both be specified for TABS command.**

Explanation: The combination of the parameters *aaaaaaaa* and *bbbbbbbb* is not allowed on the TABS command.

User Response: Specify a valid combination of parameters for the TABS command.

ISRE576 **Invalid profile parm - Line-count, profile-name, or LOCK/UNLOCK are the only valid parameters.**

Explanation: An invalid parameter was specified on the PROFILE command. The valid parameters are LOCK, UNLOCK, a profile name, or the number of profile lines to display.

User Response: Use valid parameters on the PROFILE command.

ISRE577 **Invalid profile name - The name must be 1 to 8 alphanumeric characters starting with an alpha.**

Explanation: An invalid name was specified for the profile on the PROFILE command. Profile names must be valid member names that start with an alpha character followed by up to 7 alphanumeric characters.

User Response: Specify a valid member name on the PROFILE command.

ISRE579 **New edit profile - *aaaaaaaa* (*bbbbbbbb-ccccccc*) has now been defined as an edit profile.**

Explanation: This is an informational message. A new edit profile, *aaaaaaaa*, has been created.

ISRE580 **STATS is invalid - STATS mode cannot be turned on for a sequential file.**

Explanation: The STATS command is only valid for members of a partitioned data set.

User Response: Only issue the STATS command when editing a partitioned data set.

ISRE581 **COBOL numbering invalid - COBOL numbering is not valid with variable records (RECFM = V).**

Explanation: COBOL numbering was specified for a data set that has variable length records. COBOL numbering can only be performed for data sets with fixed length records (RECFM = F).

User Response: Verify that the data set is allocated with fixed length records (RECFM = F) to use COBOL numbering.

ISRE582 **Not in number mode - UNNUM is valid only when you are in number mode.**

Explanation: The UNNUM command is only valid when numbering is turned on.

User Response: Only issue the UNNUM command when editing a member or data set with line numbers.

ISRE583 **Not in STATS mode - VERSION or LEVEL commands are valid only when you are in STATS mode.**

Explanation: The VERSION or LEVEL commands are only valid when in stats mode.

User Response: Specify STATS ON to get stats for a member of a partitioned data set. The STATS command cannot be specified for sequential data sets.

ISRE584 **Invalid in hex mode - TE is not valid when you are in hexadecimal mode.**

Explanation: The TE line command is not valid in hexadecimal mode.

User Response: Specify HEX OFF to turn off hexadecimal mode before using the TE line command.

ISRE585 **Invalid command - Hexadecimal mode is not valid when you are in text-entry mode.**

Explanation: Hexadecimal mode cannot be entered while in text-entry mode.

User Response: Press Enter to exit text-entry mode before entering the HEX command.

ISRE586 **Too many parameters - Valid parameters for DELETE command are: ALL X/NX, lptr-1, lptr-2.**

Explanation: Too many parameters were specified on the DELETE command.

User Response: Specify the correct number of parameters for the DELETE command.

ISRE587 **Inconsistent parameters - 'aaaaaaaa' and 'bbbbbbbb' cannot both be specified for DELETE command.**

Explanation: The parameters *aaaaaaaa* and *bbbbbbbb* cannot be specified at the same time on the DELETE command.

User Response: Change the DELETE command to specify a valid combination of parameters.

ISRE588 **Invalid parameter - Valid parameters for DELETE command are: ALL X/NX, lptr-1, lptr-2.**

Explanation: An invalid parameter was specified for the DELETE command.

User Response: Ensure that the DELETE command is using valid parameter names.

ISRE589 **Invalid parameter - Valid parameters for DELETE command are: ALL X/NX and a label range.**

Explanation: An invalid parameter was specified for the DELETE command.

User Response: Ensure that the DELETE command is using valid parameter names.

ISRE590 **Required parms missing - Specify: DELETE ALL X/NX or DELETE X/NX .A .B or DELETE ALL .A .B**

Explanation: Not enough parameters were specified on the DELETE command.

User Response: Ensure that parameters are specified on the DELETE command. The parameters must include a range. For example:

- ALL
- .A .B
- ALL .A .B

Unless ALL .A .B is specified, one of the parameters must be X or NX to indicate how excluded lines are to be processed.

ISRE591 **Delete parameter omitted - If ALL is specified, then X, NX, or a label range is required.**

Explanation: When the ALL parameter is specified on the DELETE command, one of the following parameters must be specified: X, NX, or a label range.

User Response: Update the command to specify one of the missing parameters.

ISRE592 **Delete parameter omitted - If X or NX is specified, then ALL or a label range is required.**

Explanation: When the X or NX parameter is specified on the DELETE command, one of the following parameters must be specified: ALL or a label range.

User Response: Update the command to specify one of the missing parameters.

ISRE593 **No lines deleted - No excluded lines existed to delete.**

Explanation: The X parameter was specified on the DELETE command but no lines were excluded.

User Response: Exclude the lines to be deleted prior to issuing a DELETE command with the X parameter.

ISRE594 **No lines deleted - No non-excluded lines existed to delete.**

Explanation: The NX parameter was specified on the DELETE command but all lines had been excluded.

User Response: Do not exclude the lines to be deleted prior to issuing a DELETE command with the NX parameter.

ISRE595 **No parameters specified - The DELETE command has no defaulted parameters.**

Explanation: The DELETE command was issued, but no parameters were specified to indicate what to delete.

User Response: Specify parameters on the DELETE command to indicate which lines are to be deleted.

ISRE596 **Invalid line pointer - The DELETE command cannot locate the specified line(s).**

Explanation: One or both of the labels specified to the DELETE command had not been defined.

User Response: Define both labels to be used on the DELETE command prior to issuing the command. Labels can be assigned by typing the label over the line number that is displayed by Edit.

ISRE597 **No lines deleted - "Top of data" and "Bottom of data" are invalid relative line numbers.**

Explanation: No lines were within the deletion criteria.

User Response: Change the parameters specified for DELETE to delete the desired lines.

ISRE598 **Range incomplete - A single-label range specification is invalid for the DELETE command.**

Explanation: A range must be specified with a beginning label and an ending label for the DELETE command.

User Response: Specify two labels on the delete command. The first label is the first line to be deleted; the second is the last line to be deleted. If a single line is to be deleted, specify the label for that line as the start and end of the range.

PDF Messages

ISRE599 **Invalid line pointer – "0" specified for the starting line of a DELETE range is invalid.**

Explanation: One or both of the labels for the DELETE command was set to 0 (zero).

User Response: Update or change the label used for the DELETE command to indicate a data line.

ISRE600 **Invalid bounds parameter – "aaaaaaaa" is invalid as a parameter to the BOUNDS command.**

Explanation: The value *aaaaaaaa* specified on the BOUNDS command is not a valid parameter.

User Response: Ensure that all parameters are valid when entering BOUNDS command. Information for the BOUNDS command can be obtained by using Help.

ISRE601 **Too many parameters – Left and right column numbers (or *) are only valid BOUNDS command parms.**

Explanation: Too many parameters were specified on the BOUNDS command. The BOUNDS command should be entered with no parameters or 2 parameters. The 2 parameters are the left column number and the right column number.

ISRE602 **Invalid specification - Either specify both left and right BOUNDS operands or specify neither.**

Explanation: Only one parameter was specified on the BOUNDS command. The BOUNDS command requires either no parameters or 2 parameters.

User Response: Specify no parameters on the BOUNDS command to use the default bounds, or specify both left and right columns. An "*" (asterisk) can be used as either the left or right column parameter, indicating that the current value for that bounds should be retained.

ISRE603 **Invalid left bound - Left bound was invalid as entered and was reset to its default column.**

Explanation: The left bound that was specified is either before the first data column or after the last data column.

User Response: Specify a left bound that is within the data columns.

ISRE604 **Invalid right bound - Right bound was invalid as entered and was reset to its default column.**

Explanation: The right bound that was specified is either before the first data column or after the last data column.

User Response: Specify a right bound that is within the data columns.

ISRE605 **Left bound exceeds right - Invalid for left bound specification to exceed right bound specification.**

Explanation: The first value specified, which is the left bound, is greater than the value specified for the right bound. The value specified for the left bound must be smaller than the value for the right bound.

User Response: Specify a value for the left bound that is smaller than the value specified for the right bound.

ISRE606 **Both bounds invalid - Both bounds were invalid as entered and were reset to their default columns.**

Explanation: The left bound that was specified is either before the first data column or after the last data column and the right bound that was specified is either before the first data column or after the last data column.

User Response: Specify bounds values within the data columns.

ISRE607 **Too many parameters - Invalid line number, column number, label, or cursor command keyword.**

Explanation: Too many parameters were specified on the CURSOR command. This may be due to an invalid line number, column number, or label.

User Response: Ensure that the cursor command has the correct number of parameters.

ISRE608 **Invalid parameter - Invalid line number, column number, label, or cursor command keyword.**

Explanation: A parameter specified on the CURSOR command is not valid. This may be due to an invalid line number, column number, or label.

User Response: Ensure that the line number and column number specified on the cursor command have valid values.

ISRE609 **Parameter unrecognized - Invalid line number, column number, label, or cursor command keyword.**

Explanation: A parameter specified on the CURSOR command was not recognized as a valid parameter. This may be due to an invalid line number, column number, or label.

User Response: Ensure that the cursor command has the correct number of parameters and that they are all valid.

ISRE610 **Changes not saved - Changes to data are not saved within View sessions. Use Create or Replace commands to save changes.**

Explanation: A SAVE or END command has been requested from within an edit macro running in VIEW. View does not save changes to data.

User Response: In order to save the changes, use the primary CREATE or REPLACE command.

Programmer Response: If your macro is designed to run from within View, and your macro makes data changes, use the cancel command to leave the view session.

ISRE632 **Changes are shown - The differences between the files are now highlighted. This file was compared to 'aaaaaaaa'.**

Explanation: The compare command completed successfully and the differences between the files are now highlighted. The file with which the edited data set was compared is shown in the long message (aaaaaaaa).

User Response: If some differences are not shown, or you would like to modify the comparison methods, use the COMPARE command with no operands to change the comparison settings.

ISRE633 **Files are the same - This file was compared to 'aaa(56)'. The compared files have no differences.**

Explanation: The compare command completed successfully and no differences were found. The file with which the edited data set was compared is shown in the long message (aaa(56)).

User Response: If some differences are not shown, or you would like to modify the comparison methods, use the COMPARE command with no operands to change the comparison settings.

ISRE638 **SuperC error - SuperC ended with a return code of aa.**

Explanation: The SuperC compare program, which is used to compare the files specified with the COMPARE command, ended with a return code (aa), which indicates that the comparison failed. Possible reasons for the failure may include I/O errors, unsupported data set types, allocation errors or other failures.

User Response: Use the SuperC dialog in the utilities section to compare the files. If there is a failure there, you may be able to find the cause in the SuperC listing.

ISRE639 **Delta file error - An unrecognized control card was found in the delta file. Use the SuperC dialog in the utilities section to compare the files.**

Explanation: An unrecognized control card was found in the delta file which was produced by SuperC during the comparison. This may result if the temporary delta file created by the editor was too small to hold all of the records written by SuperC, or it may be the result of a SuperC error.

User Response: Use the SuperC dialog in the utilities section to compare the files.

ISRE644 **Files Compared - No differences were found, but some differences may exist which are not shown. Options were selected on the Edit Compare Settings panel that may cause some data to be ignored during the comparison. This file was compared to 'aaa(56)'.**

Explanation: The COMPARE edit command detected no differences. However, options were selected on the Edit Compare Settings Panel that filtered the input to the compare program. As a result, some differences may have been ignored during the compare and may not be highlighted in the editor.

ISRE648 **Files compared - No differences were found, but some differences may not be shown because SuperC "don't process" options were selected on the Edit Compare Settings panel. This file was compared to 'aaa(56)'.**

Explanation: The COMPARE edit command detected no differences. However, SuperC "don't process" options were selected on the Edit Compare Settings Panel. As a result, some differences may have been ignored during the compare and may not be highlighted in the editor.

PDF Messages

ISRE720 **Too many parameters - You may specify a member name and AFTER or BEFORE aaaaaaaa with MOVE command**

Explanation: Too many parameters are specified for the MOVE command.

User Response: Remove the invalid parameter.

ISRE721 **Invalid parameter - You may specify a member name and AFTER or BEFORE followed by a aaaaaaaa.**

Explanation: An invalid parameter was specified.

User Response: Remove the invalid parameter and try again.

ISRE722 **Destination is required - aaaaaaaa requires AFTER/BEFORE lptr. Member name is also required.**

Explanation: The destination parameter was omitted.

User Response: Specify either AFTER or BEFORE and the member name.

ISRE723 **Member name is required - In a macro a member name or a data set name and member are required by aaaaaaaa command**

Explanation: The member name was omitted.

User Response: Specify a valid member name.

ISRE724 **Too many parameters - You may specify a member name or a data set name and member, and aaaaaaaa range on a CREATE command.**

Explanation: Too many parameters were specified.

User Response: Remove the invalid parameter.

ISRE725 **Invalid parameter - You may specify a member name or a data set name and member and aaaaaaaa range on a CREATE command.**

Explanation: An invalid parameter was specified.

User Response: Remove the invalid parameter and try the CREATE command again.

ISRE728 **Too many parameters - You may specify a member name or a data set name and member and an aaaaaaaa range with REPLACE command**

Explanation: Too many parameters were specified for the REPLACE command.

User Response: Remove the excess parameters and try the operation again.

ISRE729 **Invalid parameter - You may specify a member name or a data set name and member and an aaaaaaaa range with REPLACE command**

Explanation: An invalid parameter was specified for the REPLACE command.

User Response: Remove the invalid parameter and try the command again.

ISRE730 **STAE macro error - Unable to obtain storage for STAE macro, subpool 0 full.**

Explanation: This is an informational message.

ISRE731 **Invalid block size - Specified data set has zero block size.**

Explanation: The specified data set has a block size of zero; this is invalid.

User Response: Either choose a different data set or change the block size.

ISRE732 **BLDL error - I/O error, insufficient virtual storage, or other BLDL error.**

Explanation: This is an informational message.

User Response: Request additional virtual storage. If the error recurs, contact your system programmer.

System Programmer Response: This is a probable system failure. Isolate the reason for the failure.

ISRE733 **I/O error during read - Unable to read data.**

Explanation: A failure occurred while attempting to read a data set.

User Response: Contact your system programmer.

System Programmer Response: This is probably a system error. Isolate the error, contact IBM support.

ISRE734 **Member not found - The requested member was not found in the PDS directory(s).**

Explanation: The member you specified was not found in the data set directory.

User Response: Verify that the member exists.

ISRE735 **Data set not partitioned - Member name specified, but the data set is not a partitioned data set.**

Explanation: If you specify a member name, the data set must be partitioned.

User Response: Either remove the member name or correct the data set name.

ISRE736 **Member list update error - Member name not added to member list. An error occurred during update.**

Explanation: The attempt to update the member list failed.

User Response: Contact your system programmer.

System Programmer Response: This is likely the result of a system failure. Isolate the cause of the failure.

ISRE737 **Invalid member name - Member name *aaaaaaaa* not valid for partitioned data sets.**

Explanation: An invalid member name was entered.

User Response: Correct the member name.

ISRE738 **Member *aaaaaaaa* created - *aaaaaaaa* was added to *bbbbbbbb***

Explanation: This is an informational message.

ISRE739 **Too many parameters - Too many parameters were entered with the scrolling command.**

Explanation: Too many parameters were entered for the SCROLL command.

User Response: Remove the invalid parameters.

ISRE740 **Command is not a macro - "*aaaaaaaa*" does not contain an ISREDIT MACRO statement.**

Explanation: The command you entered is not a valid edit macro.

User Response: Determine the correct edit macro name. If the edit macro name is correct, contact the responsible programmer.

Programmer Response: Verify the macro name, add an ISREDIT MACRO statement to the macro.

ISRE741 **Command not executed - An ISREDIT MACRO statement must precede any executable statements.**

Explanation: The macro name you entered does not have the ISREDIT MACRO statement as the first executable instruction.

User Response: Contact the responsible programmer.

Programmer Response: Verify that the first executable instruction in the macro is the ISREDIT MACRO instruction.

ISRE742 **System error, no SYSPROC - Command is invalid or a macro. Macros require an allocated SYSPROC.**

Explanation: Either you entered an invalid command or you requested that a macro be run but did not first allocate a SYSPROC.

User Response: Allocate a SYSPROC and attempt the operation again or correct the command.

ISRE743 **Command name invalid - "*aaaaaaaa*" is an invalid macro name; invalid SYSPROC member name.**

Explanation: Either you entered an invalid command or macro name.

User Response: Correct the command or macro name.

ISRE744 **Error accessing macro - BLDL error accessing SYSPROC member "*aaaaaaaa*".**

Explanation: A BLDL error was received when attempting to access the specified macro.

User Response: Contact your systems programmer.

System Programmer Response: Isolate the system failure.

ISRE745 **Invalid command name - "*aaaaaaaa*" is not a valid edit command or macro name**

Explanation: An invalid macro name or edit command was entered.

User Response: Correct the command or macro name.

ISRE746 **No command name found - ISREDIT was not followed by a command name**

Explanation: The ISREDIT command was entered without the required command parameter.

User Response: Reenter the ISREDIT command with the correct command name.

PDF Messages

ISRE747 **Invalid macro command - Parameter found outside parentheses and is not PROCESS/NOPROCESS.**

Explanation: PROCESS or NOPROCESS is probably misspelled.

User Response: Correct the macro command.

ISRE748 **Parameters are invalid - The "aaaaaaaa" macro command must be specified without parameters.**

Explanation: Additional parameters were specified that are not allowed for this service.

User Response: Remove the invalid parameters.

ISRE749 **MACRO command is invalid - The MACRO command must be specified only once in a macro.**

Explanation: The macro that was specified has multiple MACRO statements.

User Response: Contact the responsible programmer.

Programmer Response: Correct the macro logic.

ISRE750 **No space in directory - PDS directory is full, allocate more directory blocks.**

Explanation: The data set you specified has no more directory space for entries.

User Response: Reallocate the data set with additional directory entries.

ISRE751 **I/O error during STOW - Permanent I/O error occurred updating directory block.**

Explanation: An attempt to write directory information resulted in an error.

User Response: Contact your system programmer.

System Programmer Response: This likely is the result of a system failure. Isolate the cause for the STOW error.

ISRE752 **I/O error during STOW – Permanent I/O error occurred writing EOF mark after member.**

Explanation: An attempt to write the end-of-file marker resulted in an error.

User Response: Contact your system programmer.

System Programmer Response: This likely is the result of a system failure. Isolate the cause of the error.

ISRE753 **Truncation warning – The data you are editing is variable length data with at least one record that ends with a blank. Saving the data will result in removal of any trailing blanks from all records. You can issue the PRESERVE ON command if you don't want the blanks removed.**

Explanation: The data being edited contains variable length records, and one or more of these records ends with a blank. If you use the Edit SAVE or END command to save the data, the editor will remove any trailing blanks from each record prior to writing the record. Blanks will be removed regardless of whether an individual record was modified during the edit session. Issuing the PRESERVE ON command will tell the editor not to strip the blanks off the records.

ISRE754 **I/O error during write – Unable to write data.**

Explanation: STOW with replace failed.

User Response: Contact your system programmer.

System Programmer Response: This likely is the result of a system failure. Isolate the cause of the failure.

ISRE755 **System abend 'aaaaaaaa' - Data was not saved due to abend. Press Help key for further information.**

Explanation: This is an informational message.

User Response: See *MVS Message Library: System Codes* for an explanation of the abend code if the tutorial panel was not sufficient help.

ISRE756 **Invalid command – The only valid command is LOCATE (L).**

Explanation: An invalid command was entered for this panel.

User Response: Change the command to LOCATE member or L member.

ISRE757 **Either the member name was not found in the PDS directory(s) or the data set name is not cataloged.**

Explanation: The member or data set requested for the copy could not be found.

User Response: Change the member name or data set name.

ISRE758 **Insufficient storage - Not enough storage is available to update directory (using STOW).**

Explanation: STOW failed due to insufficient virtual memory.

User Response: Try this operation again later. If the error recurs, contact your systems programmer.

System Programmer Response: If this is a recurring error, verify that a system failure is not occurring.

ISRE759 **aaaaaaaa input error - VPUT failed to set variable bbbbbbbb to value cccccccc**

Explanation: An ISPF internal VPUT failed to set variable *bbbbbbbb* in an edit macro. Possible causes for this in a program macro are:

- The value is longer than the variable VDEFINED in the program.
- The value cannot be stored as the type VDEFINED in the program.

Additional possibilities, applicable to all types of macros, are:

- The length of all variables in the variable pool exceeds 32K.
- There is an error in your profile table (I/O or internal format).

User Response: Contact the responsible programmer.

Programmer Response: Check for the problems listed above. If none of these problems exists, contact IBM service.

ISRE760 **Too many parameters - The member name is the only valid parameter for the EDIT, VIEW, or BROWSE commands.**

Explanation: Too many parameters were specified for the EDIT, VIEW, or BROWSE commands. The EDIT, VIEW, and BROWSE commands allow only the member name as a parameter.

User Response: Remove the extraneous parameters and try the command again.

ISRE761 **Invalid parameter - Extraneous or invalid parameter was specified for the EDIT, VIEW, or BROWSE command.**

Explanation: An extra or invalid parameter was specified for the EDIT VIEW, or BROWSE command. The EDIT, VIEW, and BROWSE commands allow only the member name as a parameter.

User Response: Remove the invalid parameter and try the command again.

ISRE762 **Member/filename omitted - Required member/filename parameter not specified for EDIT, VIEW, or BROWSE command.**

Explanation: The member name or filename is required to use the EDIT, VIEW, or BROWSE command.

User Response: Specify a member name or filename when using the EDIT, VIEW, or BROWSE command.

ISRE763 **Invalid member name - Member name "aaaaaaaa" must be alphanumeric chars, starting with alpha.**

Explanation: The member name is invalid for the EDIT, VIEW, or BROWSE command.

User Response: The member name must contain alphanumeric characters beginning with an alphabetic character. Correct the member name and try the command again.

ISRE764 **Invalid member name - Member name "aaaaaaaa" exceeds 8-character allowable length.**

Explanation: The member name is invalid for the EDIT, VIEW, or BROWSE command.

User Response: The member name may not exceed 8 characters. Correct the member name and try the command again.

ISRE765 **Member name not allowed - A member name cannot be specified when editing, viewing, or browsing a sequential data set.**

Explanation: The EDIT, VIEW, or BROWSE command cannot be invoked with a member name when a sequential data set is being edited, viewed, or browsed.

User Response: Specify EDIT, VIEW, or BROWSE with no member name and try again.

ISRE766 **Variable process error - Error occurred processing a variable in the EDIT or VIEW command.**

Explanation: A severe internal error has occurred.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRE767 **EDIT or VIEW not allowed - Recursive entry to edit or view is not allowed when recovery session is active.**

Explanation: The EDIT and VIEW commands are not allowed because recovery is being processed on this

PDF Messages

screen. The recovery process needs to be completed before creation of a new recovery data set.

User Response: End edit or view recovery before using the EDIT or VIEW command.

ISRE768 **EDIT or VIEW table error - A table error was encountered while processing EDIT or VIEW command.**

Explanation: A severe internal error has occurred.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRE769 **Message line error - An error was encountered while trying to format a message line.**

Explanation: The message line could not be formatted.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRE770 **Too many parameters - The edit primary NOP command allows no parameters.**

Explanation: Parameters are not allowed for the edit primary NOP command.

User Response: Remove the parameters and try the command again.

ISRE771 **Too many parameters - The edit primary MACRO command allows no parameters.**

Explanation: Parameters are not allowed for the edit primary MACRO command.

User Response: Remove the parameters and try the command again.

ISRE772 **No parameters - The edit scrolling macro requires MAX/CSR/PAGE/HALF/DATA or amount.**

Explanation: The parameter for the macro was invalid.

User Response: Valid parameters are MAX, CSR, PAGE, HALF, DATA, or the actual amount.

ISRE773 **Data panel error - A severe error occurred trying to process data display panel through PQUERY.**

Explanation: An internal error has occurred.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRE774 **Storage allocation error - A severe error occurred trying to GETMAIN storage for edit data display.**

Explanation: Storage could not be obtained to display the edit data.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRE775 **Severe display error - A severe error occurred in trying to display the edit data**

Explanation: A severe error has occurred while trying to display the edit data.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRE776 **Invalid parameter - Extraneous or invalid parameter specified with this command.**

Explanation: An extraneous or invalid parameter was specified with this command.

User Response: Remove the extraneous parameter or correct the invalid parameter and try the command again.

ISRE777 **Error updating directory - STOW failed. Return code=aaaaaaaa Reason code=bbbbbbbb (x'cccccccc').**

Explanation: An internal error has occurred.

User Response: Contact the responsible programmer.

Programmer Response: Increase the size of the directory.

ISRE778 **System abend 'aaaaaaaa' - An abend occurred while attempting to save the data. The previous information in the target sequential data set has been overwritten. The CANCEL command will not restore the data in the data set. Press Help for further information.**

Explanation: An abend has occurred while attempting to save data. If the ABEND code specified was B37, D37, or E37, there is no space on the disk pack or there is no space in the data set to store the data. If an x37 ABEND occurred writing to a sequential data set, that data set has been overwritten. The CANCEL command will not restore the original contents. If UNDO is available, you may be able to undo all of your changes and SAVE the data set to restore its original contents.

User Response: From within the edit session (the edit data display screen) you may:

- Split the screen and reallocate the data set.
- Enter the CREATE or REPLACE command to save into another data set.
- Enter the CANCEL primary command to exit from EDIT without saving.

From the create or replace menus you may:

- Split the screen and reallocate the data set%OR+use END from
- Use END from the create or replace menu to exit without saving the data.

ISRE779 Panel not found - The panel name specified in the PANEL field for EDIT/VIEW could not be found.

Explanation: The EDIT service was invoked, passing the name of a panel to be used when displaying the edit data. The panel does not exist in the current ISPLIB concatenation.

User Response: Determine what data set the panel exists in, then modify your ISPF allocation clist or logon proc to contain that data set.

ISRE780 Too many parameters - Do not specify parameters with the RFIND command.

Explanation: Parameters were specified with the RFIND command, but parameters are not allowed.

User Response: Remove the parameters and try the command again.

ISRE781 Too many parameters - Do not specify parameters with the RCHANGE command.

Explanation: Parameters were specified with the RCHANGE command, but parameters are not allowed.

User Response: Remove the parameters and try the command again.

ISRE782 Issue a change command - RCHANGE command works only after a valid CHANGE command is issued.

Explanation: The RCHANGE command was issued, but no CHANGE command was issued previously.

User Response: Issue a CHANGE command before issuing the RCHANGE command.

ISRE783 Issue a FIND command - RFIND command works only after a valid FIND command is issued.

Explanation: The RFIND command was issued, but no FIND command was issued previously.

User Response: Issue a FIND command before issuing the RFIND command.

ISRE784 Level out of range - The level parameter must be a positive number from 0 to 255.

Explanation: The level parameter specified was not in the range 0 to 255.

User Response: Enter a value for the LEVEL parameter from 0 to 255 and try the command again.

ISRE785 Invalid data sets - When comparing any data set to a one which does not have a fixed record length, neither data set can have a record length greater than 32756.

Explanation: The Edit Compare command does not allow comparisons of files when one or both of the files has a logical record length greater than 32756 and at least one of the files has a record format of variable(V) or unblocked(U).

User Response: If you need to compare the files, use the SuperC utility to produce a listing instead of using the edit COMPARE command.

ISRE790 Too many parameters - Too many parameters specified for the LABEL command.

Explanation: Too many parameters were specified for the LABEL command.

User Response: Contact the responsible programmer.

Programmer Response: Specify the correct number of parameters for the LABEL command.

ISRE791 Invalid label name - 'aaaaaaaa' is an invalid label name specified in the LABEL command.

Explanation: The label name is invalid.

User Response: Contact the responsible programmer.

Programmer Response: Specify a valid label name in the LABEL command. The label name must begin with a period followed by 1 to 8 alphabetic characters, the first of which must not be Z.

ISRE792 No label found - No label is associated with the line specified in the LABEL command.

Explanation: There is no label associated with the line specified in the LABEL command.

User Response: Specify a label for the line.

PDF Messages

ISRE793 **Invalid label name - Name started with reserved character "Z"**

Explanation: The label name started with the character Z, which is reserved for editor-defined labels.

User Response: Contact the responsible programmer.

Programmer Response: Specify a valid label name that does not start with Z.

ISRE794 **Label name missing - Required label name parm not correctly specified for LABEL command.**

Explanation: The label name is missing.

User Response: Contact the responsible programmer.

Programmer Response: Specify a label name for the LABEL command.

ISRE795 **Assignment command error - Assignment type (GET/SET) unrecognized for LABEL command.**

Explanation: An internal error has occurred.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRE796 **Invalid line pointer - The line pointer specified for the LABEL command does not exist.**

Explanation: This is an informational message. The line number specified on the LABEL command does not exist.

ISRE797 **Required parm missing - Too few parameters were specified for the LABEL command.**

Explanation: There were too few parameters specified for the LABEL command.

User Response: Contact the responsible programmer.

Programmer Response: Specify all required parameters for the LABEL command.

ISRE798 **Invalid keyphrase - The LABEL command requires the keyphrase: LABEL LINE-POINTER.**

Explanation: The LABEL command must contain the phrase LABEL LINE-POINTER.

User Response: Contact the responsible programmer.

Programmer Response: Correct the LABEL command to contain the phrase LABEL LINE-POINTER.

ISRE799 **Invalid parameter - The optional level parameter of the LABEL command must be numeric.**

Explanation: The level parameter was not numeric.

User Response: Contact the responsible programmer.

Programmer Response: Specify a number from 0 to 255 for the level parameter.

ISRE800 **Edit profile unavailable - Edit profile table member 'aaaaaaaa' could not be created or read. It may already be in use by you or another user. Edit will run with a default profile. Changes made to the edit profile will not be saved.**

Explanation: The edit profile table could not be read or created.

User Response: Exit the application and try again. If this message still appears, attempt to compress the profile data set, or delete the edit profile table.

ISRE801 **Edit table not open - Table 'aaaaaaaa' is not open. Table service RC=bbbbbbbb.**

Explanation: The edit profile table is not open.

User Response: Exit the application and try again. If this message still appears, attempt to compress the profile data set, or delete the edit profile table.

ISRE802 **Invalid edit table - Table 'aaaaaaaa' contains invalid variable(s). Table service RC=bbbbbbbb.**

Explanation: The edit profile table contains invalid variables.

User Response: Delete the edit profile table from the profile data set.

ISRE803 **Edit profile error - Changes to any edit profile will not be saved on disk this edit session.**

Explanation: There was an error in the edit profile. Any changes to the edit profile will not be saved in this edit session.

User Response: Exit the application and try again. If this message still appears, attempt to compress the profile data set, or delete the edit profile table.

ISRE804 **Invalid label - A label name assigned to level 0 has more than 5 characters following the period.**

Explanation: A label name assigned to level 0 must have only 5 characters following the period. The label name being assigned has more than 5 characters.

User Response: Contact the responsible programmer.

Programmer Response: Correct the label statement to assign a label name of 5 characters or fewer following the period.

ISRE805 Label not allowed - Label names can only be entered on data lines.

Explanation: A label name was entered on a line other than a data line.

User Response: Enter the label name on a data line.

ISRE806 Member not allowed - Specifying a member is only allowed for a partitioned data set.

Explanation: A member name was specified for the CREATE, REPLACE, MOVE, or COPY command, but the data set is not partitioned.

User Response: Specify the command without a member name.

ISRE807 Error: File changed - This member has changed since the edit session began. Save the data and reissue the COMPARE function. If you do not want to save the data, use the CREATE or REPLACE command to save it to a temporary location and use the COMPARE command while editing that temporary file.

Explanation: The COMPARE service was issued in an edit session where the data was changed. The data in the edit session must exist on disk the same as it does in the edit session for the COMPARE command to function. Therefore, compare is only valid before the data is changed in the editor.

User Response: Save the data and reissue the COMPARE function. If you do not want to save the data, use the CREATE or REPLACE command to save it to a temporary location and use the COMPARE command while editing that temporary file.

ISRE808 Parameters required - The COMPARE macro command requires parameters.

Explanation: The COMPARE edit macro command was issued without parameters. In an edit macro, the COMPARE parameter requires parameters since edit macro commands do not display panels.

User Response: Contact the author of the edit macro.

Programmer Response: Change the edit macro to include parameters on the COMPARE macro command.

ISRE809 File allocation error - The temporary SuperC delta file could not be allocated.

Explanation: An allocation error occurred creating the SuperC delta file.

User Response: Contact the System Programmer

System Programmer Response: Insure that the PDFCUNIT field in the configuration table ISRCONFG points to a valid unit which can allocate a 50 track temporary data set.

ISRE810 Internal error - Contact your systems developer for the reason for this error.

Explanation: An internal error has occurred.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRE811 Label missing - Two labels must be entered to indicate a range for the 'aaaaaaaa' command.

Explanation: Two labels are required to indicate a range for this command.

User Response: Specify two labels for the range and try the command again.

ISRE812 Some lines not x'd - Line(s) were not excluded that contained pending line command(s).

Explanation: Lines that contained pending line commands were not excluded.

User Response: Execute the line commands before excluding the lines.

ISRE813 Open error - An error occurred while trying to open the PDS.

Explanation: An internal error has occurred.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRE814 I/O error - I/O error while trying to build the member list.

Explanation: An internal error has occurred.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

PDF Messages

ISRE815 **All lines excluded - aaaaaaaa lines were excluded**

Explanation: This is an informational message.

ISRE816 **Range excluded - aaaaaaaa lines were excluded in range bbbbbbbb to cccccccc.**

Explanation: This is an informational message.

ISRE817 **No lines excluded - aaaaaaaa lines met EXCLUDE criteria**

Explanation: This is an informational message.

ISRE818 **BLDL error - I/O error, insufficient virtual storage, or other BLDL error.**

Explanation: An internal error has occurred.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRE819 **No members in data set - The PDS specified contains no members.**

Explanation: There are no members in the data set being accessed.

User Response: Specify a data set that has members and try the command again.

ISRE820 **Too many parameters - ON/OFF are the only valid parameters for the PACK command.**

Explanation: Too many parameters were specified for the PACK command.

User Response: Specify ON or OFF as the parameter for the PACK command and try the command again.

ISRE821 **Inconsistent parameters - "aaaaaaa" and "bbbbbbb" cannot both be entered with PACK command.**

Explanation: The parameters entered for the PACK command are not consistent.

User Response: Enter either ON or OFF as the parameter for the PACK command and try the command again.

ISRE822 **Parameter unrecognized - ON/OFF are the only valid parameters for the PACK command.**

Explanation: The parameter specified for the PACK command is invalid.

User Response: Specify either ON or OFF as the

parameter for the PACK command and try the command again.

ISRE823 **Invalid parameter - ON/OFF are the only valid parameters for the PACK command.**

Explanation: The parameter specified for the PACK command is invalid.

User Response: Specify either ON or OFF as the parameter for the PACK command and try the command again.

ISRE824 **Required parm missing - NOWARN parameter not accepted without OFF keyword being specified.**

Explanation: The OFF keyword must be specified with the NOWARN parameter.

User Response: Specify the OFF keyword with the NOWARN parameter and try the command again.

ISRE825 **Assignment command error - Assignment type (GET/SET) not recognized for the PACK command.**

Explanation: An internal error has occurred.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRE826 **Required parm missing - WARN parameter not accepted without OFF keyword being specified.**

Explanation: The OFF keyword must be specified with the WARN parameter.

User Response: Specify the OFF keyword with the WARN parameter and try the command again.

ISRE827 **Inconsistent parameters - ON and PROMPT cannot both be specified for the AUTOSAVE command.**

Explanation: The parameters specified for the AUTOSAVE command were not consistent.

User Response: Specify either ON or PROMPT as parameters for the AUTOSAVE command and try the command again.

ISRE828 **Required parm missing - NOPROMPT parameter not accepted without OFF keyword being specified.**

Explanation: The OFF keyword must be specified with the NOPROMPT parameter.

User Response: Specify the OFF keyword with the NOPROMPT parameter and try the command again.

ISRE829 **Data not saved by END - AUTOSAVE OFF NOPROMPT: Data changes not saved automatically by END command.**

Explanation: This is an informational message.

ISRE830 *aaaaaaaa* **label invalid - Labels must be alphabetic characters only.**

Explanation: The label *aaaaaaaa* must be alphabetic characters only.

User Response: Respecify the label to contain only alphabetic characters.

ISRE831 *aaaaaaaa* **label invalid - Labels starting with ".Z" are reserved for system use.**

Explanation: The label name started with the character Z, which is reserved for editor-defined labels.

User Response: Specify a valid label name that does not start with Z.

ISRE832 *aaaaaaaa* **name invalid - Command name is greater than 6, the length of the line command area.**

Explanation: The line command name used in the PROCESS macro command is greater than six characters.

User Response: Contact the responsible programmer.

Programmer Response: Correct the line command name used in the PROCESS macro command.

ISRE833 **Range name is missing - Process RANGE keyword requires one line command name to be specified.**

Explanation: No line command name was specified with the RANGE keyword in the PROCESS macro command.

User Response: Contact the responsible programmer.

Programmer Response: Specify a line command name for the RANGE keyword in the PROCESS macro command.

ISRE834 **Unrecognized parameter - PROCESS parm is not RANGE or DEST keyword: PROCESS <DEST> <RANGE cmdname>**

Explanation: An unrecognized parameter was entered for the PROCESS macro command.

User Response: Contact the responsible programmer.

Programmer Response: Correct the PROCESS macro command to use the RANGE and DEST keywords.

ISRE835 **Command on invalid line - Place *aaaaaaaa* line command in command area associated with a data line.**

Explanation: The command is on an invalid line.

User Response: Place the line command in a command area that contains a data line.

ISRE836 **Invalid process request - End user input previously processed. Specify NOPROCESS on macro command.**

Explanation: Input was previously processed.

User Response: Contact the responsible programmer.

Programmer Response: Specify NOPROCESS on the macro command before using the PROCESS macro command.

ISRE837 **Missing variable name - Information cannot be returned in a variable: no variable name found.**

Explanation: No variable name was specified in which to return information.

User Response: Supply a variable name with the command and try again.

ISRE838 **Member not replaced - The Replace command was not confirmed.**

Explanation: The Confirm Replace panel was displayed at the user's request. The user chose not to Replace the member by entering the End command.

ISRE839 **Member not created - Member already existed. The Create command was not confirmed.**

Explanation: The Confirm Create panel was displayed at the user's request. The user chose not to replace the member by entering the END command. The Confirm Create panel is only displayed if there is a member in the lowest level library with the same name requested by the create command, and if confirm replace was chosen.

ISRE840 **Too many parameters - A version number is the only valid parameter for the VERSION command.**

Explanation: The VERSION command allows only a version number as a parameter.

User Response: Specify only a version number for the VERSION command and try the command again.

PDF Messages

ISRE841 **Parameter unrecognized - A version number is the only valid parameter for the VERSION command.**

Explanation: The parameter specified for the VERSION command is invalid.

User Response: Specify a version number as a parameter for the VERSION command and try the command again.

ISRE842 **Invalid parameter - A version number is the only valid parameter for the VERSION command.**

Explanation: The parameter specified for the VERSION command is invalid.

User Response: Specify a version number as the parameter for the VERSION command and try the command again.

ISRE843 **Required parm missing - A version number parameter is required for the VERSION command.**

Explanation: The version number parameter is required for the VERSION command.

User Response: Specify a version number as the parameter for the VERSION command and try the command again.

ISRE844 **Invalid version number - The specified version number must be in the range: 1-99.**

Explanation: The version number specified for the VERSION command is invalid.

User Response: Specify a version number from 1 to 99 for the VERSION command and try the command again.

ISRE845 **Assignment command error - Assignment type (GET/SET) is unrecognized for the AUTOSAVE command.**

Explanation: An internal error has occurred.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRE846 **Too many parameters - ON/OFF and PROMPT/NOPROMPT are the only valid AUTOSAVE parameters.**

Explanation: Too many parameters were specified for the AUTOSAVE command.

User Response: Specify ON or OFF and PROMPT or

NOPROMPT for the AUTOSAVE command and try the command again.

ISRE847 **Inconsistent parameters - "aaaaaaaa" and "bbbbbbbb" cannot both be specified on the AUTOSAVE command.**

Explanation: Inconsistent parameters were specified for the AUTOSAVE command.

User Response: Specify one but not both of the inconsistent parameters for the AUTOSAVE command and try the command again.

ISRE848 **Parameter unrecognized - ON/OFF and PROMPT/NOPROMPT are the only valid AUTOSAVE parameters.**

Explanation: The parameter specified for the AUTOSAVE command is not valid.

User Response: Specify ON/OFF and PROMPT/NOPROMPT for the AUTOSAVE command and try the command again.

ISRE849 **Invalid parameter - ON/OFF and PROMPT/NOPROMPT are the only valid AUTOSAVE parameters.**

Explanation: The parameter specified for the AUTOSAVE command is not valid.

User Response: Specify ON or OFF and PROMPT or NOPROMPT for the AUTOSAVE command and try the command again.

ISRE850 **Too many parameters - A modification level number is the only valid parm for the LEVEL command.**

Explanation: The LEVEL command has too many parameters. Only one parameter in the range 0-99 is accepted.

User Response: Issue the LEVEL command with one parameter in the range 0-99.

ISRE851 **Invalid modlevel number - A valid specification for LEVEL is in the range 0-99.**

Explanation: The LEVEL command parameter is out of range. It must be in the range 0-99.

User Response: Issue the LEVEL command with one parameter in the range 0-99.

ISRE852 **Assignment command error - Assignment type (GET/SET) not recognized for the LEVEL command.**

Explanation: The setting of the modification level or the retrieval of the modification level for assignment to

a variable failed. The LEVEL macro command may not have been properly used.

User Response: Contact programmer of the dialog that uses the LEVEL macro command.

Programmer Response: Check the syntax of the LEVEL macro command for errors.

ISRE853 **Invalid parameter - The only valid parameter for the LEVEL command is a number (0-99).**

Explanation: The LEVEL command parameter is invalid. It must be a number in the range 0-99.

User Response: Issue the LEVEL command with one parameter in the range 0-99.

ISRE854 **Required parm missing - The LEVEL command requires a numeric parameter in the range 0-99.**

Explanation: No explanation available at this time.

ISRE855 **Assignment command error - Assignment type (GET/SET) not recognized for the VERSION command.**

Explanation: The setting of the version number or the retrieval of the version number for assignment to a variable failed. The VERSION macro command may not have been properly used.

User Response: Contact programmer of the dialog that uses the VERSION edit macro.

Programmer Response: Check the syntax of the VERSION macro command for errors.

ISRE857 **Assignment command error - Assignment type (GET) not recognized for the CTL_LIBRARY command.**

Explanation: The PDF editor encountered an edit macro statement involving the command CTL_LIBRARY, but the editor could not recognize the statement as a GET type request (a request for PDF to get the value for a current editor setting and place it into a dialog-specified variable). A GET type request is the only valid request type for the CTL_LIBRARY macro command.

User Response: Change the CTL_LIBRARY command to specify the proper parameters. Refer to *Edit and Edit Macros* for PDF editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the CTL_LIBRARY command to specify the proper parameters. Refer to *Edit and Edit Macros* for editor command syntax.

ISRE858 **Command not found - The aaaaaaaa program macro could not be loaded.**

Explanation: The load module was not found or the load module was marked not executable.

User Response: Make sure the load module name was spelled correctly. Contact the load module programmer if the load module name was spelled correctly.

Programmer Response: The load module may need to be relinked if it was marked not executable. The load module may need to be added to the proper library if it was not located by the system.

System Programmer Response: The load module may be in a library that is not concatenated in the user environment. In this case, the library concatenation for the user may need to be changed in order to find the appropriate library.

ISRE859 **Data set not replaced - The Replace command was not confirmed.**

Explanation: The Confirm Replace panel was displayed at the user's request. The user chose not to Replace the data set by entering the End command.

ISRE860 **Too many parameters - The only valid parameter for the IMACRO command is a name or NONE.**

Explanation: More than one parameter was entered for the IMACRO command. The only valid parameter for the IMACRO command is a name or NONE.

User Response: Reissue the IMACRO command with a name or NONE as the only parameter.

Programmer Response: Examine the edit macro for an ISREDIT macro command that assigns too many parameters to IMACRO.

ISRE861 **Assignment command error - Assignment type (GET/SET) not recognized for the IMACRO command.**

Explanation: Assignment type (GET/SET) was not recognized for an ISREDIT macro command. The value of IMACRO was being retrieved to a variable (GET) or being assigned a value (SET).

User Response: Contact the responsible programmer.

Programmer Response: Examine the edit macro for an incorrect ISREDIT macro command that references IMACRO.

System Programmer Response: Examine the invocation of the edit macro for a possible read (GET) or write (SET) error.

PDF Messages

ISRE863 **Required parm missing - The IMACRO command requires an initial macro name as a parameter.**

Explanation: No parameter was specified for a macro name.

User Response: Reissue the IMACRO command with a macro name or NONE.

Programmer Response: Examine the edit macro for an ISREDIT macro command that is not assigning any parameter to IMACRO.

ISRE864 **Invalid macro name - "aaaaaaaa" specified for the IMACRO command is an invalid macro name.**

Explanation: An invalid macro name was specified. Valid parameters are a valid macro name or NONE.

User Response: Reissue the IMACRO command with a valid macro name or NONE.

Programmer Response: Examine the edit macro for an ISREDIT macro command that assigns an invalid macro name to IMACRO.

ISRE865 **Invalid macro name - The length of name "aaaaaaaa" specified for the IMACRO command is invalid.**

Explanation: The number of characters in the macro name for the IMACRO command exceeds the maximum length for a name.

User Response: Reissue the IMACRO command with a macro name of the appropriate length.

Programmer Response: Examine the edit macro for an ISREDIT macro command that is assigning a macro name of inappropriate length to IMACRO.

ISRE866 **Imacro name not accepted - A new IMACRO name will not be accepted while the profile is locked.**

Explanation: IMACRO command is not permitted when the edit profile is locked.

User Response: Unlock the profile and issue the IMACRO command again. Contact the responsible programmer if the IMACRO command is in an edit macro and the profile will not unlock.

Programmer Response: Examine the edit macro. The profile must be unlocked in order to issue the IMACRO command successfully.

ISRE867 **SETUNDO unavailable - The SETUNDO command has not been enabled by your system programmer.**

Explanation: The SETUNDO command is only available if the function has been enabled by your system programmer. SETUNDO is enabled by way of the PDF configuration table.

User Response: Turn Recovery on to enable UNDO support.

System Programmer Response: To enable the SETUNDO command, change the value UNDO SIZE to a non-zero value in the PDF configuration table.

ISRE868 **Some data not processed - The files are different, but additional differences may not be shown. Options were selected on the Edit Compare Settings panel that may cause some data to be ignored during the comparison. This file was compared to 'aaa(56)'.**

Explanation: The COMPARE edit command detected differences. However, options were selected on the Edit Compare Settings Panel that filtered the input to the compare program. As a result, some differences may have been ignored during the compare and may not be highlighted in the editor.

Comments on the current file may not be marked as different.

Reformatted lines may not be marked as different.

Comments in the compared file may not be shown at all.

Case differences may not be shown at all.

User Response: No action is required unless you are using the COMPARE command to merge changes from another file. If you are using the COMPARE command to merge changes from another file, you may want to deselect all of the "don't process" options on the Edit Compare Settings panel and run the COMPARE command again. To deselect the "don't process" options, type COMPARE with no parameters on the command line and press enter.

ISRE869 **Data set not allocated - In a macro the target data set must be allocated for the aaaaaaaaa command**

Explanation: The data set name specified is not allocated.

User Response: Specify a data set that has been allocated.

ISRE870 **Too many parameters - The only valid parameter for the RMACRO command is a name or NONE.**

Explanation: More than one parameter was entered for the RMACRO command. The only valid parameter

for the RMACRO command is a name or NONE.

User Response: Reissue the RMACRO command with a name or NONE as the only parameter.

Programmer Response: Examine the edit macro for an ISREDIT macro command that assigns too many parameters to RMACRO.

ISRE871 **Assignment command error - Assignment type (GET/SET) not recognized for the RMACRO command.**

Explanation: Assignment type (GET/SET) is not recognized for an ISREDIT macro command. The value of RMACRO is being retrieved to a variable (GET) or being assigned a value (SET).

User Response: Contact the responsible programmer.

Programmer Response: Examine the edit macro for an incorrect ISREDIT macro command that references RMACRO.

System Programmer Response: Examine the invocation of the edit macro for a possible read (GET) or write (SET) error.

ISRE873 **Required parm missing - The RMACRO command requires a recovery macro name as a parameter.**

Explanation: No parameter is specified for a recovery macro name or NONE.

User Response: Reissue the RMACRO command with a recovery macro name or NONE.

Programmer Response: Examine the edit macro for an ISREDIT macro command that is not assigning any parameter to RMACRO.

ISRE874 **Invalid macro name - "aaaaaaaa" specified for the RMACRO command is an invalid macro name.**

Explanation: An invalid macro name was specified. Valid parameters are either a valid macro name or NONE.

User Response: Reissue the RMACRO command with a valid macro name or NONE.

Programmer Response: Examine the edit macro for an ISREDIT macro command that assigns an invalid macro name to RMACRO.

ISRE875 **Invalid macro name - The length of name "aaaaaaaa" specified for the RMACRO command is invalid.**

Explanation: The number of characters in the macro name for the RMACRO command exceeds the maximum length for a name.

User Response: Reissue the RMACRO command with a macro name of the appropriate length.

Programmer Response: Examine the edit macro for an ISREDIT macro command that is assigning a macro name of inappropriate length to RMACRO.

ISRE876 **Too many parameters - You may specify one or two labels on the FLIP command.**

Explanation: The FLIP command was issued with more than two labels.

User Response: Reissue the FLIP command with zero, one, or two labels.

Programmer Response: Examine the edit macro for a FLIP command with more than two labels.

ISRE877 **Invalid parameter - You may specify one or two labels on the FLIP command.**

Explanation: The FLIP command may be specified with zero, one, or two labels. One of the parameters specified with the FLIP command is not a valid label.

User Response: Reissue the FLIP command with zero, one, or two valid labels.

Programmer Response: Examine the edit macro for a FLIP command with an invalid label.

ISRE878 **Member not moved - The Move command was not confirmed.**

Explanation: The Confirm Move panel was displayed at the user's request. The user chose not to move the member by entering the END command. The Confirm Move panel is only displayed if there is a member in the lowest level library with the same name requested by the move command, and if confirm move was chosen.

ISRE879 **Data set not moved - The Move command was not confirmed.**

Explanation: The Confirm Move panel was displayed at the user's request. The user chose not to move the data set by entering the END command. The Confirm Move panel is only displayed if confirm move was chosen.

ISRE880 **Model class error - Too many parameters entered. The correct format is: MODEL CLASS NAME.**

Explanation: The MODEL macro command was issued with too many parameters. The correct syntax is MODEL CLASS NAME.

User Response: Reissue the MODEL command with the correct syntax.

PDF Messages

ISRE881 **Member not found - Model member desired was not found in ISPSLIB skeleton library.**

Explanation: The name of a member in a skeleton library was not found. The name may be misspelled or the member may not be present in the skeleton library.

User Response: Contact the responsible programmer.

Programmer Response: Check the panel member for a misspelled name and the skeleton library for a missing member.

Problem Determination: The skeleton member name may be misspelled in the panel member or be missing from the skeleton library.

ISRE882 **Member selection failed - Error received during selection panel process to determine a model.**

Explanation: The MODEL command was issued with a member name for the message class. Since there is only one model for messages, the concatenation of the class and the specified member name resulted in the error.

User Response: Reissue the MODEL command without specifying a member name.

Programmer Response: Examine the edit macro for a MODEL command that specifies a member name for the message class.

ISRE883 **I/O error reading member - Error received during read for requested model.**

Explanation: An I/O error was received during read for the requested model.

User Response: Reissue the MODEL command. Contact the system programmer if the error persists.

System Programmer Response: Examine the model data set for corruption. Use data set recovery techniques if the model data set is not usable.

Problem Determination: The model data set may be corrupted. Use standard I/O error problem determination techniques.

ISRE884 **Model command pending - An A or B line command or a valid label has not been specified.**

Explanation: A MODEL command was issued without specifying where to place the model. An A or B line command or a valid label has not been specified.

User Response: Specify an A or B line command or a valid label.

ISRE885 **Model class changed - Model class is now set to "aaaaaaaa".**

Explanation: This is an informational message indicating that the model class has been changed. This message may appear after issuing the MODEL CLASS command and selecting a different class.

ISRE886 **DVPUT returning error - DVPUT to set a variable for model function fails.**

Explanation: An ISPF system error, installation error, or unrecoverable I/O error has occurred.

User Response: Contact your system programmer.

ISRE887 **DVDEF returning error - When defining variables for model function fails.**

Explanation: An ISPF system error, installation error, or unrecoverable I/O error has occurred.

User Response: Contact your system programmer.

ISRE888 **DVGET returning error - Attempt to retrieve variable for model function fails.**

Explanation: An ISPF system error, installation error, or unrecoverable I/O error has occurred.

User Response: Contact your system programmer.

ISRE889 **Invalid model class name - Name is too long; it may contain a maximum of eight characters.**

Explanation: A model class name was entered that exceeds 8 characters in length.

User Response: Reissue the MODEL command with a class name of the proper length.

Programmer Response: Examine the edit macro for "ISREDIT MODEL CLASS name" where "name" is greater than 8 characters in length.

ISRE890 **Probable macro loop - Macros are nested 255 levels deep. Check recursive invocations.**

Explanation: Each macro operates on a separate level. A person at the keyboard always operates at level 0. Macros started by that person operate at level 1. Macros started by macros at level "n" will operate at level "n+1". The limit on the number of levels is 255.

User Response: Contact the responsible programmer.

Programmer Response: Change the macro or macros to remove repetitive starts of the same macro. A design change is required if there are more than 254 macro starts.

Problem Determination: The following statement may be added to the macro (or macros):

ISREDIT (varname) = MACRO_LEVEL

A WRITE statement to display varname may assist in monitoring macro levels for problem determination.

ISRE891 *aaaaaaaa macro error - aaaaaaaaa macro set a return code of bbbbbbbb*

Explanation: The EDIT macro set a return code greater than 11. Return codes greater than 11 are considered error codes.

User Response: Determine the cause of the error. Contact the programmer if the error code should be less than 12.

Programmer Response: The code may be changed if the return code should be less than 12.

ISRE892 **Macro command error - PROCESS/NOPROCESS keywords specified more than once on macro command.**

Explanation: Multiple PROCESS/NOPROCESS keywords have been recognized on the macro command.

User Response: Contact the responsible programmer.

Programmer Response: The edit macro MACRO command must have only one PROCESS/NOPROCESS keyword. Change the MACRO command so that there is only one PROCESS/NOPROCESS keyword.

Problem Determination: Multiple PROCESS/NOPROCESS keywords are recognized when they are separated by a parameter string. Without a parameter string separation the first keyword will be used and the others will be ignored without an error message.

ISRE893 **Macro command error - No ending parenthesis found to delimit macro parameters.**

Explanation: The MACRO command parameters are not delimited by an ending parenthesis.

User Response: Contact the responsible programmer.

Programmer Response: Change the MACRO command in the edit macro so the parameters have an ending parenthesis.

ISRE894 *aaaaaaaa macro error - Command as entered: "bbbbbbbb".*

Explanation: A command in an edit macro ended in error.

User Response: Examine the parameters (if any) specified for the edit macro. Invalid parameters passed

to commands in the edit macro may cause an error. Contact the edit macro programmer for additional assistance.

Programmer Response: A command in an edit macro ended in error. If the parameters passed to the command are correct then the problem may be with incorrect command syntax, execution of the wrong version of the command, or errors in the command itself.

Problem Determination: Examine the edit macro for incorrect parameters specified by the user, incorrect command specification in the edit macro, and incorrect version of the command to be executed.

ISRE895 *aaaaaaaa macro error - Command after an END or CANCEL or a severe error was not executed.*

Explanation: An ISREDIT or ISPEXEC statement follows and END, CANCEL or a severe error, and was not executed.

User Response: Reissue the edit macro after removing the cause of the severe error. Contact the responsible programmer if there was no severe error.

Programmer Response: In the situation of no severe error, the edit macro may be changed so that the macro exits after the END or CANCEL.

ISRE896 **Invalid define request - It is invalid to assign an alias for a command/macro that is NOP'ed.**

Explanation: The DEFINE command may be used to make a name inoperable (NOP). The DEFINE command may not be used to identify a name as an alias of a name that is inoperable (NOP).

User Response: The DEFINE command may be used to make inoperable names operable through the use of RESET. The DEFINE command may then be used to assign an alias to an operable name.

ISRE897 **Model member missing - The model member desired must be specified on the MODEL macro command.**

Explanation: The MODEL macro command requires the name of the model to be copied.

User Response: Contact the responsible programmer.

Programmer Response: The edit macro may contain a MODEL macro command that does not specify the name of the model to be copied. The edit macro code may be changed so that the name of a model is specified as part of the MODEL macro command.

Problem Determination: Examine the edit macro for MODEL commands that do not specify the name of a model.

PDF Messages

ISRE898 **Member not found - Model "aaaaaaa" was not found in ISPSLIB skeleton library.**

Explanation: The name of the model specified on the MODEL macro command was not found in the ISPSLIB skeleton library. The model may be missing from the library or the model name may be misspelled.

User Response: Contact the responsible programmer.

Programmer Response: The edit macro may need to be corrected with a proper spelling of the model name, or the model may need to be added to the ISPSLIB skeleton library.

Problem Determination: Examine the edit macro for a misspelled model name. If the model name is spelled properly, then the model may need to be added to the ISPSLIB skeleton library.

ISRE899 **Class name not specified - The class name desired must be specified on the MODEL macro command.**

Explanation: The MODEL macro command class syntax requires specification of a class name. There was no class name specified.

User Response: Contact the responsible programmer.

Programmer Response: The edit macro may contain a MODEL command that does not specify a class name as per the macro command class name syntax. Change the macro so a class name is specified on the MODEL CLASS command.

Problem Determination: Examine the edit macro for a missing class name on the MODEL CLASS command.

ISRE900 **Invalid IMACRO name - Name must follow member name rules or start with "!" followed by a valid name**

Explanation: The IMACRO command saves the name of an initial macro in the current edit profile. A value of NONE specifies that no macro is to be run at the beginning of each edit session. The name must follow the rules for a member name or start with an exclamation mark ! followed by a valid name.

User Response: Reissue the IMACRO command with NONE or a valid name. Contact the edit macro programmer if the IMACRO command is issued in an edit macro.

Programmer Response: Examine the edit macro for an IMACRO command with an invalid name. Replace the invalid name with a valid name.

ISRE901 **Severe error - Unexpected return code from the dialog supplied read routine.**

Explanation: An unexpected return code was received from the dialog supplied read routine. Expected return codes are 0, 8, 16, and 20.

User Response: Contact your system programmer.

System Programmer Response: The dialog supplied read routine should be examined for errors. There may be a problem with the data being read.

ISRE902 **Data set too large - Insufficient storage to read in data set at this time.**

Explanation: An out of storage situation has been detected. There is insufficient storage for a GETMAIN.

User Response: The region size may need to be increased. Contact the system programmer if increased region size does not solve the problem, or if the region size is already at the maximum limit.

System Programmer Response: Examine the data set to see if it is too large for the user environment. A larger region size may solve the problem.

ISRE903 **I/O error reading data - I/O error occurred reading the edit data.**

Explanation: An I/O error with a return code of 16 was encountered. This is an ISPF system error, installation error, or unrecoverable I/O error.

User Response: Contact your system programmer.

System Programmer Response: Investigate the cause of the I/O error.

ISRE904 **I/O error reading data - I/O error occurred reading the edit data. Check data set block sizes.**

Explanation: An error occurred while reading the edit data.

User Response: Contact your system programmer.

System Programmer Response: Investigate the cause of the I/O error.

Problem Determination: This should not be a packed data problem as errors from packed data result in a different message. The data set block sizes may be causing the error.

ISRE905 **Invalid EDIT/VIEW parm - Password is not allowed when DATAID is specified.**

Explanation: A password and DATAID are present. A password is not allowed with a DATAID.

User Response: Contact the programmer of the dialog that invokes the EDIT or VIEW service.

Programmer Response: Correct the dialog so that a password is not present with a DATAID.

ISRE906 **Invalid EDIT/VIEW parm - Data set specified is sequential, but member parm has been coded.**

Explanation: A member is specified for a sequential data set. This is not correct.

User Response: Contact the programmer of the dialog that invokes the EDIT or VIEW service.

Programmer Response: Correct the dialog so that a member is not specified with a sequential data set.

ISRE907 **EDREC service error - EDREC PROCESS, CANCEL or DEFER issued, but Recovery is not pending.**

Explanation: The dialog is attempting to issue an edit recovery PROCESS, CANCEL, or DEFER without first issuing a query.

User Response: Contact the responsible programmer.

Programmer Response: The dialog may be issuing two consecutive edit recovery PROCESS, CANCEL, or DEFER functions. Examine the dialog that invokes the edit service. The dialog code may need to be corrected.

ISRE908 **EDREC service error - EDREC QUERY or INIT is not allowed because recovery is pending.**

Explanation: The dialog is attempting to perform an edit recovery QUERY or INIT while a recovery is pending.

User Response: Contact the responsible programmer.

Programmer Response: The dialog may be issuing two consecutive edit recovery queries. Examine the dialog that invokes the edit service. The dialog code may need to be corrected.

ISRE913 **Invalid DEFINE request - RESET was attempted for a name not currently defined.**

Explanation: A DEFINE name RESET command was issued for an undefined name.

User Response: Examine the command syntax for a misspelled name or a name that is not defined. Contact the edit macro programmer if the DEFINE command is in an edit macro.

Programmer Response: Examine DEFINE name RESET commands for misspelled name or name not previously defined in the edit macro.

ISRE914 **Parameter not recognized - Check for misspelled keywords or too many BOUNDS or RANGE parameters.**

Explanation: The SEEK macro command in an edit macro was issued with a misspelled keyword or too many BOUNDS or RANGE parameters.

User Response: Contact the responsible programmer.

Programmer Response: Examine the edit macro for a SEEK macro command that has a misspelled keyword or too many BOUNDS or RANGE parameters. The edit macro code may need to be corrected.

Problem Determination: Compare the SEEK macro command in the edit macro with the syntax of the SEEK macro command in *ISPF Edit and Edit Macros*. The keywords or bound and range parameters may be incorrect at run time.

ISRE915 **Missing parameter - At least one variable name parameter required for SESSION command.**

Explanation: The SESSION assignment statement is missing the required variable name used to return the requested data.

User Response: Correct the SESSION assignment statement so that it includes the required variable name.

ISRE917 **Required string missing - The SEEK command requires specification of a target string.**

Explanation: The SEEK macro command in an edit macro was issued without a search string.

User Response: Contact the responsible programmer.

Programmer Response: Examine the edit macro for a SEEK macro command that does not have a search string. The edit macro code may need to be corrected.

Problem Determination: Compare the SEEK macro command in the edit macro with the syntax of the SEEK macro command in *ISPF Edit and Edit Macros*. The search string for the SEEK command may be null at run time which may also be the cause of the error.

ISRE918 **Inconsistent parameters - 'aaaaaaaa' and 'bbbbbbbb' cannot both be specified for SEEK command.**

Explanation: The SEEK macro command in an edit macro was issued with inconsistent parameters such as LAST and PREV.

User Response: Contact the responsible programmer.

Programmer Response: Examine the edit macro for a SEEK macro command with inconsistent parameters. The edit macro code may need to be corrected.

PDF Messages

Problem Determination: Compare the SEEK macro command in the edit macro with the syntax of the SEEK macro command in *ISPF Edit and Edit Macros*

ISRE925 **Too many parameters - Valid parameters for the SETUNDO command are ON, OFF, STG, and REC.**

Explanation: The SETUNDO command was entered with too many parameters.

User Response: Reissue the SETUNDO command with a correct parameter. Contact the responsible programmer if the SETUNDO command is in an edit macro.

Programmer Response: Examine the edit macro for a SETUNDO command with too many parameters. The valid parameters are ON, OFF, STG, and REC. The edit macro code may require changes to the SETUNDO command invocation.

ISRE928 **Parameter unrecognized - Valid parameters for the SETUNDO command are ON, OFF, STG, and REC.**

Explanation: The SETUNDO command was entered with a parameter that was not recognized. The parameter may be misspelled or invalid.

User Response: Reissue the SETUNDO command with a correct parameter. Contact the edit macro programmer if the SETUNDO command is in an edit macro.

Programmer Response: Examine the edit macro for a SETUNDO command with an incorrect parameter. The valid parameters are ON, OFF, STG, and REC. The edit macro code may require changes to the SETUNDO command invocation.

ISRE929 **Invalid specification - GET assignment type unrecognized for the SESSION command.**

Explanation: Either the SESSION assignment statement contains an invalid variable name or a parameter is missing.

User Response: Verify that the SESSION assignment statement contains no syntax errors or missing parameters.

ISRE938 **Missing parameter - Variable name parameter required for VOLUME command.**

Explanation: The VOLUME assignment statement is missing the required variable name for the volume of the edit data set.

User Response: Correct the VOLUME assignment statement so that it includes the required variable name

for the volume of the current edit data set.

ISRE939 **Invalid specification - GET assignment type unrecognized for the VOLUME command.**

Explanation: Either the VOLUME assignment statement contains an invalid variable name or a parameter is missing.

User Response: Verify that the VOLUME assignment statement contains no syntax errors or missing parameters.

ISRE940 **Dialog unavailable - The HILITE dialog cannot be started from an edit macro.**

Explanation: The edit command HILITE without operands was specified in an edit macro. The HILITE dialog is not available from edit macros.

User Response: Specify at least one operand on the HILITE command in the edit macro.

ISRE941 **Invalid line number - The relative line number of a line to be copied cannot be zero.**

Explanation: A relative line number for a copy operation was specified as zero. The relative line number must be one or greater.

User Response: Respecify the relative line number(s).

ISRE942 **HILITE unavailable - The HILITE command is not available in mixed mode edit sessions.**

Explanation: This is an informational message.

ISRE943 **Option unavailable - The only HILITE services available when editing data sets with data lengths greater than 255 characters are FIND and CURSOR. All language sensitive highlighting is disabled.**

Explanation: This is an informational message.

ISRE944 **HILITE unavailable - The HILITE command is not available when enhanced edit color is not enabled. Enhanced edit color is either disabled in the PDF configuration table, or the edit panel in use does not support enhanced edit color or you issued the HILITE disable command.**

Explanation: Enhanced edit color is not available because it is disabled for one of the following reasons:

- The edit panel in use is not enabled for enhanced color.

- The enhanced color capabilities were disabled when ISPF was installed.
- The HILITE DISABLE command was entered on the command line or was run from an edit macro.

User Response: If enhanced color is unavailable because the panel you are using is not enabled for it, change the edit panel you are using to enable it. The panel must have a dynamic area called ZDATA, a shadow variable called ZSHADOW, and special attributes in the)ATTR section. See the panel ISREDDE2 which is shipped with ISPF for an example.

System Programmer Response: If you decide to enable enhanced coloring, update the ISPF configuration table. See *Planning and Customizing*

ISRE945 HILITE unavailable - The HILITE command is not available when an edit format is used.

Explanation: This is an informational message.

ISRE947 Invalid terminal - Enhanced coloring is not available on this terminal because the terminal does not support extended highlighting.

Explanation: This is an informational message.

ISRE948 HI DISABLE unavailable - Enhanced coloring cannot be disabled with the current edit panel. Only panels ISREDDE2, ISREDDE3 and FLMEDDE support the HILITE DISABLE command.

Explanation: Only panels ISREDDE2, ISREDDE3, and FLMEDDE support the HILITE DISABLE command. These are the default panels shipped with ISPF for option 2 and SCLM edit. Extended highlighting cannot be disabled when you are using customized (user) panels that support extended highlighting.

ISRE949 HILITE unavailable - The HILITE command is not available when the editor is used in GUI mode.

Explanation: Edit highlighting is not available when you are using the Graphical User Interface (GUI) component of ISPF.

ISRE970 Read-only member - You do not have update authority to the PDSE you selected. Use the View function to access the member in an editor environment.

Explanation: You do not have update authority to the PDSE you selected. Edit cannot be used to access the member.

User Response: Use the View function to access the member.

ISRE971 Command not supported - aaaaaaaa command not supported by the dialog supplied command routine.

Explanation: The Edit Interface (EDIF) service uses a dialog-supplied command routine to process the MOVE, COPY, CREATE, REPLACE, and EDIT primary commands. The command routine considers the command you entered invalid and set the return code to 12. This message is issued as a default when one is not set by the routine.

User Response: Enter one of the commands supported by the dialog. Contact the responsible programmer for a list of supported commands.

Programmer Response: Provide the user with a list of supported commands, and update the command routine to set a more specific error message.

ISRE972 Severe error - Severe error occurred in the dialog supplied command routine.

Explanation: A severe error occurred in the command routine specified on an Edit Interface (EDIF) service call made by the dialog. The routine set a return code of 20. This message is issued as the default when an error message was not set by the routine.

User Response: Contact the responsible programmer.

Programmer Response: Provide the user with an explanation and response for the error condition, and update the command routine to set a more specific error message.

ISRE973 Severe error - Unexpected return code from the dialog supplied command routine.

Explanation: The command routine specified on an Edit Interface (EDIF) service call made by the dialog set an unexpected return code. The supported return codes for the command routine are 0, 4, 12, and 20.

User Response: Contact the responsible programmer.

Programmer Response: Update the command routine to use one of the supported return codes. Provide the user with an explanation and response to the error condition.

ISRE974 Severe error - Severe error occurred in the dialog supplied read routine.

Explanation: A severe error occurred in the read routine specified on an Edit Interface (EDIF) service call. A return code of 20 was passed back by the routine. This message is issued as the default because an error message was not set by the routine.

PDF Messages

User Response: Contact the responsible programmer.

Programmer Response: Provide the user with an explanation and response for the error condition, and update the read routine to set a more specific error message.

ISRE976 Severe error - Unexpected return code from the dialog supplied write routine.

Explanation: The write routine specified on an Edit Interface (EDIF) service call made by the dialog set an unexpected return code. The supported return codes for the write routine are 0, 16, and 20.

User Response: Contact the responsible programmer.

Programmer Response: Update the write routine so that it uses one of the supported return codes. Provide the user with an explanation and response to the error condition.

ISRE977 Severe error - Severe error occurred in the dialog supplied write routine.

Explanation: A severe error occurred in the write routine specified on an Edit Interface (EDIF) service call. A return code of 20 was passed back by the routine. This message is issued as the default because an error message was not set by the routine.

User Response: Contact the responsible programmer.

Programmer Response: Provide the user with an explanation and response for the error condition, and update the write routine to set a more specific error message.

ISRE978 I/O error writing data - I/O error occurred writing the edit data.

Explanation: An output error occurred in the write routine specified on an Edit Interface (EDIF) service call. A return code of 16 was set by the routine. This message is issued as the default because an error message was not set by the routine.

User Response: Contact the responsible programmer.

Programmer Response: Provide the user with an explanation and response for the error condition, and update the write routine to set a more specific error message.

ISRE979 Member name not allowed - A member name cannot be specified when editing data with the EDIF service.

Explanation: The dialog is using the Edit Interface (EDIF) service to edit data. A member name cannot be specified when using the EDIT, VIEW, or BROWSE primary command from an EDIF session.

User Response: Reenter the EDIT, VIEW, or BROWSE

command without specifying a member name.

ISRE980 Invalid LOCATE range - Specify two valid aaaaaaaa.s to indicate search range for LOCATE command.

Explanation: Two valid labels must be used to specify the range on the generic form of the LOCATE primary edit command. Either relative line numbers or labels may be used to specify the range on the generic form of the LOCATE Edit macro command. Either only one range parameter was specified, or one or both of the parameters entered were not valid labels or line numbers.

User Response: If you are using the LOCATE primary command, reenter the command using two valid labels to define the group of lines to be searched. If you are using an Edit macro, contact the responsible programmer.

Programmer Response: Update the LOCATE macro command so that it uses either two valid labels or two valid line numbers to specify the range.

ISRE981 Invalid line number - Line number aaaaaaaa does not exist. Invalid range for LOCATE.

Explanation: One or both of the line numbers used to specify a range on the generic form of the LOCATE Edit macro command are invalid.

User Response: Contact the responsible programmer.

Programmer Response: Update the LOCATE macro command in the Edit macro so that it uses two valid line numbers to specify the range of lines to be searched.

ISRE982 Invalid LOCATE syntax - A range is only valid with a keyword: X/ERR/CHG/SPECIAL/CMD/LABEL.

Explanation: A range is only valid on the generic form of the LOCATE primary and macro commands. This command is used to locate a particular kind of line. A range was specified without specifying the kind of line to be searched for.

User Response: If you are using the LOCATE primary command, reenter the command, specifying the kind of line to be located. If you are using an Edit macro, contact the responsible programmer.

Programmer Response: Update the LOCATE macro command so that it includes the kind of line to be located.

ISRE983 **No records to LOCATE - File is empty. LOCATE cannot position display to a record in the file.**

Explanation: This is an informational message. An attempt is being made to locate a line in an empty file.

ISRE984 **Command name missing - BUILTIN must be followed by a valid edit command name.**

Explanation: The BUILTIN command was entered without specifying the name of the command you wish to execute.

User Response: Reenter the command with the Edit command name specified.

ISRE985 **Invalid line pointer - LPTR not numeric or label in syntax "ISREDIT (varname) = aaaaaaa LPTR".**

Explanation: An assignment statement of the form above requires that the line pointer be either a valid label or line number. The line pointer used was invalid.

User Response: Contact the responsible programmer.

Programmer Response: Update the assignment statement in the Edit macro to specify a valid label or line number.

ISRE986 **Invalid line pointer - LPTR not numeric or label in syntax "ISREDIT aaaaaaa LPTR = value".**

Explanation: An assignment statement of the form above requires that the line pointer be either a valid label or line number. The line pointer used was invalid.

User Response: Contact the responsible programmer.

Programmer Response: Update the assignment statement in the Edit macro to specify a valid label or line number.

ISRE987 **Macro/text mode invalid - Macros cannot be executed when in text entry mode**

Explanation: An Edit macro cannot be executed when you are in text entry mode.

User Response: Complete the text entry before invoking the macro.

ISRE988 **Command string too long - Exceeds maximum length of 512 bytes after variable substitution.**

Explanation: An Edit macro command resolved to more than 512 bytes after variable substitution.

User Response: Contact the responsible programmer.

Programmer Response: Rework the macro command so that it resolves to a length less than 512 bytes after variable substitution.

ISRE989 **Var substitution error - Severe error while resolving symbolic variables in ISREDIT statement.**

Explanation: One of the variables used in an Edit macro command cannot be resolved.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that values are being assigned correctly to all variables used in your Edit macro commands.

ISRE997 **LMF lock not allowed - The member being edited belongs to an SCLM controlled project.**

Explanation: The member being edited is under the control of both LMF and SCLM libraries. Saving the member under LMF will invalidate the SCLM accounting information for the member.

User Response: Contact your Library Administrator to determine whether LMF or SCLM should be used to edit the member.

ISRE998 **SCLM warning - The member being edited may belong to an SCLM controlled project.**

Explanation: The member being edited may belong to an SCLM controlled project. If so, editing the member outside of SCLM will invalidate the member's accounting information.

User Response: Verify that the member does not belong to an SCLM controlled project before saving any changes.

ISRF000 *aaaaaaa - to
bbbbbbb..ccccccc..OBJ(dddddddd)*

Explanation: This is an informational message. The short message identifies the foreground compiler language. The long message identifies the ISPF library member into which the compiled output object code is stored.

ISRF001 *aaaaaaa - to bbbbbbbb..OBJ(ccccccc)*

Explanation: This is an informational message. The short message identifies the foreground compiler language. The long message identifies the partitioned data set member into which the compiled output object code is stored.

PDF Messages

ISRF002 *aaaaaaaa - to bbbbbbbb..OBJ*

Explanation: This is an informational message. The short message identifies the foreground compiler language. The long message identifies the sequential data set into which the compiled output object code is stored.

ISRF003 *aaaaaaaa - of bbbbbbbb..ccccccc.(ddddddd)*

Explanation: This is an informational message. The short message identifies a FORTRAN interactive debug session. The long message identifies the partitioned data set against which the FORTRAN interactive debug session is run.

ISRF004 *aaaaaaaa - of bbbbbbbb..ccccccc*

Explanation: This is an informational message. The short message identifies a FORTRAN interactive debug session. The long message identifies the sequential data set against which the FORTRAN interactive debug session is run.

ISRF005 *aaaaaaaa - to
bbbbbbb..ccccccc..LOAD(dddddd)*

Explanation: This is an informational message. The short message identifies a foreground linkage edit or bind. The long message identifies the ISPF load library member into which the linkage editor or binder output is stored.

ISRF006 *aaaaaaaa - to bbbbbbbb..LOAD(cccccc)*

Explanation: This is an informational message. The short message identifies a foreground linkage edit or bind. The long message identifies the other partitioned load data set member into which the linkage editor or binder output is stored.

ISRF007 *aaaaaaaa - of bbbbbbbb..LOAD(cccccc)*

Explanation: This is an informational message. The short message identifies a COBOL interactive debug session. The long message identifies the partitioned data set against which the COBOL interactive debug session is run.

ISRF009 *aaaaaaaa - to bbbbbbbb*

Explanation: This is an informational message. The short message identifies the foreground script language. The long message identifies the data set into which the scripted output is stored.

ISRF010 **VDEFINE error RC=aaaaaaaa - VDEFINE service return code was aaaaaaaa.**

Explanation: A severe internal error has occurred. An unexpected return code was received from the VDEFINE service.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRF011 **DISPLAY severe error - DISPLAY service severe error occurred.**

Explanation: A severe internal error has occurred. An unexpected returned code was received from the DISPLAY service.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRF012 **Duplicate format "aaaaaaaa" - Format name "aaaaaaaa" already exists.**

Explanation: The format name specified, aaaaaaaa, already exists in the format table.

User Response: Correct the format name.

ISRF013 **"aaaaaaaa" does not exist - Format name "aaaaaaaa" does not exist.**

Explanation: The format name specified, aaaaaaaa, does not exist in the format table.

ISRF014 **Table service error - Table service severe error occurred.**

Explanation: A severe internal error has occurred. An unexpected return code was received from a table service.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRF015 **TBDISPL error RC=aaaaaaaa - Table display service return code was aaaaaaaa.**

Explanation: A severe internal error has occurred. An unexpected return code was received from the table display service.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRF016 **Need field definition - At least one field definition is required.**

Explanation: At least one field definition is required in a format definition.

User Response: Enter at least one field definition.

ISRF017 **Field overlap - A field is overlapped with other field.**

Explanation: One field definition is overlapped with another field definition.

User Response: Correct the overlapping field definition.

ISRF018 **Operation cancelled - The requested function was cancelled.**

Explanation: This is an informational message. The requested function was cancelled.

ISRF019 **Normal completion - Requested function successfully completed.**

Explanation: This is an informational message. The requested function was completed successfully.

ISRF020 **Field length error - Zero length field is defined.**

Explanation: An invalid field length of zero is specified.

User Response: Specify a field length between 1 and 71.

ISRF021 **Odd length DBCS field - Odd length DBCS field is defined.**

Explanation: An odd field length is specified.

User Response: Specify an even number for the DBCS field length.

ISRF022 **Invalid command - aaaaaaaa is an invalid command.**

Explanation: An invalid format selection list command is entered.

User Response: Correct the invalid format selection list command.

ISRF023 **Too many parameters - Too many parameters are specified in the command area.**

Explanation: Too many parameters are specified in the command area.

User Response: Blank out the extra parameters.

ISRF024 **Invalid parameter - Invalid parameter is specified in the command area.**

Explanation: An invalid parameter is specified for the format selection list command.

User Response: Correct the invalid parameter.

ISRF025 **"aaaaaaa" does not exist - From format name "aaaaaaa" does not exist.**

Explanation: The FROM format specified, aaaaaaaa, for the copy operation in the Format Specification utility does not exist.

User Response: Correct the FROM format name.

ISRF026 **Format name missing - This command requires a format name.**

Explanation: The FROM format name for the copy operation in the Format Specification utility is missing.

ISRF027 **Duplicate name - Same format in same TABLE(ISRFORM) is specified for copy.**

Explanation: The same format in the same format table is specified for copy.

User Response: Correct the format names.

ISRF028 **"*" is invalid - "*" cannot be specified when the From table is ISRFORM.**

Explanation: An asterisk ("*") cannot be specified when the FROM table is ISRFORM.

User Response: Specify a valid FROM format name, or specify a FROM table name other than ISRFORM.

ISRF029 **Duplicate format name - Format name specified already exists.**

Explanation: The format name specified already exists.

User Response: Correct the format name.

ISRF030 **RECFM must be fixed - Variable length records may not be used for the formatted file.**

Explanation: Variable RECFM formatted data sets are not supported.

User Response: Specify a fixed RECFM formatted data set or blank out the format name.

ISRF031 **No format table - Format table ISRFORM does not exist.**

Explanation: A format name is specified, but the format table does not exist.

User Response: Use the Format Specification utility (option 3.11) to add the new format.

PDF Messages

ISRF032 **Format table is in use - Format table is in use by another user or by you.**

Explanation: The format table is in use by another user or by you on another logical screen.

User Response: Find out if another user is using the format table, or release the format table on another logical screen.

ISRF033 **Library is not allocated - The table library is not allocated.**

Explanation: The table library for ISPF is not allocated.

User Response: Refer to the Program Directory for details on allocating the table library for ISPF.

ISRF034 **Table service error - Severe table service error occurred.**

Explanation: A severe table service error has occurred. The table data set may be corrupted.

User Response: Contact the responsible programmer.

Programmer Response: Check the integrity of the table data set. Reallocate or restore from a backup if the table data set is corrupted. Otherwise, contact IBM support.

ISRF035 **Format not found - The specified format does not exist.**

Explanation: The specified format does not exist in the format table.

User Response: Contact the responsible programmer.

Programmer Response: Correct the spelling of the format name, or add the new format using the Format Specification utility (option 3.11).

ISRF036 **Invalid format - The maximum column position in format exceeds record length.**

Explanation: The maximum column position in the format exceeds the record length of the data set.

User Response: Contact the responsible programmer.

Programmer Response: Use the Format Specification utility (option 3.11) to update the format so that the maximum column position in the format does not exceed the record length of the data set.

ISRF037 **LRECL limit exceeded - LRECL plus formatted attribute bytes exceeds edit/browse lrecl limit.**

Explanation: The record length of the data set plus the formatted attribute bytes exceeds the Edit or Browse record length limit.

User Response: Contact the responsible programmer.

Programmer Response: Divide the format into two smaller formats and Edit or Browse the data set in two steps.

ISRF038 **No formats found - No format table entries were found to process.**

Explanation: No format table entries were found to process.

User Response: Use option A to add a new format.

ISRF040 **Table does not exist - From table "aaaaaaaa" does not exist.**

Explanation: The FROM table *aaaaaaaa* specified for the copy operation in the Format Specification utility does not exist.

User Response: Correct the FROM table name.

ISRF041 **Table is in use - From table "aaaaaaaa" is in use.**

Explanation: The FROM table *aaaaaaaa* specified for the copy operation in the Format Specification utility is in use by another user or by you on another logical screen.

User Response: Find out if another user is using the table, or release the table on another logical screen.

ISRF042 **Table service error - Severe table service error occurred with from table.**

Explanation: A severe table service error has occurred with the FROM table. The FROM table may be corrupted.

User Response: Contact the responsible programmer.

Programmer Response: Check the integrity of the FROM table. Reallocate or restore from a backup if the table is corrupted. Otherwise, contact IBM support.

ISRF043 **Invalid selection code - Valid codes are: S (select), U (update), R (rename), or D (delete).**

Explanation: An invalid selection code is specified.

User Response: Enter one of the valid selection codes (S, U, R, or D) for the format selection list.

ISRF044 **Invalid selection code - Valid code is: S (select).**

Explanation: An invalid selection code is specified.

User Response: Enter the valid selection code (S) for the copy format selection list.

ISRF900 **Function ended RC=X'aaaa' - The selected function completed with return code of X'aaaa'.**

Explanation: This is an informational message. The selected foreground function is complete with a return code of *aaaa* hex.

ISRF901 **ISRLEMX ended RC=aaaa - Member expansion completed with return code of aaaa.**

Explanation: The PDF Member Expansion routine (ISRLEMX) failed with a return code of *aaaa*. The ISRLEMX return codes are:

- 1-15** Parameter n was too long, where n is the return code.
- 16** Too many parameters specified.
- 17** Too few parameters specified.
- 20** Severe error. Refer to the data set allocated to DDNAME ISRLMSG for details on the failure.

User Response: Refer to *ISPF Dialog Developer's Guide and Reference* and *ISPF Planning and Customizing* for further information on the ISRLEMX routine.

ISRF902 **No list file found - Unable to locate list file for aaaaaaaaaa or the file was empty.**

Explanation: This is an informational message. The processing (indicated by variable *aaaaaaaa*) is complete, but the expected listing data set was not found.

ISRF903 **Invalid ZSEL variable - The ZSEL panel variable must start with CMD or PGM.**

Explanation: The PDF foreground processor (ISRFPR) is invoked passing the name of a panel to display. The)PROC section of this panel must set variable &ZSEL to an CMD(...) or PGM(...) string that PDF can pass to the ISPF SELECT service. A ZSEL string was encountered that does not start with CMD or PGM.

User Response: Contact the responsible programmer.

Programmer Response: Correct the ZSEL string and retry the function.

ISRF904 **Non-zero return code - The selected function terminated with return code of X'aaaa'.**

Explanation: This is an informational message. The selected foreground function is complete with a return

code of *aaaa* hex. If *aaaa* is X'63' this indicates a clist error, probably caused by entering an arithmetic operator (*, /, +, -, etc.) in one of the panel input fields. Any other return code is the return code returned by the selected language processor.

ISRF905 **Invalid organization - Only partitioned and physical sequential data sets processed.**

Explanation: The PDF foreground option was invoked specifying a data set that was other than partitioned or sequential.

User Response: Change the input data set to one that is partitioned or sequential and retry.

ISRF906 **Invalid organization - Only partitioned data sets processed.**

Explanation: The PDF foreground Binder/Linkage Editor and VS COBOL II Interactive Debug options only support partitioned data sets as input.

User Response: Change the input data set to one that is partitioned and retry.

ISRF907 **Processor failed, RC=20 - The aaaaaaaaa language processor ended with a return code of 20, possibly indicating that it could not be found by ISPF.**

Explanation: The PDF foreground processor attempted to invoke the language processor you requested, but the ISPF SELECT service returned a return code 20. This could be a return code 20 from the processor, or it could be indicate that ISPF could not find the language processor.

User Response: Verify that your MVS search sequence includes the load module data set containing the processor requested is included, then retry the request. If the same message is returned, the language processor is returning the 20 and you should refer to the documentation supplied with that processor for problem determination.

ISRF911 **Specify list ID - Specify a "list ID" for sequential file.**

Explanation: The list ID, used as one of the qualifiers for the listing data set name, normally defaults to the name of the PDS member being processed. When a sequential data set is specified, no default name is used and the list ID must be specified.

User Response: Specify a list ID and retry the function.

PDF Messages

ISRF912 Invalid ZSEL2 variable - The ZSEL2 panel variable must start with CMD or PGM

Explanation: The PDF foreground processor (ISRFPR) is invoked passing the name of a panel to display. The)PROC section of this panel must set variable &ZSEL and may optionally set variable &ZSEL2 to an CMD(...) or PGM(...) string that PDF can pass to the ISPF SELECT service. A ZSEL2 string was encountered that did not start with CMD or PGM.

User Response: Contact the responsible programmer.

Programmer Response: Correct the ZSEL2 string and retry the function.

ISRF914 BLDL error - I/O error, insufficient virtual storage or other BLDL error

Explanation: PDF received an error from the BLDL macro processing the the data set specified for foreground processing.

User Response: Contact your system programmer.

System Programmer Response: Check your MVS console for messages caused by this error and refer to the System Messages and Codes manual for problem determination. If further assistance is needed, contact IBM support.

ISRF915 No members in data set - The PDS specified contains no members.

Explanation: A member list was requested from the PDF foreground processor, but no members exist in the specified data set.

User Response: Either add the appropriate members to the data set you are using, or specify a different data set.

ISRF916 I/O error - An I/O error occurred while reading the PDS directory.

Explanation: PDF received a return code 8 from the BLDL macro while attempting to gather member statistics while building a foreground member list.

User Response: Contact your system programmer.

ISRF917 I/O error - An I/O error occurred during member list processing.

Explanation: PDF member list routine received an I/O error while attempting to read the PDS directory of the data set specified for foreground processing.

User Response: Contact your system programmer.

System Programmer Response: Check your MVS console for messages caused by this error and refer to the System Messages and Codes manual for problem

determination. If further assistance is needed, contact IBM support.

ISRF918 Member list error - Unexpected error from member list display routine

Explanation: The PDF foreground processor (ISRFPR) received an unexpected return code from the PDF member list processor (ISRCML).

User Response: Contact your system programmer.

System Programmer Response: Check your MVS console for messages caused by this error and refer to the System Messages and Codes manual for problem determination. If further assistance is needed, contact IBM support.

ISRF919 Member not found - The requested member was not found in the PDS directory(s).

Explanation: The member specified for foreground processing does not exist in the library specified.

User Response: Correct the data set name and member name to specify an existing member and retry the function.

ISRF920 Style deleted - Selected style(s) deleted from style table.

Explanation: This is an informational message. The selected style was deleted successfully from the Select Script/VS Formatting Style panel (panel ISRF09T).

ISRF921 Style table deleted - A new table will be created with the next script invocation.

Explanation: This is an informational message. All styles were deleted from the existing style table, so the table was deleted.

ISRF922 Bad directory - Directory block size exceeds maximum of 256.

Explanation: The PDF common member list routine detected a data set that had a directory block greater than 256 bytes, the maximum supported by PDF.

User Response: Copy the data into a new data set and retry the request.

ISRF923 Function terminated - Processing was terminated by user request (end).

Explanation: This is an informational message. The user entered the END command to terminate the current function.

ISRF924 Select formatting style - Select a formatting style to process script input.

Explanation: Enter was pressed on the Select Script/VS Formatting Style panel (panel ISRF09T) while a style was being selected.

User Response: Select a style using the S line command, delete a style using the D line command, or enter the END command to exit without a selection.

ISRF925 Invalid line command - Enter either S to select a style or D to delete one.

Explanation: A line command other than S or D was entered on the Select Script/VS Formatting Style panel (panel ISRF09T). S and D are the only valid line commands.

User Response: Select a style using the S line command, delete a style using the D line command, or enter the END command to exit without a selection.

ISRF926 Select one style - Select only one style for the SCRIPT/VS processor to use.

Explanation: Multiple selections were made (using the S line command) on the Select Script/VS Formatting Style panel (panel ISRF09T). Only one style may be selected from this panel.

User Response: Remove the extra selections and press Enter to continue the request, or enter the END command to exit without processing.

ISRF927 Table not found - System style table 'aaaaaaaa.' was not found.

Explanation: The PDF style table, used to hold the various default and user defined styles for processing script documents, could not be found in any of the data sets concatenated to ISPTLIB.

User Response: Check your ISPTLIB allocation to see if it is complete, or contact your system programmer for assistance.

System Programmer Response: Check the user's ISPTLIB concatenation to see if it is complete. If not, make the necessary corrections to the logon proc or CLIST/REXX exec used. If the ISRSTLYE member cannot be located, a default copy of table ISRSTYLE can be found in the PDF product libraries shipped on the ISPF install tape.

ISRF928 Internal dialog error - aaaaaaaa received a return code of X'bbbb'.

Explanation: The PDF Script/VS CLIST (CLIST ISRFC09) received a return code *bbbb* hex from an ISPEXEC *aaaaaaaa* service call.

User Response: Contact your system programmer.

System Programmer Response: Refer to *ISPF Services Guide* for return code explanations.

ISRF929 Style table in use - Style table 'aaaaaaaa.' is currently in use by another user.

Explanation: PDF received a return code 12 from the TBOPEN service for table *aaaaaaaa*, indicating that the table is in use by you or another user.

User Response: Wait until the table is free, then retry the request.

ISRF930 Expand failed - Error during execution of member expansion, return code aaaa.

Explanation: A failure was encountered while an attempt was being made to unpack members that are packed.

User Response: Refer to *ISPF User's Guide* under "Member Expansion ISRLEMX Return Codes" for further information.

ISRF935 No list file found - Unable to locate list file for member parts list, or the file was empty.

Explanation: This is an informational message. The member parts list processor is complete, but the expected listing data set was not found for PDF to browse.

ISRF936 DSN unavailable - DSN for input aaa(12) is unavailable or does not exist.

Explanation: The *aaa(12)* data set specified on the Script/VS Options for Style: *xxxxx* (panel ISRF09O) does not exist, or may be in use by another user.

User Response: If the data set was specified incorrectly, correct the data set name and retry the function. If the name is correct, contact your system programmer for assistance.

ISRF937 Additional lib error - The aaaaa of additional library bbb(44) and the aaaaa of the input library are incompatible.

Explanation: PDF detected an inconsistency in either the RECFM or LRECL (indicated by *aaaaa*) of one of the additional input libraries specified when compared against your primary input library.

User Response: Enter a correct data set in the additional input library field and retry the function.

PDF Messages

ISRF938 **Additional lib error – Additional library *aaa(44)* was not found in catalog.**

Explanation: Data set *aaa(44)*, specified in the additional input libraries field, does not exist.

User Response: Either create the library, or specify an existing library and retry the request.

ISRF939 **Invalid data set name - The data set must be fully qualified and enclosed in apostrophes.**

Explanation: A data set name was entered in the additional input libraries field that was not enclosed in apostrophes.

User Response: Correct the data set name and retry the request.

ISRF940 **Additional lib error - Additional input library *aaa(44)* is not partitioned. All libraries specified in the additional input libraries fields must be partitioned.**

Explanation: Data set *aaa(44)*, specifies as one of the additional input libraries specified at the bottom of one of the compiler interface data entry panels is not partitioned. Only partitioned data sets may be specified in these fields.

User Response: Specify a partitioned data set and retry the request.

ISRG002 **Enter project name - Project name is missing or invalid.**

Explanation: The Project name field is blank or invalid in the ISPF library data set input fields.

User Response: A valid Project name must be entered for the ISPF library. An ISPF library is a cataloged partitioned data set with a three-level data set name in this format:
'project.group.type'

ISRG003 **Enter group name - Group name is missing or invalid.**

Explanation: The Project name field is blank or invalid in the ISPF library data set input fields

User Response: A valid Project name must be entered for the ISPF library. An ISPF library is a cataloged partitioned data set with a three-level data set name in this format:
'project.group.type'

ISRG004 **Enter type qualifier - Type is missing or invalid.**

Explanation: The Type name field is blank or invalid in the ISPF library data set input fields.

User Response: A valid Type name must be entered for the ISPF library. An ISPF library is a cataloged partitioned data set with a three-level data set name in this format:
'project.group.type'

ISRG007 **Vol serial not allowed - Use "Other data set name" field when specifying volume serial.**

Explanation: The Volume Serial input field invalidly contains a value when not specifying Other Data Set Name field.

User Response: When using the ISPF Library input fields for entering the data set name, do not put any value in the Volume Serial input field. Only when using the Other Data Set Name input field can the Volume Serial input field contain a valid value.

ISRG010 **Data set is open - Data set is currently being used by ISPF.**

Explanation: The specified data set is open and currently being used by ISPF.

User Response: This message is issued when one of the data sets LIST, LOG, TEMPLIST, TEMPCNTL, or EDIT RECOVERY is specified and ISPF is currently using the data set. The LOG and LIST data sets are controlled by the LOG and LIST commands. These two commands can keep the current data set and continue with a new data set so that keep data set can be used. The TEMPLIST, TEMPCNTL, and EDIT RECOVERY data sets need to be saved and closed in order to be used.

ISRG011 **Unsupported data type - HFS data sets are supported for data set creation, data set information, data set rename and data set delete only.**

Explanation: An attempt was made to perform a PDF function other than data set creation, data set information, data set rename, or data set delete against an HFS data set.

User Response: Use a supported data set type.

ISRG040 **Invalid DSORG - Data set organization must be partitioned or sequential.**

Explanation: The data set organization was entered incorrectly.

User Response: Correct the data set organization.

ISRG044 Concatenation failed - Unable to concatenate the specified libraries.

Explanation: The concatenation failed, ISPCDAIR did not return with RC=0.

User Response: Contact your system programmer.

System Programmer Response: If the user's action was correct, contact IBM support.

ISRG045 STAE macro error - Unable to obtain storage for STAE macro, subpool 0 full.

Explanation: Storage has been exhausted; there was a previous error that could have used all of the available storage.

User Response: Verify that your region size is large enough to run the task that just failed. If you still have a problem, contact the system programmer.

System Programmer Response: Verify that the task is not looping and that the storage is sufficient to execute the failing function.

ISRG071 Concatenation failed - Unable to concatenate the specified libraries.

Explanation: The allocation of a concatenated set of libraries failed because the concatenation could not be completed.

User Response: Verify that the libraries to be concatenated can, in fact, be concatenated for allocation. Try using the TSO ALLOCATE command to perform the allocation and see if it produces messages. Also check for incompatible data set attributes among the data sets to be concatenated.

ISRG072 Tape not supported - ISPF does not support data sets on tape.

Explanation: An allocation request was made for a data set which resides on tape. This action is not supported by ISPF.

User Response: Copy the data from the tape to a direct access storage device (DASD) and work with the data from the disk instead of the tape.

ISRG073 Load failed - The attempt to load the installation allocation exit failed.

Explanation: The allocation exit specified in the Configuration Table could not be loaded.

User Response: Contact your system programmer.

Programmer Response: Ensure that the exit listed in the Configuration Table is available to the user, and that is not marked non-executable.

ISRG074 Unknown return code - The installation allocation exit returned an unknown return code of aaaaaaaa.

Explanation: Your installation is using an allocation exit that is specified in the Configuration table. That exit returned a return code (aaaaaaa) which is not defined to ISPF. There is probably an error in the exit.

Programmer Response: Verify that the exit is operating properly and ensure that the exit returns only return codes for which ISPF is prepared.

ISRG076 Inconsistent record size - All libraries must have the same record length.

Explanation: An attempt was made to concatenate data sets with different record lengths. This action is not supported by ISPF.

User Response: Check to be sure that the correct data sets are being allocated and that the record lengths and record formats are the same for all of the data sets. You may need to reallocate the data sets or copy the contents to temporary data sets which you allocate instead.

ISRG077 Inconsistent record type - All libraries must be the same record type.

Explanation: An attempt was made to concatenate data sets with different record formats (fixed, variable, etc). This action is not supported by ISPF.

User Response: Check to be sure that the correct data sets are being allocated and that the record lengths and record formats are the same for all of the data sets. You may need to reallocate the data sets or copy the contents to temporary data sets which you allocate instead.

ISRG078 Inconsistent record size - The first library must have the largest record length.

Explanation: An attempt was made to concatenate two data sets with variable record lengths where one data set has a larger record length than the first data set. This action is not supported by ISPF.

User Response: Check to be sure that the correct data sets are being allocated and that the first data set has the largest record length among the data sets. You may need to reallocate the data sets or copy the contents to temporary data sets which you allocate instead.

ISRG079 LOCATE failed - The LOCATE for 'aaaaaaa' failed, RC = bbbbbbbb.

Explanation: A return code which ISPF does not recognize was received from the LOCATE macro. The return code is specified in bbbbbbbb and is NOT one of the following:

PDF Messages

Data set not catalogued
Invalid index structure
Invalid data set name
I/O error on catalog
Volume error

User Response: Verify that the data set exists and is located on the volume specified by the catalog. If it exists, there may be other problems with the system, volume, or catalog. Contact your system programmer.

ISRG080 Inconsistent data sets - Data set organizations are not the same.

Explanation: An attempt was made to concatenate data sets with different data set organizations. This action is not supported by ISPF.

User Response: Check to be sure that the correct data sets are being allocated and that the data set organizations (sequential or partitioned) are the same for all of the data sets. You may need to reallocate the data sets or copy the contents to temporary data sets which you allocate instead.

ISRG081 Data set not partitioned - Member name specified, but the data set is not a partitioned data set.

Explanation: A member name was specified with a data set which is not partitioned.

User Response: Remove the member name, or verify that the data set was correctly specified and correctly allocated.

ISRG082 Data set not partitioned - Only partitioned data sets may be concatenated.

Explanation: An attempt was made to concatenate data sets that are not partitioned. ISPF does not support concatenated sequential data sets.

User Response: Check to be sure that the correct data sets are being allocated and that the data set organizations are all partitioned.

ISRG083 Deconcatenation failed - Unable to deconcatenate the specified libraries.

Explanation: An attempt was made to unallocate a set of concatenated libraries but the deconcatenate operation failed.

User Response: Since this is probably due to another allocation that uses the same ddname needed by the deconcatenation operation, you may need to use the TSO FREE command to free ddnames. If it does not matter if you have the data sets allocated, you may be able to ignore this message. However, if other users may need the data sets, it may be a good idea to free

the data sets manually with the TSO FREE command, or to log off and back on.

Problem Determination: Determine what activity has occurred between the allocation and freeing of the failing concatenation. It is possible that some other allocation attempt failed and did not free all of its allocations. These allocations may or may not have been done by ISPF.

ISRG084 Reallocation failed - Reallocation failed for data set 'aaaaaaaa'

Explanation: The attempt to allocate a data set exclusively before deleting it failed. The data set may be in use by other users.

User Response: Try the operation again later.

ISRG085 Deallocation failed - Deallocation failed for data set 'aaaaaaaa'

Explanation: The attempt to deallocate a data set in order to delete it failed. The data set may be in use by other users or by you.

User Response: Use the TSO FREE command to free all your allocations of the data set, and retry the operation.

ISRG086 Delete data set failed - 'aaaaaaaa' is in use, it cannot be deleted.

Explanation: The attempt to delete a data set failed. The data set may be in use by other users or by you, or you may not have authority to delete the data set.

User Response: Use the TSO FREE command to free all your allocations of the data set and retry the operation. If other users are not using the data set and you are authorized to delete the data set, contact your system programmer.

ISRG087 Data set in use - The data set is currently in use by you.

Explanation: An operation on a data set failed because you are already allocated to the data set.

User Response: Return to the primary option menu on all screens and retry the operation again. If that does not fix the problem, use the TSO FREE command to free the data set and retry the operation.

ISRG088 DSN alloc check failed - Unable to check if data set is already allocated.

Explanation: An internal error occurred.

User Response: Log off the system and log back on. Then retry the operation that failed.

ISRG090 Invalid DSN - quotes - Data set name contains unbalanced apostrophes.

Explanation: The data set name entered contains unbalanced apostrophes.

User Response: Reenter the data set name with the correct apostrophes.

ISRG091 Invalid DSN - length - Data set name must be 1-44 characters in length counting prefix (if any).

Explanation: The data set name you entered had an invalid length. It must be no more than 44 characters including the TSO prefix, if used.

User Response: Check the data set name, and reenter it correctly.

ISRG092 Invalid member name - Member name must be 1-8 characters and enclosed in parentheses.

Explanation: The member name that was entered was invalid. The member name must be 1 to 8 characters, enclosed in parentheses.

User Response: Reenter the member name using the correct syntax.

ISRG093 Invalid DSN - syntax - Imbedded blanks, parentheses, or apostrophes in data set name are invalid.

Explanation: The data set name that was entered contained blanks, apostrophes, or parentheses, which are invalid in a data set name.

User Response: Reenter the data set name following the correct syntax.

ISRG094 Data set not cataloged - Generation data set not found. Check catalog of generation group.

Explanation: The data set specified was not found.

User Response: Check the data set name entered.

ISRG095 Inconsistent block size - The first library must have the largest block size.

Explanation: The first library of the concatenation must have the largest block size of the libraries within the concatenation.

System Programmer Response: Update the concatenation so that the largest block size data is first in the concatenation.

ISRG096 Inconsistent record size - All libraries must have the same record length.

Explanation: All libraries within a concatenation must have the same record length.

System Programmer Response: Update the concatenation and library allocations to have consistent record lengths.

ISRG097 Inconsistent record type - All libraries must be the same record type.

Explanation: All libraries within a concatenation must be defined with the same record type.

Programmer Response: Review the libraries within the concatenation for the correct record type.

ISRG098 Inconsistent record size - The first library must have the largest record length.

Explanation: The first library within a concatenation must be defined with the largest record length.

Programmer Response: Review the libraries within the concatenation for the correct record length and concatenation sequence.

ISRG099 Not generation data set - Data set is not a generation data set.

Explanation: The data set specified is not a generation data set.

Programmer Response: Check the specified data set name.

ISRG100 Vol serial not allowed - Use "Other data set name" field when specifying volume serial.

Explanation: A volume serial was specified on a panel when the Project/Group/Type fields were used for the data set name. The volume serial may only be specified when you use the Other Data Set Name field for the data set.

User Response: If you are trying to access a data set on a particular volume, type the data set name in the Other Data Set Name field and place the volume name in the Volume Serial field before pressing the Enter key.

ISRG101 Load failed - The attempt to load the data set allocation exit failed.

Explanation: PDF attempted to load the allocation exit specified in the PDF configuration table but was unable to do so. The exit may not have been found, may have been non-executable, or you may not be authorized to load it.

PDF Messages

User Response: Ensure that the allocation exit is correctly specified in the configuration table and is available and executable in your load libraries or system libraries before entering PDF.

ISRG102 Load failed - The attempt to load the print utility exit failed.

Explanation: PDF attempted to load the print utility exit specified in the PDF configuration table but was unable to do so. The exit may not have been found, may have been non-executable, or you may not be authorized to load it.

User Response: Ensure that the print utility exit is correctly specified in the configuration table and is available and executable in your load libraries or system libraries before entering PDF.

ISRG103 Load failed - The attempt to load the compress exit failed.

Explanation: PDF attempted to load the compress exit specified in the PDF configuration table but was unable to do so. The exit may not have been found, may have been non-executable, or you may not be authorized to load it.

User Response: Ensure that the compress exit is correctly specified in the configuration table and is available and executable in your load libraries or system libraries before entering PDF.

ISRG104 Load failed - The attempt to load the data set list exit failed.

Explanation: PDF attempted to load the data set list exit specified in the PDF configuration table but was unable to do so. The exit may not have been found, may have been non-executable, or you may not be authorized to load it.

User Response: Ensure that the data set list exit is correctly specified in the configuration table and is available and executable in your load libraries or system libraries before entering PDF.

ISRG105 Load failed - The attempt to load the member list filter exit failed.

Explanation: PDF attempted to load the member list filter exit specified in the PDF configuration table but was unable to do so. The exit may not have been found, may have been non-executable, or you may not be authorized to load it.

User Response: Ensure that the member list filter exit is correctly specified in the configuration table and is available and executable in your load libraries or system libraries before entering PDF.

ISRG106 Load failed - The attempt to load the data set name change exit failed.

Explanation: PDF attempted to load the data set name change exit specified in the PDF configuration table but was unable to do so. The exit may not have been found, may have been non-executable, or you may not be authorized to load it.

User Response: Ensure that the data set name change exit is correctly specified in the configuration table and is available and executable in your load libraries or system libraries before entering PDF.

ISRG107 Load failed - The attempt to load the data set list line command exit failed.

Explanation: PDF attempted to load the data set list line command exit specified in the PDF configuration table but was unable to do so. The exit may not have been found, may have been non-executable, or you may not be authorized to load it.

User Response: Ensure that the data set list line command exit is correctly specified in the configuration table and is available and executable in your load libraries or system libraries before entering PDF.

ISRG108 Load failed - The attempt to load the installation accounting exit failed.

Explanation: PDF attempted to load the installation accounting exit specified in the PDF configuration table but was unable to do so. The exit may not have been found, may have been non-executable, or you may not be authorized to load it.

User Response: Ensure that the installation accounting exit is correctly specified in the configuration table and is available and executable in your load libraries or system libraries before entering PDF.

ISRI001 ISPF load error – The subroutine table for the PDF component of ISPF could not be loaded, probably due to an installation error. Please contact your system programmer.

Explanation: ISPF received an error attempting to load the Subroutine Table for the PDF component, load module ISRTSP.

User Response: Contact your system programmer.

System Programmer Response: Check the load library concatenation sequence (ISPLLIB, STEPLIB, and so forth) to ensure that the library containing ISRTSP is included.

ISR1003 **Incorrect DM version – The PDF component of ISPF for OS/390 Release 5 requires the DM component of ISPF for OS/390 Release 5, probable installation error. Please contact your system programmer.**

Explanation: The PDF component of ISPF for OS/390 Release 5 was invoked with a version of ISPF for OS/390 Release 5 that is not compatible.

User Response: Contact your system programmer.

System Programmer Response: Check the load library concatenation sequence (ISPLLIB, STEPLIB, and so forth) to ensure that the proper ISPF libraries for OS/390 are specified.

ISRJ001 *aaaaaaaa – from bbb(56)*

Explanation: This is an informational message. The message logged upon successful building of the job step to invoke the *aaaaaaaa* language processor against data set and member *bbb(56)*.

ISRJ002 *aaaaaaaa - from bbb(44)*

Explanation: This is an informational message. The message logged upon successful building of the job step to invoke the *aaaaaaaa* language processor against data set *bbb(44)*.

ISRJ003 *aaaaaaaa - to bbbbbb..LOAD(cccccc)*

Explanation: This is an informational message. The message logged upon successful building of the job step to invoke the *aaaaaaaa* language processor, placing the output in data set *bbbbbbb.LOAD*, member *cccccc*.

ISRJ004 **Job step generated - aaaaaaaa ----- from bbb(56).**

Explanation: This is an informational message. Indicates a JCL job step has been successfully generated for the *aaaaaaaa* language processor, using input from data set and member *bbb(56)*.

ISRJ005 **Job step generated - aaaaaaaa ----- from bbbbbb.**

Explanation: This is an informational message. Indicates a JCL job step has been successfully generated for the *aaaaaaaa* language processor, using input from data set *bbbbbbb*.

ISRJ006 **Job step generated - aaaaaaaa ----- to bbbbbb..LOAD(cccccc).**

Explanation: This is an informational message. Indicates a JCL job step has been successfully generated for the *aaaaaaaa* language processor, sending output

from data set and member *bbbbbbb.LOAD(cccccc)*.

ISRJ007 **Job - aaaaaaaa - Cancelled.**

Explanation: This is an informational message. The user entered the CANCEL command on the Batch Termination panel to exit batch without submitting the generated JCL.

ISRJ008 **Job - aaaaaaaa - Submitted.**

Explanation: This is an informational message. The user entered the END command on the Batch Termination panel to exit batch after submitting the generated JCL.

ISRJ009 **Submit job ERROR1 - Error submitting job from aaaaaaaa.**

Explanation: An error occurred while attempting to use the TSO SUBMIT command to submit the generated JCL (allocated to ddname *aaaaaaaa*) for processing.

User Response: Regenerate the JCL and resubmit the job. If problems persist, contact your system programmer for assistance.

ISRJ010 *aaaaaaaa - from bbb(56)*

Explanation: This is an informational message. This message is logged on the successful building of the job step to invoke the *aaaaaaaa* language processor against data set and member *bbb(56)*.

ISRJ011 *aaaaaaaa - to bbbbbb..cccccc..LOAD(dddddd).*

Explanation: This is an informational message. This message is logged on the successful building of the job step to invoke the *aaaaaaaa* language processor against ISPF library *bbbbbbb.ccccccc.LOAD(dddddd)*.

ISRJ012 **Job step generated - aaaaaaaa ----- from bbb(56).**

Explanation: This is an informational message. Indicates a JCL job step has been successfully generated for the *aaaaaaaa* language processor, using input from data set and member *bbb(56)*.

ISRJ013 **Job step generated - aaaaaaaa ----- to bbbbbb..cccccc..LOAD(dddddd).**

Explanation: This is an informational message. Indicates a JCL job step has been successfully generated for the *aaaaaaaa* language processor, sending output to the ISPF library and member *bbbbbbb.ccccccc.LOAD(dddddd)*.

PDF Messages

ISRJ014 **Enter option - Enter one of the listed options.**

Explanation: The Enter key was pressed on either the Batch Selection panel (ISRJPA) or the Batch Termination panel (ISRJPB) without an option being selected.

User Response: Specify the option desired on the command line and press Enter.

ISRJ015 **Invalid option - The option that was entered was not valid.**

Explanation: An invalid option was entered on either the Batch Selection panel (ISRJPA) or the Batch Termination panel (ISRJPB).

User Response: Specify a valid option and press Enter.

ISRJ902 **Skeleton not found - Skeleton "aaaaaaaa" or imbedded skeletons in "aaaaaaaa" not found.**

Explanation: PDF issued an ISPEXEC FTINCL for skeleton *aaaaaaaa*, but received a non-zero return code, indicating the skeleton could not be found.

User Response: Check your ISPSLIB concatenation to ensure the proper skeleton libraries are specified. After correcting your concatenation, retry the request.

ISRJ903 **Invalid ZSEL variable - The ZSEL panel variable must start with CMD or PGM.**

Explanation: The PDF batch processor (ISRJB2) is invoked, passing the name of a panel to display. The)PROC section of this panel must set variable &ZSEL to a CMD(...) or PGM(...) string that PDF can pass to the ISPF SELECT service. A ZSEL string was encountered that did not start with CMD or PGM.

User Response: Contact the responsible programmer.

Programmer Response: Correct the ZSEL string and retry the function.

ISRJ904 **BLDL error - I/O error, insufficient virtual storage or other BLDL error**

Explanation: PDF received an error from the BLDL macro processing the the data set specified for batch processing.

User Response: Contact your system programmer for assistance in problem determination.

System Programmer Response: Check the MVS console for messages and refer to the appropriate IBM documentation for problem determination steps.

ISRJ905 **Invalid organization - Only partitioned and physical sequential data sets processed.**

Explanation: The PDF batch option was invoked, specifying a data set that was other than partitioned or sequential.

User Response: Change the input data set to one that is partitioned or sequential and retry.

ISRJ906 **Invalid organization - Only partitioned data sets processed.**

Explanation: The PDF batch Binder/Linkage Editor option only supports partitioned data sets as input.

User Response: Change the input data set to one that is partitioned and retry.

ISRJ908 **Job skeleton not found - Job skeleton file ISRJSJC not found.**

Explanation: PDF batch skeleton ISRJSJC, used to set up the job cards for batch job submission, could not be found in your ISPSLIB concatenation.

User Response: Check your ISPSLIB concatenation to ensure the proper skeleton libraries are specified. After correcting your concatenation, retry the request.

ISRJ909 **File tailoring error - File tailoring is already in progress.**

Explanation: The PDF batch option uses ISPF file tailoring to create its jobstream; therefore, it cannot be invoked when another file tailoring request is in progress.

User Response: Finish the in-process file tailoring request, then retry the batch request.

ISRLA000 **Activity log error - See system programmer - details in the LMF address space ISPLLOG.**

Explanation: No explanation available at this time.

ISRLA001 **Activity log allocation - Error data set could not be allocated.**

Explanation: No explanation available at this time.

ISRLA002 **Activity log unavailable - Data set 'aaaaaaaa..bbbbbbb..ACTLOG' could not be opened. It may be in use.**

Explanation: No explanation available at this time.

ISRLA003 **Activity log write error - Data set**
'aaaaaaaa..bbbbbbbb..ACTLOG' had a write error.

Explanation: No explanation available at this time.

ISRLA004 **Act. log close out error - Data set**
'aaaaaaaa..bbbbbbbb..ACTLOG' had a write close out error.

Explanation: No explanation available at this time.

ISRLA005 **Activity log free error - Data set**
'aaaaaaaa..bbbbbbbb..ACTLOG' could not be freed.

Explanation: No explanation available at this time.

ISRLA006 **Activity log read error - Data set**
'aaaaaaaa..bbbbbbbb..ACTLOG' had a read error.

Explanation: No explanation available at this time.

ISRLA007 **Activity log write error - An error occurred writing**
'aaaaaaaa..bbbbbbbb..ACTLOG' to a temporary file.

Explanation: No explanation available at this time.

ISRLA100 **Deactivate ID not match - User ID**
'aaaaaaaa' does not match the deactivate ID *'bbbbbbbb'*.

Explanation: No explanation available at this time.

ISRLA101 **Bad deactivate IDs - Deactivate IDs are not consistent. Deactivate and try again.**

Explanation: No explanation available at this time.

ISRLA102 **Already activated - The hierarchy**
'aaaaaaaa' has already been activated.

Explanation: No explanation available at this time.

ISRLA103 **Already deactivated - The hierarchy**
'aaaaaaaa' has already been deactivated.

Explanation: No explanation available at this time.

ISRLA104 **SCLM project deactivated - The project is SCLM controlled, but has been successfully deactivated.**

Explanation: No explanation available at this time.

ISRLA105 **SCLM project activated - The project is SCLM controlled, but has been successfully activated.**

Explanation: No explanation available at this time.

ISRLA110 **Activated successfully - The hierarchy**
'aaaaaaaa' is activated successfully.

Explanation: No explanation available at this time.

ISRLA111 **Activated successfully - All hierarchies in project**
'aaaaaaaa' are activated successfully.

Explanation: No explanation available at this time.

ISRLA112 **Deactivated successfully - The hierarchy**
'aaaaaaaa' is deactivated successfully.

Explanation: No explanation available at this time.

ISRLA113 **Deactivated successfully - All hierarchies in project**
'aaaaaaaa' are deactivated successfully.

Explanation: No explanation available at this time.

ISRLA114 **Defined types - Structure for -** *aaaaaaaa*
Date: *bbbbbbbb* **Time:** *cccccccc*

Explanation: No explanation available at this time.

ISRLA115 **Where: - 1, 2 ... 50 indicates hierarchical position.**

Explanation: No explanation available at this time.

ISRLA116 ***** No defined type *** - B indicates bottom group.**

Explanation: No explanation available at this time.

ISRLA117 **The following groups were not activated.**

Explanation: No explanation available at this time.

ISRLA118 **Top group Deactivate ID**

Explanation: No explanation available at this time.

ISRLA119 **The following groups are active.**

Explanation: No explanation available at this time.

PDF Messages

ISRLA120 **No unit description - Must specify the unit description for the outlist data set.**

Explanation: No explanation available at this time.

ISRLA121 **No block size - Must specify the block size for the outlist data set.**

Explanation: No explanation available at this time.

ISRLA122 **No logical record length - Must specify the logical record length for the outlist data set.**

Explanation: No explanation available at this time.

ISRLA123 **No lines per page - Must specify the lines per page for the outlist data set.**

Explanation: No explanation available at this time.

ISRLA124 **No primary/secondary - Must specify primary/secondary space quantity for outlist data set.**

Explanation: No explanation available at this time.

ISRLA125 **No primary space - Must specify primary space quantity for partitioned outlist data set.**

Explanation: No explanation available at this time.

ISRLA200 **Enter group name - A group name is required for this option.**

Explanation: No explanation available at this time.

ISRLA201 **Type "aaaaaaaa" deleted - All entries for type "aaaaaaaa" have been deleted.**

Explanation: No explanation available at this time.

ISRLA202 **Type not found - No entries for type "aaaaaaaa" exist in the member activity log.**

Explanation: No explanation available at this time.

ISRLA203 **Delete failed - Entries in 'aaaaaaaa..bbbbbbbb..ACTLOG' were not all deleted.**

Explanation: No explanation available at this time.

ISRLA204 **Activity log emptied - All entries in activity log 'aaaaaaaa..bbbbbbbb..ACTLOG' have been removed.**

Explanation: No explanation available at this time.

ISRLA205 **aaaaaaaa types processed - aaaaaaaa types were processed.**

Explanation: No explanation available at this time.

ISRLA206 **No types logged - There are no entries in 'aaaaaaaa..bbbbbbbb..ACTLOG'.**

Explanation: No explanation available at this time.

ISRLA208 **Log not allocated - 'aaaaaaaa..bbbbbbbb..ACTLOG' may be in use by another user.**

Explanation: No explanation available at this time.

ISRLA209 **Invalid record length - 'aaaaaaaa..bbbbbbbb..ACTLOG' has an invalid record length for an activity log.**

Explanation: No explanation available at this time.

ISRLA210 **Invalid record format - 'aaaaaaaa..bbbbbbbb..ACTLOG' does not have a fixed or fixed blocked record format.**

Explanation: No explanation available at this time.

ISRLA211 **Log not sequential - 'aaaaaaaa..bbbbbbbb..ACTLOG' is not a sequential data set.**

Explanation: No explanation available at this time.

ISRLA213 **ADMIN not allowed - You cannot specify a group name of ADMIN for a member activity log.**

Explanation: No explanation available at this time.

ISRLA214 **Invalid selection code - Type an "s" in front of the type to be selected.**

Explanation: No explanation available at this time.

ISRLA215 **Invalid type name - You must enter a type name, an asterisk ("*") or leave the field blank.**

Explanation: No explanation available at this time.

ISRLA216 **Group name required - Enter the group name of the activity log.**

Explanation: No explanation available at this time.

ISRLA217 **Project name required - Enter the project name of the activity log.**

Explanation: No explanation available at this time.

ISRLA218 **Type "aaaaaaaa" browsed - The logged activity for type "aaaaaaaa" was browsed.**

Explanation: No explanation available at this time.

ISRLA219 **Activity log browsed - The activity in log 'aaaaaaaa..bbbbbbb..ACTLOG' was browsed.**

Explanation: No explanation available at this time.

ISRLA220 **Browse failed - An error occurred browsing 'aaaaaaaa..bbbbbbb..ACTLOG'.**

Explanation: No explanation available at this time.

ISRLA221 **Parameter required - The LOCATE command requires a valid type name as a parameter.**

Explanation: No explanation available at this time.

ISRLA222 **'aaaaaaaa' not located - The type name 'aaaaaaaa' would be after the end of the displayed list.**

Explanation: No explanation available at this time.

ISRLA223 **Invalid command - The only valid command on this panel is LOCATE.**

Explanation: No explanation available at this time.

ISRLA224 **Invalid parameter - The LOCATE command requires a valid type name as a parameter.**

Explanation: No explanation available at this time.

ISRLA225 **Logging failed - The activity log is defined with an alias data set name.**

Explanation: No explanation available at this time.

ISRLC010 **Member entry not created - Member entry 'aaaaaaaa' not created. The type does not exist.**

Explanation: No explanation available at this time.

ISRLC011 **Member entry not created - Member entry 'aaaaaaaa' not created. The group does not exist.**

Explanation: No explanation available at this time.

ISRLC012 **Member entry not created - Member entry 'aaaaaaaa' not created. The project does not exist.**

Explanation: No explanation available at this time.

ISRLC013 **Entry not created - 'aaaaaaaa' was not created. It already exists.**

Explanation: No explanation available at this time.

ISRLC014 **Promote failed - The 'to' data set was allocated as an alias. Aliases are not allowed.**

Explanation: No explanation available at this time.

ISRLC015 **ATTACH failed - ATTACH failed in module aaaaaaaa.**

Explanation: No explanation available at this time.

ISRLC016 **"aaaaaaaa" not started - The LMF started task "aaaaaaaa" was not found.**

Explanation: No explanation available at this time.

ISRLC017 **Local lock failed - Local lock failed in the SVC.**

Explanation: No explanation available at this time.

ISRLC018 **SVC GETMAIN failed - GETMAIN failed in the library management facility SVC.**

Explanation: No explanation available at this time.

ISRLC019 **SVC FREEMAIN failed - FREEMAIN failed in the library management facility SVC.**

Explanation: No explanation available at this time.

ISRLC020 **SRB GETMAIN failed - GETMAIN failed in the SRB.**

Explanation: No explanation available at this time.

PDF Messages

ISRLC022 **SRB purged - The SRB was purged.**

Explanation: No explanation available at this time.

ISRLC023 **GETMAIN failed - GETMAIN failed for a dynamic TLD.**

Explanation: No explanation available at this time.

ISRLC024 **Member in use - Member is edit locked by 'aaaaaaaa'.**

Explanation: No explanation available at this time.

ISRLC025 **User not authorized - Member 'aaaaaaaa' could not be edit locked by user.**

Explanation: No explanation available at this time.

ISRLC026 **Ddname not found in TIOT - Ddname not found in the TIOT.**

ISRLC027 **Library not deleted - Library controls were not deleted. Member controls exist for this library.**

Explanation: No explanation available at this time.

ISRLC028 **Update failed - The group hierarchy is active. The update was not performed.**

Explanation: No explanation available at this time.

ISRLC029 **Project in use - Project is currently being updated by 'aaaaaaaa'.**

Explanation: No explanation available at this time.

ISRLC030 **"aaaaaaaa" not active - The LMF address space "aaaaaaaa" is not accepting any requests.**

Explanation: No explanation available at this time.

ISRLC031 **LMF start up in progress - The LMF address space initialization is not complete.**

Explanation: No explanation available at this time.

ISRLC033 **Promote failed - The group 'aaaaaaaa' is not active.**

Explanation: No explanation available at this time.

ISRLC034 **Promote failed - From a non-controlled lib. can only promote into an entry level lib.**

Explanation: No explanation available at this time.

ISRLC035 **Promote failed - Target group 'aaaaaaaa' could not be found.**

Explanation: No explanation available at this time.

ISRLC036 **Promote failed - User is not current updater of member. current updater is 'aaaaaaaa'.**

Explanation: No explanation available at this time.

ISRLC037 **Abend 'aaaaaaaa' occurred - 'aaaaaaaa'abend during the processing of a library management request.**

Explanation: No explanation available at this time.

ISRLC038 **Promote failed - Entry level group 'aaaaaaaa' could not be found.**

Explanation: No explanation available at this time.

ISRLC039 **Activity log not valid - Activity log for type 'aaaaaaaa' must be a sequential data set.**

Explanation: No explanation available at this time.

ISRLC040 **Edit lock failed - The member is in a controlled library which is not active.**

Explanation: No explanation available at this time.

ISRLC041 **Edit lock failed - Requestor is not an authorized accessor.**

Explanation: No explanation available at this time.

ISRLC042 **Edit lock failed - The member "aaaaaaaa" has a status or owner of "bbbbbbbb".**

Explanation: No explanation available at this time.

ISRLC043 **Member entry not found - Member entry 'aaaaaaaa' could not be found in the control file.**

Explanation: No explanation available at this time.

ISRLC044 **Promote failed - The "to" and "from" libraries have incompatible record formats.**

Explanation: No explanation available at this time.

ISRLC045 **Unable to promote data - Data contains a user ttr, but is not a load module.**

Explanation: No explanation available at this time.

ISRLC046 **Promote failed - The logical record lengths are incompatible.**

Explanation: No explanation available at this time.

ISRLC047 **Promote failed - The "from" library is not allocated.**

Explanation: No explanation available at this time.

ISRLC048 **SVC not installed - The library management facility SVC is not installed.**

Explanation: No explanation available at this time.

ISRLC049 **Promote failed - Promote free is invalid. Member does not exist.**

Explanation: No explanation available at this time.

ISRLC050 **Edit lock failed - Edit lock failed due to an invalid condition on group 'aaaaaaaa'.**

Explanation: No explanation available at this time.

ISRLC051 **Promote failed - The member is not available for update.**

Explanation: No explanation available at this time.

ISRLC052 **Promote failed - Authorized promoter for requested group is 'aaaaaaaa'.**

Explanation: No explanation available at this time.

ISRLC053 **Dist. table deleted - Distribution table 'aaaaaaaa' was deleted from the control file.**

Explanation: No explanation available at this time.

ISRLC054 **User-set deleted - User-set 'aaaaaaaa' was deleted from the control file.**

Explanation: No explanation available at this time.

ISRLC055 **Type deleted - Controls for type 'aaaaaaaa' were deleted from the control file.**

Explanation: No explanation available at this time.

ISRLC056 **Group deleted - Controls for group 'aaaaaaaa' were deleted from the control file.**

Explanation: No explanation available at this time.

ISRLC057 **Project deleted - Controls for project 'aaaaaaaa' were deleted from the control file.**

Explanation: No explanation available at this time.

ISRLC058 **ENQUEUE failed - Member 'aaaaaaaa' is not available.**

Explanation: No explanation available at this time.

ISRLC059 **Promote failed - The member was not edit locked.**

Explanation: No explanation available at this time.

ISRLC060 **Request failed - The project could not be locked or freed.**

Explanation: No explanation available at this time.

ISRLC061 **Promote failed - Member 'aaaaaaaa' is not edit locked by user.**

Explanation: No explanation available at this time.

ISRLC062 **Promote failed - Current user for desired member is 'aaaaaaaa'.**

Explanation: No explanation available at this time.

ISRLC063 **Promote failed - Only predefined members can be promoted into this hierarchy.**

Explanation: No explanation available at this time.

ISRLC064 **Promote failed - 'aaaaaaaa' is the only authorized promoter of undefined members.**

Explanation: No explanation available at this time.

PDF Messages

ISRLC065 **Promote failed - Promote failed due to invalid "from" data set organization.**

Explanation: No explanation available at this time.

ISRLC066 **Promote failed - Promote after system failure must be identical to previous promote.**

Explanation: No explanation available at this time.

ISRLC067 **Member entry not deleted - Member entry 'aaaaaaaa' is not a predefined member.**

Explanation: No explanation available at this time.

ISRLC068 **Get close out failed - Get close out failed on the "from" library.**

Explanation: No explanation available at this time.

ISRLC069 **Read error occurred - A read error occurred on the "from" library.**

Explanation: No explanation available at this time.

ISRLC070 **Member not found - The "from" library member was not found.**

Explanation: No explanation available at this time.

ISRLC071 **Promote free failed - Member has not been edit locked or does not exist.**

Explanation: No explanation available at this time.

ISRLC072 **Project has no groups - Project 'aaaaaaaa' has no promote hierarchies defined.**

Explanation: No explanation available at this time.

ISRLC073 **Invalid hierarchy exists - Group 'aaaaaaaa' not in a valid hierarchy. Must be corrected first.**

Explanation: No explanation available at this time.

ISRLC074 **Activity log not valid - Logical record length for member log 'aaaaaaaa' is invalid.**

Explanation: No explanation available at this time.

ISRLC075 **Promote failed - Authorized promoter or user-set for predefined member is 'aaaaaaaa'.**

Explanation: No explanation available at this time.

ISRLC076 **Multiple distrib tables - Hierarchy with top 'aaaaaaaa' has more than one dist. table defined.**

Explanation: No explanation available at this time.

ISRLC077 **Types are not identical - Hierarchy with top group 'aaaaaaaa' does not have identical types.**

Explanation: No explanation available at this time.

ISRLC078 **Distribution table error - Distribution table 'aaaaaaaa' has not been created.**

Explanation: No explanation available at this time.

ISRLC079 **Group not found - Group found in distribution table 'aaaaaaaa' does not exist.**

Explanation: No explanation available at this time.

ISRLC080 **Allocation failed - "to" library 'aaaaaaaa' could not be allocated.**

Explanation: No explanation available at this time.

ISRLC081 **Distribution table error - There are no groups defined in distribution table 'aaaaaaaa'.**

Explanation: No explanation available at this time.

ISRLC082 **Distribution table error - Group 'aaaaaaaa' references the wrong distribution table.**

Explanation: No explanation available at this time.

ISRLC083 **Distribution table error - Group in dist. tab. 'aaaaaaaa' has inconsistent types with other groups.**

Explanation: No explanation available at this time.

ISRLC084 **Invalid user id - Invalid user id for request in the SVC.**

Explanation: No explanation available at this time.

ISRLC085 **Type queue build failed - Type queue build failed in module 'aaaaaaaa'.**

Explanation: No explanation available at this time.

ISRLC086 **Type queue free failed - Type queue free failed in module 'aaaaaaaa'.**

Explanation: No explanation available at this time.

ISRLC087 **Hierarchy already deact - Hierarchy is already deactivated. Deactivate ID is 'aaaaaaaa'.**

Explanation: No explanation available at this time.

ISRLC088 **Hierarchy already deact - aaaaaaaaa hierarchy(s) already deactivated. They are not deactivated again.**

Explanation: No explanation available at this time.

ISRLC089 **Bad deactivate IDs - Deactivate IDs,top 'aaaaaaaa',inconsistent. Deactivate and try again.**

Explanation: No explanation available at this time.

ISRLC090 **Not a complete activate - aaaaaaaaa hierarchy(s) not activated - they don't belong to user.**

Explanation: No explanation available at this time.

ISRLC091 **Groups already active - aaaaaaaaa hierarchy(s) are already active.**

Explanation: No explanation available at this time.

ISRLC092 **Invalid control block - Invalid control block - request could not be processed.**

Explanation: No explanation available at this time.

ISRLC093 **Invalid hierarchy exists - An invalid hierarchy exists, there are no valid hierarchies defined.**

Explanation: No explanation available at this time.

ISRLC094 **Activation failed - Top group 'aaaaaaaa' deleted from hierarchy after ACTIVATE command.**

Explanation: No explanation available at this time.

ISRLC095 **Change not allowed - Another project administrator must remove your id.**

Explanation: No explanation available at this time.

ISRLC096 **Promote failed - Cannot promote "planned overlay" load modules.**

Explanation: No explanation available at this time.

ISRLC097 **To lib not controlled - "to" group 'aaaaaaaa' not a controlled library.**

Explanation: No explanation available at this time.

ISRLC098 **STOW failed - STOW failed in module 'aaaaaaaa'.**

Explanation: No explanation available at this time.

ISRLC099 **Member not found - Member 'aaaaaaaa' not found. control file/control lib inconsistent.**

Explanation: No explanation available at this time.

ISRLC100 **Promote failed - Requested version code not in distribution table 'aaaaaaaa'.**

Explanation: No explanation available at this time.

ISRLC101 **Library not deleted - Group 'aaaaaaaa' references the library as a target library.**

Explanation: No explanation available at this time.

ISRLC102 **Top group not controlled - Top group 'aaaaaaaa' could not be found in the specified library.**

Explanation: No explanation available at this time.

ISRLC103 **Type not controlled - Type entry 'aaaaaaaa' could not be found in the specified library.**

Explanation: No explanation available at this time.

ISRLC104 **Member not controlled - Member 'aaaaaaaa' could not be found in the specified library.**

Explanation: No explanation available at this time.

ISRLC105 **Promotion successful - 'aaaaaaaa' was last member successfully processed.**

Explanation: No explanation available at this time.

ISRLC106 **Promote failed - Record formats of the "from" and "to" groups are incompatible.**

Explanation: No explanation available at this time.

PDF Messages

ISRLC107 **Activ. log not allocated - Activity log 'aaaaaaaa' could not be allocated. it may not be cataloged.**

Explanation: No explanation available at this time.

ISRLC108 **Promote failed - "To" data set 'aaaaaaaa' must be allocated as partitioned data set.**

Explanation: No explanation available at this time.

ISRLC109 **Distribution table error - Group 'aaaaaaaa' references no distribution table.**

Explanation: No explanation available at this time.

ISRLC111 **Promote failed - "From" record length is greater than "to" block size for record format U.**

Explanation: No explanation available at this time.

ISRLC112 **Exit type required - Activity log full exit was requested without specifying exit type.**

Explanation: No explanation available at this time.

ISRLC113 **Exit name required - Data set full exit was requested without specifying exit name.**

Explanation: No explanation available at this time.

ISRLC114 **Exit type required - Data set full exit was requested without specifying exit type.**

Explanation: No explanation available at this time.

ISRLC115 **Control file not valid - The control file is not bound to any started task.**

Explanation: No explanation available at this time.

ISRLC116 **Control file not valid - The control file contains controls from a previous ISPF/PDF version.**

Explanation: No explanation available at this time.

ISRLC117 **Exit name required - Activity log full exit was requested without specifying exit name.**

Explanation: No explanation available at this time.

ISRLC118 **Record format not fixed - The activity log must have a fixed record format.**

Explanation: No explanation available at this time.

ISRLC119 **Invalid control file - The old control file contains invalid members.**

Explanation: No explanation available at this time.

ISRLC120 **Delete failed - Member was not deleted because the controlled library is an alias.**

Explanation: No explanation available at this time.

ISRLC121 **Invalid record format - The LMF control file record format must be variable blocked. Dd ISRCFIL**

Explanation: No explanation available at this time.

ISRLC122 **Secondary extents exist - The control file must not have any secondary extents allocated.**

Explanation: No explanation available at this time.

ISRLC123 **Invalid command - Command is not valid. The only valid command is END.**

Explanation: No explanation available at this time.

ISRLC124 **Get closeout failed - Close out of control file failed in module 'aaaaaaaa'.**

Explanation: No explanation available at this time.

ISRLC125 **Not authorized - You are not authorized to change a log for project "aaaaaaaa".**

Explanation: No explanation available at this time.

ISRLC126 **Invalid members found - The new control file must not contain any members.**

Explanation: No explanation available at this time.

ISRLC127 **Invalid control file - The old control file is not a valid control file.**

Explanation: No explanation available at this time.

ISRLC128 **No updates made - No entries were found which use activity log 'aaaaaaaa'.**

Explanation: No explanation available at this time.

ISRLC129 Migration successful - Migration of old control file to new control file was successful.

Explanation: No explanation available at this time.

ISRLC130 Data set not allocated - The output data set could not be allocated by user 'aaaaaaaa'.

Explanation: No explanation available at this time.

ISRLC131 Data set LRECL too small - The output data set LRECL may result in truncation of records.

Explanation: No explanation available at this time.

ISRLC132 Member list failed - A member list could not be created for group 'aaaaaaaa'.

Explanation: No explanation available at this time.

ISRLC133 Data set not allocated - Group 'aaaaaaaa' could not be allocated.

Explanation: No explanation available at this time.

ISRLC134 Controlled data set full - A controlled data set is out of space. See your library administrator.

Explanation: No explanation available at this time.

ISRLC135 Control file full - The LMF control file is out of space. See your library administrator.

Explanation: No explanation available at this time.

ISRLC136 Activity log full - The activity log is out of space. See your library administrator.

Explanation: No explanation available at this time.

ISRLC137 Administrator log full - The administrator log is out of space. See your library administrator.

Explanation: No explanation available at this time.

ISRLC138 Write failed - Write failed to output data set in module 'aaaaaaaa'.

Explanation: No explanation available at this time.

ISRLC139 Entries in data set - Entries were recorded in the output data set. Please review them.

Explanation: No explanation available at this time.

ISRLC140 Activity log not valid - The activity log must have a logical record length of 'aaaaaaaa'.

Explanation: No explanation available at this time.

ISRLC141 Invalid member controls - Group 'aaaaaaaa' may have bad member controls. Activate cannot be done.

Explanation: No explanation available at this time.

ISRLC142 Invalid member controls - Use member utilities options 2 or 4 to correct the problem.

Explanation: No explanation available at this time.

ISRLC143 Entries in data set - This hierarchy not valid until problems in output data set are fixed.

Explanation: No explanation available at this time.

ISRLC144 Controls cleared - All member controls for this hierarchy have been cleared.

Explanation: No explanation available at this time.

ISRLC145 Verify required - Verify or initialize is required before hierarchy can be activated.

Explanation: No explanation available at this time.

ISRLC146 Data set not allocated - The output data set could not be allocated by started task 'aaaaaaaa'.

Explanation: No explanation available at this time.

ISRLC147 Data set not opened - Group 'aaaaaaaa' could not be opened.

Explanation: No explanation available at this time.

ISRLC148 Member name required - A member name is required when a partitioned data set is specified.

Explanation: No explanation available at this time.

PDF Messages

ISRLC149 **Data set is not a PDS - LMF requires that group 'aaaaaaaa' be a partitioned data set.**

Explanation: No explanation available at this time.

ISRLC150 **Delete not allowed - Delete not allowed on a member whose status is "Promote-in-process".**

Explanation: No explanation available at this time.

ISRLC151 **Group not found - Use VERIFY CONTROLS option to determine the problem.**

Explanation: No explanation available at this time.

ISRLC152 **Allocate failed - Allocate failed in module "aaaaaaaa".**

Explanation: No explanation available at this time.

ISRLC153 **No members found - No physical members were found to initialize with member controls.**

Explanation: No explanation available at this time.

ISRLC154 **Controls cleared - Member controls that existed for the hierarchy were cleared.**

Explanation: No explanation available at this time.

ISRLC155 **No controls exist - No member controls exist to clear in the LMF hierarchy.**

Explanation: No explanation available at this time.

ISRLC156 **All members not deleted - Not all physical members were deleted. VERIFY CONTROLS recommended.**

Explanation: No explanation available at this time.

ISRLC157 **Data set full exit error - LMF services cannot be issued from the lmf address space.**

Explanation: No explanation available at this time.

ISRLC158 **Lock not allowed - Lock not allowed on a member whose status is "Promote-in-process".**

Explanation: No explanation available at this time.

ISRLC159 **Member "aaaaaaaa" in use - Member "aaaaaaaa" is in use. The physical member cannot be deleted.**

Explanation: No explanation available at this time.

ISRLC160 **Member not locked - Project "aaaaaaaa" is an SCLM controlled project.**

Explanation: No explanation available at this time.

ISRLC161 **SCLM warning - The project being updated is an SCLM controlled project.**

Explanation: No explanation available at this time.

Messages ISRLA000 through ISRLA229 are listed in "Chapter 5. Library Management Facility (LMF) Messages" on page 535.

ISRLD000 **Missing parameters - One or both of level and volume must be specified for LMDINIT.**

Explanation: Either a data set name level or a volume or both must be specified for the data set list service.

User Response: Correct the LMDINIT command.

ISRLD001 **Insufficient storage - Not enough main storage was available to satisfy request for LMDINIT.**

Explanation: There is not enough storage available to build the control block for processing LMDINIT.

User Response: Increase your region size and retry the request.

ISRLD002 **Free storage failed - Free main storage request failed.**

Explanation: The LMDINIT service was unable to free the storage used to build the control block.

User Response: Contact your system programmer.

ISRLD003 **Invalid data set level - Data set level must not have quotes.**

Explanation: The data set name level does not need to be included in quotes.

User Response: Remove the quotes from the data set name level.

ISRLD004 **Invalid DSname level - Two or more adjacent asterisks within a DSname level qualifier is invalid. A single asterisk indicates 0 or more letters may occupy that position in the qualifier.**

Explanation: Two or more adjacent asterisks means 0 or more qualifiers may occupy that position. This is invalid within a single qualifier. Double asterisks may be used as a qualifier with no other characters.

User Response: Change the adjacent asterisks to a single asterisk.

ISRLD005 **Invalid DSname level - In order to list catalog entries, you must specify at least one partial qualifier. Any DSname level that contains only asterisks is invalid.**

Explanation: If you specify only asterisks for a DSNAME level, a search will be made of all the catalogs on the system. This is detrimental to performance, so at least one partial qualifier is required.

User Response: Partially qualify at least one dsname level qualifier.

ISRLD006 **Invalid data set level - Qualifiers cannot be longer than 8 characters.**

Explanation: This is an informational message.

ISRLD007 **Invalid data set level - Qualifiers must be at least one character long.**

Explanation: This is an informational message.

ISRLD008 **Invalid data set level - A data set level cannot have more than 8 qualifiers.**

Explanation: This is an informational message.

ISRLD010 **Invalid option - Specify one of LIST, FREE and SAVE.**

Explanation: Valid options for the LMDLIST service are LIST, FREE, and SAVE.

User Response: Specify a valid option.

ISRLD011 **List ID not initialized - The list ID was not initialized successfully by the LMDINIT service.**

Explanation: The LMDINIT service failed.

User Response: Contact the responsible programmer.

Programmer Response: Check the parameters of the LMDINIT service.

ISRLD012 **Volume error - The volume specified for this list ID is invalid**

Explanation: An invalid volume was specified for the LMDINIT command.

User Response: Specify a valid volume.

ISRLD013 **No data set names found - No data set names were found to satisfy the search argument(s).**

Explanation: This is an informational message.

ISRLD014 **Cannot free list - No data set list has been built by the LMDLIST service for this list ID**

Explanation: An invalid dslist ID was specified for the LMDFREE command.

User Response: Contact the responsible programmer.

Programmer Response: Check the list ID specified for the LMDFREE command.

ISRLD015 **Cannot save list - A save cannot be performed when a list already exists for a list ID**

Explanation: When a LMDLIST command has been issued with the LIST option, an LMDFREE must be issued before an LMDLIST with option SAVE is executed.

User Response: Contact the responsible programmer.

Programmer Response: Issue an LMDFREE command for the list before using LMDLIST with the save option.

ISRLD016 **Data set not specified - The data set parameter is required for the list option.**

Explanation: The data set parameter is required for the list option to establish the position of the list.

User Response: Specify a data set parameter.

ISRLD017 **Invalid STATS parameter - Specify either YES or NO.**

Explanation: The only valid parameters for the STATS parameter of LMDLIST are YES or NO.

User Response: Enter YES or NO to have STATS saved in the function pool.

ISRLD018 **Invalid data set level - The DSname level cannot contain imbedded blanks.**

Explanation: Blanks are not allowed in the DSname level for the LMDINT service.

PDF Messages

User Response: Remove the blanks from the DSname level.

ISRLD020 **List ID not initialized - The list ID was not initialized successfully by the LMDINIT service.**

Explanation: An LMDFREE service was requested for a data set list ID that was not initialized by the LMDINIT service.

Programmer Response: Initialize the data set list ID before trying to free it.

ISRLD030 **Internal error - The LDB was not properly initialized. Contact system programmer.**

Explanation: The control block for this data set list has not been initialized. The control block is initialized by the LMDINIT service.

Programmer Response: Use the LMDINIT service to initialize the control block for the LMDDISP service.

ISRLD031 **Invalid VIEW value - Specify either VOLUME, SPACE, ATTRIB or TOTAL.**

Explanation: When the VIEW parameter is specified for the LMDDISP service, the parameter must be VOLUME, SPACE, ATTRIB, or TOTAL. Any other specification for VIEW is invalid.

Programmer Response: Specify a valid view parameter.

ISRLD032 **Invalid CONFIRM value - Specify either YES or NO.**

Explanation: For the LMDDISP service, the only valid values for the CONFIRM parameter are YES or NO.

Programmer Response: Use YES or NO with the CONFIRM parameter.

ISRLD033 **Load failed for ISRUDL - The load of the data set list utility load module (ISRUDL) failed.**

Explanation: The LMDDISP service was unable to load module ISRUDL.

User Response: Contact your system programmer.

System Programmer Response: Check the load library concatenation sequence (ISPLLIB, STEPLIB, and so forth) to ensure that the library containing ISRUDL is included.

ISRLE000 **Enter project name - Project name is missing or invalid.**

Explanation: Either no project name was entered on the Member Parts List panel or the project name entered was syntactically incorrect.

User Response: Correct the project value and retry the request.

ISRLE001 **Enter group name - Group name is missing or invalid.**

Explanation: Either no group name was entered on the Member Parts List panel or the group name entered was syntactically incorrect.

User Response: Correct the group value and retry the request.

ISRLE002 **Enter type qualifier - Type is missing or invalid.**

Explanation: Either no type name was entered on the Member Parts List panel or the type name entered was syntactically incorrect.

User Response: Correct the type value and retry the request.

ISRLE003 **DSN required - Output data set name required for option 2.**

Explanation: When using Member Parts List option 2 (Write Member Parts Data Set), the output data set must be specified.

User Response: Specify a data set name in the Output Data Set field and retry the request.

ISRLE004 **Invalid DSORG - Input data set must be partitioned.**

Explanation: Input to the Member Parts List function must be a partitioned data set or a concatenation of partitioned data sets.

User Response: Correct the input data set name to specify one or more partitioned data sets, and retry the request.

ISRLE005 **Library allocation error - ISPF input library cannot be allocated to the input ddname.**

Explanation: The Member Parts List processor attempted to allocate the input data sets specified to ddname ISRLCODE. This allocation failed, most likely because the ddname is already in use.

User Response: Free ddname ISRLCODE and retry the request.

ISRLE006 Output DSN error - The output data set could not be allocated.

Explanation: The Member Parts List processor could not successfully allocate the data set specified in the Output Data Set field.

User Response: The data set may be in use by another user. Verify that the data set is available and usable, then retry the request.

ISRLE007 Allocate temp DSN failed - A temporary output data set could not be allocated.

Explanation: Member Parts List attempted to create a temporary data set to hold the listing requested, but the allocation failed.

User Response: There may be no available data set names for Member Parts List to use, or an existing data set that Member Parts List is trying to use may have incorrect characteristics. Delete all existing data sets that follow the Member Parts List naming convention, and retry the request. The data set names generated by Member Parts List have one of the following forms:

userid.SPFnnn.OUTLIST

or

prefix.userid.SPFnnn.OUTLIST

ISRLE009 Enter valid LANG value - Minimum valid values are: ASM, COB, FOR/FTN, PAS, PL1/PLI, SCR.

Explanation: The value entered in the language field was not valid. The supported values and languages are:

ASM	Assembler
COB	COBOL
FOR or FTN	FORTRAN
PAS	Pascal
PL1 or PLI	PL/I
SCR	Script

User Response: Enter a valid language value, and retry the request.

ISRLE012 Member name not allowed - A member name was specified for a sequential data set.

Explanation: The data set specified in the Output Data Set field is a sequential data set, but a member name was specified. Member name is not valid for a sequential data set.

User Response: Either specify a sequential data set without a member name or specify a partitioned data set and member in the Output Data Set field, then retry the request.

ISRLE013 Member name is required - A partitioned data set was specified with no member name.

Explanation: The data set specified in the Output Data Set field is a partitioned data set, but no member name was specified. A member name is required for a partitioned data set.

User Response: Either specify a sequential data set without a member name, or specify a partitioned data set and member in the Output Data Set field, then retry the request.

ISRLE014 Error: SPFnnn.OUTLIST - Please delete all unneeded SPFnnn.OUTLIST data sets.

Explanation: Member Parts List attempted to create a temporary data set to hold the listing requested, but could not find a name available to use for the temporary data set.

User Response: Delete all existing data sets that follow the Member Parts List naming convention, and retry the request. The data set names generated by Member Parts List have one of the following forms:

userid.SPFnnn.OUTLIST

or

prefix.userid.SPFnnn.OUTLIST

ISRLE015 Invalid output data set - The output data set must be record format fixed with record length >= 17.

Explanation: The Member Parts List output data set must have a record format for Fixed or Fixed-Blocked and a logical record length of 17.

User Response: Reallocate the data set with the correct characteristics, then retry the request.

ISRLE020 Enter project name - Project name is missing or invalid.

Explanation: Either no project name was entered on the Member Parts List panel or the project name entered was syntactically incorrect.

User Response: Correct the project value and retry the request.

ISRLE021 Enter group name - Group name is missing or invalid.

Explanation: Either no group name was entered on the Member Parts List panel or the group name entered was syntactically incorrect.

User Response: Correct the group value and retry the request.

PDF Messages

ISRLE022 **Enter type qualifier - Type is missing or invalid.**

Explanation: Either no type name was entered on the Member Parts List panel or the type name entered was syntactically incorrect.

User Response: Correct the type value and retry the request.

ISRLE023 **Invalid DSORG - Data set organization must be partitioned (PO).**

Explanation: Input to the Member Parts List function must either be a partitioned data set or a concatenation of partitioned data sets.

User Response: Correct the input data set name to specify one or more partitioned data sets and retry the request.

ISRLE024 **Skeleton not found - Skeleton for aaaaaaaa not found in skels data set.**

Explanation: A skeleton needed for batch processing (aaaaaaa) could not be found by the ISPF file tailoring program.

User Response: Verify that the proper ISPF skeleton library is allocated to ddname ISPSLIB, then retry the request.

ISRLE025 **DSN required - Data set name is required for option 2.**

Explanation: When using Member Parts List option 2 (Write Member Parts Data Set), the output data set must be specified.

User Response: Specify a data set name in the Output Data Set field and retry the request.

ISRLE026 **Member name not allowed - A member name was specified for a sequential data set.**

Explanation: The data set specified in the Output Data Set field is a sequential data set, but a member name was specified. Member name is not valid for a sequential data set.

User Response: Either specify a sequential data set without a member name or a partitioned data set and member in the Output Data Set field, then retry the request.

ISRLE027 **Member name is required - A partitioned data set was specified with no member name.**

Explanation: The data set specified in the Output Data Set field is a partitioned data set, but no member name

was specified. A member name is required for a partitioned data set.

User Response: Either specify a sequential data set without a member name or a partitioned data set and member in the Output Data Set field, then retry the request.

ISRLE029 **Enter valid LANG value - Minimum valid values are: ASM, COB, FOR/FTN, PAS, PL1/PLI, SCR.**

Explanation: The value entered in the language field was not valid. The supported values and languages are:

ASM	Assembler
COB	COBOL
FOR or FTN	FORTRAN
PAS	Pascal
PL1 or PLI	PL/I
SCR	Script

User Response: Enter a valid language value and retry the request.

ISRLF000A **Messages ISLRF000 through ISRLF049 are listed in "Chapter 5. Library Management Facility (LMF) Messages" on page 535.**

Explanation: This is an informational message.

ISRLI000A **Messages ISRLI000 through ISRLI069 are listed in "Chapter 5. Library Management Facility (LMF) Messages" on page 535.**

Explanation: This is an informational message.

ISRLK000A **Messages ISRLK000 through ISRLK049 are listed in "Chapter 5. Library Management Facility (LMF) Messages" on page 535.**

Explanation: This is an informational message.

ISRLI000A **Messages ISRLI000 through ISRLI069 are listed in "Chapter 5. Library Management Facility (LMF) Messages" on page 535.**

Explanation: This is an informational message.

ISRLO999 **Licensed Materials - Property of IBM 5655-042 (C) Copyright IBM Corp. 1980, 1998. All rights reserved. US Government Users Restricted Rights - Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.**

Explanation: This is an informational message.

ISRLP100A Messages ISLRP100 through ISRLP109 are listed in “Chapter 5. Library Management Facility (LMF) Messages” on page 535.

Explanation: This is an informational message.

ISRLQ000A Messages ISLRQ000 through ISRLQ039 are listed in “Chapter 5. Library Management Facility (LMF) Messages” on page 535.

Explanation: This is an informational message.

ISRLS000 No data set specified - Must specify either an ISPF library, data set, or ddname for LMINIT.

Explanation: The LMINIT service was incorrectly invoked. Either a complete ISPF library name (Project, Group(s), and Type), a data set name, or a ddname must be specified.

User Response: Contact the responsible programmer.

Programmer Response: If you are using the ISPF library keywords, insure that the project, group, and type are all correctly specified. If you are using the data set or ddname keywords, insure that the values you are passing to the service are complete and correct.

If you are using a compiled language, check to see that values shorter than the maximum possible length are terminated with at least one blank.

ISRLS001 Incomplete specification - Must specify project, group1, and type for an ISPF library.

Explanation: The LMINIT service was incorrectly invoked. An incomplete ISPF library name (Project, Group(s), and Type) was specified.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the project, group, and type are all correctly specified. If you are using a compiled language, check to see that values shorter than the maximum possible length are terminated with at least one blank.

ISRLS002 Invalid ENQ requirement - Specify either SHR, EXCLU, SHRW, or MOD.

Explanation: An LMINIT service was issued with an invalid or missing value for the ENQ parameter.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the LMINIT service specifies either SHR, EXCLU, SHRW, or MOD for the ENQ parameter. In compiled languages, it is a good idea to pad the SHR parameter with a blank.

ISRLS003 Invalid data set org - Data set is not sequential or partitioned. Not supported by ISPF.

Explanation: An LMINIT service was issued for a data set that has an organization not supported by ISPF.

User Response: Specify another data set, or contact the responsible programmer.

Programmer Response: Ensure that the data sets used by your application are either sequential data sets or partitioned data sets.

ISRLS004 Insufficient storage - Not enough main storage was available to satisfy request.

Explanation: An LMINIT service was unable to obtain the storage it needed to complete.

User Response: Try to reduce the number of programs already running while this program is running. If that is not feasible, try logging on with a larger region size.

ISRLS005 Free storage failed - Free main storage request failed.

Explanation: Storage obtained by an ISPF service could not be freed.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that your program is not incorrectly freeing storage that it did not obtain. If this does not solve the problem, contact IBM support.

ISRLS006 Invalid data set status - Only sequential data sets can be allocated mod for LMINIT.

Explanation: An LMINIT service was issued to allocate a data set for disposition MOD but the data set is not sequential.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the application is allocating only sequential data sets with disposition MOD.

ISRLS007 Member name not allowed - Member name not allowed in the specification of data set parameter.

Explanation: An LMINIT service was issued with the member name specified in the data set parameter. This is not supported by ISPF.

User Response: Contact the responsible programmer.

Programmer Response: Change the application to specify only the data set name on the LMINIT service. Then use the LMMFIND service before the LMGET service, or use the MEMBER keyword of the EDIT or BROWSE services.

PDF Messages

ISRLS008 Member name not allowed - Ddname allocated to member of partitioned data set is not allowed.

Explanation: An LMINIT service was issued to use a preallocated ddname that was allocated to a member of a partitioned data set. This is not supported.

User Response: Contact the responsible programmer.

Programmer Response: If you know the name of the data set and member to be allocated, use the LMINIT service in combination with other services to allocate the data set as a whole, then to access the member.

ISRLS009 Invalid data set status - Only partitioned data sets can be allocated shrw for LMINIT.

Explanation: An LMINIT service was issued to allocate a data set for disposition SHRW but the data set is not partitioned

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the application is allocating only partitioned data sets with disposition SHRW.

ISRLS010 Ddname not found - Ddname 'aaaaaaaa' not found.

Explanation: An LMINIT by ddname was requested, but the ddname specified is not currently allocated.

User Response: Contact the responsible programmer.

Programmer Response: If the ddname specified is correct, use the TSO ALLOCATE command to allocate the correct data sets to that ddname. If the ddname specified is not correct, make the necessary corrections.

ISRLS011 Invalid data set status - Data set is not allocated as NEW, OLD, SHARED, or MOD.

Explanation: An LMINIT by ddname was requested, but the ddname was allocated with a status other than NEW, OLD, SHARED, OR MOD.

User Response: Contact the responsible programmer.

Programmer Response: Reallocate the ddname using a correct status value and retry the LMINIT request.

ISRLS012 Invalid concatenation - More than 4 concatenated data sets not supported by ISPF.

Explanation: An LMINIT by ddname was requested, but the ddname specified has more than 4 data sets allocated to it. PDF only supports up to 4 concatenated data sets.

User Response: Contact the responsible programmer.

Programmer Response: Reallocate the ddname using 4 or fewer data sets, and retry the LMINIT request.

ISRLS013 Invalid data set - Multivolume data sets are not supported by LME.

Explanation: An LMINIT by ddname was requested, but the data set allocated to the specified ddname is a multivolume data set. PDF does not support multivolume data sets.

User Response: Reallocate the ddname to a single volume data set, and retry the LMINIT request.

ISRLS014 Invalid device - Data sets not on direct access device are not supported by ISPF.

Explanation: An LMINIT by ddname was requested, but one of the data sets allocated to the specified ddname does not reside on a direct access device. ISPF and PDF only support direct access devices.

User Response: Contact the responsible programmer.

Programmer Response: Reallocate the ddname using data sets on direct access devices, and retry the LMINIT request.

ISRLS015 Obtain failed - Unable to obtain data set organization.

Explanation: An LMINIT by ddname was requested, but a failure was encountered when issuing the OBTAIN macro to retrieve the data set characteristics.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRLS016 Inconsistent data sets - Data sets with inconsistent 'aaaaaaaa' cannot be concatenated.

Explanation: An LMINIT by ddname was requested, but the data sets allocated to the specified ddname did not all have the same data set organization, record format, or record length (as indicated by aaaaaaaa).

User Response: Contact the responsible programmer.

Programmer Response: Reallocate the ddname using data sets with consistent attributes and retry the LMINIT request.

ISRLS017 Data set not partitioned - Only partitioned data sets may be concatenated under ISPF.

Explanation: An LMINIT by ddname was requested, but the specified ddname represented a concatenation of sequential data sets. PDF only supports concatenations of partitioned data sets.

User Response: Contact the responsible programmer.

Programmer Response: Reallocate the ddname using either one sequential data set or a concatenation of partitioned data sets, and retry the LMINIT request.

ISRLS018 **Missing 'aaaaaaaa' - Must specify DSORG, RECFM, BLKSZ, LRECL for ddname allocated new.**

Explanation: An LMINIT by ddname was requested for a ddname representing a data set with a disposition of NEW, but valid values had not been specified for one of more of the following: data set organization, record format, block size, or logical record length.

User Response: Contact the responsible programmer.

Programmer Response: Reallocate the ddname, specifying all the appropriate information, then retry the LMINIT request.

ISRLS019 **No directory blocks - Must specify number of directory blocks for new partitioned data set.**

Explanation: An LMINIT by ddname was requested for a ddname representing a partitioned data set with a disposition of NEW, but the value for directory blocks is zero.

User Response: Contact the responsible programmer.

Programmer Response: Reallocate the ddname, specifying a non-zero value for directory blocks, then retry the LMINIT request.

ISRLS020 **Data ID not found - Data ID 'aaaaaaaa' not found.**

Explanation: The data ID specified in the library access service request does not exist. A previous LMINIT service was not successfully issued before the current service request was made.

User Response: Contact the responsible programmer.

Programmer Response: Check the application to verify that the LMINIT service was issued and that it was successful. You may want to add logic to bypass subsequent service requests if the LMINIT fails.

ISRLS021 **No information available - No information available for field 'aaaaaaaa'.**

Explanation: The LMQUERY service was issued for a data ID that was not allocated in a manner that LMQUERY supports. LMQUERY only supports the allocations made with the ISPF library qualifiers (Project, Group(s), and Type) on the LMINIT service.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the LMQUERY service is only used for data IDs that are allocated

using the Project, Groups, and Type fields on the LMINIT service.

ISRLS022 **Unexpected severe error - Severe error occurred trying to free data ID.**

Explanation: An internal error occurred while trying to free a control block called the LSB.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRLS023 **Unrecoverable I/O error - An unrecoverable read I/O error occurred while freeing data set.**

Explanation: An unrecoverable I/O error occurred while trying to free a data set that was open for reading.

User Response: Since the data set may not be usable, you may need to obtain a backup copy of it. Try to use other programs to read the data set before replacing it with an older backup copy.

ISRLS025 **Unrecoverable error - An unrecoverable error occurred while freeing member list.**

Explanation: An unrecoverable error occurred while freeing a member list during the execution of the LMFREE service.

User Response: Contact the responsible programmer.

Programmer Response: Before issuing the LMFREE service, issue the LMMLIST service with the free option. If this does not solve the problem, contact IBM support.

ISRLS027 **Members not found - No members were found in the specified data set.**

Explanation: The LMPROM service was issued to promote members out of a data set that does not contain the members requested.

User Response: Contact the responsible programmer.

Programmer Response: Verify that the members you want to promote exist in the data set from which you are promoting.

ISRLS028 **Members not found - No members were found in the data set to match pattern 'aaaaaaaa'.**

Explanation: No members were found in the data set to match pattern *aaaaaaaa*, which was supplied to the LMPROM service.

User Response: Depending on the application, this may not be a problem. However, if you supplied the

PDF Messages

pattern, check to see if the pattern specified was correct.

Programmer Response: Verify that the pattern specified on the LMPROM service was correct. If this situation does not signify an error the application user needs to be aware of, you may want to ensure that LMPROM return codes are appropriately handled.

ISRLS029 Invalid disposition - An enqueue disposition of MOD is invalid for standard format records.

Explanation: You cannot do an LMINIT with the ENQ(MOD) on data sets with a record format of FS or FBS. Writing to an FS or FBS data set using a disposition of MOD will corrupt the data set.

User Response: Either use a disposition of OLD, or copy the data into a record format F or FB data set and that process the data set MOD.

ISRLS030 Invalid open option - 'aaaaaaaa' is an invalid option. Specify either INPUT or OUTPUT.

Explanation: An LMOPEN service was invoked with an invalid parameter for the OPTION keyword.

Programmer Response: Verify that the OPTION value on the LMOPEN service is either INPUT or OUTPUT. The default is INPUT.

ISRLS031 Data set already opened - The data set identified by data ID 'aaaaaaaa' is already open.

Explanation: An LMOPEN service was invoked for a data ID that was already open.

Programmer Response: Check to see if LMOPEN is being called twice without an intervening LMCLOSE or LMFREE. If this is not the error, check to see if the data ID is open on entry to your program (if it was supplied by another program). For example, the edit macro DATAID statement will return a data ID that is already open and should not be closed by an edit macro.

ISRLS032 OUTPUT not allowed - OUTPUT option is not allowed with data set allocated SHR.

Explanation: An LMOPEN service attempted to open a data set for output when the data set was allocated by LMINIT with ENQ(SHR).

Programmer Response: Change the LMINIT ENQ option to EXCLU or SHRW.

ISRLS033 OUTPUT not allowed - OUTPUT option is not allowed with concatenated data sets.

Explanation: An LMOPEN service attempted to open a data ID for output when the data ID was allocated to more than one data set. Concatenated libraries cannot be opened for output by the LMOPEN service.

Programmer Response: Change the logic of your program to create a separate data ID for the specific data set you need to write to, then use that data ID for writes. You may find the LMQUERY service helpful in this effort, or you may need to use another method (such as trapping the output of the TSO LISTALC STATUS command, or examining MVS control blocks) to determine the name of the data set to allocate.

ISRLS034 Invalid data set status - Data set can only be allocated shared, old, shared/write, mod, or new.

Explanation: An LMOPEN service was attempted for a data ID that had an invalid allocation status.

Programmer Response: Verify that the LMINIT service that created the data ID has an ENQ value of SHR, SHRW, EXCLU, or MOD. If it does, then an internal control block was altered. Check your program for incorrect storage references. If none are found, contact IBM support.

ISRLS035 INPUT not allowed - Only OUTPUT option is allowed with data set allocated MOD.

Explanation: An LMOPEN service attempted to open a data ID for input when the data ID was allocated with the LMINIT service with a ENQ value of MOD.

Programmer Response: Change the LMINIT service that created the data ID to specify an ENQ value of SHR, SHRW, or EXCLU. The MOD value should only be used for writing to the end of a sequential data set.

ISRLS036 Invalid parameter - With multiple "from" members the "to" member parameter is not valid.

Explanation: More than one member name was specified on the FRMEMBER operand of the LMPROM service, and the TOMEMBER operand was also specified. When multiple names are specified, the TOMEMBER operand is not valid.

Programmer Response: Change the LMPROM service, eliminating the TOMEMBER operand. The member names cannot be changed when multiple members are being promoted.

ISRLS037 **Invalid parameter - With all or pattern specified the "to" member parameter is not valid.**

Explanation: A pattern or more than one member name was specified on the FRMEMBER operand of the LMPROM service, and the TOMEMBER operand was also specified. When a pattern or multiple names are specified, the TOMEMBER operand is not valid.

Programmer Response: Change the LMPROM service, eliminating the TOMEMBER operand. The member names cannot be changed when multiple members are being promoted.

ISRLS038 **Invalid member name - "From" member name 'aaaaaaaa' is invalid.**

Explanation: The source (or "from") member name (aaaaaaaa) specified on the LMPROM service is syntactically incorrect.

Programmer Response: Correct the member name, then reissue the LMPROM service.

ISRLS039 **Promote successful - All requested members were promoted successfully.**

Explanation: This is an informational message.

ISRLS040 **Invalid STATS option - Specify either YES or NO for the STATS parameter for LMMFIND.**

Explanation: STATS parameter must be YES or NO.

User Response: Contact the responsible programmer.

Programmer Response: Specify the STATS parameter as YES if you want the LMMFIND service to return statistics. Otherwise, specify the STATS parameter as NO.

System Action: LMMFIND ends with a return code of 12.

ISRLS041 **Data set not opened - LMMFIND service requires the previous successful completion of LMOPEN.**

Explanation: No LMOPEN was done prior to invoking LMMFIND.

User Response: Contact the responsible programmer.

Programmer Response: Add an LMOPEN invocation for the data ID used in the LMMFIND service.

System Action: LMMFIND ends with a return code of 12.

ISRLS042 **Data set not partitioned - LMMFIND service data set to be partitioned data set.**

Explanation: The LMMFIND service is used to find a member of a partitioned data set. The data set represented by the given data ID is not partitioned.

User Response: Contact the responsible programmer.

Programmer Response: Change the DATAID parameter to the DATAID for the partitioned data set to find the member name.

System Action: LMMFIND ends with return code 12.

ISRLS043 **Member not found - Specified member 'aaaaaaaa' not found in data set(s).**

Explanation: The given member was not found in the data set(s) specified by the given data ID.

User Response: Contact the responsible programmer.

Programmer Response: The response depends upon the design of the dialog. This may be an expected response.

System Action: LMMFIND ends with return code 8.

ISRLS044 **Severe error - Unexpected return code aaaaaaaa from common data set BLDL routine ISPCDB.**

Explanation: An unexpected error occurred during BLDL processing. The return code may be one of the following:

- 24 OPEN was unsuccessful.
- 28 OBTAIN was unsuccessful.
- 32 Other BLDL error.

User Response: Contact the responsible programmer.

Programmer Response: Verify the input parameters to LMMFIND. Try accessing the member through Browse (option 1) to verify that the member exists as expected in the data set(s).

System Programmer Response: Recover the data set, if necessary.

System Action: LMMFIND ends with return code 20.

ISRLS045 **Severe error - I/O error trying to close out on read.**

Explanation: This is an informational message.

System Action: LMMFIND ends with return code 20.

PDF Messages

ISRLS046 **Not open for input - LMMFIND service requires the data set to be opened for input.**

Explanation: The data ID for the LMMFIND service must be opened for input before invoking the LMMFIND service.

User Response: Contact the responsible programmer.

Programmer Response: Change the OPTION to INPUT on the LMOPEN service for the specified data ID.

System Action: LMMFIND ends with return code 12.

ISRLS047 **I/O error finding member - A permanent I/O error was detected when searching the directory.**

Explanation: BLDL ended with return code 8.

User Response: Contact the responsible programmer.

Programmer Response: Verify the input parameters to LMMFIND. Try accessing the member through Browse (option 1) to verify that the member exists as expected in the data set(s).

System Programmer Response: Recover the data set, if necessary.

System Action: LMMFIND ends with return code 8.

ISRLS048 **Insufficient storage - Insufficient virtual storage was available to search the directory.**

Explanation: There is not enough virtual storage for ISPF to be able to read the directory.

User Response: Increase virtual storage.

ISRLS049 **Promote successful - Member or data set promoted successfully.**

Explanation: This is an informational message.

ISRLS054 **Incomplete specification - The project name must be specified.**

Explanation: The PROJECT parameter is not specified for the LMACT or LMDEACT service.

User Response: Contact the responsible programmer.

Programmer Response: Specify the PROJECT parameter for the LMACT or LMDEACT service.

System Action: LMACT or LMDEACT ends with return code 12.

ISRLS055 **Incomplete specification - The group name must be specified.**

Explanation: The GROUP parameter is not specified for the LMACT or LMDEACT service.

User Response: Contact the responsible programmer.

Programmer Response: Specify the GROUP parameter for the LMACT or LMDEACT service.

System Action: LMACT or LMDEACT ends with return code 12.

ISRLS056 **Invalid project name - Project must be up to 8 alphanumeric chars (first must be an alphabetic character).**

Explanation: The Project parameter contains invalid characters for the LMACT or LMDEACT service.

User Response: Contact the responsible programmer.

Programmer Response: Specify a valid project parameter for the LMACT or LMDEACT service.

System Action: LMACT or LMDEACT ends with return code 12.

ISRLS057 **Invalid group name - Group must be up to 8 alphanumeric chars (first must be an alphabetic character) or '*'.**

Explanation: The group parameter contains invalid characters for the LMACT or LMDEACT service.

User Response: Contact the responsible programmer.

Programmer Response: Specify a valid group name or "*" (asterisk) for all groups for the LMACT or LMDEACT service.

System Action: LMACT or LMDEACT ends with return code 12.

ISRLS060 **Invalid mode specified - Specify either MOVE, LOCATE, or INVAR for mode parameter.**

Explanation: The valid modes for the LMGET service are:

MOVE Moves the data to the address specified by the DATALOC parameter

LOCATE
Stores the address of the data into the DATALOC parameter

INVAR Stores the data in an ISPF dialog variable specified by the DATALOC variable.

User Response: Contact the responsible programmer.

Programmer Response: Specify the MODE parameter as MOVE, LOCATE, or INVAR.

System Action: LMGET service ends with return code 12.

ISRLS061 Data set not opened - Data set is not opened for LMGET service.

Explanation: The data set(s) represented by the DATAID parameter of LMGET must be open.

User Response: Contact the responsible programmer.

Programmer Response: Open the data set(s) for the data ID, using the LMOPEN service, before calling LMGET.

System Action: LMGET service ends with return code 12.

ISRLS062 Find member not done - For partitioned data sets, LMGET requires previous successful LMMFIND.

Explanation: In order for LMGET to process the correct member, the LMMFIND service must be invoked before the LMGET service.

User Response: Contact the responsible programmer.

Programmer Response: Find the member to be read by calling the LMMFIND service before calling LMGET.

System Action: LMGET service ends with return code 12.

ISRLS063 Null DATALOC variable - For MOVE mode, DATALOC variable must contain a value.

Explanation: For the LMGET MOVE mode, the DATALOC variable must contain a binary virtual storage address where the data read by LMGET is to be stored.

User Response: Contact the responsible programmer.

Programmer Response: Set the variable, specified by the DATALOC parameter, to an address to store the data read by LMGET.

System Action: LMGET service ends with return code 12.

ISRLS064 Invalid DATALOC variable - For MOVE mode, DATALOC variable must have a positive numeric value.

Explanation: For the LMGET MOVE mode, the value specified by the DATALOC variable must be a valid address. All of the characters must be numeric and have a positive value.

User Response: Contact the responsible programmer.

Programmer Response: Set the DATALOC variable to a valid address.

System Action: LMGET service ends with return code 12.

ISRLS065 DATALOC var out of range - For MOVE mode, DATALOC variable must have value <= (231)-1.**

Explanation: For the LMGET service, the DATALOC variable must have a value of at least 1 but less than 2 147 483 647.

User Response: Contact the responsible programmer.

Programmer Response: Set the DATALOC variable to a valid address.

System Action: LMGET service ends with return code 12.

ISRLS066 I/O error on read - I/O error encountered while reading data set.

Explanation: A severe error occurred while attempting to read the data set(s) represented by the DATAID parameter on the LMGET service.

User Response: Contact the responsible programmer.

Programmer Response: Browse the data set to verify that it is not damaged.

System Programmer Response: Recover data, if necessary.

System Action: LMGET service ends with return code 12.

ISRLS067 Invalid record length - Maximum record length must be greater than 0.

Explanation: For LMGET, the MAXLEN parameter is negative or zero.

User Response: Contact the responsible programmer.

Programmer Response: Set the MAXLEN parameter to a valid data length.

System Action: LMGET service ends with return code 12.

ISRLS068 Not opened for input - Data set must be opened for input for LMGET service.

Explanation: The LMGET service requires that the data set(s) represented by the DATAID parameter be open for input.

User Response: Contact the responsible programmer.

Programmer Response: On the LMOPEN service for the specified data ID, specify the INPUT option.

System Action: LMGET service ends with return code 12.

PDF Messages

ISRLS070 Invalid mode specified - Specify either MOVE or INVAR for mode parameter.

Explanation: The valid modes for the LMPUT service are:

MOVE Moves the data from the address specified by the DATALOC parameter

INVAR Stores the data from an ISPF dialog variable specified by the DATALOC variable.

User Response: Contact the responsible programmer.

Programmer Response: Specify the MODE parameter as MOVE or INVAR.

System Action: LMPUT service ends with return code 12.

ISRLS071 Data set not opened - Data set is not opened for LMPUT service.

Explanation: The data set represented by the DATAID parameter of LMPUT must be open.

User Response: Contact the responsible programmer.

Programmer Response: Open the data set for the DATAID using the LMOPEN service before calling LMPUT.

System Action: LMPUT service ends with return code 12.

ISRLS072 Not opened for output - Data set is not opened for output for LMPUT service.

Explanation: The LMPUT service requires that the data set represented by the DATAID parameter be open for output.

User Response: Contact the responsible programmer.

Programmer Response: On the LMOPEN service for the specified data ID, specify the OUTPUT option.

System Action: LMPUT service ends with return code 12.

ISRLS074 Invalid DATALOC variable - For MOVE mode, DATALOC variable must have a positive numeric value.

Explanation: For the LMPUT MOVE mode, the value specified by the DATALOC variable must be a valid address. All of the characters must be numeric, and must be a positive value.

User Response: Contact the responsible programmer.

Programmer Response: Set the DATALOC variable to a valid address.

System Action: LMPUT service ends with return code 12.

ISRLS075 DATALOC var out of range - For MOVE mode, DATALOC variable must have value <= (231)-1.**

Explanation: For the LMPUT service, the DATALOC variable must have a value of at least 1 but less than 2 147 483 647.

User Response: Contact the responsible programmer.

Programmer Response: Set the DATALOC variable to a valid address.

System Action: LMPUT service ends with return code 12.

ISRLS076 I/O error on write - I/O error encountered while writing data set.

Explanation: A severe error occurred while attempting to write to the the data set represented by the DATAID parameter on the LMPUT service.

User Response: Contact the responsible programmer.

Programmer Response: Browse the data set to verify that it is not damaged.

System Programmer Response: Recover data, if necessary.

System Action: LMPUT service ends with return code 12.

ISRLS077 Invalid record length - Record length must be positive and between 1 and (215)-1.**

Explanation: For LMPUT, the DATALEN parameter must not be negative, zero, or greater than 32 767.

User Response: Contact the responsible programmer.

Programmer Response: Set the DATALEN parameter to a valid data length.

System Action: LMPUT service ends with return code 12.

ISRLS080 Invalid member name - Member name 'aaaaaaaa' is invalid.

Explanation: Member name parameter contains invalid characters.

User Response: Contact the responsible programmer.

Programmer Response: Enter a valid member name in the member name parameter.

System Action: Service ends with return code 12.

ISRLS081 Invalid STATS parameter - STATS parameter is invalid. Specify either YES or NO.

Explanation: The STATS parameter must be YES, NO, or blank.

User Response: Contact the responsible programmer.

Programmer Response: Enter a valid STATS parameter.

System Action: Service ends with return code 12.

ISRLS082 Member already exists - Directory already contains the specified member name.

Explanation: Either the LMMADD service or the LMMREN service failed because a member with the requested name already exists in the library.

User Response: Contact the responsible programmer.

Programmer Response: For the LMMADD service, either:

- Select a member name that is not already being used, or
- Use the LMMREP service to replace the member that has the same name.

For the LMMREN service, either:

- Select a member name that is not already being used, or
- Use the LMMDEL service to delete the member that has the same name before calling LMMREN.

System Action: Service ends with return code 4.

ISRLS083 Member not found - The specified member name 'aaaaaaaa' not found in the directory.

Explanation: The requested member does not exist for the LMMDEL or LMMREN service.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the correct member name is requested. No action is usually necessary for LMMDEL.

System Action: Service ends with return code 8.

ISRLS084 Member added - Member added to the data set. It did not previously exist.

Explanation: This is an informational message. The LMMREP service could not find a member to replace. The member is added to the data set.

ISRLS085 Not partitioned data set - Data set must be partitioned for LMMADD, LMMREP, LMMDEL or LMMREN.

Explanation: The LMMADD, LMMREP, LMMDEL, and LMMREN services all operate on members of partitioned data sets.

User Response: Contact the responsible programmer.

Programmer Response: Either ensure that the data set for the requested data ID is partitioned, or use the appropriate service to operate on sequential data sets. For example, to rename an entire data set, use the LMRENAME service.

System Action: Service ends with return code 8.

ISRLS086 Data set is not open - The data set must be open for LMMADD, LMMREP, LMMDEL or LMMREN.

Explanation: The data set represented by the requested data ID is not open.

User Response: Contact the responsible programmer.

Programmer Response: Use the LMOPEN service to open the data set before calling LMMADD, LMMREP, LMMDEL, or LMMREN.

System Action: Service ends with return code 12.

ISRLS087 Data set not for output - Must open data set for output for LMMADD, LMMREP, LMMDEL, or LMMREN.

Explanation: The data set represented by the requested data ID must be open for output.

User Response: Contact the responsible programmer.

Programmer Response: Use the OUTPUT option of the LMOPEN service for the requested data ID.

System Action: Service ends with return code 12.

ISRLS088 No record is written - LMMADD and LMMREP requires previous successful LMPUT service.

Explanation: The LMMADD and LMMREP services are designed to add or replace a member of a partitioned data set. The LMPUT service writes the records to be used by LMMADD and LMMREP.

User Response: Contact the responsible programmer.

Programmer Response: Use the LMPUT service to write records to the member before calling the LMMADD or LMMREP service to create or replace the member.

System Action: Service ends with return code 14.

PDF Messages

ISRLS090 **No space in directory - No space left in the directory of the data set.**

Explanation: There is no space left in the directory for the LMMADD, LMMREN, or LMMREP service to add the member.

User Response: Contact the responsible programmer.

Programmer Response: Reallocate the data set with more directory blocks.

System Action: Service ends with return code 20.

ISRLS091 **Permanent I/O error - A permanent input or output error is detected.**

Explanation: STOW ended with return code 16.

User Response: Verify that the data set is not damaged.

System Programmer Response: Recover the data set, if necessary.

System Action: Service ends with return code 20.

ISRLS092 **DCB not opened - The specified data control block is not open or is open for input.**

Explanation: STOW ended with return code 20.

User Response: Verify that the data set is not damaged.

System Programmer Response: Recover the data set, if necessary.

System Action: Service ends with return code 20.

ISRLS093 **Not enough storage - Insufficient virtual storage is available to perform STOW function.**

Explanation: STOW ended with return code 24.

User Response: Verify that the data set is not damaged.

System Programmer Response: Recover the data set, if necessary.

System Action: Service ends with return code 20.

ISRLS094 **Invalid new member name - New member name 'aaaaaaaa' is invalid.**

Explanation: The new member name parameter for the LMMREN service contains invalid characters.

User Response: Contact the responsible programmer.

Programmer Response: Enter a new member name parameter with valid characters.

System Action: LMMREN service ends with return code 12.

ISRLS095 **Variable not found - Variable not found for member statistic 'aaaaaaaa'.**

Explanation: Variable requested was not found in any of the ISPF variable pools.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the variable name is typed correctly.

System Action: Service ends with return code 12.

ISRLS100 **Data set is not open - The data set identified by data ID 'aaaaaaaa' is not open.**

Explanation: The LMCLOSE service requires that the data set or sets represented by the requested data id be opened by the LMOPEN service.

User Response: Contact the responsible programmer.

Programmer Response: If no LMOPEN is required by the dialog, remove the LMCLOSE service from the dialog.

System Action: The LMCLOSE service ends with return code 8.

ISRLS102 **Unrecoverable I/O error - An unrecoverable read I/O error occurred while closing data set.**

Explanation: LMCLOSE failed attempting to close the read buffer.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the data set or sets represented by the requested data ID are not damaged.

System Programmer Response: Recover the data sets if necessary.

System Action: The LMCLOSE service ends with return code 20.

ISRLS104 **Unrecoverable error - An unrecoverable error occurred while freeing member list.**

Explanation: LMCLOSE encountered a severe error while attempting to free a member list.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the data set or sets represented by the requested data ID are not damaged.

System Programmer Response: Recover the data sets if necessary.

System Action: The LMCLOSE service ends with return code 20.

ISRLS110 I/O error - I/O error closing data set represented by data ID 'aaaaaaaa'.

Explanation: An error occurred while attempting to close the data set.

User Response: Verify that the data set is not damaged.

System Programmer Response: Back up the data sets if necessary.

System Action: Service ends with return code 20.

ISRLS111 I/O error - I/O error freeing data set represented by data ID 'aaaaaaaa'.

Explanation: An error occurred attempting to free the data set, or attempting to free internal storage.

User Response: Verify that the data set is not damaged. Try the function again. If problem persists, contact the system programmer.

System Programmer Response: Back up the data set if necessary.

System Action: Service ends with return code 20.

ISRLS112 Severe error - Directory block size exceeds maximum of 256.

Explanation: The PDF common member list routine detected a data set that had a directory block greater than 256 bytes, the maximum supported by PDF.

User Response: Contact your system programmer.

System Programmer Response: Reallocate or recover the data set as necessary.

ISRLS113 Can't save member list - The SAVE option is valid only when no member list exists for the data ID.

Explanation: The LMMLIST service has already been invoked with the LIST option. The SAVE option cannot be used when there is already an active member list for a data ID.

User Response: Contact the responsible programmer.

Programmer Response: If you need to write the member list to a data set and process members within the member list, invoke the LMMLIST service with the SAVE option either

- Before invoking LMMLIST with the LIST option to process the members, or
- After processing the member list and invoking LMMLIST with the FREE option.

System Action: LMMLIST ends with return code 8.

ISRLS120 Invalid option - Specify either LIST, FREE, or SAVE.

Explanation: The Option parameter of the LMMLIST service must be LIST, FREE, SAVE, or blank. Blank defaults to LIST.

User Response: Contact the responsible programmer.

Programmer Response: Enter a valid value for the OPTION parameter.

System Action: LMMLIST service ends with return code 12.

ISRLS121 Invalid STATS parameter - Specify either YES or NO.

Explanation: The STATS parameter of the LMMLIST service must be YES, NO, or blank. Blank defaults to NO.

User Response: Contact the responsible programmer.

Programmer Response: Enter a valid value for the STATS parameter.

System Action: Service ends with return code 12.

ISRLS122 Data set not open - LMMLIST requires prior successful completion of LMOPEN.

Explanation: The LMOPEN service must be invoked against the requested data ID before invoking the LMMLIST service.

User Response: Contact the responsible programmer.

Programmer Response: Use the LMOPEN service to open the requested data ID, before calling the LMMLIST service.

System Action: LMMLIST service ends with return code 12.

ISRLS123 Data set not partitioned - LMMLIST requires the data set to be a partitioned data set.

Explanation: The LMMLIST service gets a list of members for partitioned data sets only.

User Response: Contact the responsible programmer.

Programmer Response: Use the LMMLIST service on the correct partitioned data set.

System Action: LMMLIST service ends with return code 12.

PDF Messages

ISRLS124 **Empty member list - There are no members in this data set.**

Explanation: This is an informational message. LMMLIST service ends with return code 4.

ISRLS125 **End of member list - No more members in this data set.**

Explanation: This is an informational message. LMMLIST service ends with return code 8.

ISRLS126 **No member list - Member list does not exist for this data set.**

Explanation: The LMMLIST service attempted to free a member list that does not exist.

User Response: Contact the responsible programmer.

Programmer Response: Verify that you are attempting to FREE a member list that was previously built.

System Action: LMMLIST service ends with return code 8.

ISRLS127 **Severe error - Open error occurred while building member list.**

Explanation: An ABEND occurred during open processing.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the data set or sets represented by the requested data ID have not been damaged.

System Programmer Response: Recover the data sets, if necessary.

System Action: LMMLIST service ends with return code 20.

ISRLS128 **Severe error - I/O error occurred while building member list.**

Explanation: An error occurred reading directory blocks.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the data set or sets represented by the requested data ID have not been damaged.

System Programmer Response: Recover the data sets, if necessary.

System Action: LMMLIST service ends with return code 20.

ISRLS129 **Severe error - BLDL error occurred while building member list.**

Explanation: BLDL failed during member list processing.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the data set or sets represented by the requested data ID have not been damaged.

System Programmer Response: Recover the data sets, if necessary.

System Action: LMMLIST service ends with return code 20.

ISRLS130 **Free member list failed - Error occurred while freeing member list.**

Explanation: An error occurred while attempting to free storage for the member list.

System Action: LMMLIST service ends with return code 20.

ISRLS131 **Invalid member name - Member name "aaaaaaaa" is invalid or has not been initialized to blanks.**

Explanation: The MEMBER parameter of the LMMLIST service contains invalid characters.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the member name variable contains either blanks or a valid member name.

System Action: The LMMLIST service ends with return code 12.

ISRLS132 **Member name too long - Member name must be 1 to 8 characters long.**

Explanation: The member name variable must be able to contain a value with a length of 8 characters.

User Response: Contact the responsible programmer.

Programmer Response: If you are using a program interface, declare the member name variable to be 8 characters long. If you are using a command interface, ensure that the member name variable contains 8 characters. Pad the member name with blanks if necessary.

System Action: The LMMLIST service ends with return code 8.

ISRLS133 **Invalid statistics value - Version number must be a positive number from 1 to 99.**

Explanation: The LMMSTATS version number parameter contains an invalid value.

User Response: Contact the responsible programmer.

Programmer Response: Set the version number to be a positive integer between 1 and 99, inclusive.

System Action: LMMSTATS service ends with return code 12.

ISRLS134 **Invalid statistics value - Modification level must be a positive number from 0 to 99.**

Explanation: The LMMSTATS modification level parameter contains an invalid value.

User Response: Contact the responsible programmer.

Programmer Response: Set the modification level to be a positive integer between 0 and 99, inclusive.

System Action: The LMMSTATS service ends with return code 12.

ISRLS135 **Invalid statistics value - Current number of records must be a positive number from 0 to 65535.**

Explanation: The LMMSTATS current number of records parameter contains an invalid value.

User Response: Contact the responsible programmer.

Programmer Response: Set the current number of records to be a positive integer between 0 and 65 535, inclusive.

System Action: The LMMSTATS service ends with return code 12.

ISRLS136 **Invalid statistics value - Initial number of records must be a positive number from 0 to 65535.**

Explanation: The LMMSTATS initial number of records parameter contains an invalid value.

User Response: Contact the responsible programmer.

Programmer Response: Set the initial number of records to be a positive integer between 0 and 65 535, inclusive.

System Action: The LMMSTATS service ends with return code 12.

ISRLS137 **Invalid statistics value - Number of modified records must be a positive number from 0 to 65535.**

Explanation: The LMMSTATS number of modified records parameter contains an invalid value.

User Response: Contact the responsible programmer.

Programmer Response: Set the number of modified records to be a positive integer between 0 and 65 535, inclusive.

System Action: The LMMSTATS service ends with return code 12.

ISRLS138 **Invalid statistics value - Creation date or last modified date 'aaaaaaa' is out of range.**

Explanation: The creation date does not exist. Either the month value is greater than 12, or the day value exceeds the number of days for the given month.

User Response: Contact the responsible programmer.

Programmer Response: Enter a valid creation date.

System Action: The LMMSTATS service ends with return code 12.

ISRLS139 **Invalid statistics value - Last modified time 'aaaaaaa' is out of range.**

Explanation: The last modified time does not exist. Either the hours are not between 00 and 23 inclusive, or the minutes are not between 00 and 59 inclusive.

User Response: Contact the responsible programmer.

Programmer Response: Enter a valid creation date.

System Action: The LMMSTATS service ends with return code 12.

ISRLS140 **Missing ZLCDATE/ZLMDATE - Must specify creation date and last update date for member statistics.**

Explanation: The LMMSTATS service requires that the ZLCDATE and ZLMDATE variables be set to valid dates. These variables must be in an ISPF variable pool.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the ZLCDATE and the ZLMDATE variables are in ISPF variable pool and contain valid dates.

System Action: LMMSTATS service ends with return code 12.

PDF Messages

ISRLS141 **Invalid statistics value - Version number (aaaaaaaa) must be positive number from 1 to 99.**

Explanation: Either the version number value is too long, or it contains non-numeric characters.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the ZLVERS variable is in an ISPF variable pool and contains a valid version number.

System Action: LMMSTATS service ends with return code 12.

ISRLS142 **Invalid statistics value - Modification level (aaaaaaaa) must be positive number from 0 to 99.**

Explanation: Either the modification level value is too long, or it contains non-numeric characters.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the ZLMOD variable is in an ISPF variable pool and contains a valid version number.

System Action: LMMSTATS service ends with return code 12.

ISRLS143 **Invalid date aaaaaaaaa - Created and last modified dates must be in format YY/MM/DD or YYYY/MM/DD. Use the "CREATED" AND "MODDATE" parameter for YY/MM/DD format and the "CREATED4" and "MODDATE4" parameter for YYYY/MM/DD format.**

Explanation: The creation date or modification date passed to the LMMSTATS service was either of incorrect length or contained incorrect data. The date must be 8 characters if the 2 character year format is used (YY/MM/DD, for example) or 10 characters if the 4 character year format is used (YYYY/MM/DD, for example).

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the dates passed to LMMSTATS via the CREATED, CREATED4, MODDATE and MODDATE4 parameters are of correct length and contain valid dates.

System Action: The LMMSTATS service ends with return code 12.

ISRLS144 **Invalid date aaaaaaaaa - Created and last modified dates must be in format YY/MM/DD or YYYY/MM/DD. Use the "ZLCDATE" and "ZLMDATE" dialog variables for YY/MM/DD format and the "ZLC4DATE" and "ZLM4DATE" dialog variables for YYYY/MM/DD format.**

Explanation: The creation date or modification date passed to an ISPF service via the ZLCDATE, ZLC4DATE, ZLMDATE or ZLM4DATE had either an incorrect length or contained incorrect data. The date must be 8 characters if the 2 character year format is used (YY/MM/DD, for example, via variable ZLMDATE or ZLMDATE) or 10 characters if the 4 character year format is used (YYYY/MM/DD, for example, via variable ZLC4DATE or ZLM4DATE).

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the dates passed to ISPF via the ZLCDATE, ZLC4DATE, ZLMDATE and ZLM4DATE variables are of correct length and contain valid dates.

System Action: The LMMSTATS service ends with return code 12.

ISRLS145 **Invalid statistics value - Last modified time (aaaaaaaa) must be in format HH:MM or HH:MM:SS.**

Explanation: Either the ZLMTIME value does not have 5 or 8 characters or does not have a colon (:) as the third character in the 5 character format and/or as the sixth character in the 8 character format.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the ZLMTIME variable is in an ISPF variable pool and contains a valid time.

System Action: LMMSTATS service ends with return code 12.

ISRLS146 **Invalid statistics value - Current number of records (aaaaaaaa) must be positive number from 0 to 65535.**

Explanation: Either the ZLCNORC variable value is too long, or contains non-numeric characters.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the ZLCNORC variable is in an ISPF variable pool and contains a valid number between 0 and 65 535.

System Action: The LMMSTATS service ends with return code 12.

ISRLS147 Invalid statistics value - Initial number of records (aaaaaaaa) must be positive number from 0 to 65535.

Explanation: Either the ZLINORC variable value is too long, or contains non-numeric characters.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the ZLINORC variable is in an ISPF variable pool and contains a valid number between 0 and 65 535.

System Action: The LMMSTATS service ends with return code 12.

ISRLS148 Invalid statistics value - Number of modified records (aaaaaaaa) must be positive number from 0 to 65535.

Explanation: Either the ZLMNORC variable value is too long, or contains non-numeric characters.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the ZLMNORC variable is in an ISPF variable pool and contains a valid number between 0 and 65 535.

System Action: The LMMSTATS service ends with return code 12.

ISRLS149 Invalid statistics value - User ID (aaaaaaaa) must be 1 to 7 characters.

Explanation: The ZLUSER variable value contains 8 or more characters.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the ZLUSER variable is in an ISPF variable pool and contains a valid user ID.

System Action: LMMSTATS service ends with return code 12.

ISRLS150 No data set specified - Must specify either an ISPF library or data set for LMPROM.

Explanation: The LMPROM service requires that the FROM data be specified, either as an ISPF library (consisting of project, group, and type), or a data set.

User Response: Contact the responsible programmer.

Programmer Response: Specify an ISPF library or a data set to promote from.

System Action: The LMPROM service ends with return code 12.

ISRLS151 Incomplete specification - Must specify project, group, type and member for "from" ISPF library.

Explanation: The LMPROM service requires that if a data set is not specified, all 3 qualifiers of the ISPF library name be specified.

User Response: Contact the responsible programmer.

Programmer Response: On the LMPROM service, specify the FROM ISPF library using the FROM project, FROM group, and FROM type parameters.

System Action: The LMPROM service ends with return code 12.

ISRLS152 Invalid promote action - Must specify either MOVE or FREE for promote action.

Explanation: If the promote action is specified, the LMPROM service requires that it be MOVE, FREE, or blank. If blank, promote action defaults to MOVE.

User Response: Contact the responsible programmer.

Programmer Response: Specify the desired promote action.

System Action: The LMPROM service ends with return code 12.

ISRLS153 Invalid pack parameter - Must specify either YES or NO for pack parameter.

Explanation: If the pack parameter is specified, the LMPROM service requires that it be YES, NO, or blank. If blank, pack defaults to specification in the LMF library controls.

User Response: Contact the responsible programmer.

Programmer Response: Specify the desired pack option.

System Action: The LMPROM service ends with return code 12.

ISRLS154 No member name - Must specify member name for partitioned data set with dsname.

Explanation: If a FROM data set is partitioned, the FROM member name must be specified as well.

User Response: Contact the responsible programmer.

Programmer Response: Specify the FROM member parameter for the partitioned data set.

System Action: The LMPROM service ends with return code 12.

PDF Messages

ISRLS155 **Invalid "to" data set - The "from" data set is controlled. Do not specify "to" data set.**

Explanation: If the FROM library is LMF-controlled, then LMF uses the control file to determine the TO library. Do not specify the TO library.

User Response: Contact the responsible programmer.

Programmer Response: If the FROM library is controlled, do not specify the TO library.

System Action: The LMPROM service ends with return code 12.

ISRLS156 **No "to" group name - "From" data set not controlled. Must specify the "to" group name.**

Explanation: If the FROM data set is not controlled by LMF, then the TO project and type default to the FROM project and type. However the TO group must be specified, since LMF cannot determine this information.

User Response: Contact the responsible programmer.

Programmer Response: Specify TO group and, if necessary, the TO project and TO type.

System Action: The LMPROM service ends with return code 12.

ISRLS157 **No "to" member name - "From" data set is sequential. Must specify the "to" member name.**

Explanation: The LMPROM service requires the TO member name be specified when the FROM data set is sequential.

User Response: Contact the responsible programmer.

Programmer Response: Specify the TO member name for the LMPROM service.

System Action: The LMPROM service ends with return code 12.

ISRLS158 **Invalid "to" data set - "From" data set is dsname. Must specify "to" ISPF library.**

Explanation: The LMPROM service requires that if the FROM data is specified as a data set, then the TO data must be specified by project, group, and type.

User Response: Contact the responsible programmer.

Programmer Response: Either specify the FROM data as an ISPF library, or specify project, group, and type of the TO data set.

System Action: The LMPROM service ends with return code 12.

ISRLS159 **Invalid "to" data set - "To" data set must be 'controlled' library.**

Explanation: The TO library must be controlled by LMF.

User Response: Contact the responsible programmer.

Programmer Response: Specify the correct LMF-controlled library into which the data is to be promoted.

System Action: The LMPROM service ends with return code 12.

ISRLS160 **Close data set failed - Close the control file unsuccessfully.**

Explanation: The close of the control file failed.

User Response: If the problem persists, contact the system programmer.

System Programmer Response: Ensure that the control file is not damaged and can be accessed from the system.

ISRLS161 **Free storage failed - Free the storage of TFD for the control file unsuccessfully.**

Explanation: The storage for the TFD of the control file could not be freed.

User Response: If the problem persists, contact the system programmer.

System Programmer Response: If the problem persists, contact IBM support.

ISRLS162 **Close data set failed - Close "from" data set failed.**

Explanation: The close of the FROM data set was not successful.

User Response: If the problem persists, contact the system programmer.

System Programmer Response: Ensure that the FROM data set is not damaged and can be accessed from the system.

ISRLS163 **Free data set failed - Free "from" data set failed.**

Explanation: The allocation of the FROM data set could not be completed successfully.

User Response: If the problem persists, contact the system programmer.

System Programmer Response: Ensure that the FROM data set is not damaged and can be accessed from the system.

ISRLS164 **Data set is not active - "aaaaaaa" controlled library is not active.**

Explanation: The LMF controlled library has not been activated.

User Response: Notify the library administrator. The library administrator should use option 8.4 to activate the library.

ISRLS165 **Data set not entry level - "To" controlled library is not an entry level.**

Explanation: Promote from a non-controlled data set must be into an entry level group of a controlled library.

User Response: Update the promote to promote into an entry level group.

ISRLS166 **Invalid promotion action - "From" data set is controlled. Promote action must be MOVE.**

Explanation: Promote action must be MOVE when promoting from a controlled data set.

User Response: Update the promote to specify MOVE.

ISRLS167 **No target group - "From" controlled library is the top group.**

Explanation: The group specified as the FROM group is the top group in the library hierarchy. Since there is no higher group in the hierarchy, promotion cannot take place.

User Response: Verify that the correct group is being specified for promotion.

ISRLS168 **Data set not cataloged - 'aaaaaaa' was not found in catalog.**

Explanation: The promote TO data set was not found in the catalog.

User Response: Ensure that the promote TO data set exists and is in the catalog.

ISRLS169 **Not a controlled library - "To" library must be controlled.**

Explanation: The library being promoted into is not controlled.

User Response: Notify the administrator to add the library.

ISRLS170 **Alias name not supported - LMERASE service does not support erasing alias data sets.**

Explanation: The name that was specified is an alias. LMERASE does not support alias names.

User Response: Use the data set name instead of the alias name.

System Action: The alias and data sets are not deleted.

ISRLS171 **Data set not expired yet - The PURGE(YES) keyword must be used to delete the data set.**

Explanation: The data set has an expiration date that has not yet been reached. The PURGE(YES) keyword must be specified to delete this data set.

User Response: Specify the PURGE(YES) keyword to delete the data set.

System Action: The data set is not deleted.

ISRLS172 **Obtain macro failed - Obtain format 1 data set control block failed.**

Explanation: LMERASE was not able to access the format 1 data set control block.

User Response: Verify that the data set name is valid and available.

System Programmer Response: Verify that the device containing the data set is online and can be accessed. Verify that the catalog containing the data set is also available.

System Action: The data set is not deleted.

ISRLS173 **Invalid PURGE value - The PURGE keyword must have a value of YES or NO.**

Explanation: The value specified for PURGE was not YES or NO.

User Response: Specify either YES or NO for the PURGE value, or allow the value to default.

System Action: The data set is not deleted.

ISRLS174 **Invalid parameter - You must specify either PROJECT/GROUP/TYPE or DATASET for the LMERASE service.**

Explanation: When invoking the LMERASE service to delete a data set, you must specify either a three-level qualified data set via the PROJECT, GROUP, and TYPE parameters, or an MVS partitioned or sequential data set via the DATASET parameter. Neither was specified.

User Response: Specify either

PDF Messages

PROJECT/GROUP/TYPE or DATASET on the LMERASE call.

System Action: The data set is not deleted.

ISRLS175 Invalid parameter - For the LMERASE service, If PROJECT is specified, GROUP and TYPE must also be specified.

Explanation: The LMERASE service was invoked with the PROJECT parameter specified, but either the GROUP or TYPE parameter was missing.

User Response: Either specify PROJECT, GROUP and TYPE, or use the DATASET parameters to specify the data set name.

System Action: The data set is not deleted.

ISRLS176 Invalid statistics value - Last modified second (ZLMSEC) must be a number between 0 and 59.

Explanation: Either the ZLMSEC value is non numeric or it is out of range.

User Response: Contact the responsible programmer.

Programmer Response: Ensure that the ZLMSEC variable is in an ISPF variable pool and contains a valid value.

System Action: The second value is not accepted.

ISRLS190 No new name specified - Must specify either NEWPROJ, NEWGROUP, or NEWTYPE for LMRENAME.

Explanation: A new name was not supplied for the LMRENAME command. One or more of the following parameters must be supplied: NEWPROJ, NEWGROUP, NEWTYPE.

User Response: Specify at least one of the values used to form the new data set name.

System Action: The name of the data set is not changed.

ISRLS191 Invalid new name - 'aaaaaaaa' specified for 'bbbbbbbb' is an invalid name.

Explanation: The value aaaaaaaa for the bbbbbbbb parameter forms an invalid data set name.

User Response: Change the value for the bbbbbbbb parameter to specify a value that will create a valid data set name.

System Action: The data set is not renamed.

ISRLS192 New name same as old - New ISPF library name specified for LMRENAME is the same as old name.

Explanation: The values specified for LMRENAME results in the new data set name being the same as the old data set name.

User Response: If the data set is to be renamed, specify values that will result in a name different from the original data set name.

System Action: The data set is not renamed.

ISRLS193 Alias name not supported - LMRENAME does not support renaming alias data sets.

Explanation: The data set name specified for renaming using LMRENAME must not be an alias.

User Response: Specify a non-alias data set name.

System Action: The data set is not renamed.

ISRLS194 Catalog unavailable - Catalog does not exist, is not open, or do not allocate bit is on.

Explanation: LMRENAME could not get access to the catalog. One of the following conditions may exist:

- The catalog does not exist.
- The catalog is not open.
- The do not allocate bit is on.

User Response: Verify that both data sets specified to the LMRENAME service can be accessed through the catalog. Notify the system programmer of any catalog problems.

System Programmer Response: Ensure that the catalog for the data sets specified to the LMRENAME service exists, is open, and that the do not allocate bit is not set.

System Action: The data set is not renamed.

ISRLS195 Authorization failed - The user is not authorized to perform the operation.

Explanation: The user is not authorized to update the catalog with a new data set name.

User Response: Verify that you have authority to update the data set name in the catalog.

Programmer Response: Ensure that the user has authority to update the data set name in the catalog.

System Action: The data set is not renamed.

ISRLS196 Name already catalogued - Entire or partial name already catalogued.

Explanation: The new name for the data set already exists in the catalog.

User Response: Change the parameters to the LMRENAME service to specify a new name that is unique.

System Action: The data set is not renamed.

ISRLS197 Index does not exist - The index structure necessary to catalog the data set does not exist.

Explanation: The needed index structure to catalog the new data set name does not exist.

User Response: Contact the system programmer to check that the catalog for the new data set name is properly set up.

System Programmer Response: Ensure that the index structure is set up for the catalog that will contain the new data set name.

System Action: The data set is not renamed.

ISRLS198 No space in catalog - There is insufficient space on the catalog data set.

Explanation: There is not enough space in the catalog that would contain the new data set name to add it to the catalog.

User Response: Notify the system programmer that the catalog does not have enough space.

System Programmer Response: Ensure that the catalog for the new data set name is large enough.

System Action: The data set is not renamed.

ISRLS199 Uncatalog error - Uncatalog failed for data set *aaa(44)*.

Explanation: The old data set name *aaa(44)* could not be uncataloged because it could not be found in the catalog.

User Response: Verify that the old data set name was specified correctly.

System Programmer Response: Ensure that there are no problems with the catalog for the old data set name.

ISRLS200 Data set not catalogued - Catalog error, Rtn code=aaaaaaaa (dec), r0=bbbbbbbb (hex), r1=cccccccc (hex).

Explanation: An error occurred while attempting to catalog or uncatalog a data set.

User Response: Contact the system programmer.

System Programmer Response: Ensure that the catalogs for both the new and old data set names are available to users for both read and update accesses.

ISRLS201 DSCB not on VTOC - The VTOC does not contain the format-1 DSCB for data set to be renamed

Explanation: The format-1 DSCB for the old data set name could not be found in VTOC of the volume where the catalog indicated that the data set exists.

User Response: Notify the system programmer.

System Programmer Response: Verify that the catalog information for the data set is correct, and that the VTOC for the volume containing the data set is correct.

ISRLS202 Data set pswd protected - Rename failed. Data set is password protected.

Explanation: The data set is password protected and cannot be renamed without the password.

User Response: Use option 3.2 or another utility that supports specifying the password of the old data set to rename the data set.

ISRLS203 New name already exists - A data set with the new name already exists on the volume.

Explanation: A data set with the same name as the new data set name already exists on the same volume. The existing data set may be uncataloged.

User Response: Either remove the existing data set with the same name as the new data set name, or specify a different new name.

ISRLS204 Permanent I/O error - Permanent I/O error, invalid format-1 DSCB found, or error from CVAF.

Explanation: A permanent I/O error occurred when accessing the format-1 DSCB in the VTOC of the volume of the data set that is being renamed.

User Response: Notify the system programmer.

System Programmer Response: Check the volume for I/O errors.

ISRLS205 Volume not mounted - Volume not mounted or no device available to mount the volume.

Explanation: The volume that contains the data set being renamed is not mounted to the system.

User Response: Mount the volume containing the data set.

PDF Messages

ISRLS206 **Volume not mounted - The operator is unable to mount the volume.**

Explanation: The volume that contains the data set being renamed is not mounted to the system. The mount request failed.

User Response: Contact the system operator to determine the reason that the volume could not be mounted.

ISRLS207 **Data set in use - Data set not renamed because it is being used.**

Explanation: The data set is currently allocated to a ddname.

User Response: Ensure that you do not have the data set allocated to a ddname and that other users are not using the data set.

ISRLS208 **Authorization failed - Data set is RACF protected. The user is not alter authorized.**

Explanation: The user does not have sufficient authority to rename the data set. ALTER authority is required for data sets that are RACF protected.

User Response: Ensure that you are given sufficient authority to rename the data set. Authority is required for both the old and new data set names.

ISRLS209 **Rename error - Rename error, Rtn code=aaaaaaaa (dec), status code=bbbbbbbb (dec).**

Explanation: The rename service failed with return code aaaaaaaaa and status code bbbbbbbb.

User Response: Contact the system programmer.

System Programmer Response: Verify that the catalog for the new and old data set names and the VTOC for the volume containing the data set can be read and updated.

ISRLS211 **Invalid ISPF libraries - Concatenated libraries must have same project and type values.**

Explanation: All data sets in the ddname concatenation must have the same project (high level qualifier) and type (last qualifier).

User Response: Ensure that the data sets concatenated to the ddname all have the same project and type values.

ISRLS212 **Members not replaced - aaaaaaaaa members not replaced, bbbbbbbb members ccccccc.**

Explanation: Members of the same name exist in the source and target data sets. The members with the same name as those in the target data set were not replaced since the REPLACE option was not specified.

User Response: Either specify the REPLACE option or specify a TOMEM name that does not match an existing member in the target data set.

ISRLS213 **'To' member in use - aaaaaaaaa members not bbbbbbbb, ccccccc members bbbbbbbb**

Explanation: Target members of the copy or move were in use.

User Response: Ensure that you or another user are not editing or in some other way using the member that is the target of the operation.

ISRLS214 **'From' member in use - aaaaaaaaa members not bbbbbbbb, ccccccc members bbbbbbbb**

Explanation: Members were not copied or moved since they were in use.

User Response: Ensure that the members in the FROM data set are not in use by edit or another utility.

ISRLS260 **Group not activated - LMHIER - group was found but not activated in hierarchy.**

Explanation: No explanation available at this time.

ISRLS261 **Project not found - LMHIER - project was not found in hierarchy.**

Explanation: No explanation available at this time.

ISRLS262 **Invalid parameter value - LMHIER - 'aaaaaaaa' is not a valid parameter value.**

Explanation: No explanation available at this time.

ISRLS263 **Severe error occurred - LMHIER - a severe error occurred while processing request.**

Explanation: No explanation available at this time.

ISRLS264 **Group not found - LMHIER - group was not found in hierarchy.**

Explanation: No explanation available at this time.

ISRLS265 **VDEFINE error - LMHIER - a severe error occurred during VDEFINE.**

Explanation: No explanation available at this time.

ISRLS270 **Invalid control type - LMREVIEW - control type must be LIBRARY or MEMBER.**

Explanation: No explanation available at this time.

ISRLS271 **Data set or data ID req. - LMREVIEW - data set name or data-id is required for output data set.**

Explanation: No explanation available at this time.

ISRLS272 **Incompatible parameters - LMREVIEW - data set name and data-id cannot both be used.**

Explanation: No explanation available at this time.

ISRLS273 **Invalid data set name - LMREVIEW - data set name is not valid.**

Explanation: No explanation available at this time.

ISRLS274 **Data-id does not exist - LMREVIEW - use LMINIT service to create a data-id.**

Explanation: No explanation available at this time.

ISRLS275 **Data-id is not open - LMREVIEW - use LMOPEN service to open a data-id.**

Explanation: No explanation available at this time.

ISRLS276 **Project name required - LMREVIEW - enter name of controlled project.**

Explanation: No explanation available at this time.

ISRLS277 **Group name required - LMREVIEW - enter name of controlled group.**

Explanation: No explanation available at this time.

ISRLS278 **Invalid group name - LMREVIEW - group name must be 1-8 alphanumeric characters, the first alphabetic.**

Explanation: No explanation available at this time.

ISRLS279 **Type required - LMREVIEW - enter controlled type.**

Explanation: No explanation available at this time.

ISRLS280 **Invalid type - LMREVIEW - type must be 1-8 alphanumeric characters, the first alphabetic.**

Explanation: No explanation available at this time.

ISRLS281 **Member name required - LMREVIEW - member name is required if member controls requested.**

Explanation: No explanation available at this time.

ISRLS282 **Invalid member name - LMREVIEW - member must be 1-8 alphanumeric characters, the first alphabetic.**

Explanation: No explanation available at this time.

ISRLS283 **DATAMEMB required - LMREVIEW - output data member is required if data ID is partitioned.**

Explanation: No explanation available at this time.

ISRLS284 **Datamemb invalid - LMREVIEW - data member must be 1-8 alphanumeric characters, the first alphabetic.**

Explanation: No explanation available at this time.

ISRLS285 **Data-id is concatenation - LMREVIEW - data ID must be for a single library.**

Explanation: No explanation available at this time.

ISRLS286 **Invalid project name - LMREVIEW - project must be 1-8 alphanumeric characters, the first alphabetic.**

Explanation: No explanation available at this time.

ISRLS287 **Datamemb not allowed - LMREVIEW - output data set is sequential.**

Explanation: No explanation available at this time.

ISRLS288 **Datamemb not allowed - LMREVIEW - data set has member name imbedded.**

Explanation: No explanation available at this time.

ISRLS289 **Gen load failed - LMREVIEW - Gen load of ISRLALIN failed.**

Explanation: No explanation available at this time.

PDF Messages

ISRLS290 **Data not open for output - LMREVIEW - output data set must be open for output.**

Explanation: This message is self-explanatory.

User Response: Contact the responsible programmer.

Programmer Response: Change the code issuing the LMREVIEW to open the output data set for OUTPUT.

ISRLS291 **Data set is a PDSE - A PDSE does not need to be compressed.**

Explanation: A compress was issued against a PDSE data set. PDSE data sets do not require a compress.

User Response: Contact the responsible programmer.

Programmer Response: Before issuing the LMCOMP service, determine if the data set is a PDSE.

ISRLS300 **Write failed with abend - Abend code of 'aaaaaaaa' during write. See system message for details.**

Explanation: A data set full condition caused an abend.

User Response: This message is most likely the result of a PDF service invocation. Contact the responsible programmer.

Programmer Response: Determine the service call that was invoked when the abend occurred. Possible services are: LMPUT, LMCOPY, LMPROM, and LMACT. Check the data sets used by the service for space. Reallocate the data sets with more space, if possible.

ISRLS301 **Close failed with abend - Abend code of 'aaaaaaaa' during close. See system message for details.**

Explanation: A data set close resulted in an abend.

User Response: This error is most likely the result of an PDF service call that issued a close data set command. Contact the responsible programmer.

Programmer Response: Determine the PDF service call that resulted in the abend. Check the data set. If you are unable to discover the reason for the close abend, contact your system programmer.

System Programmer Response: Check the data set and packs. If you are unable to discern the reason for the close abend, contact IBM support.

ISRLS302 **Unrecoverable I/O error - An unrecoverable I/O error was detected during a write request.**

Explanation: An I/O error occurred during a write to data set request.

User Response: If this is as a result of a PDF service request, contact the responsible programmer.

Programmer Response: Determine the PDF service and the data set(s) in use. Attempt to write to the data set without using the service. If you are able to do this, try the service again. If the failure recurs, contact IBM support.

ISRLS303 **STOW failed with abend - Abend code of 'aaaaaaaa' during STOW. See system message for details.**

Explanation: A STOW procedure resulted in an abend.

User Response: Follow the recommendations in the *System Messages* manual.

ISRLS304 **Write failed RECFM error - Invalid record format specified for output data set.**

Explanation: A write to a data set failed because the output data set is of an invalid record format.

User Response: If you can identify the output data set, reallocate it with an acceptable record format; otherwise, contact the responsible programmer.

Programmer Response: Reallocate the data set with the correct record format.

ISRLS305 **Write failed on pack - Invalid to pack undefined records.**

Explanation: An attempt was made to pack a data set that was allocated as a undefined record format.

User Response: If this message is a result of a PDF service call, contact the responsible programmer.

Programmer Response: Determine the record format of the data set before issuing the service call.

ISRLS306 **Write failed on pack - Records already in packed format.**

Explanation: The data set is already packed.

User Response: If this message is the result of a service call, contact the responsible programmer.

Programmer Response: Eliminate unnecessary pack requests.

ISRLS307 **Started task ISPLOG fail - Previous write to started task's ISPLOG failed.**

Explanation: The started task attempted to write to the ISPLOG but could not.

User Response: Contact the system programmer.

System Programmer Response: Determine if the

started task has authority to write to the ISPLOG data set.

ISRLS308 **Started task ISPLOG fail - Write to started task isplog abended with 'aaaaaaaa'.**

Explanation: An abend occurred on the write to the started task's ISPLOG.

User Response: Follow the recommendations in the system messages manual.

ISRLS309 **Internal program error. - STAE failed during initialization in module 'aaaaaaaa'**

Explanation: An internal error occurred within an PDF module.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRLS310 **IEBCOPY interface failed - The listing data set aaa(44) could not be allocated, opened or written to.**

Explanation: This is an informational message.

ISRLS311 **Data set not partitioned - Data set for the compress is not a partitioned one.**

Explanation: The compress command is allowed only for partitioned data sets.

ISRLS312 **Service not available - Authorized IEBCOPY service not available.**

Explanation: An attempt to attach IEBCOPY resulted in failure.

User Response: Contact your system programmer.

System Programmer Response: Verify that IEBCOPY exists and that the user has proper authority.

ISRLS313 **Compress not done - Exit return code indicates data set not eligible for compression.**

Explanation: Your site-developed compress exit determined the data set was not eligible for compression.

User Response: Contact the responsible programmer.

Programmer Response: Validate the compress exit.

ISRLS314 **Reserve failed - Unable to reserve the DASD volume at this time.**

Explanation: This is an informational message.

User Response: Try this operation again at a later time.

ISRLS315 **Error on write - Error writing IEBCOPY control cards.**

Explanation: An attempt at writing IEBCOPY control cards has failed.

User Response: Contact your system programmer.

System Programmer Response: Determine cause for IEBCOPY failure.

ISRLS316 **Open error - Data set is already opened. It cannot be opened during compression.**

Explanation: Another task has opened the data set.

User Response: Try again later.

ISRLS317 **Invalid disposition - Data set must be allocated exclusively. Use ENQ(EXCLU) in LMINIT service.**

Explanation: The data set was not allocated exclusively as required by the LMINIT service.

User Response: Contact the programmer responsible for coding the LMINIT service.

Programmer Response: Validate the program issuing the LMINIT service.

ISRLS318 **Data set unmovable - Unmovable data sets cannot be compressed. Compress aborted.**

Explanation: Compress alters the location of members within PDS storage. Because your PDS is unmovable, the compression cannot take place.

ISRLS319 **Concatenation exists - Concatenated libraries are not allowed with the LMCOMP service.**

Explanation: This is an informational message.

ISRLS320 **Authorization failed - You are not authorized to use the IEBCOPY service.**

Explanation: This message is self-explanatory.

User Response: If you feel you require authorization, contact your system programmer.

System Programmer Response: Give the user the necessary authorization, if appropriate.

PDF Messages

ISRLS321 IEBCOPY interface failed - Control card data set could not be allocated or opened.

Explanation: ISPF was unable to allocate or open the temporary data set that holds IEBCOPY control cards.

User Response: Reissue the compress or MOVE or COPY request. If the problem recurs, contact your system programmer.

System Programmer Response: This is most likely either an authorization failure or a system failure. Verify the user's authorization. Verify that a system failure did not occur.

System Action: If a system failure occurred, correct the failure.

ISRLS322 LMCOMP recursion error - Error attempting to use LMCOMP in a recursive fashion.

Explanation: Your installation-defined compress user exit routine identified a recursion error.

User Response: Contact the responsible programmer.

Programmer Response: Verify the compress exit logic.

ISRLS323 Compress failed - ISPF was unable to compress specified data set.

Explanation: ISPF received a non-zero return code from IEBCOPY when attempting to compress a data set through the LMCOMP service.

User Response: The IEBCOPY messages were written to DDNAME ISPLSTx (where x is the logical screen number that the request was issued from) if the ISPLSTx DDNAMEs were preallocated before entering ISPF, or to a data set named 'user ID.SPFLISTx.CNTL'. Refer to these messages for details on the IEBCOPY failure.

ISRLS324 Compress exit error - Unable to allocate data set while using the compress exit.

Explanation: Your installation-defined user exit issued a data set allocation error.

User Response: Contact the responsible programmer.

Programmer Response: Verify the data set allocation logic in your compress exit.

ISRLS325 Compress exit error - Data set specified not cataloged.

Explanation: Your installation-defined compress exit indicated a data set catalog error.

User Response: Contact the responsible programmer.

Programmer Response: Verify that all data sets used

by the exit exist and are cataloged, if applicable.

ISRLS326 Compress exit error - Error in compress exit, ISPF will attempt to continue.

Explanation: Your installation-defined compress exit issued an error.

User Response: Contact the responsible programmer.

Programmer Response: Determine the compress exit failure.

ISRLS327 Compress exit error - Bad return from compress exit. Error unknown.

Explanation: Your installation-defined compress exit issued an unknown return code.

User Response: Contact the responsible programmer.

Programmer Response: Determine the reason for the failure.

ISRLS328 Compress exit error - Unable to execute compress exit.

Explanation: ISPF was unable to execute your installation-defined compress exit.

User Response: Contact the responsible programmer.

Programmer Response: Verify the user exit exists and can be accessed.

ISRLS329 Severe error - Unable to continue LMCOMP service. Compress aborted.

Explanation: A severe error caused the compress to be aborted.

User Response: Contact your system programmer.

System Programmer Response: This is likely to be the result of a system failure. Isolate the cause of the error.

ISRLS331 Directory error - Directory error on member 'aaaaaaaa'.

Explanation: An attempt to STOW the member failed.

User Response: Contact your system programmer.

System Programmer Response: Check for a system failure, such as a faulty pack.

ISRLS332 IEBCOPY failed - IEBCOPY failed during copy, IEBCOPY error messages were previously displayed.

Explanation: A non-zero return code was returned from IEBCOPY during the Move or Copy operation. The IEBCOPY error listing previously displayed.

User Response: Refer to the IEBCOPY listing and documentation for assistance in debugging the error.

ISRLS333 Directory full - Directory full; unable to STOW member 'aaaaaaa'.

Explanation: The directory entries for the data set have been filled.

User Response: If you are able:

- Copy the allocation attributes of the data set.
- Allocate a new data set.
- Copy the members.
- Delete or rename the old data set.
- Name the new data to the previous name of the old data set.

ISRLS334 RECFM = U not supported - Undefined record formats are not supported in the 'aaaaaaa' service.

Explanation: Record format U (undefined) is not allowed for the aaaaaaa. service.

User Response: Determine the correct record format for this data set.

ISRLS335 IEBCOPY failed - IEBCOPY failed during copy. An IEBCOPY listing was created and is allocated to the ddname reflected by SHARED pool variable ZCMPLSTF.

Explanation: A non-zero return code was returned from IEBCOPY during the Move or Copy operation. PDF allocated the IEBCOPY error listing to an internally generated ddname, and placed the ddname into ISPF dialog variable ZCMPLSTF. The error list can be displayed by doing the following:

- Issue a VGET from the SHARED pool for variable ZCMPLSTF
- Issue an LMINIT, passing the value of ZCMPLSTF in the LMINIT ddname parameter.
- Issue the BROWSE service, passing the data-id created by LMINIT

RE>User response follows

User Response: Refer to the IEBCOPY listing and documentation for assistance in debugging the error.

ISRLS336 Invalid parameters - The DELETE keyword must be specified alone.

Explanation: Only the keyword DELETE is allowed.

Programmer Response: Specify only the DELETE keyword.

ISRLS337 Invalid open - Data set not opened for input.

Explanation: The data set was opened but not for input.

Programmer Response: If the LMMOPEN service was used, verify that the data set was opened for input.

ISRLS338 Data set not partitioned - Sequential data sets are not valid with the LMMSTATS service.

Explanation: The LMMSTATS service requires that the data set be partitioned.

User Response: Reallocate the data set as partitioned.

ISRLS339 Compress failed - Compress done by the compress exit failed.

Explanation: The installation-written compress exit failed.

User Response: Attempt the compress again. If the failure recurs, contact your system programmer.

System Programmer Response: Verify that no system failures occurred.

ISRLS340 Invalid record format - An undefined record format can only exist as a partitioned data set.

Explanation: A record format of U is only valid for partitioned data sets.

User Response: Verify that the number of directory entries is greater than 0.

ISRLS341 Open error - FROM sequential data sets cannot be open prior to using LMMOVE.

Explanation: The FROM data set was opened prior to the LMMOVE service call.

User Response: Contact the responsible programmer.

Programmer Response: Verify that a previous service did not leave the FROM data set open.

ISRLS342 Data set open for output - "From" data set must be opened for input.

Explanation: The FROM data set was opened for output instead of input.

User Response: Contact the responsible programmer.

Programmer Response: Correct the service call.

PDF Messages

ISRLS343 **DISP=MOD invalid - Disposition of mod not allowed for packed data sets.**

Explanation: Packed data sets are not allowed a disposition of MOD.

User Response: Either change the disposition or remove the pack request.

ISRLS344 **Pack failed - Specifying DISP=MOD is invalid if "to" data set has packed data.**

Explanation: When using LMCOPY and LMMOVE services and appending data to a sequential data set by using a TO data set disposition of MOD, the target output data set cannot be an existing data set that contains packed data.

User Response: Either unpack the data in the target sequential data set, or specify a different target data set that is not packed.

ISRLS345 **Read error on get - Unable to read the first record from the target sequential file.**

Explanation: When copying to a sequential data set, PDF reads the first record of that data set to see if it contains packed or unpacked data. PDF encountered an I/O error while attempting to read that first record and cannot continue your request.

User Response: Contact your system programmer for assistance determining the cause of the I/O error.

ISRLS348 **Invalid record format - The "from" or "to" data set has RECFM = U. They must both be U.**

Explanation: If either the FROM or TO data set has a record format of U (undefined), then both data sets must have record format U.

User Response: Reallocate one of the data sets or forgo the MOVE/COPY.

ISRLS349 **Pack error - Packing is not allowed with undefined record formats.**

Explanation: A pack option cannot be requested for data sets whose record format is U (undefined).

User Response: Remove the pack request from the service.

ISRLS350 **Invalid option - Lock keyword is not allowed for LMMOVE.**

Explanation: The keyword LOCK is not allowed for this service.

User Response: Remove the LOCK keyword.

ISRLS351 **Data set unmovable - Input data set cannot be moved.**

Explanation: Unable to move this data set.

User Response: Check that the data set you are attempting to move is not the input data set.

ISRLS352 **Output blksize too small - Output data set block size must be equal or greater than input.**

Explanation: A MOVE or COPY has been requested in which the TO data set has a smaller block size than the FROM data set.

User Response: Reallocate the TO data set or choose another data set.

ISRLS354 **'aaaaaaaa' terminated - 'aaaaaaaa' has been terminated due to truncation continue processing.**

Explanation: Some records may be truncated in the TO data set due to block size incompatibility.

User Response: Either accept the truncation or cancel the action.

ISRLS355 **Member name is blank - Input member name must be specified for partitioned data sets.**

Explanation: An input data set member name must be specified.

User Response: Specify the member to MOVE or COPY.

ISRLS356 **Member name is required - A new member name must be specified when from data set is sequential and to data set is partitioned.**

Explanation: An output member name for partitioned data sets must be specified.

User Response: Specify the output member to MOVE or COPY.

ISRLS357 **Member name not allowed - Member name 'aaaaaaaa' not allowed with a sequential file.**

Explanation: A sequential file does not contain members.

User Response: Blank out the member name.

ISRLS358 **Invalid data sets - Same data sets not allowed when processing 'aaaaaaaa' service.**

Explanation: The TO and FROM data set names are identical.

User Response: Correct one of the data set names.

ISRLS359 **Concatenation is invalid - The "to" data ID contains concatenated libraries. This is not allowed.**

Explanation: Concatenated libraries are not allowed for the TO data set.

User Response: Contact the responsible programmer.

Programmer Response: Correct the concatenation error.

ISRLS360 **New output name required - TO data set name and From data set name are the same. Enter a different TO data set name, or enter a member name (the FROM member will be copied/moved and renamed to the new member name).**

Explanation: The TO data set name is the same as the FROM data set name or blank.

User Response: Specify a TO data set name that is different from the FROM data set name. Or enter a member name (the member will be renamed).

ISRLS361 **Member not found - Member 'aaaaaaaa' not found in specified input library.**

Explanation: The member does not exist in the input library.

User Response: Make sure the specified member name is correct.

ISRLS362 **Open error - 'aaaaaaaa' service requires the "to" data IDs not to be opened.**

Explanation: The specified service requires that the TO data set be closed when the service is invoked.

User Response: Contact the responsible programmer.

Programmer Response: Issue an LMFREE for the TO data ID before invoking the service.

ISRLS363 **Concatenation is invalid - Concatenated libraries are not allowed with the 'aaaaaaaa' service.**

Explanation: The specified service does not allow concatenated libraries.

User Response: Specify a library that is not part of a concatenation.

ISRLS364 **Output name not allowed - Output name 'aaaaaaaa' not allowed when using member lists.**

Explanation: The TO member name is not allowed when using member lists.

User Response: Remove the TO member name.

ISRLS365 **I/O error or BLDL - I/O error or BLDL on member build.**

Explanation: A severe internal error has occurred.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRLS366 **ISPF library required - Controlled ISPF library required with lock function.**

Explanation: A controlled ISPF library is required for the lock function.

User Response: Specify a controlled ISPF library.

ISRLS367 **Library required - Controlled ISPF library required. Sequential data set not allowed.**

Explanation: Sequential data sets are not allowed with the LOCK parameter.

User Response: Specify a controlled ISPF library.

ISRLS368 **Invalid "to" library - "To" library must not be controlled.**

Explanation: The TO library must not be a controlled ISPF library.

User Response: Specify a data set that is not a controlled ISPF library.

ISRLS369 **No members in data set - The partitioned data set specified contains no members.**

Explanation: There are no members in the partitioned data set.

User Response: Specify a partitioned data set that contains members.

ISRLS370 **Seq. data set invalid - Use partitioned data set, if "from" side has multiple members.**

Explanation: The TO data set must be partitioned if the FROM data set has multiple members.

User Response: Specify a partitioned data set for the TO data set.

PDF Messages

ISRLS371 **Invalid format parameter - Format value 'aaaaaaaa' is not valid. Specify YES, NO, or blank.**

Explanation: The value specified for the FORMAT parameter is not valid.

User Response: Specify YES, NO, or blank for the value of the FORMAT parameter.

ISRLS372 **Member name not allowed - Member name not allowed when processing index print request.**

Explanation: Do not specify a member name when printing an index listing.

User Response: Remove the member name and retry.

ISRLS373 **Sequential not supported - Sequential data sets are not supported with the index option.**

Explanation: The index option does not support sequential data sets.

User Response: Use the index option with a partitioned data set.

ISRLS374 **Member name not allowed - A member name or pattern is invalid with sequential data sets.**

Explanation: A member name or pattern cannot be specified for sequential data sets.

User Response: Either remove the member name or specify a partitioned data set.

ISRLS375 **Member must be specified - A member, pattern or * must be specified with partitioned data sets.**

Explanation: A member name, pattern, or an asterisk must be specified if the data set is partitioned.

User Response: Either specify a member name, pattern, or an asterisk, or specify a sequential data set.

ISRLS376 **No members match pattern - Pattern 'aaaaaaaa' contains no matching members.**

Explanation: This is an informational message.

ISRLS377 **Print failed - Unable to write to the listing data set.**

Explanation: The print failed because it was unable to write to the listing data set.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRLS378 **Print failed - Unable to allocate listing data set.**

Explanation: The print failed because the listing data set could not be allocated.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRLS379 **Member(s) empty - 'aaaaaaaa' member(s) processed contained no records.**

Explanation: This is an informational message.

ISRLS440 **Data set is empty - Data set contains no records to print.**

Explanation: The data set requested for printing contains no records.

User Response: Specify a data set that contains records.

ISRLS442 **Invalid data-id - No data set is associated with the specified data-id.**

Explanation: There is no data set associated with the specified data-id.

User Response: Issue an LMINIT and an LMOPEN to associate the data set with the data-id, and open the data set.

ISRLS443 **Severe error - The PDS directory block size exceeds a maximum of 256.**

Explanation: A severe error occurred because the PDS directory block size is greater than 256.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRLS444 **Data set not partitioned - LMMDISP requires the data set to be a partitioned data set.**

Explanation: The data set is not partitioned; LMMDISP requires a a partitioned data set.

User Response: Specify a partitioned data set.

ISRLS445 **Severe error - An open error occurred while building the member list.**

Explanation: An open error occurred while building the member list.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRLS446 **Severe error - An I/O error occurred while building the member list.**

Explanation: An I/O error occurred while building the member list.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRLS447 **Severe error - A BLDL error occurred while building the member list.**

Explanation: A BLDL error occurred while building the member list.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRLS448 **Severe error - A severe BLDL error occurred while getting the next selection.**

Explanation: A severe BLDL error occurred while getting the next selection.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRLS450 **Severe error - A translation or truncation error occurred while accessing dialog variables.**

Explanation: A translation or truncation error occurred while accessing dialog variables.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRLS451 **Empty member list - The specified data-id produces an empty member list.**

Explanation: The partitioned data set contains no members.

User Response: Specify a data set that contains members.

ISRLS452 **No member list - A member list does not exist for this data set.**

Explanation: The data set does not have a member list.

User Response: Specify a data set that contains members.

ISRLS453 **End of selections - No more members were selected from this member list.**

Explanation: This is an informational message.

ISRLS454 **End of display - END or RETURN was entered to terminate the member list display.**

Explanation: This is an informational message.

ISRLS455 **Member exists - The specified member already exists in the member list.**

Explanation: This is an informational message.

ISRLS456 **Member not found - The specified member cannot be found in the data set concatenation.**

Explanation: The specified member cannot be found in the concatenation of data sets.

User Response: Specify a member that exists in the data set concatenation.

ISRLS457 **No matches found - No members matched the specified pattern.**

Explanation: This is an informational message.

ISRLS460 **Keyword missing - Keyword MEMBER is required for use with option ADD.**

Explanation: A member name must be specified with the ADD option of the LMMDISP service.

User Response: Specify a member name for the ADD option of the LMMDISP service.

ISRLS462 **Invalid OPTION value - The valid values for keyword OPTION are DISPLAY, GET, ADD, PUT, and FREE.**

Explanation: An invalid value was specified for the OPTION keyword of the LMMDISP service.

User Response: Specify DISPLAY, GET, ADD, PUT, or FREE for the OPTION keyword.

ISRLS463 **Invalid panel width - The member list panel ZDATA area requires a width of 80 characters.**

Explanation: The ZDATA area of the member list panel must be 80 characters.

User Response: Specify a member list panel with a ZDATA area that is 80 characters.

PDF Messages

ISRLS466 **No ZDATA area - The member list display panel must contain a ZDATA area.**

Explanation: There is no ZDATA area specified on the member list display panel.

User Response: Specify a member list display panel that contains a ZDATA area.

ISRLS467 **Invalid CURSOR value - The valid values for keyword CURSOR are ZCMD, ZLLCMD, and ZLUDATA.**

Explanation: The value specified for the CURSOR keyword of the LMMDISP service is invalid.

User Response: Specify ZCMD, ZLLCMD, or ZLUDATA for the CURSOR keyword.

ISRLS468 **Invalid COMMANDS value - The valid values for keyword COMMANDS are S and ANY.**

Explanation: The value specified for the COMMANDS keyword of the LMMDISP service is invalid.

User Response: Specify S or ANY for the COMMANDS keyword.

ISRLS469 **Invalid STATS value - The valid values for keyword STATS are YES and NO.**

Explanation: The value specified for the STATS keyword of the LMMDISP service is invalid.

User Response: Specify YES or NO for the STATS keyword.

ISRLS470 **Invalid member list - You may not use a member list created by LMMDISP with the LMMLIST service.**

Explanation: Member lists generated by LMMDISP cannot be used with LMMLIST.

User Response: Free the member list using OPTION(FREE) when switching between LMMLIST and LMMDISP with the same data-id.

ISRLS471 **Invalid member list - You may not use a member list created by LMMLIST with the LMMDISP service.**

Explanation: Member lists generated by LMMLIST cannot be displayed by LMMDISP.

User Response: Free the member list using OPTION(FREE) when switching between LMMLIST and LMMDISP with the same data-id.

ISRLS472 **Data set not open - LMMDISP requires prior successful completion of LMOPEN.**

Explanation: The data set is not open. LMOPEN must be issued for the data set before calling the LMMDISP service.

User Response: Call the LMOPEN service for the data set before calling LMMDISP.

ISRLS473 **Invalid MEMBER name - The value for keyword MEMBER contains invalid characters.**

Explanation: There are invalid characters in the value specified for the MEMBER keyword.

User Response: Specify a valid pattern for the member name. Asterisk and percent are allowed in the pattern.

ISRLS474 **Invalid PANEL name - The value for keyword PANEL contains invalid characters.**

Explanation: There are invalid characters in the value specified for the PANEL keyword.

User Response: Correct the invalid characters.

ISRLS475 **Invalid FIELD value - The valid values for keyword FIELD are 1 and 9.**

Explanation: The value specified for the FIELD keyword is invalid.

User Response: Specify either 1 or 9 for the FIELD keyword.

ISRLS477 **PQUERY error - A PQUERY error occurred. Contact your system programmer.**

Explanation: An error occurred while using PQUERY.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRLS478 **Panel not found - The specified member list display panel was not found.**

Explanation: The specified member list display panel was not found.

User Response: Specify a display panel that exists.

ISRLS479 **Invalid member name - The value for keyword TOP contains invalid characters.**

Explanation: The value specified for the TOP keyword is invalid.

User Response: Correct the value specified for the TOP keyword.

ISRLS480 **Member not found - The specified member was not found in the member list.**

Explanation: The PUT option of LMMDISP attempted to store data for a member that was not found in the list.

User Response: Contact the responsible programmer.

Programmer Response: Correct the incorrect member name.

ISRLS490 **Promote failed - The "from" library is an SCLM controlled library.**

Explanation: The FROM library is an SCLM-controlled library; LMF cannot promote to it.

User Response: Use SCLM to promote members.

ISRLS491 **Promote failed - The "to" library is an SCLM controlled library.**

Explanation: The TO library is an SCLM-controlled library; LMF cannot promote to it.

User Response: Use SCLM to promote members.

ISRLS492 **Copy/lock failed - The "from" library is an SCLM controlled library.**

Explanation: The FROM library is an SCLM-controlled library and cannot be copied or locked by LMF.

User Response: Use SCLM to copy and lock members.

ISRLT000 **Invalid primary command - 'aaaaaaaa' is not a valid command.**

Explanation: No explanation available at this time.

ISRLT001 **Enter LOCATE parameter - Enter the argument to be located.**

Explanation: No explanation available at this time.

ISRLT002 **Parameter not allowed - No parameter is allowed for the CANCEL command.**

Explanation: No explanation available at this time.

ISRLT003 **Too many parameters - Too many parameters are defined for this command.**

Explanation: No explanation available at this time.

ISRLT004 **Command not recognized - Valid line commands are: I (insert), D (delete), R (repeat).**

Explanation: No explanation available at this time.

ISRLT005 **Command conflict - 'aaaaaaaa' is within range of the D command. Correct either one.**

Explanation: No explanation available at this time.

ISRLT006 **'aaaaaaaa' not found - 'aaaaaaaa' not located.**

Explanation: No explanation available at this time.

ISRLT007 **Delete not allowed - Member has a delete status of "I".**

Explanation: No explanation available at this time.

ISRLT008 **Duplicate found - Duplicate table rows exists. Make changes before saving.**

Explanation: No explanation available at this time.

ISRLT009 **Invalid parameter length - Parameter for LOCATE command cannot be more than 8 characters.**

Explanation: No explanation available at this time.

ISRLT010 **'aaaaaaaa' found - 'aaaaaaaa' is located, and appears on the first line.**

Explanation: No explanation available at this time.

ISRLT011 **Delete not allowed - A member with delete status of "I" is within range of a DELETE command.**

Explanation: No explanation available at this time.

ISRLT012 **Line command invalid - The numeric portion of the line command must be greater than zero.**

Explanation: No explanation available at this time.

ISRLU000 **No members in data set - The PDS specified contains no members.**

Explanation: No explanation available at this time.

PDF Messages

ISRLU001 **Data set aaaaaaaaa - To data set bbbbbbbb.**

Explanation: No explanation available at this time.

ISRLU002 **Not entry level library - 'To ISPF library' must be an entry level controlled library.**

Explanation: No explanation available at this time.

ISRLU003 **Library is deactivated - Control library must be activated before promotion can be done.**

Explanation: No explanation available at this time.

ISRLU004 **Error on member list - Severe error creating member list.**

Explanation: No explanation available at this time.

ISRLU005 **Free error - Severe error freeing input data set.**

Explanation: No explanation available at this time.

ISRLU006 **Close error - Severe error closing input data set.**

Explanation: No explanation available at this time.

ISRLU007 **Invalid name - Reenter a valid name at cursor location.**

Explanation: No explanation available at this time.

ISRLU008 **Required field - Enter a valid name at cursor location.**

Explanation: No explanation available at this time.

ISRLU009 **Not a controlled library - 'To ISPF library' must be a controlled library.**

Explanation: No explanation available at this time.

ISRLU010 *aaaaaaaa*

Explanation: No explanation available at this time.

ISRLU011 **Data set not aaaaaaaaa - Data set was not processed for promotion.**

Explanation: No explanation available at this time.

ISRLU012 **Close error - Cannot close control files.**

Explanation: No explanation available at this time.

ISRLU013 *aaaaaaaa member bbbbbbbb - to data set cccccccc.*

Explanation: No explanation available at this time.

ISRLU014 *aaaaaaaa members bbbbbbbb - to data set cccccccc.*

Explanation: No explanation available at this time.

ISRLU015 **FREEMAIN error - Cannot FREEMAIN control files storage.**

Explanation: No explanation available at this time.

ISRLU016 **No members aaaaaaaaa - No members were processed for promotion.**

Explanation: No explanation available at this time.

ISRLU017 **Severe error in service - Severe error defining ISPF dialog variables.**

Explanation: No explanation available at this time.

ISRLU018 **Severe error in service - Severe error deleting ISPF dialog variables.**

Explanation: No explanation available at this time.

ISRLU019 **Member aaaaaaaaa bbbbbbbb - Member 'aaaaaaaa' is now bbbbbbbb to data set 'ccccccc'.**

Explanation: No explanation available at this time.

ISRLU020 **Invalid select code - Type 's' for select or 'b' for browse in front of the member desired.**

Explanation: No explanation available at this time.

ISRLU022 **Invalid newname - Newname field contains an invalid member name.**

Explanation: No explanation available at this time.

ISRLU023 **Member not found - Selected member is not available for promotion.**

Explanation: No explanation available at this time.

ISRLU024 **BLDL error - Severe error performing BLDL on selected member.**

Explanation: No explanation available at this time.

ISRLU025 **Cannot use 'top' library - 'From' library cannot be a 'top' or 'only' library.**

Explanation: No explanation available at this time.

ISRLU026 **Data set aaaaaaaa - bbbbbbbb aaaaaaaa successfully**

Explanation: No explanation available at this time.

ISRLU027 **to aaaaaaaa.**

Explanation: No explanation available at this time.

ISRLU028 **Promotion error - Multiple messages previously displayed.**

Explanation: No explanation available at this time.

ISRLU029 **'To' lib not cataloged - 'aaaaaaa' was not found in catalog.**

Explanation: No explanation available at this time.

ISRLU030 **Write variables failed - Write variables to shared pool for promote failed.**

Explanation: No explanation available at this time.

ISRLU031 **Promotion not allowed - Promotion user exit validation failed.**

Explanation: No explanation available at this time.

ISRLU032 **aaaaaaa bbbbbbbb - ccccccc(aaaaaaaa) bbbbbbbb successfully**

Explanation: No explanation available at this time.

ISRLU033 **Severe error occurred - Module aaaaaaaa received a return code bbbbbbbb from module ccccccc.**

Explanation: No explanation available at this time.

ISRLU034 **Print failed - Print request failed. list data set may have more details.**

Explanation: No explanation available at this time.

ISRLU035 **Open failed - I/O error occurred trying to open 'from' data set for input.**

Explanation: No explanation available at this time.

ISRLU036 **Delete failed - I/O error occurred trying to open 'from' data set for output.**

Explanation: No explanation available at this time.

ISRLU037 **Delete failed - Permanent I/O error.**

Explanation: No explanation available at this time.

ISRLU038 **Delete failed - Data control block is not open or is open for input.**

Explanation: No explanation available at this time.

ISRLU039 **Delete failed - Insufficient virtual storage is available to perform STOW function.**

Explanation: No explanation available at this time.

ISRLU040 **Open failed - Open failed for selected member.**

Explanation: No explanation available at this time.

ISRLU041 **Region size too small - Insufficient virtual storage to perform BLDL.**

Explanation: No explanation available at this time.

ISRLU042 **Program error in ISPCDB - Module ISRLUPR22 or isrluprs received a return code of 36 from module ISPCDB.**

Explanation: No explanation available at this time.

ISRLU043 **Bad BLDL return code - A bad BLDL return code was returned from module ISPCDB.**

Explanation: No explanation available at this time.

ISRLU044 **Obtain failed - Obtain failed for BLDL on selected member.**

Explanation: No explanation available at this time.

ISRLU045 **I/O error on BLDL - I/O error on BLDL for selected member.**

Explanation: No explanation available at this time.

PDF Messages

ISRLU046 **Promotion failed - Cannot promote from password protected data set.**

Explanation: No explanation available at this time.

ISRLU047 **After exit failed - Member promoted. Exit after promotion failed.**

Explanation: No explanation available at this time.

ISRLU048 **Seq. data set invalid - Use partitioned data set, if "from" member not given.**

Explanation: No explanation available at this time.

ISRLU050 **Library required - Controlled ISPF library required. Sequential data set not allowed.**

Explanation: No explanation available at this time.

ISRLU051 **ISRCFIL not allocated - Control file not allocated to ddname ISRCFIL.**

Explanation: No explanation available at this time.

ISRLU052 **Library not controlled - Unable to lock member. Library "aaaaaaa" is not controlled.**

Explanation: No explanation available at this time.

ISRLU053 **Member already locked - Member "aaaaaaa" is locked by "bbbbbbb".**

Explanation: No explanation available at this time.

ISRLU054 **Controls not active - Controls must be activated before copy and lock performed.**

Explanation: No explanation available at this time.

ISRLU055 **Severe error - see log - Lock failed for member "aaaaaaa". Copy/lock completed for bbbbbbbb members.**

Explanation: No explanation available at this time.

ISRLU056 **Copy and lock failed - Copy failed. Member is still locked with your ID.**

Explanation: No explanation available at this time.

ISRLU057 **ISPF library required - Controlled ISPF library required for lock function.**

Explanation: No explanation available at this time.

ISRLU058 **Invalid "to" library - "To" library must not be controlled.**

Explanation: No explanation available at this time.

ISRLU059 **Unable to lock member - Member "aaaaaaa" exists at a lower level of the hierarchy.**

Explanation: No explanation available at this time.

ISRLU060 **Unable to lock member - Member "aaaaaaa" exists at a lower level. bbbbbbbb members copy/locked.**

Explanation: No explanation available at this time.

ISRLU061 **Severe error - see log - Copy and lock failed for member "aaaaaaa". See log for details.**

Explanation: No explanation available at this time.

ISRLU062 **Member already locked - Member "aaaaaaa" locked by "bbbbbbb". Copy/lock completed for cccccc members.**

Explanation: No explanation available at this time.

ISRLU063 **Lock failed - Requestor is not authorized to access "aaaaaaa".**

Explanation: No explanation available at this time.

ISRLU064 **Lock failed - Requestor is not authorized to access "aaaaaaa". bbbbbbbb members copy/locked.**

Explanation: No explanation available at this time.

ISRLU065 **Lock failed - Promote is in process for member "aaaaaaa".**

Explanation: No explanation available at this time.

ISRLU066 **Lock failed - Promote is in process for member "aaaaaaa". bbbbbbbb members copy/locked.**

Explanation: No explanation available at this time.

ISRLU100 **Invalid option number - Enter one of the listed options.**

Explanation: No explanation available at this time.

ISRLU110	Dynamic allocation error - Unavailable resource with error code <i>aaaaaaaa</i>, press Help key for detail.
Explanation:	No explanation available at this time.

ISRLU111	Dynamic allocation error - Invalid parameter list with error code <i>aaaaaaaa</i>, press Help key for detail.
Explanation:	No explanation available at this time.

ISRLU112	Dynamic allocation error - Environmental error with error code <i>aaaaaaaa</i>, press Help key for detail.
Explanation:	No explanation available at this time.

ISRLU113	Dynamic allocation error - System routine error with error code <i>aaaaaaaa</i>, press Help key for detail.
Explanation:	No explanation available at this time.

ISRLU114	No dynamic allocation - Installation validation routine deny dynamic allocation/unallocation.
Explanation:	No explanation available at this time.

ISRLU115	Catalog error - Already cataloged, VSAM protected, or other reason - <i>aaaaaaaa</i>
Explanation:	No explanation available at this time.

ISRLW001	ISRLW001: LMF started task '<i>aaaaaaaa</i>' initialized.
Explanation:	No explanation available at this time.

ISRLW002	ISRLW002: LMF started task <i>aaaaaaaa</i> has been stopped by user "<i>bbbbbbbb</i>".
Explanation:	No explanation available at this time.

ISRLW003	ISRLW003: LMF unable to establish ESTAE environment in started task <i>aaaaaaaa</i>.
Explanation:	No explanation available at this time.

ISRLW004	ISRLW004: LMF started task <i>aaaaaaaa</i> terminating - restart LMF.
Explanation:	No explanation available at this time.

ISRLW006	ISRLW006: Control file version is not correct for LMF started task <i>aaaaaaaa</i>.
Explanation:	No explanation available at this time.

ISRLW007	ISRLW007: LMF started task name <i>aaaaaaaa</i> is not bound to the control file.
Explanation:	No explanation available at this time.

ISRLW008	ISRLW008: LMF task <i>aaaaaaaa</i> could not be started. Contact system programmer.
Explanation:	No explanation available at this time.

ISRLW009	ISRLW009: Please refer to the Planning and Customizing guide.
Explanation:	No explanation available at this time.

ISRLW014	Invalid control file - The current control file has an invalid ZNAMES member.
Explanation:	No explanation available at this time.

ISRLW015	<i>aaaaaaaa</i> has run out of space.
Explanation:	No explanation available at this time.

ISRLW016	For LMF started task <i>aaaaaaaa</i>..
Explanation:	No explanation available at this time.

ISRLW017	<i>aaaaaaaa</i> has no directory blocks available.
Explanation:	No explanation available at this time.

ISRLW018	<i>aaaaaaaa</i> had a <i>bbbbbbbb</i>abend.
Explanation:	No explanation available at this time.

ISRLW019	The time that this event occurred was <i>aaaaaaaa</i>.
Explanation:	No explanation available at this time.

ISRM000	Specify name or pattern - Command requires a member name or pattern be specified.
Explanation:	The SELECT command requires that a member name or pattern be specified.
User Response:	Reenter the SELECT command with a member name or pattern, or choose another command.

PDF Messages

ISRM001 **Member not found - The requested member was not found in the PDS directory(s).**

Explanation: PDF was unable to locate the member specified.

User Response: Check that the member name was spelled correctly. If the member is known to exist, contact your system programmer.

System Programmer Response: PDF received an RC=4 from a BLDL. Run the appropriate diagnostics against the PDS (or PDSE) directory to verify that the member does exist. If directory problems are found, contact IBM support for the DFP component.

ISRM002 **Invalid member name - Member name specified contains invalid characters.**

Explanation: One or more invalid characters were entered in the member name.

User Response: Check that the member name entered is a character string of up to 8 alphanumeric characters, the first of which is either alphabetic or \$, #, or @.

ISRM003 **Invalid command - Valid member list commands are SELECT, SORT, LOCATE, RESET, REFRESH, SAVE, MLC, and CONFIRM.**

Explanation: A command other than SELECT, SORT, LOCATE, RESET, REFRESH, SAVE, MLC, or CONFIRM was entered.

User Response: Check the spelling of the command entered. Valid member list commands are SELECT, SORT, LOCATE, RESET, REFRESH, SAVE, MLC, or CONFIRM.

ISRM006 **Member name too long - Member name must be less than or equal to 8 characters.**

Explanation: A member name of more than 8 characters was entered.

User Response: Verify the member name entered and ensure it is less than or equal to 8 characters.

ISRM007 **Invalid select code - Use "S" to select or primary command RESET to erase all line commands.**

Explanation: A line command other than S was entered on a BROWSE or EDIT member list.

User Response: Make sure that BROWSE or EDIT is where you want to be. If so, enter S next to the member(s) to be selected, or enter RESET to clear all line commands.

ISRM008 **Invalid panel width - ISRCML requires a panel that is 80 characters wide.**

Explanation: The member list panel specified has a width of fewer than 80 characters.

User Response: Verify that the member list panel being used has a width of 80 characters.

System Programmer Response: Check user's //ISPPLIB concatenation and any LIBDEFs to any panel libraries to ensure that the correct panel is being picked up and that it has a width of 80 characters.

ISRM009 **Pattern too long - Pattern must be less than or equal to 8 characters.**

Explanation: The pattern specified has more than 8 characters.

User Response: Reduce the pattern specified to 8 or fewer characters.

ISRM010 **Invalid sort field - Valid sort fields are NAME, LIB, VV, MM, CRE, CHA, SIZE, INIT, MOD and ID.**

Explanation: An invalid sort field type was specified.

User Response: Enter one of valid listed sort fields.

ISRM011 **Invalid sort field - Valid sort fields are NAME, LIB, SIZE, TTR, ALIAS, AC, and ATTR.**

Explanation: An invalid sort field type was specified.

User Response: Enter one of valid listed sort fields.

ISRM012 **List in sorted order - The member list is already sorted in the specified order.**

Explanation: This is an informational message.

ISRM013 **Panel not found - The specified member list panel could not be found.**

Explanation: The panel specified for the LMMLIST service could not be found.

System Programmer Response: Verify that the panel specified for the LMMLIST service exists in a library that is concatenated to ISPPLIB.

ISRM014 **Invalid PDS directory - The directory block size exceeds a maximum of 256.**

Explanation: The directory for the specified library exceeds the maximum of 256.

System Programmer Response: Allocate a data set with a directory that is less than the maximum of 256.

ISRM015 **Member deleted - The member you selected has been deleted. Please select again.**

Explanation: The user has selected a new action for a member which has been deleted by a previous action.

User Response: No further actions can be performed against a deleted member.

ISRM016 **Members deleted - The members you selected have been deleted. Please select again.**

Explanation: You have selected a new action for a group of members which has been deleted by a previous action.

User Response: No further actions can be performed against a deleted member.

ISRM017 **Invalid pattern - The specified pattern contains invalid characters.**

Explanation: An invalid character was used as part of a pattern.

User Response: Refer to the Guide and Reference, under Using Member Selection Lists for an explanation of member pattern usage.

ISRM018 **No matches - The specified pattern produced no matching members.**

Explanation: This is an informational message.

ISRM019 **Invalid select code - Use select code "s" to select a member.**

Explanation: A selection code other than S was entered.

User Response: The member list for this function only supports the selection code of S.

ISRM020 **Invalid command syntax - The primary command you entered contains invalid syntax.**

Explanation: A syntax error was detected for a primary member list command.

User Response: Valid member list commands are SELECT, SORT, LOCATE, RESET, REFRESH, and SAVE.

ISRM021 **I/O error - An I/O error was encountered while saving the member list.**

Explanation: An I/O error was detected while writing the member list to the ISPF list data set.

System Programmer Response: Verify that the ISPF list data set is allocated and functional.

ISRM022 **List saved - The member list was saved in the ISPF list data set.**

Explanation: This is an informational message.

ISRM023 **List saved - The member list was saved in 'aaaaaaa'.**

Explanation: This is an informational message.

ISRM024 **Authorization failed - You may not use this protected data set. Open 913 abend.**

Explanation: You do not have write authority to the list data set. Contact your system programmer.

System Programmer Response: Update the user's authority level to the allocated list data set.

ISRM025 **Too many sort fields - You may specify up to two fields for use with the SORT command.**

Explanation: Too many parms were entered for the SORT primary command.

User Response: Enter up to two sort fields on the SORT primary command.

ISRM026 **Enter "aaaaaaa" string - The LOCATE command requires you to enter a "aaaaaaa" string.**

Explanation: The LOCATE primary command was entered with no parameter.

User Response: Enter one parameter with the LOCATE primary command.

ISRM027 **Invalid list-id - "aaaaaaa" contains invalid characters.**

Explanation: The supplied list-id is invalid. The list-id is the third qualifier in the data set the member list is to be written to. The format is as follows:
prefix.userid.list-id.MEMBERS

If the data set does not exist, ISPF will create the data set. If the data set exists, it will be written over with the new list.

User Response: Enter a valid data set qualifier.

ISRM028 **Invalid created date - "aaaaaaa" is invalid as a "Created" date.**

Explanation: The member list has been sorted by date created and a locate command has been entered that is not a numeric value.

User Response: Enter a valid date.

PDF Messages

ISRM029 **Invalid changed string - "aaaaaaa" is invalid as a "Changed" date/time**

Explanation: The member list has been sorted by date changed and a locate command has been entered that is not a numeric value.

User Response: Enter a valid date/time

ISRM030 **I/O error - An I/O error occurred while processing the member list SORT command.**

Explanation: An I/O error was detected during BLDL processing against the member list data set.

User Response: Retry the operation.

System Programmer Response: Verify that the data set is functional.

ISRM031 **BLDL error - A BLDL error occurred while processing the member list SORT command.**

Explanation: A BLDL error was detected against the member list data set.

User Response: Retry the operation.

System Programmer Response: Verify that the data set is functional.

ISRM032 **OPEN error - An OPEN error occurred while processing the member list SORT command.**

Explanation: An OPEN error was detected against the member list data set.

User Response: Retry the operation.

System Programmer Response: Verify that the data set is functional.

ISRM033 **No members left - All members have been deleted from the PDS(s).**

Explanation: This is an informational message. All the current members of the PDS have been deleted by a previous action.

ISRM034 **LOCATE command invalid - The member list must be sorted again before you can use the LOCATE command.**

Explanation: This is an informational message.

ISRM035 **Invalid locate string - NX, DATA, OVLY, RU, RN, RF and TEST are the valid LOCATE parameters when a member list is sorted by ATTRIBUTES.**

Explanation: The valid LOCATE parameters are based upon the most recent sort command. When a member list is sorted by attributes, use one of the LOCATE parameters listed.

ISRM036 **Allocation error - An error occurred allocating 'aaaaaaa'.**

Explanation: An error was encountered in allocating the List data set while processing the SAVE primary command.

User Response: Contact your system programmer.

System Programmer Response: Verify that the data set is functional.

ISRM037 **Invalid sort field - Valid sort fields are NAME, LIB, VV, MM, CHA, SIZE, INIT, MOD, and ID.**

Explanation: An invalid SORT primary command parameter was entered.

User Response: Retry the operation with a valid SORT parameter.

ISRM038 **Invalid sort field - Valid sort fields are NAME, LIB, SIZE, TTR, AC, and ATTR.**

Explanation: An invalid SORT primary command parameter was entered.

User Response: Retry the operation with a valid SORT parameter.

ISRM039 **I/O error - An I/O error occurred while saving the member list.**

Explanation: An I/O was encountered while processing the SAVE primary command.

User Response: Retry the operation.

System Programmer Response: Verify that the data set is functional.

ISRM039A **Confirm forced on - Confirm member delete is forced on for default action Delete.**

Explanation: Informational only

ISRM039B **Initial edit macro set - An initial edit macro is defined for actions Edit and View. Enter a "/" in the prompt field for Edit or View Actions to display or change Edit/View entry fields.**

Explanation: Informational only

ISRM040 **Invalid data set name - The specified data set name contains invalid syntax.**

Explanation: A data set qualifier syntax is invalid.

User Response: Correct and reenter the data set name.

ISRM041 **Invalid sort field - Valid sort fields are NAME, VV, MM, CRE, CHA, SIZE, INTT, MOD, and ID.**

Explanation: An invalid SORT primary command parameter was entered.

User Response: Retry the operation with a valid SORT parameter.

ISRM042 **Invalid sort field - Valid sort fields are NAME, SIZE, TTR, ALIAS, AC, and ATTR.**

Explanation: An invalid SORT primary command parameter was entered.

User Response: Retry the operation with a valid SORT parameter.

ISRM043 **Invalid sort field - Valid sort fields are NAME, VV, MM, CHA, SIZE, INIT, MOD, and ID.**

Explanation: An invalid SORT primary command parameter was entered.

User Response: Retry the operation with a valid SORT parameter.

ISRM044 **Invalid sort field - Valid sort fields are NAME, SIZE, TTR, AC, and ATTR.**

Explanation: An invalid SORT primary command parameter was entered.

User Response: Retry the operation with a valid SORT parameter.

ISRM045 **No members selected - None of the members in the member list matched the specified pattern.**

Explanation: This is an informational message.

ISRM046 **Locate string too long - Locate string "aaaaaaa" must be less than or equal to bbbbbbbb characters.**

Explanation: The LOCATE parameter contains too many characters.

User Response: Retry the operation with correct number of characters.

ISRM047 **Invalid LRECL - Data set logical record length must be greater than or equal to 80.**

Explanation: The list-id data set must have a LRECL that is equal to or greater than 80.

User Response: Correct the list-id data set and retry the SAVE operation.

ISRM048 **Error freeing data set - Error freeing the list data set.**

Explanation: The list data set encountered an error while processing a FREE command.

User Response: Contact your system programmer.

System Programmer Response: Verify that the data set is functional.

ISRM049 **Error closing data set - Error closing the data set in which the member list was saved.**

Explanation: An error was encountered while closing the list data set.

User Response: Contact your system programmer.

System Programmer Response: Verify that the data set is functional.

ISRM050 **List-id too long - The list-id must be less than or equal to 8 characters in length.**

Explanation: The SAVE member list primary command allows a list-id as a parameter. The list-id must have 8 or fewer characters.

ISRM051 **Invalid locate string - Enter numeric characters (0-9) for locate string.**

Explanation: The locate parameter must be a valid number, if the list is sorted by LIB, VV, or MM.

User Response: Reissue the LOCATE command with a valid parameter.

PDF Messages

ISRM052 **Invalid locate string - Enter hexadecimal characters (0-9,A-F) for locate string.**

Explanation: The locate parameter must be a valid hex number, if the list is sorted by SIZE, TTR, or AC.

User Response: Reissue the LOCATE command with a valid parameter.

ISRM053 **"*" not supported. - The "*" pattern is not supported for this action.**

Explanation: This message is self-explanatory.

ISRM054 **Select code too long - Only 1 character select codes are valid.**

Explanation: The select primary command allows a member name and a select code as parameters. For normal member list panels, only 1-character select codes are valid.

ISRM055 **Date not numeric - Enter numeric characters for month, day, and year.**

Explanation: The LOCATE command requires that the month, day, and year be expressed as numbers.

User Response: Reissue the LOCATE command with a valid parameter.

ISRM056 **Time not numeric - Enter numeric characters for hour, minute and second.**

Explanation: The LOCATE command requires that the hour, minute and second be expressed as numbers.

User Response: Reissue the LOCATE command with a valid parameter.

ISRM057 **Locate string too long - Changed date must have a length less than or equal to 8.**

Explanation: The LOCATE command requires that the month, day, and year be 2-digit numbers, separated by one character.

User Response: Reissue the LOCATE command with a valid parameter.

ISRM058 **Locate string too long - Changed time must have a length less than or equal to 5.**

Explanation: The LOCATE command requires that the hour and minute be 2-digit numbers, separated by one character.

User Response: Reissue the LOCATE command with a valid parameter.

ISRM059 **Date incomplete - Enter complete date in format YY/MM/DD.**

Explanation: The LOCATE command requires a fully specified date.

User Response: Reissue the LOCATE command with a valid parameter.

ISRP000 **There are no keywords defined for language aaaaaaaa.**

Explanation: This is an informational message. Language aaaaaaaa has no keywords which the editor specifically highlights, so you cannot look at the keyword list.

ISRP001 **Settings for language aaaaaaaa were reset to their original values.**

Explanation: This is an informational message. All of the settings for language aaaaaaaa, including colors, highlighting, intensity, and special characters to highlight were reset to the values they had when the HILITE command was invoked.

ISRP002 **Colors for language aaaaaaaa were reset to their default values.**

Explanation: This is an informational message. All of the settings for language aaaaaaaa, including colors, highlighting, intensity, and special characters to highlight were set to the default values defined by ISPF. The default settings will be saved when you exit the HILITE dialog unless you make further changes or use the CANCEL command or pull-down choice.

ISRP003 **No changes were made to language aaaaaaaa.**

Explanation: This is an informational message. The language dialog for language aaaaaaaa was exited without any changes.

ISRP003A **No changes were made to the FIND string color.**

Explanation: This is an informational message. The FIND string color dialog was ended with the CANCEL command. No changes were made to the FIND string color.

ISRP003B **No changes were made to the Cursor phrase color.**

Explanation: This is an informational message. The cursor phrase color dialog was ended with the CANCEL command. No changes were made to the cursor phrase color.

ISRP003C **No changes were made to the overtyping color.**

Explanation: This is an informational message. The overtyping color dialog was ended with the CANCEL command. No changes were made to the overtyping color.

ISRP004 **Values for language *aaaaaaa* were updated. They will be saved when this application is ended.**

Explanation: This is an informational message. The settings for language *aaaaaaa*, including colors, highlighting, intensity, and special characters to highlight were changed. The changes will be saved when you exit the HILITE dialog unless you make further changes or use the CANCEL command or pull-down choice.

ISRP004A **Values for the overtyping color were updated. They will be saved when this application is ended.**

Explanation: This is an informational message. The settings for overtyping color were changed and will be saved when you exit HILITE dialog unless you make further changes to the overtyping color, or use the CANCEL command or pull-down choice.

ISRP004B **Values for the FIND string highlight color were updated. They will be saved when this application is ended.**

Explanation: This is an informational message. The settings for FIND string highlight color were changed and will be saved when you exit HILITE dialog unless you make further changes to the FIND string highlight color, or use the CANCEL command or pull-down choice.

ISRP004C **Values for the cursor phrase highlight color were updated. They will be saved when this application is ended.**

Explanation: This is an informational message. The settings for cursor phrase highlight color were changed and will be saved when you exit HILITE dialog unless you make further changes to the cursor phrase highlight color, or use the CANCEL command or pull-down choice.

ISRP005 **Color and symbol settings have been saved in the *aaaa* application profile. All other HILITE settings were saved in the edit profile.**

Explanation: This is an informational message. The HILITE command was used to update the behavior of ISPF enhanced edit coloring. The color and symbol settings for the languages have been saved in the

current application profile (*aaaa*). Other settings which affect highlighting, such as ON, OFF, LOGIC, PAREN and the current language determination method were saved in the edit profile.

ISRP006 **All settings have been reset to their original values.**

Explanation: This is an informational message. All enhanced edit coloring settings, including colors, highlighting, intensity, and special characters to highlight were reset to the values they had when the HILITE command was invoked.

ISRP008 **All settings have been set to the defaults.**

Explanation: This is an informational message. All of the settings, including colors, highlighting, intensity, and special characters to highlight, were set to the default values defined by ISPF. The default settings will be saved when you exit the HILITE dialog unless you make further changes or use the CANCEL command or pull-down choice.

ISRP009 **Cancel requested. No changes were saved.**

Explanation: This is an informational message. The HILITE command dialog was exited with the CANCEL command. No changes to the enhanced coloring settings were saved.

ISRP009A **The settings for ALL LANGUAGES were set. These changes will be saved when this application is ended. Use Cancel to avoid saving these changes.**

Explanation: This is an informational message. The settings for all of the supported languages were changed. Cancel out of the HILITE dialog if you do not want to save the changes.

ISRP020 **ISRP020 - EDIT RECOVERY OR UNDO FAILED. If you are currently in an edit session, DO NOT SAVE THE DATA. Press HELP for more information and instructions. (Error Cause: Error writing ignore record)**

Explanation: An error occurred processing an edit recovery or undo request. This error indicates that the record of changes that is kept by PDF was corrupted.

User Response: If you are in an edit session, do not save the data; it may have been corrupted.

Since this problem may indicate that the recovery record may have been built incorrectly, you may want to save the recovery data set (if one exists), and contact IBM support. In addition, please write down everything you remember about the edit session that

PDF Messages

originally created the recovery file or that you were in when the UNDO failed. Useful information includes messages you saw, what types of commands and macros you used, and any unusual data or system conditions.

ISRP021 **ISRP021 - INCOMPLETE RECOVERY OR UNDO. If you are currently in an edit session, DO NOT SAVE THE DATA WITHOUT CHECKING IT FIRST. This message may not indicate a data loss error. Press HELP for more information and instructions. (Error Cause: Invalid data or length in recovery file or chain)**

Explanation: An error occurred processing an edit recovery or undo request. This error indicates that the record of changes that is kept by PDF was corrupted.

User Response: If you are in an edit session, do not save the data; it may have been corrupted.

Since this problem may indicate that the recovery record may have been built incorrectly, you may want to save the recovery data set (if one exists), and contact IBM support. In addition, please write down everything you remember about the edit session that originally created the recovery file or that you were in when the UNDO failed. Useful information includes messages you saw, what types of commands and macros you used, and any unusual data or system conditions.

ISRP022 **ISRP022 - EDIT RECOVERY OR UNDO FAILED. If you are currently in an edit session, DO NOT SAVE THE DATA. Press HELP for more information and instructions. (Error Cause: Error reading recovery file or chain)**

Explanation: An error occurred processing an edit recovery or undo request. This error indicates that the record of changes which is kept by PDF was corrupted.

User Response: If you are in an edit session, do not save the data; it may have been corrupted.

Since this problem may indicate that the recovery record may have been built incorrectly, you may want to save the recovery data set (if one exists), and contact IBM support. In addition, please write down everything you remember about the edit session that originally created the recovery file or that you were in when the UNDO failed. Useful information includes messages you saw, what types of commands and macros you used, and any unusual data or system conditions.

ISRP023 **ISRP023 - EDIT RECOVERY OR UNDO FAILED. If you are currently in an edit session, DO NOT SAVE THE DATA. Press HELP for more information and instructions. (Error Cause: Invalid verb in recovery file or chain (case 1))**

Explanation: An error occurred processing an edit recovery or undo request. This error indicates that the record of changes which is kept by PDF was corrupted.

User Response: If you are in an edit session, do not save the data; it may have been corrupted.

Since this problem may indicate that the recovery record may have been built incorrectly, you may want to save the recovery data set (if one exists), and contact IBM support. In addition, please write down everything you remember about the edit session that originally created the recovery file or that you were in when the UNDO failed. Useful information includes messages you saw, what types of commands and macros you used, and any unusual data or system conditions.

ISRP024 **ISRP024 - EDIT RECOVERY OR UNDO FAILED. If you are currently in an edit session, DO NOT SAVE THE DATA. Press HELP for more information and instructions. (Error Cause: Nonexistent record referenced in recovery file or chain)**

Explanation: An error occurred processing an edit recovery or undo request. This error indicates that the record of changes which is kept by PDF was corrupted.

User Response: If you are in an edit session, do not save the data; it may have been corrupted.

Since this problem may indicate that the recovery record may have been built incorrectly, you may want to save the recovery data set (if one exists), and contact IBM support. In addition, please write down everything you remember about the edit session that originally created the recovery file or that you were in when the UNDO failed. Useful information includes messages you saw, what types of commands and macros you used, and any unusual data or system conditions.

ISRP025 **ISRP025 - EDIT RECOVERY OR UNDO FAILED. If you are currently in an edit session, DO NOT SAVE THE DATA. Press HELP for more information and instructions. (Error Cause: Invalid verb in recovery file or chain (case 1))**

Explanation: An error occurred processing an edit recovery or undo request. This error indicates that the record of changes which is kept by PDF was corrupted.

User Response: If you are in an edit session, do not

save the data; it may have been corrupted.

Since this problem may indicate that the recovery record may have been built incorrectly, you may want to save the recovery data set (if one exists), and contact IBM support. In addition, please write down everything you remember about the edit session that originally created the recovery file or that you were in when the UNDO failed. Useful information includes messages you saw, what types of commands and macros you used, and any unusual data or system conditions.

ISRP026 **ISRP026 - EDIT RECOVERY OR UNDO FAILED. If you are currently in an edit session, DO NOT SAVE THE DATA. Press HELP for more information and instructions. (Error Cause: Invalid verb in recovery file or chain (case 1))**

Explanation: An error occurred processing an edit recovery or undo request. This error indicates that the record of changes which is kept by PDF was corrupted.

User Response: If you are in an edit session, do not save the data; it may have been corrupted.

Since this problem may indicate that the recovery record may have been built incorrectly, you may want to save the recovery data set (if one exists), and contact IBM support. In addition, please write down everything you remember about the edit session that originally created the recovery file or that you were in when the UNDO failed. Useful information includes messages you saw, what types of commands and macros you used, and any unusual data or system conditions.

ISRP100 **No connection - This action requires a connection with the workstation to be established. A workstation connection can be established from ISPF Settings panel.**

Explanation: No connection to a workstation exists. The user must identify the workstation by specifying the GUI parameter on ISPSTART or by selecting the Workstation pull-down choice from ISPF Settings panel.

User Response: Start a session with a workstation before performing this action.

Programmer Response: None.

ISRP101 **Configuration error - Distributed View/Edit is only valid when ISPF Workstation Tool Integration is configured for the View/Edit actions. Select the Configure ISPF Workstation Tool Integration pull-down choice from the Workstation action bar pull-down on the View/Edit Entry Panel to configure the ISPF Workstation Tool Integration or enter the ISPF command INT on the command line.**

Explanation: ISPF Workstation Tool Integration not configured. The user must configure the ISPF Workstation Tool Integration by issuing the INT ISPF command or by selecting the Configure ISPF Workstation Tool Integration pull-down choice from the Workstation action bar pull-down on the View/Edit Entry Panel to configure the ISPF Workstation Tool Integration.

User Response: Issue the INT ISPF command or select the Configure ISPF Workstation Tool Integration pull-down choice from the Workstation action bar pull-down on the View/Edit Entry Panel to configure the ISPF Workstation Tool Integration.

Programmer Response: None.

ISRP102 **Invalid VIEW/EDIT parm – When workstation file parameter is specified, do not code DATAID or member.**

Explanation: To invoke the VIEW or EDIT service, you may specify either a data set name, DATAID or workstation file. When workstation file parameter is specified, do not code DATAID or member.

User Response: Remove the DATAID and member parameters.

ISRP103 **File unavailable – File transfer failed, the workstation file could not be opened or the file does not exist. For the Java environment, files that exist on a disk cannot be edited.**

Explanation: The requested workstation file could not be accessed for one of the following reasons:

- The workstation file could not be opened
- You are running with a Java client and the requested file does not exist in workstation memory. Workstation files on disk cannot be edited on the host for the Java environment.

PDF Messages

ISRP104 **Error writing file – File transfer failed. Error writing workstation file: aaaaaaaa.. The workstation disk drive is full or the subdirectories do not exist. Create the subdirectories if they do not exist and try the action again.**

Explanation: Error writing workstation file. Workstation disk drive is full or the subdirectories do not exist.

User Response: Check the workstation disk drive and retry.

ISRP105 **File transfer failed – Error returned by FILEXFER service, FILEXFER return code aaaaaaaa.. Refer to the ISPF Services Guide for an explanation of the return code.**

Explanation: No explanation available at this time.

ISRP106 **Function not supported – Distributed Browse is not a supported function. Try Distributed View.**

Explanation: Distributed Browse is not a supported function.

User Response: Try Distributed View.

ISRP107 **Conflicting options - View on Workstation and Browse Mode options cannot be selected simultaneously. De-select one of the conflicting options.**

Explanation: View on Workstation and Browse Mode options cannot be selected simultaneously.

User Response: De-select one of the conflicting options.

ISRP108 **No file access - File transfer failed. File access on workstation disallowed by ISPF Server.**

Explanation: No explanation available at this time.

ISRP109 **File not saved - File not saved on workstation.**

Explanation: No explanation available at this time.

ISRP110 **Default configuration - ISPF Workstation Tool Integration was not configured for the View/Edit actions. Default configuration will be used. You may modify or save the default configuration.**

Explanation: ISPF Workstation Tool Integration was not configured for the View/Edit actions. Default configuration will be used.

User Response: Modify or save the default configuration.

Programmer Response: None.

ISRP111 **Edit not confirmed - The edit session canceled at your request. Member cannot be promoted with requested authcode.**

Explanation: Entering END or EXIT on the SCLM Edit Authcode Confirmation panel cancels the edit session.

User Response: If you want to promote the member, try editing with a different authcode. If you need to change the authcode, use the SCLM library utility.

ISRP112 **WS command failed - Workstation command failed. Return code = aaaaaaaa..**

Explanation:

The following return codes are possible if a panel is specified:

- | | |
|----|--|
| 0 | Normal completion. The END command was entered from the selected menu. |
| 4 | Normal completion. The RETURN command was entered or the EXIT option was specified from the selected menu or from some lower-level menu. |
| 12 | The specified panel could not be found. |
| 16 | Truncation error in storing the ZCMD or ZSEL variable. |
| 20 | Severe error. |

The following return codes are possible from a MODAL workstation command:

- | | |
|----|---|
| 20 | Parameter or syntax on SELECT service (all SELECTs) is not valid. |
| 41 | A null command was passed to the workstation. |
| 42 | ISPF was not able to start the command at the workstation. |
| 43 | Remote execution of commands was not allowed by the user. |

OTHER

The return code from the workstation command + 100 if the return code from the workstation command was > 0

ISRP113 **Error saving data set - File transfer failed. Error saving the workstation work file: *aaaaaaaa* into host data set: *bbbbbbbb*.. The host data set may be RACF protected. The workstation work file is kept on the workstation.**

Explanation: Error saving the workstation work file: *aaaaaaaa* into host data set: &ZDSN. The host data set may be RACF protected.

User Response: Request RACF access to the data set and upload the workstation work file manually.

ISRP114 **Data set packed - File transfer does not support packed data sets. Unpack the data set and try the action again.**

Explanation: No explanation available at this time.

ISRP115 **File in use - The ISPF generated workstation work file name *aaaaaaaa* is in use. Try the action again later.**

Explanation: No explanation available at this time.

ISRP116 **Member *aaaaaaaa* viewed - Member *aaaaaaaa* in *bbbbbbbb* was viewed in View mode. The workstation work file was saved in *cccccccc*..**

Explanation: No explanation available at this time.

ISRP117 **Data set viewed - *aaaaaaaa* was viewed in View mode. The workstation work file was saved in *bbbbbbbb*..**

Explanation: No explanation available at this time.

ISRP118 **Member *aaaaaaaa* edited - Member *aaaaaaaa* in *bbbbbbbb* was edited in modeless Edit mode. The workstation work file was saved in *cccccccc*..**

Explanation: No explanation available at this time.

ISRP119 **Data set edited - *aaaaaaaa* was edited in modeless Edit mode. The workstation work file was saved in *bbbbbbbb*..**

Explanation: No explanation available at this time.

ISRP120 **Command not started - ISPF was not able to start the command at the workstation.**

Explanation: ISPF was not able to start the command at the workstation.

User Response: Make sure you are able to start the workstation command in the workstation's native environment.

Programmer Response: None.

ISRP121 **Command not allowed - Remote execution of the workstation command was not allowed by the workstation.**

Explanation: Remote execution of the workstation command was not allowed by the workstation.

Programmer Response: None.

ISRP122 **No ISPF statistics – _____ was saved in _____, but no space in PDS directory for ISPF statistics.**

Explanation: There is not sufficient directory space to create statistics.

Programmer Response: Re-allocate the data set with additional directory blocks.

ISRP123 **Device not ready – The requested device is not ready or available. Please verify that the device has the correct media and that it is available or select a different device.**

Explanation: The device that was requested is not ready, available or found. Please check the device that was requested.

User Response: Check the device and verify that it is available and working. If needed, place the proper media in the device or select a different device.

Programmer Response: None.

System Programmer Response: Contact IBM support.

ISRP124 **Update not allowed – Configuring the Workstation Tool Integration values is not supported for the Java environment.**

Explanation: ISPF does not support configuration of the workstation tools for edit and view when you are using Java. Edit and View on workstation is supported using the ISPF supplied interface only.

Programmer Response: None.

System Programmer Response: Contact IBM support.

PDF Messages

ISRP125 **Build not allowed – An SCLM Workstation Build cannot be performed from the ISPF Java environment.**

Explanation: SCLM Workstation Build uses the ISPF FILEXFER and WSCMDV services. These services are not valid when used for a Workstation Build in the Java environment.

Programmer Response: None.

System Programmer Response: Contact IBM support.

ISRP126 **Assignment command error — Assignment type (GET/SET) unrecognized for the PRESERVE command.**

Explanation: A severe error (return code 20) has been received using the PRESERVE macro command. The assignment type used with the PRESERVE command is invalid.

User Response: Correct the edit macro so that it uses the correct assignment type for the PRESERVE command.

ISRP127 **PASTE data truncated - The Paste operation was successfully completed, but some data may have been truncated. The data that was pasted into the current edit session was CUT from a data set with a longer logical record length. Data past the end of the current record length was not copied into this edit session.**

Explanation: The data that was pasted into the current edit session was CUT from a data set with a longer logical record length. Some data may have been truncated during the PASTE operation.

ISRP130 **Insufficient storage — CUT failed because not enough virtual storage was available for saving the records being cut. 'aaaaaaaa' bytes were required, but only 'bbbbbbbb' bytes were available in the requested clipboard. Clipboard 'cccccccc' was not changed.**

Explanation: The ISPF editor reserves a certain amount of space to save CUT lines and the cut request would use more than that reserved amount of space.

User Response: Reduce the number of lines being cut, use the REPLACE parameter or specify a different clipboard on the CUT request.

Programmer Response: None.

ISRP131 **'aaaaaaaa' lines cut to 'bbbbbbbb' — 'aaaaaaaa' lines were saved in clipboard 'bbbbbbbb' for later retrieval by the paste command.**

Explanation: The CUT command was successfully completed. The clipboard contains the lines that were most recently cut.

Programmer Response: None.

ISRP132 **'aaaaaaaa' lines added to 'bbbbbbbb' — 'aaaaaaaa' lines were saved in clipboard 'bbbbbbbb' for later retrieval by the paste command. These lines were added to lines that were already saved by one or more CUT commands.**

Explanation: The CUT command was successfully completed. The clipboard contains the lines that were most recently cut in addition to lines that were already in the clipboard.

Programmer Response: None.

ISRP133 **Use CUT before PASTE — No lines exist in the clipboard named 'aaaaaaaa' or the clipboard does not exist. The CUT command must be used before the PASTE command.**

Explanation: A PASTE request was issued using the name of an empty or nonexistent clipboard.

User Response: Use the CUT DISPLAY command to see the names of existing clipboards. Insure that you are using a clipboard that has had data placed in it by a previous CUT command.

Programmer Response: None.

ISRP134 **Clipboard limit reached — The maximum number of clipboards have been created. No new clipboards may be created. Use the CUT DISPLAY command to see the names of existing clipboards.**

Explanation: Use the CUT DISPLAY command to see the names of existing clipboards. You may want to rename or reuse an existing clipboard.

Programmer Response: None.

ISRP135 Invalid clipboard name — The clipboard name was greater than eight characters long. Reenter the command using a different clipboard name or use the CUT DISPLAY command to view existing clipboard names.

Explanation: Clipboard names are 1 to 8 characters long, contain alphanumeric characters and start with an alphabetic character.

User Response: Reenter the command using a valid clipboard name.

Programmer Response: None.

ISRP136 No Clipboards — No Clipboards are available to list by the CUT DISPLAY command.

Explanation: No clipboards exist. This condition should only occur when your userid cannot create data spaces.

Programmer Response: None.

System Action: Cut/paste services are not available.

ISRP137 No more clipboards — No clipboards are available to use. Use the CUT DISPLAY command to display the available clipboard names.

Programmer Response: None.

ISRP138 DISPLAY is invalid — DISPLAY is not a valid operand on the CUT edit macro command.

Explanation: The edit macro form of the CUT command was specified incorrectly.

User Response: Contact the author of the edit macro.

Programmer Response: Change the edit macro to remove the DISPLAY keyword of the CUT command. CUT DISPLAY is not supported from a macro.

ISRP139 'aaaaaaaa' is empty — The requested clipboard (aaaaaaaa) contains no lines to browse or edit.

Explanation: A browse or edit request was made for a clipboard that has no lines. Only clipboards containing lines may be browsed or edited.

User Response: Use the CUT command to add lines to the clipboard.

Programmer Response: None.

ISRP140 Invalid clipboard name — The clipboard name entered is not a valid name. Clipboard names follow the same rules as PDS member names within ISPF.

Explanation: A CUT or PASTE command was entered with an invalid clipboard name. Clipboard names are 1 to 8 alphanumeric characters starting with an alphabetic character.

User Response: Enter the command with a valid clipboard name.

Programmer Response: None.

ISRP141 'aaaaaaaa' exists — A clipboard named 'aaaaaaaa' already exists. Choose a different name.

Explanation: When renaming a clipboard, the name of an existing clipboard was used.

User Response: Choose a different name for the clipboard or reenter the original name.

Programmer Response: None.

ISRP142 Name change invalid — You may not change the name of the ISPF default clipboard.

Explanation: An attempt was made to rename the ISPF default clipboard. This is not allowed because ISPF reserves the name DEFAULT for the first clipboard.

User Response: If you need additional clipboards, use the CUT command to create them and specify the clipboard name on the CUT command.

Programmer Response: None.

ISRP143 Invalid command— Valid commands are B (Browse), E (Edit), C (Clear), D (Delete), R (Rename), and O (Toggle read only).

Explanation: An invalid letter or symbol was placed next to a clipboard name. Only the listed commands are valid.

User Response: Enter one of the listed commands.

Programmer Response: None.

ISRP144 Invalid parameter— You must specify a 'aaaaaaaa' range on a 'bbbbbbbb' command and you may also specify a clipboard name and the REPLACE keyword.

Explanation: An invalid parameter was specified on a CUT command.

PDF Messages

User Response: Remove the invalid parameter and try the CUT command again.

ISPR145 **Invalid parameter— You must specify a 'aaaaaaaa' destination on a 'bbbbbbbb' command using the BEFORE or AFTER keyword. You may also specify a clipboard name and the KEEP keyword.**

Explanation: An invalid parameter was specified on a PASTE command.

User Response: Remove the invalid parameter and try the PASTE command again.

ISPR146 **CUT/PASTE unavailable — ISPF could not create a data space in which to keep information about the editor clipboards. CUT/PASTE services are not available.**

Explanation: ISPF uses OS/390 data spaces to store information about editor clipboards and ISPF was unable to create the data space required. If this is the first invocation of CUT then the system may not allow you to create data spaces.

User Response: Remove the invalid parameter and try the CUT or PASTE command again.

System Programmer Response: Insure that data spaces can be created by users by checking IEFUSL.

System Action: CUT/PASTE services are not allowed in the edit session.

ISPR147 **'aaaaaaaa' lines pasted — 'aaaaaaaa' lines were moved or copied into this edit session from clipboard 'bbbbbbbb'.**

Explanation: The contents of clipboard *bbbbbbbb* were inserted into the current edit session. If the KEEP keyword was used on the PASTE command, the contents of the clipboard were not changed. Otherwise, the clipboard was emptied.

ISPR148 **'aaaaaaaa' is read-only — Clipboard 'aaaaaaaa' cannot be changed using the CUT command because it was marked read-only by using the 'O' line command on the CUT DISPLAY panel. If you want to change this clipboard, use the 'O' line command in the CUT DISPLAY entry panel to change the read-only status to read-write.**

Explanation: The contents of clipboard *aaaaaaaa* were not changed.

User Response: If you want to change this clipboard, use the 'O' line command in the CUT DISPLAY entry panel to change the read-only status to read-write..

ISPR149 **Delete not allowed — The default ISPF edit clipboard cannot be deleted.**

Explanation: The default ISPF edit clipboard cannot be deleted.

User Response: You can clear the contents of the default clipboard using the C line command.

ISRP280 **Too many parameters – ON/OFF are the only valid parameters for the PRESERVE command.**

Explanation: The PDF edit PRESERVE command was invoked with more than one parameter. Only one parameter (either ON or OFF) may be specified for the PRESERVE command. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameter for the PRESERVE command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRP281 **Invalid parameter – ON/OFF are the only valid parameters for the PRESERVE command.**

Explanation: The PDF edit PRESERVE command was invoked with a parameter other than ON or OFF.

User Response: Change the command to specify the proper parameters for the PRESERVE command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameter for the PRESERVE command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRP282 **Inconsistent parameters – "aaaaaaaa" and "bbbbbbbb" cannot both be entered with PRESERVE command.**

Explanation: Mutually exclusive parameters (*aaaaaaaa* and *bbbbbbbb*) were specified on invocation of the PRESERVE command.

User Response: Change the command to specify the proper parameters for the PRESERVE command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameter for the PRESERVE command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRP283 Too many parameters - Too many parameters specified for the SAVE_LENGTH command. Is data quoted?

Explanation: An invalid SAVE_LENGTH command was entered.

User Response: Review documentation for the SAVE_LENGTH command in *ISPF Edit and Edit Macros*.

ISRP284 Unrecognized parameter – Extraneous or invalid parameter was specified for the SAVE_LENGTH command.

Explanation: An invalid SAVE_LENGTH command was entered.

User Response: Review documentation for the LINE command in *ISPF Edit and Edit Macros*.

ISRP285 Invalid parameter – Extraneous or invalid parameter was specified for the PRESERVE command.

Explanation: An invalid PRESERVE command was entered.

User Response: Review documentation for the PRESERVE command in *ISPF Edit and Edit Macros*.

ISRP286 Line pointer invalid – Required line pointer not correctly specified for the PRESERVE command.

Explanation: An invalid PRESERVE command was entered.

User Response: Review documentation for the PRESERVE command in *ISPF Edit and Edit Macros*.

ISRP287 Data parm omitted – Required data parameter not specified for the PRESERVE command.

Explanation: An invalid PRESERVE command was entered.

User Response: Review documentation for the PRESERVE command in *ISPF Edit and Edit Macros*.

ISRP288 Assignment command error – Assignment type (GET/SET) unrecognized for the SAVE_LENGTH command.

Explanation: A severe error (return code 20) has been received using the SAVE_LENGTH macro command. The assignment type used with the command is invalid.

User Response: Correct the edit macro so that it uses the correct assignment type for the LINE command.

ISRP289 Parameter unrecognized – ON/OFF are the only valid parameters for the PRESERVE command.

Explanation: The PDF edit PRESERVE command was invoked with a parameter other than ON or OFF.

User Response: Change the command to specify the proper parameters for the PRESERVE command and reissue the command or rerun the macro. Refer to *ISPF Edit and Edit Macros* for editor command syntax. If the macro was supplied by someone else, contact the writer for assistance in correcting the error.

Programmer Response: Change the macro to specify the proper parameter for the PRESERVE command. Refer to *ISPF Edit and Edit Macros* for editor command syntax.

ISRRS000 aaaaaaaa - bbbbbbbb – Member or Member pattern - aaaaaaaa - bbbbbbbb.

Explanation: This is an informational message. The member or pattern named in the message was Browsed, Printed, Renamed, Deleted, Moved, Copied, Edited, Reset, Viewed, or a command executed as specified.

ISRRS001 Action mismatch – 'aaaaaaa' organization must be partitioned to perform this action.

Explanation: The option or line command selected requires a partitioned data set.

ISRRS002 Personal List not found – Personal list is not defined as one of your personal data set lists.

Explanation: Informational only.

ISRRS003 Personal list not found - The Personal list was not found.

Explanation: The personal list name was not found in the list of personal lists.

User Response: Retry with a different list name.

Programmer Response: None.

ISRRS004 Data Set - aaaaaaaa - Data set - 'bbbbbbbb' - aaaaaaaa.

Explanation: No explanation available at this time.

ISRRS005 No data sets matched - No data sets matched the entries in the referral list.

Explanation: No explanation available at this time.

PDF Messages

ISRRS006 **Workstation file aaaaaaaa - Workstation file aaaaaaaa successfully.**

Explanation: Informational only.

ISRRS007 **No default set - No default open action has been defined, or open action requested from enhanced member list which does not support action "OPEN".**

Explanation: No explanation available at this time.

User Response: Select a default for the Open action on the Workplace settings panel.

ISRRS008 **Open not supported - The Open action is not supported from LIBRARY or DSLIST utility.**

Explanation: No explanation available at this time.

ISRRS009 **List aaaaaaaa of bbbbbbbb - List aaaaaaaa of bbbbbbbb**

Explanation: No explanation available at this time.

ISRS000 **No differences found - Normal completion (RC=0). Files compare equally.**

Explanation: This is an informational message. No differences were found by SuperC.

User Response: See the SuperC listing data set for further information.

ISRS001 **Differences found - Normal completion (RC=1). Files are not the same.**

Explanation: This is an informational message. Differences were found by SuperC.

User Response: See the SuperC listing data set for the differences and further information.

ISRS002 **Invalid input detected - Abnormal completion (RC=4). See listing for warning.**

Explanation: This is a warning message. The compare was performed; however, erroneous or conflicting input options have been detected by SuperC and reported in the SuperC listing data set.

User Response: Check the SuperC listing data set for explanations of the invalid input. The compare results may not be consistent with your expectations.

ISRS003 **Bad sequence numbers - Abnormal completion (RC=6). See listing for warning.**

Explanation: This is a warning message. The old data set (OLDDD) does not contain proper sequence numbers, or the sequence number intervals are not large enough to contain insert activity. This applies only to UPDCMS8 or UPDMVS8 process options.

User Response: Verify that the old data set name is correct. Verify that sequence numbers exist in the old data set; create them if necessary. The NUMBER ON command in EDIT may be used. Use the RENUM command in EDIT to expand the sequence number intervals if necessary.

ISRS004 **Old input file error - Abnormal completion (RC=8). See listing for details.**

Explanation: There is an error involving the old input data set (OLDDD) and the compare was not performed. For example, if you modified the JCL and inadvertently omitted the OLDDD allocation, SuperC would return code 8. This error is also received if the old data set fails to open, perhaps because of an I/O error.

User Response: Check the SuperC listing data set for specific information describing the error. Correct the JCL and resubmit.

ISRS005 **Bad grouping - Abnormal completion (RC=12). See listing for details.**

Explanation: This message indicates inconsistent data set organizations. The new and old data sets are not both PDSs or sequential data sets. The compare was not run.

User Response: Mixed compares of PDS to sequential data sets are not permitted. The dialog interface prevents this, but you may have incorrectly modified or submitted JCL that attempts to allocate OLDDD to a PDS and NEWDD to a sequential (or vice versa). Correct the allocations and retry.

ISRS006 **New input file error - Abnormal completion (RC=16). See listing for details.**

Explanation: There is an error involving the new input data set (NEWDD). The compare was not performed. For example, if you modified the JCL and inadvertently omitted the NEWDD allocation, SuperC would return code 16. This error is also received if the new data set fails to open, perhaps because of an I/O error.

User Response: Check the SuperC listing data set for specific information describing the error. Correct the JCL and resubmit.

ISRS007 Bad update data set - Abnormal completion (RC=20). See listing for details.

Explanation: There has been an error involving the update output data set (DELDD). Typically, the cause is a space abend writing to the data set, although an I/O error is also possible. If you modified the JCL and inadvertently omitted the DELDD allocation, then SuperC would also return code 20.

User Response: Check the SuperC listing data set for specific information describing the error. Correct the JCL and resubmit. If the problem is a space abend, delete the update data set and preallocate larger with option 3.2 or specify larger default allocation parameters using option 3.13.A.D.

ISRS008 Listing file error - Abnormal completion (RC=24). Listing empty/incomplete.

Explanation: Error occurred during open or while writing to the SuperC listing output data set (OUTDD). This error can also be returned due to a NEW or OLD input data set simultaneously being used as the listing data set. The listing data set may or may not contain further information.

User Response: Verify that the name of the listing data set is not the same as any of the input data sets. Delete the listing data set and retry.

ISRS009 No data compared - Abnormal completion (RC=28). See listing for details.

Explanation: No data was compared because the old and new data sets were empty, member names were invalid, or nothing was left to compare after input filtering (such as DPPLCMT on a data set containing only comments). If you attempted a search, strings were not found due to empty input data sets, or nothing was left to search after input filtering.

User Response: Verify that the correct old and new data sets were specified. Verify that the SELECT process statements designate members that exist in the input data sets. Modify the input filtering statements and options so that something is left to compare or search.

ISRS010 Insufficient storage - Abnormal completion (RC=32). See listing for error.

Explanation: Insufficient storage is available for the SuperC program to run. The region size is either too small or storage is too fragmented.

User Response: Consider submitting the SuperC job to batch, specifying a REGION= keyword and sufficient storage on the job card for the job to run. If batch is unavailable, consult your system programmer for

instructions on how to temporarily increase your available region size at session logon.

ISRS016 Display Output conflict - Display Output UPD specified with no update process option.

Explanation: Setting the Display Output field to UPD implies that you are creating an update data set as output from your compare job. SuperC has detected that you have neglected to supply a process option (such as UPDPDEL) that would result in an update data set. Consequently, the request to Browse or View the UPD output is an error.

User Response: Either supply an update process option using option P, or change your Display Output field to YES, NO, or COND instead of UPD.

ISRS017 *** SuperC aaaaaaaa compare invoked. *******

Explanation: This is an informational message. The foreground SuperC compare is executing. The message specifies which type of compare it is (LINE, WORD, FILE, or BYTE).

ISRS018 Append to PDS invalid - Data set organization and append option conflict.

Explanation: It is not valid to attempt to append to a SuperC listing that is a member of a partitioned data set. This action is only valid for sequential data sets. SuperC only replaces the content of PDS members. It will not add to them.

User Response: Verify that the list data set is sequential, or remove the APNDLST process option from the input to SuperC.

ISRS019 Bad ds organizations - Concatenated data sets must have consistent DS organizations.

Explanation: SuperC cannot search or compare a mixture of partitioned and sequential data sets. All data sets in the NEW and OLD concatenation must be of the same organization. MVS concatenation rules will not permit the allocation of a mixture.

User Response: Verify that all data sets within the NEW and OLD concatenation (DS1-DS4) are all sequentials or all partitioned. This may be done using option 3.4 ATTRIB view and inspecting the DSORG field. All data sets need to be PS or PO, unmixed.

ISRS020 Mutually exclusive - aaaaaaaa and bbbbbbbb are mutually exclusive.

Explanation: An invalid combination of process options was specified. The two process options substituted into the message are an either/or pair and

PDF Messages

are not meaningful in conjunction.

User Response: Remove one (or both) of the mutually exclusive options. Consult the tutorials and documentation for detailed explanations of the meaning and usage of each option.

ISRS021 Unrecognizable keyword - aaaaaaaa is an unrecognizable process option.

Explanation: The process option substituted into your message is unknown to SuperC.

User Response: Verify that the option is spelled correctly. Use option P in 3.13 or 3.13.S to select available process options. Remove the invalid option from the PROCESS OPTION input field before SuperC will continue. Consult the tutorials and documentation for a list of valid process options, some options are only valid for certain compare types.

ISRS022 Keyword conflict - aaaaaaaa is invalid for bbbbbbbb compare type.

Explanation: The process option you are specifying is not applicable for the compare type you are requesting.

User Response: Either remove the invalid process option from process options field on the panel or change the compare type to one valid for the process option. Use option P for a selection list of valid options for the current compare type.

ISRS023 Inconsistent keyword - APNDUPD without update options are specified.

Explanation: You have specified the APNDUPD process option, implying you wish to append output to an update file. However, you have not specified an option that will cause update file output to be created.

User Response: Either add an update file creation option (such as UPDMVS8), remove the APNDUPD, or change it to APNDLST, if you want to append compare output to an existing SuperC listing. Option P may be used to get a selection list of process options.

ISRS024 Return (aaaaaaa) - No description of return code value.

Explanation: SuperC has returned an undefined return code.

User Response: This is a SuperC programming error or possible installation problem. Please write down the return code captured in the short message field and contact your system programmer.

System Programmer Response: This is a possible ISPF installation problem. Verify that ISRSUPC is at the correct release level and that no other level of release exists on your system. Have your user check the header in his SuperC output. It should contain the current

release of ISPF installed on your system. If no mixed release or wrong version of SuperC is evident, contact IBM support.

ISRS025 DS organization mismatch - New/old data set organizations are not compatible.

Explanation: You are attempting to compare one or more partitioned data sets to one or more sequential data sets. This is not supported by SuperC. SuperC requires that all data sets be of the same organization, either all partitioned or all sequential. A partitioned data set specified with a member name - PDS(MEMBER) - is treated as a sequential for purposes of this requirement.

User Response: Correct the old and new data sets specified to comply with the data set organization matching rule.

ISRS026 Too many process options - Unable to assemble all selected options on panel line(s).

Explanation: The maximum number of process options that will fit on the 2 lines available for them has been exceeded. Those that will fit have been carried forward to the panel, but one or more specified in option P are missing.

User Response: Eliminate any redundant, conflicting, or unnecessary process options. It may be possible to squeeze in a few more by using option B to submit a batch compare, editing the JCL, and adding them to the PARM string to SuperC. Be aware that MVS limits the overall length of the PARM string to 255. If this limit is exceeded, a JCL error occurs.

ISRS027 Password not accepted - Password only valid when used with "Other data set name". Cleared.

Explanation: Input has been entered in the Password field, perhaps inadvertently. This is only accepted when the corresponding Data Set Name is filled in. Passwords are not accepted for the DS1-4 fields. SuperC has cleared the password field.

User Response: No action is required unless you intend to compare a password protected data set, in which case you are restricted to using the Data Set Name field and Password field.

ISRS028 Invalid option - Only "3.13.S " (SRCHFOR) and "3.13.A " (Activate/Create) are valid.

Explanation: You have attempted to jump into option 3.13 (SuperCE) with an invalid option, =3.13.X, for example.

User Response: You may jump directly into Searchfor

or profile manager using =3.13.S or =3.13.A; otherwise, you must use =3.13 to jump to SuperCE. From there you may specify the individual option you want (for example, E), for editing statements data sets.

ISRS029 **No strings searched - Abnormal completion (RC=28). See listing for details.**

Explanation: No string search was attempted because the search data set or members were empty. This may have resulted from filtering. For example, DPLINE or DPPLCMT statements may have eliminated all candidate lines from the input.

User Response: See the Searchfor listing data set for details. You may need to adjust input filtering statements to exclude fewer lines from the search set. Verify that the search data set is not empty.

ISRS030 **Required field - First concatenation or "Other data set name" must be specified.**

Explanation: At a minimum, either the DS1 field or the Other Data Set field must be filled in for the new and old (or search) data sets. If both are filled in, the Other Data Set field will be used.

User Response: Fill in either required field and retry.

ISRS032 **Profile created - Profile DS 'aaaaaaaa' is created.**

Explanation: The profile data set or member named in the message, which did not previously exist, has been created for you.

User Response: Use the created profile in option 3.12 or option 3.13 to specify compare options.

ISRS033 **Profile activated - Profile DS 'aaaaaaaa' is activated.**

Explanation: The profile data set in the message has been read and its process and compare options written to the panel for your use. If the profile data set contains any process statements, it has replaced the Statements Dsn name on the panel.

User Response: The compare options contained in the profile data set are now transferred to the panel. You may now specify the compare data sets and run the compare.

ISRS034 ******* SuperC Search-for invoked. *******

Explanation: The search is now in progress. Depending on the amount of input to be searched, this may take some time. Typically, the next thing you see is a browse session of a listing data set that contains the results of the search. If no strings are found, you receive only a message, but the listing data set has been

created and may be browsed by you outside of the SuperC dialog.

User Response: Consider submitting a batch search to avoid tying up your session during lengthy searches. This may be done using either option 3.14 or 3.13.S.B.

ISRS035 *** Search-for invoked. String(s) used from statements data set ***

Explanation: The search is in progress. However, since SRCHFOR or SRCHFORC statements are specified in a statements data set, they are used to specify the strings to be searched instead of the strings specified on the panel. The strings in the statements data set override the strings on the panel.

User Response: None, unless you wanted to use the panel strings, in which case blank out the Statements Dsn field, or remove the SRCHFOR statements from the statements data set.

ISRS036 **No strings found - Search-for completed with no strings found. See listing for details.**

Explanation: The search is complete with no strings found. There may be further information in the search listing data set, which may be browsed outside of Searchfor. Input filtering (DPLINE, for example) may have hidden strings that otherwise would be found.

User Response: If this result is unexpected, consider editing the statements data set (if one was specified) and investigating the filtering options. Also browse the listing data set.

ISRS037 **Strings found - Search-for completed. Strings were found.**

Explanation: This is an informational message. The search was completed successfully with strings found. Other possible outcomes are no strings found, no strings searched, or errors.

ISRS039 **Profile replaced - Profile DS 'aaaaaaaa' is replaced.**

Explanation: The profile data set or member named in the message has been replaced for you. It previously existed.

User Response: Use the profile in option 3.12 or option 3.13 to specify compare options.

ISRS040 **Profile not created - Invalid compare type: aaaaaaaa.**

Explanation: The attempt to create a profile was not successful because the Compare Type field is invalid. Valid types are LINE, FILE, BYTE, and WORD.

PDF Messages

User Response: Correct the invalid compare type and retry.

ISRS041 Profile not created - Invalid listing type:
aaaaaaaa.

Explanation: The attempt to create a profile was not successful because the Listing Type field is invalid. Valid types are OVSUM, DELTA, CHNG, LONG, and NOLIST.

User Response: Correct the invalid listing type and retry.

ISRS042 Profile not created - aaaaaaaa and
bbbbbbbb **are mutually exclusive.**

Explanation: The attempt to create a profile was not successful because the two Process options named in the message are not valid in combination.

User Response: Eliminate either (or both) of the process options and retry the operation.

ISRS043 Profile not created - aaaaaaaa is an
unrecognizable process option.

Explanation: The attempt to create a profile was unsuccessful because the process option named in the message is not valid.

User Response: Correct the spelling of the process option and retry. Use option P for a selection of process options.

ISRS044 Profile not created - aaaaaaaa is invalid
for bbbbbbbb compare type.

Explanation: The attempt to create a profile was unsuccessful because the process option named in the message is not valid in combination with the specified compare type.

User Response: Eliminate the offending process option or change the compare type and retry. Use option P for a selection of process options valid with the current compare type.

ISRS045 Profile not created - APNDUPD without
update options are specified.

Explanation: The attempt to create a profile was unsuccessful because the APNDUPD process option implies that you are creating an update file but no UPD process option is specified.

User Response: Specify a UPD process option to create an update file, or use APNDLST instead of APNDUPD to specify append to the listing data set. Retry.

ISRS046 Profile not created - Invalid browse
option: aaaaaaaa.

Explanation: The attempt to create a profile was unsuccessful because the Browse output field is invalid. Valid types are YES, NO, COND, and UPD.

User Response: Correct the invalid browse output selection and retry.

ISRS047 Statements DS saved - Edit session for
process statements DS is complete.
changes saved.

Explanation: This is an informational message. This message confirms that you made changes to the statements data set using option E. These changes were saved in the data set or member.

ISRS048 Job submitted - JCL generated and
submitted to the job scheduler.

Explanation: This message confirms that your batch compare or search job was submitted. It is still possible that there may be JCL errors and the job will fail, but the process of creating and submitting the JCL succeeded.

User Response: Monitor the job for completion. You need not remain in the SuperC dialog.

ISRS049 Listing not generated - Abnormal
completion (RC=25). Existing list DS
attribute conflict.

Explanation: The listing data set was not allocated due to a conflict with the LRECL, RECFM, or DS organization. A listing may only be saved in a PDS with identical DS attributes (that is, LRECL or RECFM); an APNDLST may never be done to a PDS; and an APNDLST may only be made to a sequential DS with identical attributes. No output was generated.

User Response: Use a new name for the listing data set that is not the same as an existing data set, or delete the existing data set (if it is not one you want to keep) so that SuperC can reallocate it with the proper attributes.

ISRS050 Listing data set full - Listing data set or
volume is full. Delete and preallocate
larger using option 3.2 or delete and
increase default space parms using
option 3.13.A.D

Explanation: The listing data set or the volume on which it resides is out of space and could not hold all the output that SuperC attempted to generate.

User Response: If the data set is sequential, you may delete it and preallocate it larger using option 3.2, or use option 3.13.A.D to increase the default space allocation parameters. If the data set is partitioned, you

may attempt to compress it using option 3.1. If the volume is out of space, you may need to consult your system programmer for advice on where to allocate the listing data set.

ISRS051 Invalid profile - Profile contains an invalid compare type: aaaaaaaa.

Explanation: The profile data set or member contains the invalid compare type indicated in the message. This is most likely the result of a manual edit of the profile that has corrupted it. Profiles normally should be modified only using option 3.13.A CREATE profile.

User Response: You may edit the profile and correct the invalid compare type in the first PROF PREFIX statement at line 1. The syntax is CTYP=FILE/LINE/WORD/BYTE. Alternatively, you may use the option 3.13.A CREATE function to replace the invalid profile with new values taken from the 3.13 panel.

ISRS052 Invalid profile - Profile contains an invalid listing type: aaaaaaaa.

Explanation: The profile data set or member contains the invalid listing type indicated in the message. This is most likely the result of a manual edit of the profile that has corrupted it. Profiles normally should be modified only using option 3.13.A CREATE profile.

User Response: Edit the profile and correct the invalid listing type in the first PROF PREFIX statement at line 1. The syntax is LTYP=OVSUM/DELTA/CHNG/LONG/NOLIST. Alternatively, use the option 3.13.A CREATE function to replace the invalid profile with new values taken from the 3.13 panel.

ISRS053 Invalid profile - Profile contains an invalid Display Output parameter: aaaaaaaa.

Explanation: The profile data set or member contains the invalid Display Output parameter indicated in the message. This is most likely the result of a manual edit of the profile that has corrupted it. Profiles normally should be modified only using option 3.13.A CREATE profile.

User Response: Edit the profile and correct the invalid Display Output parameter in the first PROF PREFIX statement at line 1. The syntax is BRW=YES/NO/COND/UPD. Alternatively, use the option 3.13.A CREATE function to replace the invalid profile with new values taken from the 3.13 panel.

ISRS054 Invalid profile - aaaaaaaa and bbbbbbbb are mutually exclusive.

Explanation: The profile data set or member contains the invalid combination of process options indicated in the message. This is most likely the result of a manual edit of the profile that has corrupted it. Profiles normally should be modified only using the option 3.13.A CREATE profile.

User Response: Edit the profile and correct the PROF PREFIX statements at lines 2 and 3 by specifying a valid combination of process options. Alternatively, use the option 3.13.A CREATE function to replace the invalid profile with new values taken from the 3.13 panel.

ISRS055 Invalid profile - aaaaaaaa is an unrecognizable process option.

Explanation: The profile data set or member contains the invalid process option indicated in the message. This is most likely the result of a manual edit of the profile that has corrupted it. Profiles normally should be modified only using the option 3.13.A CREATE profile.

User Response: Edit the profile and correct the PROF PREFIX statements at lines 2 and 3 by specifying a valid combination of process options. Alternatively, use the option 3.13.A CREATE function to replace the invalid profile with new values taken from the 3.13 panel.

ISRS056 Invalid profile - aaaaaaaa is invalid for bbbbbbbb compare type.

Explanation: The profile data set or member contains the invalid process option and compare type combination indicated in the message. This is most likely the result of a manual edit of the profile that has corrupted it. Profiles normally should be modified only using option 3.13.A CREATE profile.

User Response: Edit the profile and correct the PROF PREFIX statements at lines 1, 2, and 3 by specifying a valid combination of process options and compare type. Alternatively, use the option 3.13.A CREATE function to replace the invalid profile with new values taken from the 3.13 panel.

ISRS057 Invalid profile - APNDUPD without update options are specified.

Explanation: The profile data set or member contains the invalid combination indicated in the message. This is most likely the result of a manual edit of the profile that has corrupted it. Profiles normally should be modified only using the option 3.13.A CREATE profile.

User Response: Edit the profile and correct the invalid combination by specifying a valid update process option in the PROF PREFIX line 2. Alternatively, use

PDF Messages

the option 3.13.A CREATE function to replace the invalid profile with new values taken from the 3.13 panel.

ISRS058 Invalid ds RECFM/LRECL - Profile and statements data sets must be fixed 80.

Explanation: Verify that the name of the data set that you are attempting to use for a SuperC profile data set is not mistyped. Alternatively, you may have created the data set yourself to be used as a SuperC profile but with an incorrect LRECL.

User Response: Check the spelling of the data set name. If you are using option 3.13.A CREATE to create a data set for use as a SuperC profile data set, you may need to specify another name because the name you have chosen already exists. If you allocated the data set yourself, verify that the LRECL is FIXED 80. If it is not, correct it and retry. Always browse the data set to check the contents before deleting it.

ISRS059 Invalid profile prefix - Profile prefix record is incorrect or missing.

Explanation: The profile data set or member does not contain valid prefixes to the first 3 records. It is probable that a data set was specified that is not a SuperC profile. SuperC profiles contain .* PROF PREFIX in the first 14 positions of the first 3 records and are FIXED 80 LRECL.

User Response: Verify that the name of the data set is correct. Otherwise, you may need to edit the profile to correct the invalid prefix. Alternatively, use the option 3.13.A CREATE function to replace the invalid profile with new values taken from the 3.13 panel. Be certain this is data that does not need to be preserved. A backup copy might be a good idea.

ISRS060 Error in SUBMIT - SUBMIT error.

Explanation: The TSO SUBMIT command returned a non-zero return code. The job was not submitted successfully. This is either an MVS system problem or an internal ISPF processing failure.

User Response: Save or print the ISPF LOG data set for your system programmer. This may be done by temporarily exiting ISPF. Write down the circumstances of the failure and contact your system programmer.

System Programmer Response: ISPF selects the TSO SUBMIT command passing a temporary data set. There may be information in the user's ISPF LOG data set or in the system log. Attempt to run the TSO SUBMIT command from option 6 to see if there is a TSO problem. If the SUBMIT only fails from within ISPF, contact IBM support.

ISRS061 FTOPEN error - Error using FTOPEN.

Explanation: This is a probable ISPF internal processing failure. ISPF was unable to open a temporary data set for file tailoring the JCL statements to be submitted.

User Response: Save or print your ISPF LOG data set for your system programmer. This may be done by temporarily exiting ISPF. Write down the circumstances of the failure and contact your system programmer.

System Programmer Response: An ISPF FTOPEN TEMP call has failed. There may be information in the user's ISPF LOG data set or in the system log. If you are unable to resolve the problem, contact IBM support.

ISRS062 File tailor failure - File include.

Explanation: This is a probable ISPF internal processing failure. ISPF was unable to file tailor JCL statements into the temporary data set to be submitted.

User Response: Save or print your ISPF LOG data set for your system programmer. This may be done by temporarily exiting ISPF. Write down the circumstances of the failure and contact your system programmer.

System Programmer Response: An ISPF FTINCL SKELNAME call has failed. There may be information in the user's ISPF LOG data set or in the system log. Make sure the ISPF SKELS data set (ISPSLIB) is properly allocated by the user's logon proc. If you are unable to resolve the problem, contact IBM support.

ISRS063 File tailor failure - File close.

Explanation: This is a probable ISPF internal processing failure. The JCL to be submitted was not successfully generated.

User Response: Save or print your ISPF LOG data set for your system programmer. This may be done by temporarily exiting ISPF. Write down the circumstances of the failure and contact your system programmer.

System Programmer Response: An ISPF FTCLOSE call has failed. There may be information in the user's ISPF LOG data set or in the system log. If you are unable to resolve the problem, contact IBM support.

ISRS064 Invalid search-string - Matching end quote around string missing.

Explanation: Unbalanced quotation marks were detected in the search string(s). If you are attempting to enter a DBCS string that contains a X '7D' as part of a DBCS pair, you must use the Enhanced SearchFor option (Option 3.15) specifying the MIXED process option.

User Response: Correct and retry. Two consecutive quotation marks may be used to specify one searchable quotation mark. For example, DON"T is a correct

specification to find the string don't.

ISRS065 Invalid search-qualifier - Must be WORD, PREFIX, SUFFIX or C (continued).

Explanation: SuperC has detected an invalid operand outside of the search string itself. This may be because a quotation mark intended to be part of the search string has prematurely terminated the string. Data to the right of the quotation mark is treated as a search qualifier.

User Response: Enclose the entire string in single quotation marks and double any imbedded data quotation marks. For example: 'DON'T RUN' Alternatively, correct the spelling of the search qualifier and retry.

ISRS066 Search string required - The search string must be specified or be in statements input.

Explanation: No search string was specified from option 3.13.S Search-For, either on the panel or in a statements data set.

User Response: Either specify one or more of the 5 search string fields on the panel (CAPS or ASIS fields), or specify one or more SRCHFOR statements in the statements data set. The statements data set specification will override the strings specified on the panel.

ISRS067 Hex character not paired - The hex string has an uneven pair of hex characters.

Explanation: The hexadecimal string you have specified is incorrect. There must be an even number of hexadecimal characters for a valid string.

User Response: Correct the hexadecimal string and retry. For example:

Use X'F0F0'

Not X'F1F'

ISRS068 Invalid hex string - The hex string has an invalid character within the specified string

Explanation: Hexadecimal characters must be in the range 0-9 or A-F.

User Response: Correct the hexadecimal string and retry.

For example:

Use X'F123'

Not X'ZZZZ'

ISRS069 Null string invalid - A null string is an unacceptable search argument.

Explanation: SuperC cannot search for a null string. One blank is the minimum valid string.

User Response: Correct the search string and retry. For example:

Use ' '

Not ' '

to search for one blank character on a line.

ISRS077 Selections cancelled - User request cancellation of new process option selections.

Explanation: This is an informational message. This message confirms that you have cancelled out of the process option selection dialog. The options are not changed.

ISRS079 Invalid imbedded quote - A quote may be used as a delimiter or specified as two quotes.

Explanation: The search string contains an ambiguous quotation mark. Quotation marks are used in pairs to delimit the beginning and end of the search string if it contains imbedded blanks. They may also be used to specify a searchable quotation mark, in which case two consecutive quotation marks are understood to be one and are taken as data instead of as a delimiter. If you are attempting to enter a DBCS string that contains a X '7D' as part of a DBCS pair, you must use the Enhanced SearchFor option (Option 3.15) specifying the MIXED process option.

User Response: Correct and retry. Two consecutive quotation marks may be used to specify one searchable quotation mark.

For example:

DON'T is the correct specification to find the string don't.

ISRS080 Allocation error - Allocation error on "new" data set.

Explanation: The TSO allocation of the specified data set to the NEWDD DDNAME requested by SuperC was unsuccessful, an unexpected result. This is probably either a SuperC internal processing failure or an ISPF installation problem. It is also possible that the data set has been deleted or exclusively allocated by another job or user between the time SuperC checks for the availability of the data set and the time the allocation is attempted.

User Response: Retry the process. The condition causing the failure may be transient and may have

PDF Messages

resolved. You may also receive a more helpful error message the second time, if, for example, the data set was deleted before the allocation could succeed.

If the problem persists, write down the circumstances of the failure and contact your system programmer. The ISPF log may contain useful information and can be printed or saved by temporarily exiting ISPF. It may be useful for your system programmer to know whether you are running SuperC in CLIST or PROGRAM mode. This can be determined by going to option 3.13.A.D and checking whether "Invoke SuperC via program interface" is selected.

System Programmer Response: Determine whether the user is running the CLIST or PROGRAM interface to SuperC. User's option 3.13.A.D and the PDF configuration table will determine this. If the user is in CLIST mode, verify that the user is running an uncorrupted version of ISRSFORG (or ISRSSRCH) CLIST by checking his SYSPROC allocation. Mixed level of code is possible, and the user could be picking up an old copy of the CLIST. Also, be sure that you are at current maintenance levels. There have been problems in the past with allocations of exotic data sets (aliases, uncataloged data sets with same name as cataloged data sets). Try to recreate the problem yourself. There may be some reasonable and correctable explanation for why the allocation is failing. If not, contact IBM support.

ISRS081 Allocation error - Allocation error on "old" data set.

Explanation: The TSO allocation of the specified data set to the OLDD DDNAME requested by SuperC was unsuccessful, an unexpected result. See ISRS080 above.

ISRS082 Allocation error - Allocation error on "listing" data set.

Explanation: The TSO allocation of the specified data set to the OUTDD DDNAME requested by SuperC was unsuccessful, an unexpected result. See ISRS080 above.

ISRS083 Allocation error - Allocation error on "statements/profile" data set.

Explanation: The TSO allocation of the specified data set to the SYSIN DDNAME requested by SuperC was unsuccessful, an unexpected result. See ISRS080 above.

ISRS084 Allocation error - Allocation error on "member names" data set.

Explanation: The TSO allocation of the specified data set to the SYSIN2 DDNAME requested by SuperC was unsuccessful, an unexpected result. See ISRS080 above.

ISRS085 Allocation error - Allocation error on "update" data set.

Explanation: The TSO allocation of the specified data set to the DELDD DDNAME requested by SuperC was unsuccessful, an unexpected result. See ISRS080 above.

ISRS086 Allocation error - Allocation error on "search" data set.

Explanation: The TSO allocation of the specified data set to the NEWDD DDNAME requested by SuperC was unsuccessful, an unexpected result. See ISRS080 above.

ISRS088 Invalid member name - Member name not valid for a partitioned data set.

Explanation: One or more invalid characters were entered in the member name.

User Response: Check that the member name entered is a character string of up to 8 alphanumeric characters, the first of which is either alphabetic or \$, #, or @. Alternatively, you may enter a pattern (example: ABC* for a list of all members starting with ABC) or no member name and select members from a list.

ISRS089 Old-mem not found - The member "aaaaaaaa", selected for the old data set, was not found.

Explanation: A single member was selected from the selection list panel for the New DS Name partitioned data set and ended from the panel. SuperC attempted to compare this single member to a member of the same name in the Old DS Name partitioned data set, but the member did not exist.

User Response: Check that the Old DS Name is specified correctly. If it is correct, consider specifying an alternative old DS member name in the OLDMEM field on the member selection list panel, and compare a member in the list to a member of a different name.

ISRS091 Too many operands - Only WORD, SUFFIX, or PREFIX and/or C are allowed.

Explanation: The search argument specified is invalid because it contains more than the maximum of two keywords in addition to the search string. You may receive this message if you have neglected to enclose a search string of several words in quotation marks. Example: 'This is just a test'

User Response: Correct the search string and retry the search. Note that WORD, SUFFIX, and PREFIX are mutually exclusive. Only one may be specified for each string. C (for continuation) may be used with or without the other three operands to indicate that 2 or

more strings must be found on the same line to constitute a find.

ISRS092 **Incorrect operands used - "aaaaaaa" and "bbbbbbb" are mutually exclusive or redundant.**

Explanation: WORD, PREFIX, and SUFFIX may not be used together to qualify the same search string, they must stand alone. WORD means delimited by blanks, PREFIX means starting a word, SUFFIX means ending a word.

User Response: Correct the search string specification and retry the search.

ISRS093 **Concatenation disallowed - All data set logical record lengths (LRECL) must be identical to concatenate.**

Explanation: An attempt has been made to concatenate 2 or more data sets with different logical record lengths. This is not allowed by MVS. Possibly one of the data set names is misspelled, or you are inadvertently attempting to concatenate different types of data, such as source and listings.

User Response: Check that the list of concatenated data sets is the one you need. Use option 3.2 or 3.4 data set information functions to find the LRECLs of the data sets. Correct and retry.

ISRS094 **Concatenation disallowed - All data set record formats (RECFM) must be identical to concatenate.**

Explanation: You have attempted to concatenate 2 or more data sets with different record formats, such as Fixed and Variable. This is not allowed by MVS. One of the data set names may be misspelled or you are inadvertently attempting to concatenate different types of data, such as source and listings.

User Response: Check that the list of concatenated data sets is the one you need. Use option 3.2 or 3.4 data set information functions to find the RECFMs of the data sets. Correct and retry.

ISRS095 **Concatenation disallowed - Largest logical record length (LRECL) must be first to concatenate.**

Explanation: For RECFM Variable data sets, the largest LRECL must be the first in the concatenation, according to MVS rules.

User Response: Reorder the data sets and retry the compare. Use the data set information function of options 3.2 or 3.4 to learn which data set has the largest LRECL.

ISRS096 **C invalid for string one - Continuation operand valid on any or all subsequent search strings.**

Explanation: The continuation operand (C) was specified on the first search string. This is not allowed. Continuation means that the string with the C, the continued string, must be found on the same line as the previous string to make a match. There is no previous string for string one.

User Response: Remove the continuation operand (C), from string one and put it on string 2 for continuation. Ensure that the search string is enclosed in quotes. The string (for example, Vitamin C) may have been interpreted as an invalid continuation attempt. Try 'Vitamin C' instead.

ISRS097 **Concatenation specified - Select options and press enter to display the concatenation panel.**

Explanation: The user has requested either Extended SuperC or Extended SearchFor from the Workplace and has passed an ISPF library concatenation. The project, group(s), and type fields have been specified on the concatenation panel.

User Response: Type options and press Enter to get the concatenation panel.

ISRS098 **Volume specified - Select options and press enter to display the uncataloged data set panel.**

Explanation: The user has requested either Extended SuperC or Extended SearchFor from the Workplace and has passed a volume field along with the Other Data Set. It is assumed that the data set is uncataloged.

User Response: Type options and press Enter to get the uncataloged data set panel.

ISRS101 **Vol serial not allowed - Use "Other data set name" field when specifying volume serial.**

Explanation: A volume serial was specified on a panel when the Project/Group/Type fields were used for the data set name. The volume serial may only be specified when you use the Other Data Set Name field for the data set.

User Response: If you are trying to access a data set on a particular volume, type the data set name in the Other Data Set Name field and place the volume name in the Volume Serial field before pressing Enter.

PDF Messages

ISRS103 **Member name required - Member name is required for this partitioned data set.**

Explanation: Add a member name to complete the specification of the partitioned data set indicated by the cursor.

User Response: Specify the member name and retry. Browse the data set if you are uncertain which member is correct.

ISRS104 **Enter "old" PDS name - Cannot compare "new" PDS to "old" sequential data set or PDS member.**

Explanation: Because the New data set is partitioned (contains members), the Old data set must also be partitioned. Valid combinations are PDS to PDS, Sequential to Sequential, PDS(member) to PDS(member), or Sequential to PDS(member). In other words, SuperC compares one-to-one or many-to-many, but not one-to-many.

User Response: Specify a valid combination and retry.

ISRS105 **Enter "old" member name - Cannot compare "new" sequential data set or PDS member to "old" PDS.**

Explanation: Because the New data set is a sequential or a member of a PDS, the Old data set requires a member. Valid combinations are PDS to PDS, Sequential to Sequential, PDS(member) to PDS(member), or Sequential to PDS(member). In other words, SuperC compares one-to-one or many-to-many, but not one-to-many.

User Response: Specify a valid combination and retry.

ISRS106 **Member name not allowed - Member name not allowed for sequential data set.**

Explanation: The sequential data set indicated by the cursor is incorrectly specified with a member name. Only partitioned data sets can accept member names.

User Response: Remove the member name and retry.

ISRS107 **TBCREATE failure - Creating the table of member selections failed.**

Explanation: This is an internal ISPF processing failure.

User Response: Write down the circumstances of the failure and contact your system programmer. It may be helpful to print or save the ISPF log when you exit ISPF.

System Programmer Response: There may be information in the ISPF log that sheds light on

ISRS101 **Vol serial not allowed - Use "Other data set name" field when specifying volume serial.**

Explanation: A volume serial was specified on a panel when the Project/Group/Type fields were used for the data set name. The volume serial may only be specified when you use the Other Data Set Name field for the data set.

User Response: If you are trying to access a data set on a particular volume, type the data set name in the Other Data Set Name field and place the volume name in the Volume Serial field before pressing the Enter key.

ISRS103 **Member name required - Member name is required for this partitioned data set.**

Explanation: Add a member name to complete the specification of the partitioned data set indicated by the cursor.

User Response: Specify the member name and retry. Browse the data set if you are uncertain which member is correct.

ISRS104 **Enter "old" PDS name - Cannot compare "new" PDS to "old" sequential data set or PDS member.**

Explanation: Because the New data set is partitioned (contains members), the Old data set must also be partitioned. Valid combinations are PDS to PDS, Sequential to Sequential, PDS(member) to PDS(member), or Sequential to PDS(member). In other words, SuperC compares one to one or many to many, but not one to many.

User Response: Specify a valid combination and retry.

ISRS105 **Enter "old" member name - Cannot compare "new" sequential data set or PDS member to "old" PDS.**

Explanation: Because the New data set is a sequential or a member of a PDS, the Old data set requires a member. Valid combinations are PDS to PDS, Sequential to Sequential, PDS(member) to PDS(member), or Sequential to PDS(member). In other words, SuperC compares one to one or many to many, but not one to many.

User Response: Specify a valid combination and retry.

ISRS106 **Member name not allowed - Member name not allowed for sequential data set.**

Explanation: The sequential data set indicated by the cursor is incorrectly specified with a member name. Only partitioned data sets can accept member names.

User Response: Remove the member name and retry.

ISRS107 TBCREATE failure - Creating the table of member selections failed.

Explanation: This is an internal ISPF processing failure.

User Response: Write down the circumstances of the failure and contact your system programmer. It may be helpful to print or save the ISPF log when you exit ISPF.

System Programmer Response: There may be information in the ISPF log that sheds light on this failure. Perhaps there is a problem with the user's ISPTABL or ISPTLIB allocation. If you are unable to resolve the problem, contact IBM support.

ISRS108 TBPUT failure - TBPUT or TBADD to table of member selections failed.

Explanation: This is an internal ISPF processing failure.

User Response: Write down the circumstances of the failure and contact your system programmer. It may be helpful to print or save the ISPF log when you exit ISPF.

System Programmer Response: There may be information in the ISPF log that sheds light on this failure. Perhaps there is a problem with the user's ISPTABL or ISPTLIB allocation. If you are unable to resolve the problem, contact IBM support.

ISRS109 LMMDISP(get) failure - Internal ISPF error processing member list.

Explanation: This is an internal ISPF processing failure.

User Response: Write down the circumstances of the failure and contact your system programmer. It may be helpful to print or save the ISPF log when you exit ISPF.

System Programmer Response: There may be information in the ISPF log that sheds light on this failure. If you are unable to resolve the problem, contact IBM support.

ISRS110 File tailor failure - File tailoring of member selections failed.

Explanation: This is an internal ISPF processing error while attempting to file tailor statements into the SYSIN2 data set.

User Response: Write down the circumstances of the error and contact your system programmer. It may be helpful to print or save the ISPF log when you exit ISPF.

System Programmer Response: There may be information in the ISPF log that sheds light on this

error. Perhaps there is a problem with the user's ISPTABL or ISPTLIB allocation. If you are unable to resolve the problem, contact IBM support.

**ISRS111 LMINIT failure - LMINIT of specified data set failed with return code =
aaaaaaaa.**

Explanation: This is an internal ISPF processing error.

User Response: Write down the circumstances of the error and contact your system programmer. It may be helpful to print or save the ISPF log when you exit ISPF.

System Programmer Response: There may be information in the ISPF log that sheds light on this error. You might also try looking up the LMINIT return code in *&ispsfg*. It is possible there is something wrong with the data set itself. If you are unable to resolve the problem, contact IBM support.

**ISRS112 LMMFIND failure - LMMFIND of specified data set failed with return code
= aaaaaaaaa.**

Explanation: This is an internal ISPF processing error.

User Response: Write down the circumstances of the error and contact your system programmer. It may be helpful to print or save the ISPF log when you exit ISPF.

System Programmer Response: There may be information in the ISPF log that sheds light on this error. You might also try looking up the LMMFIND return code in *&ispsfg*. It is also possible there is something wrong with the data set itself. If you are unable to resolve the problem, contact IBM support.

**ISRS113 LMOPEN failure - LMOPEN of specified data set failed with return code
= aaaaaaaaa.**

Explanation: This is an internal ISPF processing error.

User Response: Write down the circumstances of the error and contact your system programmer. It may be helpful to print or save the ISPF log when you exit ISPF.

System Programmer Response: There may be information in the ISPF log that sheds light on this error. You might also try looking up the LMOPEN return code in *&ispsfg*. It is also possible there is something wrong with the data set itself. If you are unable to resolve the problem, contact IBM support.

PDF Messages

ISRS114 **LMCLOSE failure - LMCLOSE of specified data set failed with return code = aaaaaaaa.**

Explanation: This is an internal ISPF processing error.

User Response: Write down the circumstances of the error and contact your system programmer. It may be helpful to print or save the ISPF log when you exit ISPF.

System Programmer Response: There may be information in the ISPF log that sheds light on this error. You might also try looking up the LMCLOSE return code in *&ispsfg* . It is also possible there is something wrong with the data set itself. If you are unable to resolve the problem, contact IBM support.

ISRS115 **LMFREE failure - LMFREE of specified data set failed with return code = aaaaaaaa.**

Explanation: This is an internal ISPF processing error.

User Response: Write down the circumstances of the error and contact your system programmer. It may be helpful to print or save the ISPF log when you exit ISPF.

System Programmer Response: There may be information in the ISPF log that sheds light on this error. You might also try looking up the LMFREE return code in *&ispsfg* . It is also possible there is something wrong with the data set itself. If you are unable to resolve the problem, contact IBM support.

ISRS116 **LMMREP failure - LMMREP of specified data set failed with return code = aaaaaaaa.**

Explanation: This is an internal ISPF processing error.

User Response: Write down the circumstances of the error and contact your system programmer. It may be helpful to print or save the ISPF log when you exit ISPF.

System Programmer Response: There may be information in the ISPF log that sheds light on this error. You might also try looking up the LMMREP return code in *&ispsfg* . It is also possible there is something wrong with the data set itself. If you are unable to resolve the problem, contact IBM support.

ISRS117 **LMMDISP failure - LMMDISP of member list failed with return code = aaaaaaaa.**

Explanation: This is an internal ISPF processing error.

User Response: Write down the circumstances of the error and contact your system programmer. It may be helpful to print or save the ISPF log when you exit ISPF.

System Programmer Response: There may be information in the ISPF log that sheds light on this error. You might also try looking up the LMMDISP return code in *&ispsfg* . It is also possible there is something wrong with the data set itself. If you are unable to resolve the problem Contact IBM support.

ISRS119 **No members found - No members matched member list pattern or "new" data set empty.**

Explanation: No member selection list was created because no members matched the selection criteria established by the specified pattern. If no pattern was specified, the New data set is empty.

User Response: Modify the pattern to include one or more members of the New data set if you want to select from a list. Blank for member pattern allows you to select from a list of all members.

ISRS123 **Invalid profile - Too many options - no room to insert sequence option.**

Explanation: The profile you are using contains so many options that there is no room to add the sequence number option (SEQ, NOSEQ, or COBOL) specified from the panel without exceeding the maximum string size for parameters passed to SuperC.

User Response: You, or the creator of the profile, need to modify the profile to remove 1 or possibly 2 process options to free additional space. This may be done by using option 3.13.A ACTIVATE and CREATE functions. Consider specifying the sequence option in the profile so there is no need to override it in option 3.12.

ISRS121 **LMMDISP(PUT) failure - Creating the table of member selections failed.**

Explanation: This is an internal ISPF processing error.

User Response: Write down the circumstances of the error and contact your system programmer. It may be helpful to print or save the ISPF log when you exit ISPF.

System Programmer Response: There may be information in the ISPF log that sheds light on this error. If you are unable to resolve the problem, contact IBM support.

ISRS122 **Browse substituted - Browse has been substituted for View because View has been disabled via the configuration table.**

Explanation: This is an informational message.

ISRS123 Invalid profile - Too many options - no room to insert sequence option.

Explanation: The profile you are using contains so many options that there is no room to add the sequence number option (SEQ, NOSEQ, or COBOL) specified from the panel without exceeding the maximum string size for parameters passed to SuperC.

User Response: You, or the creator of the profile, need to modify the profile to remove 1 or possibly 2 process options to free additional space. This may be done by using option 3.13.A ACTIVATE and CREATE functions. Consider specifying the sequence option in the profile so there is no need to override it in option 3.12.

ISRS124 ***Search in progress*******

Explanation: This is an informational message. Your input has been validated successfully, and SuperC is invoked to process your search request.

ISRS125 GDS-use other DSN field - GDG data sets are permitted only in the "Other data set name" field.

Explanation: A Generation Data Group data set was entered in the Project-Group-Type fields. This is not supported.

User Response: Use the Data Set Name field for the GDG and retry.

ISRS126 Error browsing listing - aaaaaaaa

Explanation: This is an ISPF internal processing error.

User Response: This condition may be temporary. Retry. If the error persists, contact your system programmer. It may be helpful to save or print the ISPF log data set when you exit ISPF.

System Programmer Response: There may be information in the ISPF log data set. Try to browse the list data set outside of SuperC to determine if something is wrong with it. If you cannot resolve the problem, contact IBM support.

ISRS127 Error updating profile - aaaaaaaa

Explanation: This is an ISPF internal processing error.

User Response: This condition may be temporary. Retry. If the failure persists, contact your system programmer. It may be helpful to save or print the ISPF log data set when you exit ISPF.

System Programmer Response: There may be information in the ISPF log data set. Try to edit and save the profile data set outside of SuperC to determine if something is wrong with it. If you cannot resolve the problem, contact IBM support.

ISRU000 Invalid option - Select one of the listed options.

Explanation: No option was entered on the primary option panel.

User Response: Select one of the options available on this panel.

ISRU001 Data set not printed - Print control characters exist, press Help for additional information.

Explanation: The data set being printed contains print control characters.

User Response: Use the Hardcopy Utility, option 3.6, to print the data set.

ISRU002 Prompt not valid - Prompt is entered only for the rename, move, copy, TSO command, WS command, edit, or view actions.

Explanation: A Prompt is only allowed when the option entered supports a prompt.

User Response: Clear the Newname field.

ISRU003 Enter new member name - Rename member option specified for member aaaaaaaa.

Explanation: A new member name is required for the Rename option.

User Response: Enter a new name for the member being renamed.

ISRU004 Invalid DSORG - 'aaaaaaa' organization must be partitioned.

Explanation: The option or line command selected requires a partitioned data set.

User Response: Enter a valid command for the data set selected.

ISRU005 Invalid DSORG - 'aaaaaaa' organization must be partitioned or sequential.

Explanation: Data set with this DSORG cannot be printed.

User Response: Specify a data set to be printed that is partitioned or sequential.

ISRU006 Not real data set name - The selected option cannot process an alias data set name.

Explanation: Rename and Delete are not allowed for alias names.

PDF Messages

User Response: Use the real name to rename or delete a data set.

ISRU007 Enter member name - The selected option requires a member name.

Explanation: Commands B, D, E, P, R, and V are member commands and require a member name.

User Response: Enter a member name.

ISRU008 Pattern/name not allowed - The selected option applies to the entire data set.

Explanation: Commands C, I, L, S, and X apply to the whole data set and a member name is not required.

User Response: Do not use a pattern or a member name.

ISRU009 SYSCTLG not allowed - aaaaaaaaa not valid for the selected option.

Explanation: A CVOL catalog is not allowed for the option selected.

User Response: Change the data set name specified.

ISRU010 Invalid data set name - Syntax error in data set name aaaaaaaa.

Explanation: A valid TSO data set name qualifier begins with an alphabetic character (A-Z, \$, @, or #). The remaining characters must be alphanumeric or a hyphen (-).

User Response: Correct the data set name.

ISRU011 Request failed - Catalog authorization failed for aaaaaaaa.

Explanation: RACF authorization failed for cataloging or uncataloging the data set.

User Response: If you need this particular data set cataloged or uncataloged, contact your systems programmer or RACF administrator for assistance.

Programmer Response: Catalog or uncatalog the data set as requested.

ISRU012 Rename failed - Rename return code aaaaaaaa decimal, status code bbbbbbbb decimal.

Explanation: The return code and status code indicate that one of several errors occurred. For more information, check the DADSM RENAME return and diagnostic codes.

ISRU013 Data set not on volume - aaaaaaaa not on volume bbbbbbbb.

Explanation: The data set being renamed does not exist.

User Response: Enter a data set name that exists.

ISRU014 Request failed - Data set is password protected.

Explanation: This message is self-explanatory.

User Response: Enter the data set password.

ISRU015 New name already on vol – Volume aaaaaaaa contains data set bbbbbbbb.

Explanation: The data set already exists on the volume.

User Response: Change the new data set name.

ISRU016 Invalid record unit – Average record unit must be 'M', 'K', 'U', or blank.

Explanation: When selecting space units of records, an allocation unit of M for megabytes, K for kilobytes, or U for bytes must be used. If a blank is entered, the default is U for bytes.

User Response: Enter a valid average record unit.

ISRU017 Vol aaaaaaaa not mounted - Contact computer center if this volume is required.

Explanation: The data set specified is on a volume that is not currently mounted.

User Response: Contact a computer operator to have the volume mounted.

ISRU018 Rename data set failed - aaaaaaaa is open, cannot be renamed.

Explanation: The data set cannot be renamed because it is currently open.

User Response: Rename the data set after it has been closed.

ISRU019 aaaaaaaa not allowed - aaaaaaaa only allowed for first library of concatenation.

Explanation: The member must be in the first library of a concatenation for the Rename, Delete, Reset, Move, TSO Command, and WS command Member options.

User Response: Enter the library containing the member as the first library in the concatenation.

ISRU020 **Utility - Delete - 'aaaaaaaa' deleted from volume bbbbbbbb.**

Explanation: This is an informational message. This message is written to the ISPF log data set when a data set is successfully deleted.

ISRU021 **Data set deleted - 'aaaaaaaa' deleted from volume bbbbbbbb.**

Explanation: This is an informational message. This message is displayed when a data set is successfully deleted.

ISRU022 **The data set was successfully renamed and cataloged, but the catalog entry for the old name could not be removed from the catalog. The uncatalog return code was aaaaaaaa. Enter the HELP command for further information.**

Explanation: A data set is renamed in a 3 step process:

1. The new data set name is cataloged.
2. The data set is renamed.
3. The old data set name is uncataloged.

PDF successfully cataloged the new data set name and successfully renamed the data set itself, but could not uncatalog the old data set name.

The current status of your system: Catalog entries exist for both the old and new names, the data set itself has the new name.

User Response: Contact your system programmer.

System Programmer Response: Remove the catalog entry.

ISRU023 **Data set renamed - Oldname: 'aaaaaaaa', newname: 'bbbbbbbb'**

Explanation: This is an informational message. This message is displayed when a data set is successfully renamed. The message gives both the old and the new name of the data set.

ISRU024 **Utility - Rename - Old name: 'aaaaaaaa'**

Explanation: This is an informational message. This message is written to the ISPF log data set when a data set is successfully renamed. It contains the old name of the data set.

ISRU025 **New name: 'aaaaaaaa'**

Explanation: This is an informational message. This message is written to the ISPF log data set when a data set is successfully renamed. It contains the new data set name.

ISRU026 **Member not printed - Unable to use aaaaaaaa**

Explanation: An error occurred either allocating, opening, or writing to the SPF list data set.

User Response: Check the characteristics of your list data set in using option 0.

ISRU027 **Member aaaaaaaa bbbbbbbb - In data set 'ccccccc'**

Explanation: This is an informational message. The member or pattern named in the message was Browsed, Printed, Renamed, Deleted, Moved, Copied, Edited, Reset, Viewed, or a command executed as specified.

ISRU028 **aaaaaaaa bbbbbbbb processed - In data set 'ccccccc'**

Explanation: This is an informational message.

ISRU029 **Data set deleted - Multivolume data set 'aaaaaaaa' was deleted**

Explanation: A multiple volume data was deleted.

ISRU030 **Invalid selection code - Valid codes: P (Print), D (Delete), R (Rename), B (Browse), E (Edit), V (View), M (Move), C (Copy), G (Reset), J (Submit), T (TSO Command), W (WS Command), S (Select - If default select set), or O (Open - If ISPF Workplace).**

Explanation: Either the member list command is not a valid PDF member list command or the command length is too long.

User Response: Correct the command.

ISRU031 **Member not found - aaaaaaaa was not found in the directory for bbbbbbbb.**

Explanation: This message indicates that a member was not found by a BLDL command. The BLDL was issued by a member list command to Print, Rename, or Delete a member.

User Response: Use member list to determine what members are in the the partitioned data set selected.

ISRU032 **Member not printed - aaaaaaaa invalid for printing or could not be read.**

Explanation: This message is issued as a result of a BLDL for an error other than member not found. This may be the result of an I/O error or a directory error.

User Response: Contact your system programmer.

PDF Messages

ISRU033 **Invalid member name - Member name**
aaaaaaaa **not valid for partitioned data**
sets.

Explanation: The new name selected for a Rename operation is not a valid member name.

User Response: Select a valid member name.

ISRU034 *aaaaaaaa* **already exists - Invalid to**
rename member to an existing name.

Explanation: The member name selected for this rename operation already exists in the directory for this data set.

User Response: Select another member name for the Rename Member operation.

ISRU035 **Request failed - STOW** *aaaaaaaa* **error**
with member *bbbbbbbb*.

Explanation: A stow error occurred while trying to rename a member. The return code indicates an I/O or directory error.

User Response: Contact your system programmer.

ISRU036 **Request failed - Unable to read member**
aaaaaaaa **directory entry or data.**

Explanation: A directory error occurred while trying to read the directory entry for the member named.

User Response: Contact your system programmer.

ISRU037 **Utility - Rename -** *aaaaaaaa(bbbbbbbb)*
renamed (*cccccccc*).

Explanation: This is an informational message. This message is recorded in the ISPF log and specifies the member renamed and the new name.

ISRU038 **Utility - Delete -** *aaaaaaaa(bbbbbbbb)*
deleted.

Explanation: This is an informational message. This message is recorded in the ISPF log and specifies the member deleted.

ISRU039 **Conflicting selections - Enhanced**
member list must be selected when
Display Edit/View panel is selected.

Explanation: Enhanced member list must be selected for prompt Edit/View setting.

User Response: Select enhanced member lists, or de-select prompt Edit/View settings.

ISRU039A **Partial list displayed - Referral library**
list contained more than 30 data set
entries. Only the first 30 entry matches
are shown.

Explanation: Referral list DSLIST supports up to 30 data set name/filters. The referral library list contained greater than 30 data set entries. The first 30 entry matches are shown.

User Response: None, informational only.

ISRU040 **Index printed - Index of** *aaaaaaaa* **placed**
in *bbbbbbbb*.

Explanation: This is an informational message.

ISRU041 **Index not printed - Index of** *aaaaaaaa* **not**
placed in *bbbbbbbb*.

Explanation: Error opening temporary data set or error writing line to ISPF list data set.

ISRU042 **Member is empty -** *aaaaaaaa* **contains no**
records.

Explanation: A PRINT command was issued for an empty member.

ISRU043 **Data set printed - Listing of** *aaaaaaaa*
placed in *bbbbbbbb*.

Explanation: This is an informational message.

ISRU045 **Data set not printed -** *aaaaaaaa* **has**
invalid RECFM/LRECL, index printed.

Explanation: The record format is spanned, or the LRECL is not between 0 and 300. The index is printed, but the data set could not be printed.

User Response: To print the data set, reformat it with an LRECL of 300 or less.

ISRU046 **Data set not printed -** *aaaaaaaa* **is empty,**
index printed.

Explanation: This is an informational message. This is an empty sequential data set, or a partitioned data set with no members. The index is printed but the data set is not printed.

ISRU047 **Data set not printed -** *aaaaaaaa* **had a**
directory error, index printed.

Explanation: An error occurred while reading the directory or opening a data set.

User Response: Contact your system programmer.

ISRU048 **Part of data set printed - aaaaaaaa partially placed in bbbbbbbb.**

Explanation: There was an error when printing the data set. Messages are in the list data set.

User Response: Check the list data set to determine what the error was.

ISRU049 **OBTAIN failed - aaaaaaaa has unknown attributes, OBTAIN RC = bbbbbbbb hex.**

Explanation: The DSCBs for this data set could not be read. There is either an error in the VTOC or an I/O error occurred. Information about the data set could not be obtained.

User Response: Contact your system programmer.

ISRU050 **Utility - Allocate - aaaaaaaa allocated on volume bbbbbbbb.**

Explanation: This is an informational message. This is a message written to the ISPF log data set.

ISRU051 **Data set allocated - aaaaaaaa allocated on volume bbbbbbbb.**

Explanation: This is an informational message.

ISRU052 **Print failed - Unable to write to the list data set. The logical record length of the list data set must be greater than 8.**

Explanation: This is an informational message.

User Response: Increase the logical record length of the list data set.

ISRU053 **Invalid record format - 'aaaaaaa' is not a valid code.**

Explanation: A character other than F, V, U, T, B, S, A, or M was entered in the record format.

User Response: Correct the record format character.

ISRU054 **Invalid record format - 'aaaaaaa' conflicts with another code.**

Explanation: Two codes for the same attribute, such as Fixed and Variable, have been entered for the record format.

User Response: Correct the record format.

ISRU055 **Invalid record format - Record format F, V, or U required.**

Explanation: The record format must have a type of Fixed, Variable, or Undefined.

User Response: Correct the record format.

ISRU056 **Invalid record length - Record length is inconsistent with block size for this record format.**

Explanation: The record length is greater than the block size or is inconsistent with the block size. For fixed records, the block size should be divisible by the record length. For variable records, the block size should be a multiple of the record length plus 4.

User Response: Correct the record length or the block size.

ISRU060 **Invalid combination - The input and output data sets cannot be the same if any of the specified data sets are RECFM=U PDSEs.**

Explanation: The interface used by ISPF to copy PDSE program objects does not support specifying the same data set as both input and output.

User Response: If the function requested is Move, use option 3.1 to rename the member. If the function requested is Copy, the member must first be copied to a second library, then back to the first.

ISRU061 **Invalid combination - One data set has "undefined" record format, and the other does not.**

Explanation: Record format U data sets can only be moved or copied to another record format U data set.

User Response: Specify two format U data sets.

ISRU062 **Invalid block sizes - "To" block size is less than "from" block size with record format U.**

Explanation: For format U data sets, the block size of the TO data set must be equal to or greater than the block size of the FROM data set.

User Response: Specify a TO data set with a block size that is at least as large as the FROM data set.

ISRU063 **Invalid member name - Member name aaaaaaaa is not valid. First character must be alpha or national.**

Explanation: Valid member names consist of 1-8 alphanumeric characters (A-Z, #, \$, @, 1-9). The first character must be alphabetic.

User Response: Correct the member name.

ISRU064 **Invalid record format - Cannot move or copy record format U sequential data sets.**

Explanation: This is an informational message. Use a partitioned data set to copy format U records.

PDF Messages

ISRU065 **Invalid specification - "From" and "to" data sets cannot be the same for sequential data sets.**

Explanation: When copying from a sequential data set, a different data set must be the target of the COPY command.

User Response: Specify a different data set for the COPY command.

ISRU066 **Invalid load module - Cannot move or copy "planned overlay" load modules.**

Explanation: This is an informational message. Load modules that were created for planned overlay may not be moved or copied. ISPF does not support moving or copying data with note lists.

ISRU067 **Invalid specification - "To" member cannot be specified if "from" member is blank or *.**

Explanation: When a member list is requested, the TO member name should not be specified on the TO panel. The TO member name can be specified in the rename field on the member list.

User Response: Erase the member name on the TO panel.

ISRU068 **Enter new member name - Member must be renamed when "from" and "to" data sets are the same.**

Explanation: When copying a member of a PDS to the same PDS, a new member name must be specified. The member cannot be copied to itself.

User Response: Specify a new member name.

ISRU069 **Enter new member name - "From" data set is sequential and "to" is PDS. Enter "to" member name.**

Explanation: When copying a sequential data set to a PDS, a member name must be specified.

User Response: Specify a member name for the TO data set.

ISRU070 *aaaaaaaa members bbbbbbbb - to data set
ccccccc*

Explanation: This is an informational message.

ISRU071 *Member aaaaaaaaa bbbbbbbb - to data set
ccccccc*

Explanation: This is an informational message.

ISRU071A *Member aaaaaaaaa bbbbbbbb - in data set
ccccccc*

Explanation: This is an informational message.

ISRU072 *Member aaaaaaaaa bbbbbbbb - to data set
ccccccc(dddddddd)*

Explanation: This is an informational message.

ISRU072A *Member aaaaaaaaa bbbbbbbb - in data set
ccccccc*

Explanation: This is an informational message.

ISRU073 *Data set aaaaaaaa - to data set bbbbbbbb*

Explanation: This is an informational message.

ISRU074 *Data set aaaaaaaa - to data set
bbbbbbb(ccccccc)*

Explanation: This is an informational message.

ISRU075 *Utility - Move/Copy - aaaaaaaa(bbbbbbbb)
ccccccc*

Explanation: This is an informational message written to ISPF log data set.

ISRU076 *Utility - Move/Copy - aaaaaaaa bbbbbbbb*

Explanation: This is an informational message written to the ISPF log data set.

ISRU077 *to aaaaaaaa(bbbbbbbb)*

Explanation: This is an informational message written to the ISPF log data set.

ISRU078 *to aaaaaaaa*

Explanation: This is an informational message written to the ISPF log data set.

ISRU079 *Utility - Move/Copy - aaaaaaaa -- bbbbbbbb
members ccccccc*

Explanation: This is an informational message written to the ISPF log data set.

ISRU080 **Member not found - Member aaaaaaaaa
not found in "from" data set.**

Explanation: The member specified was not found in the input data set.

User Response: Specify a member of the input data set.

ISRU081 **I/O error on BLDL - BLDL I/O error - member aaaaaaaa. Move/Copy completed for bbbbbbbb members.**

Explanation: The Move/Copy operation was completed for the number of members specified. An I/O error occurred on the BLDL for the member named.

User Response: Contact your system programmer.

ISRU082 **I/O error during read - Unable to read member aaaaaaaa. Move/Copy completed for bbbbbbbb members.**

Explanation: An I/O error occurred reading the member named. The Move/Copy operation was completed for the number of members specified.

User Response: Contact your system programmer.

ISRU083 **I/O error during write - Unable to write member aaaaaaaa. Move/Copy completed for bbbbbbbb members.**

Explanation: This is an informational message. An I/O error occurred while writing the member named. The Move/Copy operation was completed for the number of members specified.

ISRU084 **No space on directory - Unable to STOW member aaaaaaaa. Move/Copy completed for bbbbbbbb members.**

Explanation: This is an informational message. There is no space in the directory to stow the member named. The Move/Copy operation is complete for the number of members specified.

ISRU085 **I/O error on STOW - STOW I/O error - member aaaaaaaa. Move/Copy completed for bbbbbbbb members.**

Explanation: There was an I/O error when stowing the member named. The Move/Copy operation is complete for the number of members specified.

ISRU086 **STOW delete I/O error - Member aaaaaaaa not deleted in "from" data set. bbbbbbbb members processed.**

Explanation: This is an informational message. An I/O error occurred while attempting to delete the member named from the directory. The Move/Copy operation is complete for the number of members specified.

ISRU087 **STOW delete I/O error - Member aaaaaaaa not deleted in "from" data set. Member copied, not moved.**

Explanation: This is an informational message. The member specified could not be deleted from the directory of the FROM data set. The member has been copied but not deleted.

ISRU088 **Unable to print - "To" data set not printed, but Move/Copy was successful.**

Explanation: This is an informational message.

ISRU089 **aaaaaaa not replaced - Member aaaaaaaa already exists in the 'to' data set.**

Explanation: The member specified already exists and you specified no replace.

User Response: Specify a new member name or indicate that the member is to be replaced.

ISRU093 **Sent to local printer - aaaaaaaa directed to local printer bbbbbbbbccccccc.**

Explanation: This is an informational message. The data set name specified was sent to the local printer specified.

ISRU094 **Utility - Hardcopy - aaaaaaaa directed to local printer bbbbbbbbccccccc.**

Explanation: This is an informational message. This message is added to the ISPF log data set.

ISRU095 **Data set not printed. - aaaaaaaa not printed. See the ISPF Messages and Codes or Help for ISPF Print RC = bbbbbbbb.**

Explanation: Possible return codes are:

- 2 The user cancelled local print.
- 4 ISPF issued the TSO PRINTDS command, but the user pressed ATTENTION during PRINTDS.
- 6 Local print has been disabled by the system programmer. Your system programmer has set the LOCALPRT field in ISRCNFIG to blank, which disables local print.
- 8 ISPF issued the TSO PRINTDS command, but TSO PRINTDS abended. Further information may be available from TSO PRINTDS by setting WTPMSG and MSGID in your TSO profile.
- 12 TSO PRINTDS had a return code greater than zero. Further information may be available

PDF Messages

from TSO PRINTDS by setting WTPMSG and MSGID in your TSO profile.

16 Unexpected RC from local print.

User Response: Contact your system programmer.

System Programmer Response: Verify that the local print function is set up correctly.

ISRU097 Data set not cataloged - *aaaaaaaa* was not cataloged on volume *bbbbbbbb*.

Explanation: This is an informational message. This message is issued when an uncatalog line command is issued against an uncataloged data set.

ISRU098 Data set not allocated - NULLFILE is a reserved system name and cannot be allocated.

Explanation: NULLFILE is reserved by the system as a DUMMY data set name. It cannot be used for input or output.

User Response: Specify a data set name other than NULLFILE.

ISRU099 OBTAIN failed - *aaaaaaaa* has unknown attributes, OBTAIN RC = *bbbbbbbb* hex.

Explanation: An attempt to read information about the data set to be printed was unsuccessful. The return code from the obtain macro is in the message.

ISRU100 JCL generated - JCL to print *aaaaaaaa* *bbbbbbbb* placed in *ccccccc*.

Explanation: This is an informational message.

ISRU101 Error generating JCL - JCL to print *aaaaaaaa* *bbbbbbbb* not placed in temp data set.

Explanation: The temporary data set used to build JCL could not be opened or closed.

User Response: Determine why a temporary data set cannot be opened or closed.

ISRU102 Unexpected return code - Return code *"aaaaaaaa"* from the print utility exit. The data is kept.

Explanation: The print utility has returned a return code greater than 4 but not equal to 20.

User Response: Determine why the print utility exit returned the return code, correct the problem, and resubmit the job.

ISRU103 Job - *aaaaaaaa* - Print *bbbbbbbb* *ccccccc* on SYSOUT class *ddddddd*.

Explanation: This is an informational message put in the log data set.

ISRU104 "From" data set is empty - LMCOPY or LMMOVE service invoked for empty "from" data set

Explanation: This is an informational message.

ISRU105 Job - *aaaaaaaa* - Submitted

Explanation: This is an informational message put in the log data set.

ISRU106 Cancel - *aaaaaaaa* - Canceled

Explanation: This is an informational message put in the log data set.

ISRU107 Cancel - *aaaaaaaa* - Canceled because of error in temp data set.

Explanation: This is an informational message put in the log data set.

ISRU108 Sent to TSO/E ICF - *aaaaaaaa* printed via TSO/E ICF printer support *bbbbbbbb*.

Explanation: This is an informational message.

ISRU109 Utility - Hardcopy - *aaaaaaaa* printed via TSO/E ICF printer support *bbbbbbbb*.

Explanation: This is an informational message put in the log data set.

ISRU110 Invalid specification - "From" and "to" data sets cannot be the same when all members specified.

Explanation: The TO and FROM data sets must be different if all the members are being copied.

User Response: Change the TO or FROM data set specification.

ISRU111 I/O error on BLDL - I/O error on BLDL for member *aaaaaaaa* on "to" data set.

Explanation: BLDL macro has failed. Open failed, Obtain failed, or there is insufficient virtual storage for the BLDL.

User Response: Increase virtual storage and retry.

ISRU112 **I/O error on BLDL - BLDL error on member *aaaaaaaa* on "to" data set. *bbbbbbbb* members processed.**

Explanation: BLDL macro has failed. Open failed, Obtain failed, or there is insufficient virtual storage for the BLDL.

User Response: Increase virtual storage and retry.

ISRU113 **Members not replaced - *aaaaaaaa* members not replaced, *bbbbbbbb* members *cccccccc*.**

Explanation: This is an informational message.

User Response: Determine why the members were not replaced and retry. One possible explanation is that another user was accessing the member.

ISRU114 **to *aaaaaaaa bbbbbbbb* members not replaced**

Explanation: This is an informational message.

User Response: Determine why the members were not replaced and retry. One possible explanation is that another user was accessing the member.

ISRU115 ***aaaaaaaa* not replaced - Like-named member already exists in "to" data set.**

Explanation: This is an informational message.

ISRU116 **I/O error on BLDL - BLDL I/O error member *aaaaaaaa* on "to" data set. *bbbbbbbb* members complete.**

Explanation: BLDL macro has failed. Open failed, Obtain failed, or there is insufficient virtual storage for the BLDL.

User Response: Increase virtual storage and retry.

ISRU117 ***aaaaaaaa* not *bbbbbbbb* - Cannot find member *cccccccc* on "to" data set.**

Explanation: This is an informational message.

ISRU118 ***aaaaaaaa* not *bbbbbbbb* - Cannot find member *cccccccc* on "to" data set. *dddddddd* members processed.**

Explanation: This is an informational message.

ISRU119 **I/O error on BLDL - I/O error on BLDL for member *aaaaaaaa* on "to" data set.**

Explanation: BLDL macro has failed. Open failed, Obtain failed, or there was insufficient virtual storage for the BLDL.

User Response: Increase virtual storage and retry.

ISRU120 ***aaaaaaaa* members reset - Reset statistics was completed successfully for *aaaaaaaa* members.**

Explanation: This is an informational message.

ISRU121 **Member *aaaaaaaa* reset - Reset statistics was completed successfully.**

Explanation: This is an informational message.

ISRU122 **Member not found - Member *aaaaaaaa* not found in data set.**

Explanation: This is an informational message.

ISRU123 **I/O error during search - Directory error - member *aaaaaaaa*. Reset completed for *bbbbbbbb* members.**

Explanation: BLDL macro has failed. Open failed, Obtain failed, or there is insufficient virtual storage for the BLDL.

User Response: Increase virtual storage and retry.

ISRU124 **No space on directory - Unable to STOW member *aaaaaaaa*. Reset completed for *bbbbbbbb* members.**

Explanation: Statistics could not be set because there is no space in the directory to store the statistics.

User Response: Either delete members from the data set to free space in the directory, or reallocate the data set with more directory blocks.

ISRU125 **I/O error during STOW - Directory error - member *aaaaaaaa*. Reset completed for *bbbbbbbb* members.**

Explanation: The MVS STOW system macro has failed.

User Response: Contact your system programmer.

System Programmer Response: This is likely the result of an MVS system error. Correct the failure and retry.

ISRU126 **I/O error during read - Unable to read member *aaaaaaaa*. Reset completed for *bbbbbbbb* members.**

Explanation: The MVS GET system macro has failed.

User Response: Contact your system programmer.

System Programmer Response: This is likely the result of an MVS system error. Correct failure and retry.

PDF Messages

ISRU127 **Statistics deleted - Delete statistics was completed successfully for member**
aaaaaaaa.

Explanation: This is an informational message.

ISRU128 **Utility - Reset - aaaaaaaa(bbbbbbbb)**

Explanation: This is an informational message put in the log data set.

ISRU129 **Utility - Reset - aaaaaaaa ---- All members**

Explanation: This is an informational message put in the log data set.

ISRU130 **Data set cataloged - 'aaaaaaaa' cataloged on volume**
bbbbbbbb.

Explanation: This is an informational message.

ISRU131 **Utility - Catalog - 'aaaaaaaa' cataloged on volume**
bbbbbbbb.

Explanation: This is an informational message.

ISRU132 **Data set uncataloged - 'aaaaaaaa' uncataloged.**

Explanation: This is an informational message.

ISRU133 **Utility - Uncatalog - 'aaaaaaaa' uncataloged**

Explanation: This is an informational message.

ISRU134 **Catalog unavailable - The volume containing the requested catalog is not mounted.**

Explanation: This message is self-explanatory.

User Response: Have your system programmer mount the volume.

System Programmer Response: Mount the volume.

ISRU135 **No space in system ctlg - Contact system PGMer, rtn code = aaaaaaaa, r0 =**
bbbbbbbb, r1 = ccccccc (dec).

Explanation: There is no space in system volume to process request.

User Response: Give your system programmer the information in the message.

ISRU136 **Error in system ctlg - Contact system Programmer, rtn code = aaaaaaaa, r0 =**
bbbbbbbb, r1 = ccccccc (dec).

Explanation: A severe error has occurred while processing a catalog request.

User Response: Give your system programmer the information in the message.

System Programmer Response: Correct the catalog problem.

ISRU137 **Request failed - Catalog return code =**
aaaaaaaa, r0 = bbbbbbbb, r1 = ccccccc (dec).

Explanation: A severe error has occurred while processing a catalog request.

User Response: Give your system programmer the information in the message.

System Programmer Response: Correct the catalog problem.

ISRU138 **Already cataloged - Entire or partial name cataloged, data set 'aaaaaaaa'.**

Explanation: This is an informational message.

ISRU139 **Data set not cataloged - 'aaaaaaaa' was not found in catalog.**

Explanation: This is an informational message.

ISRU140 **Compress successful - Compress listing is in 'aaaaaaaa'**

Explanation: This is an informational message.

ISRU141 **Utility - Compress - 'aaaaaaaa' compressed**

Explanation: This is an informational message.

ISRU142 **Statistics deleted - Delete statistics was completed successfully for aaaaaaaa members.**

Explanation: This is an informational message.

ISRU143 **Utility - Compress - 'aaaaaaaa' compress failed, RC = bbbbbbbb hex**

Explanation: This is an informational message put in the log data set.

ISRU144 **Incomplete *aaaa* - ISPF does not support copying PDSE program object aliases. One or more of the members you selected are program object aliases, and have been marked with *ALIAS. These members were not copied, unless you also selected the member of which it is an alias.**

Explanation: PDSE program object alias members are copied automatically when the member it is an alias of is copied. ISPF will not copy an alias member if selected. If you need to process the alias member, you must use the binder.

User Response: Use the binder to process program object alias members.

ISRU145 **Incomplete *aaaa* - ISPF does not support copying PDSE program object aliases. One or more of the members you selected are program object aliases. These members were not copied, unless you also selected the member of which it is an alias.**

Explanation: PDSE program object alias members are copied automatically when the member it of which is an alias is copied. ISPF will not copy an alias member if selected. If you need to process the alias member, you must use the binder.

User Response: Use the binder to process program object alias members.

ISRU146 **Member not *aaaaa* - ISPF does not support copying PDSE program object aliases. The member you selected is a program object alias. To copy this member, copy the member that it is an alias of.**

Explanation: PDSE program object alias members are copied automatically when the member of which it is an alias is copied. ISPF will not copy an alias member if selected. If you need to process the alias member, you must use the binder.

User Response: Use the binder to process program object alias members.

ISRU147 **Compress failed - Compress listing is in '*aaaaaaaa*', RC = *bbbbbbbb* hex.**

Explanation: The compress has failed for one of the following reasons:

- 4 Data set not eligible for compression. Set by user exit only.
- 8 Data set could not be allocated. Set by user exit only.

- 12 Data set is not catalogued. Set by user exit only.
- 16 Error in user exit; ISPF should continue. Set by user exit only.
- 17 LMCOMP recursion error. Set by user exit only.
- 18 Unknown return code from user exit.
- 19 Error encountered invoking user exit. This is due to a Catalog non-zero return code.
- 20 Severe error

ISRU148 **Uncatalog failed - The uncatalog request finished with a return code of 0, but the data set still exists in the catalog.**

Explanation: The data set was not uncataloged, probably because it resides on a volume for which a CONVERTV was issued, but not successfully completed. PDF issued the uncatalog request, received a return code zero, but on further inspection discovered that the data set name still existed in the catalog.

User Response: Contact your system programmer for assistance in removing the data set from the catalog.

System Programmer Response: Refer to the appropriate DFP documentation for assistance in removing the catalog entry.

ISRU150 **BLDL error - I/O error, insufficient virtual storage, or other BLDL error.**

Explanation: Either there was not enough storage to process BLDL, or another BLDL error has occurred.

User Response: Either add more virtual storage, or correct the other BLDL error.

ISRU151 **I/O error during read - Unable to read data.**

Explanation: The member is unreadable due to an I/O error.

User Response: Retry the operation. If the problem persists, contact your system programmer.

System Programmer Response: Correct the I/O error.

ISRU152 **Unable to copy data - Data contains user TTR, but is not a load module. ISPF cannot copy.**

Explanation: ISPF does not support the type of data being copied.

User Response: Use an alternate copy method, such as IEBCOPY.

PDF Messages

ISRU153 **Print failed – Move/Copy operation encountered an error printing one or more members.**

Explanation: The Move/Copy operation could not print all of the successfully copied members to the print data set. This may be due to an out-of-space condition on the print data set.

User Response: Reallocate the print data set with more space.

ISRU154 **Members may be copied – Only members from library *aaaaaaaa* will be moved, all else will be copied.**

Explanation: This is an informational message.

ISRU155 **Numeric out of range – The number entered is too large or too small.**

Explanation: This is an informational message.

ISRU156 **Invalid date – The date must be specified as one of the formats listed.**

Explanation: The date has been entered in an unsupported format.

User Response: Enter the date in a format that is supported.

ISRU157 **Invalid date - The specified expiration date has passed.**

Explanation: The expiration date entered has already passed.

User Response: Enter a future date.

ISRU158 **Delete failed – The expiration date for this data set has not passed.**

Explanation: This data cannot be deleted until the expiration date has passed.

User Response: Delete the data after the expiration date.

ISRU159 **Invalid field – This field is valid for Copy only.**

Explanation: This is an informational message.

ISRU160 **Invalid selection code – Valid options are: PK or PD.**

Explanation: Only PK and PD are valid choices.

User Response: Enter either PK or PD.

ISRU161 **Empty member – Member *aaaaaaaa* is empty.**

Explanation: This is an informational message.

ISRU162 **I/O error – Unable to read member *aaaaaaaa*.**

Explanation: The member is unreadable due to an I/O error.

User Response: Contact your system programmer.

System Programmer Response: Fix the I/O error.

ISRU163 **VSAM data set - VSAM data set organization is not supported for this function.**

Explanation: You cannot use the Rename, Catalog or Uncatalog functions of option 3.2 or option 3.4 against a VSAM data set.

User Response: Use IDCAMS to process the VSAM data set.

ISRU164 **Empty data set - Data set *aaaaaaaa* is empty.**

Explanation: This is an informational message.

ISRU165 **Invalid DSORG - Data set organization must be partitioned or sequential.**

Explanation: The data set organization must be partitioned or sequential to process the operation you have requested.

User Response: Enter a valid DSORG and retry the operation.

ISRU166 **Data set not partitioned - Member *aaaaaaaa* was specified for data set *bbbbbbbb*.**

Explanation: The requested operation requires a partitioned data set.

User Response: Enter a partitioned data set and retry the operation.

ISRU167 **Data set Open failed - Data set *aaaaaaaa* could not be opened to check if member existed.**

Explanation: The operation cannot continue because the data set could not be opened.

User Response: Determine why Open was unsuccessful, correct the problem, and retry the operation.

ISRU168 **Member not found - Member** *aaaaaaaa*
was not found in data set *bbbbbbbb*

Explanation: The member specified on the hardcopy Utility panel does not exist in the data set specified.

User Response: Correct the data set and/or member and retry the print request.

ISRU169 **Invalid disposition - A member cannot be deleted using this function.**

Explanation: The PD option cannot be used if the data to be printed is a member of a PDS.

User Response: Use the PK option to print the member.

ISRU170 **No data set names found - No data set names were found to satisfy the search argument(s).**

Explanation: This is an informational message.

ISRU171 **No data set names found - No data sets are cataloged that start with** *'aaaaaaaa'*.

Explanation: This is an informational message.

ISRU172 **Dsname level error - Remove the quotes from the Dsname Level.**

Explanation: The syntax of the Dsname Level is invalid. Quotation marks are not needed around the Dsname Level.

User Response: Enter a Dsname Level without quotation marks.

ISRU173 **Catalog search error - Locate return code for catalog search was** *aaaaaaaa* **decimal.**

Explanation: A catalog error has occurred during a locate.

User Response: Contact your system programmer.

System Programmer Response: Correct the catalog error.

ISRU174 **TBCREATE failure - Creating the table of data set names resulted in return code** *aaaaaaaa*.

Explanation: A return code greater than 4 was received from the TBCREATE service.

User Response: The error is probably due to the table being in use by another session. Free the table from that session and retry.

ISRU175 **Tbadd failure - Return code** *aaaaaaaa* **received adding** *bbbbbbbb* **to table.**

Explanation: A return code greater than 8 was received from the TBADD or TBPUR service.

User Response: Log off and retry. If the error recurs, contact your system programmer.

System Programmer Response: Contact IBM support.

ISRU176 **Data set list saved - The listing of data sets was placed in** *'aaaaaaaa'.*

Explanation: This is an informational message.

ISRU177 **VTOC information printed - The VTOC information for** *aaaaaaaa* **was placed in the ISPF List data set.**

Explanation: This is an informational message.

ISRU178 **Volume not mounted - Volume** *aaaaaaaa* **is not mounted or is unavailable.**

Explanation: The volume you are trying to access is not mounted.

User Response: Contact your system programmer.

System Programmer Response: Mount the volume.

ISRU179 **Enter 2nd operand - A second operand is required for the LOCATE command.**

Explanation: The LOCATE command requires that a search string be entered.

User Response: Reissue the command with a search string.

ISRU180 **Invalid LOCATE operand - Table is sorted by** *aaaaaaaa*. **Operand is not a valid fixed value.**

Explanation: An invalid LOCATE string was entered.

User Response: Enter a valid search string.

ISRU181 **LOCATE search error - Return code -** *aaaaaaaa* **- received while searching table.**

Explanation: A return code greater than 8 was received from the TBSKIP service.

User Response: Log off, log back on, and retry. If the error persists, contact the system programmer.

System Programmer Response: Contact IBM support.

PDF Messages

ISRU182 **Invalid command - The command entered is not valid for the Data Set List Utility.**

Explanation: A command was entered that is not supported by the Data Set List.

User Response: Enter a valid data set list primary command: CONFIRM, FIND, LOCATE, SAVE, SHOWCMD, or SORT.

ISRU185 **Incomplete string - Put a quote to indicate the end of the string.**

Explanation: A quote was found to indicate the argument of the FIND command is a literal string, but no ending quote was found to mark the end of the string.

User Response: Correct the FIND command string and retry.

ISRU186 **Invalid date - Specify a date in the format YYYY/MM/DD.**

Explanation: When the data set list is sorted by one of the date fields, the argument of the LOCATE command must be a valid date.

User Response: Correct the invalid date format as instructed and retry the LOCATE command.

ISRU187 **Enter required field - Dsname level and/or volume must be specified.**

Explanation: Either dsname level, volume or both must be specified when requesting a data set list.

User Response: Specify a Dsname Level, a Volume serial, or both to indicate which data sets are to be included in the list. Entering a Volume serial with a blank Dsname level will call up a list of all the data sets on the volume.

ISRU188 **Duplicate data set name - Data set is cataloged on a volume other than
aaaaaaaa.**

Explanation: An SMS data set with the same name is cataloged on another volume. Any attempt to allocate the uncataloged version of the data set will result in the SMS version of the data set being allocated.

ISRU190 **aaaaaaaa VTOC printed - VTOC listing of volume aaaaaaaaa placed in bbbbbbbb.**

Explanation: This is an informational message.

ISRU193 **Vol aaaaaaaaa not mounted - Volume must be mounted to list the VTOC.**

Explanation: The volume you are trying to get a VTOC list from is not mounted.

User Response: Contact your system programmer.

System Programmer Response: Mount the volume.

ISRU194 **Compress not allowed - The specified library is a PDSE and cannot be compressed.**

Explanation: This is an informational message.

ISRU195 **VTOC error - OBTAIN return code =
'aaaaaaaa'.**

Explanation: An error was encountered reading a format 4 DSCB.

Problem Determination: See the appropriate DFP/DFSMS documentation for return code descriptions.

ISRU196 **Free space error - LSPACE return code =
'aaaaaaaa' decimal.**

Explanation: An error occurred when issuing the LSPACE macro to obtain VTOC free space information.

Problem Determination: See the appropriate DFP/DFSMS documentation for return code descriptions.

ISRU197 **VTOC error - CVAF macro (SVC139) return code = 'aaaaaaaa'.**

Explanation: An error occurred when issuing a CVAF macro to obtain VTOC or data set information.

Problem Determination: See the appropriate DFP/DFSMS documentation for return code descriptions.

ISRU199 **Invalid record format - A record format of U is not valid when creating a PDSE.**

Explanation: A record format of U is not supported when creating a PDSE.

User Response: Either enter a supported record format for a PDSE, or allocate as a PDS.

ISRU200 **Rename failed - RACF RC=8 for rename of aaaaaaaaa.**

Explanation: RACF has returned a return code of 8 on a data set rename.

User Response: Check your RACF authorization.

Programmer Response: Check the RACF authorization for the data set.

ISRU201 **GDG base or tape entry - There are no valid built-in selections for a GDG base or tape entry.**

Explanation: An attempt to use built-in functions on a GDG BASE or TAPE data set is causing this error message. Tape data sets are not supported, and GDG Base entries are only entries in the catalog.

User Response: Contact your system programmer.

System Programmer Response: Verify the users action on the GDG Base or Tape data set to see what action the user was attempting.

ISRU203 **No member allowed - No member name or pattern allowed for this built-in command.**

Explanation: A data set member name or pattern has been entered for a built-in command that does not support a data set member name or pattern.

User Response: Remove the data set member name or pattern, or check to see which built-in commands are valid for the data set member or pattern.

ISRU204 **Invalid line command - Valid line commands are B, D, E, P, R, or a TSO command/CLIST.**

Explanation: An invalid line command has been entered.

User Response: Enter one of the following valid line commands: B, D, E, P, R, or a TSO command/CLIST.

ISRU205 **Invalid data set name - Enter a quoted, fully qualified data set name.**

Explanation: The data set name is incorrect.

User Response: Correct the data set name.

ISRU206 **Extraneous parameters - Extraneous parameters for built-in command.**

Explanation: An extraneous parameter has been entered for a built-in command.

User Response: Remove the extraneous parameter and reenter the built-in command.

ISRU207 **Invalid change - Data set name may not be changed for built-in commands.**

Explanation: The data set name cannot be changed for the built-in command.

User Response: Do not change the data set name for the built-in command.

ISRU208 **Command failed - Command 'aaaaaaaa' not found, invalid, or issued return code 20.**

Explanation: The command that was issued did not process. Either the command was not found, the command was invalid, or the command issued a return code of 20.

User Response: Reenter a valid command.

ISRU209 **Command failed - Command 'aaaaaaaa' issued return code bbbbbbbb.**

Explanation: The command failed with the issued return code.

User Response: Reenter a valid command.

ISRU210 **Data set is unmovable - Data set organization of "from" data set indicates it is unmovable.**

Explanation: The organization of the data set indicates that the data set cannot be moved.

User Response: Verify that the data set organization indicates that it cannot be moved. Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRU212 **No members in data set - The PDS specified contains no members.**

Explanation: The specified partitioned data set contains no members.

User Response: Verify that this is the correct data set for the member you are trying to locate.

Problem Determination: There are no members in the PDS.

ISRU213 **Severe error - Open, I/O, or BLDL error.**

Explanation: A severe error has occurred. Either an OPEN, I/O, or BLDL error has occurred on the data set.

User Response: Contact the system programmer.

System Programmer Response: Check the status of the data set that has caused this error.

ISRU214 **Option not implemented - Try another option.**

Explanation: The option entered is not available.

User Response: Try another option.

PDF Messages

ISRU215 **No space in directory - PDS directory is full, allocate more directory blocks.**

Explanation: There is no more directory space for the partitioned data set.

User Response: The PDS is out of directory space. More directory space needs to be allocated.

Programmer Response: Allocate more directory space.

ISRU216 **I/O error during STOW - Permanent I/O error occurred updating directory block.**

Explanation: An I/O error occurred during an attempt to update the directory block.

User Response: Contact your system programmer.

System Programmer Response: Perform diagnostics on the data set that has failed.

ISRU217 **Invalid select code - Type S for select or B for browse in front of the member desired.**

Explanation: An invalid selection code has been entered. Valid selections are S for Select or B for Browse.

User Response: Enter one of the valid selection codes.

ISRU218 **I/O error during read - Unable to read data.**

Explanation: An I/O error occurred during READ. The data cannot be read.

User Response: Contact your system programmer.

System Programmer Response: Perform diagnostics on the data set causing the error.

ISRU219 **BLDL error - I/O error, insufficient virtual storage, or other BLDL error.**

Explanation: A BLDL error occurred on the data set.

User Response: Contact your system programmer.

System Programmer Response: Perform diagnostics on the data set causing the error.

ISRU220 **Allocation failed - Allocation of print data set failed.**

Explanation: The allocation of the Print temporary data set has failed.

User Response: Contact your system programmer.

System Programmer Response: Find out why the temporary data set was not allocated. Make sure that the packs that the user has access to are not full and that a data set by the same name does not already exist.

Problem Determination: The data set that the output was allocated to may be full.

ISRU221 **No data to browse - Output command did not place any data in print data set.**

Explanation: This is an informational message. There is no data to browse in the print data set.

ISRU222 **No data to print - Output command did not place any data in print data set.**

Explanation: This is an informational message. There is no data in the data set to print. The output command did not place any data into the print data set.

ISRU223 **Utility - Outlist - Requeue issued job
aaaaaaaa.**

Explanation: This is an informational message. The OUTPUT command to requeue the requested job has been issued.

ISRU224 **Utility - Outlist - Delete issued job
aaaaaaaa.**

Explanation: This is an informational message. The job log has been deleted.

ISRU225 **Requeue issued - Output requeue attempted for job aaaaaaaaa.**

Explanation: This is an informational message. An attempt to requeue the job listed will be made.

ISRU226 **Delete issued - Output delete attempted for job aaaaaaaaa.**

Explanation: This is an informational message. An attempt to delete the job listed will be made.

ISRU227 **Print completed - Print function has completed**

Explanation: This is an informational message. The requested print function has ended.

ISRU228 **Invalid class - Class must be alphanumeric (A-Z, 0-9).**

Explanation: This is an informational message. An invalid class has been entered. The class must be either A-Z or 0-9.

ISRU229 **Member not found - Member "aaaaaaaa" not found, only library 1 searched for MOVE/PROMOTE services.**

Explanation: The member was not found in the specified library. Only one library was entered.

User Response: Check the data set concatenation to determine where the member is located.

Programmer Response: Only one library member was entered.

ISRU230 Vol serial not allowed - A volume serial is not allowed for this operation.

Explanation: The volume serial is not allowed for this operation on an SMS managed data set that is accessed using a non-VTOC data set list.

User Response: Access the data set using the data set list, and rerun the command.

Problem Determination: A command has been issued against an SMS data set that is not allowed. The data set was accessed using a non-VTOC data set list.

ISRU231 Record size too small - The following sizes are allowed: RECFM=F 10-32760, RECFM=V 14-32752.

Explanation: The logical record length is too small. The LRECL must be greater than or equal to 10 for fixed records and greater than or equal to 14 for variable records.

User Response: Reblock the data set record size.

Problem Determination: Check the data set LRECL.

ISRU232 Vol serial not allowed - Use "Other data set name" field when specifying volume serial.

Explanation: The Other Data Set Name field is used when the volume serial is specified.

User Response: Enter the Other Data Set Name.

ISRU233 Invalid unit - Generic unit must be blank if volume serial is specified.

Explanation: Generic Unit must be left blank when the volume serial is specified.

User Response: Leave Generic Unit blank.

ISRU235 Invalid required parm - Select the required parameter from the options shown.

Explanation: Enter one of the valid options listed to complete the command.

User Response: Enter a listed valid option.

ISRU236 I/O error during write - Unable to write data.

Explanation: An error has occurred while writing data to a data set member.

User Response: Check the data set to see if the data set is corrupted, and that the DASD is available.

System Programmer Response: Verify that the failing data set is not corrupted and that the DASD is available.

ISRU237 Enter member name - The specified data set is partitioned. A member name is required.

Explanation: The data set that is specified is a partitioned data set. A partitioned data set requires a member name to continue.

User Response: Enter a member name.

ISRU238 Option not implemented - Try another option.

Explanation: The requested option not available.

User Response: Enter an available option.

ISRU239 Enter required field - User ID and/or new version number must be specified with R option.

Explanation: The R option must be used with the user ID or NEW VERSION number or both.

User Response: Use the R option.

ISRU240 Invalid SORT operand - 'aaaaaaaa' is not a valid SORT operand.

Explanation: An invalid SORT operand has been entered.

User Response: Correct the SORT operand and retry the command.

Problem Determination: Verify the sort operand.

ISRU241 Too many sort fields - You may specify up to two fields for use with the SORT command.

Explanation: Too many SORT operands have been entered for the SORT command. A maximum of two operands can be entered per SORT command.

User Response: Correct the number of SORT operands.

PDF Messages

ISRU243 **Invalid operand - Valid CONFIRM operands are ON and OFF.**

Explanation: An invalid CONFIRM operand was entered. The valid operands are ON and OFF.

User Response: Use a valid CONFIRM operand, either ON or OFF.

ISRU244 **Data set saved - The data set was saved.**

Explanation: This is an informational message.

ISRU245 **Invalid command – Only ISPF system commands may be entered on this panel.**

Explanation: An invalid command was entered on the command line.

User Response: Specify a valid command. Enter HELP when this message is displayed for command information.

ISRU247 **This list of data set names contains entries from a CVOL catalog. The list exceeded the maximum number of names allowed in the input area and may be incomplete.**

Explanation: A data set list did not build completely using the qualifiers entered.

User Response: Verify the qualifiers, then consult your system programmer.

System Programmer Response: Verify that all DASD is operational and that valid qualifiers are being used.

ISRU248 **Incomplete list printed - The list of data set names exceeded the allocated input area.**

Explanation: An incomplete data set list was printed.

User Response: Verify the data set qualifiers.

ISRU249 **Error during list print - An error was encountered trying put list into the ISPF List data set.**

Explanation: An error occurred while attempting to print the ISPF list data set.

User Response: Verify that the ISPF list data set is available and is large enough to retain your data.

Problem Determination: Check the ISPF list data set attributes.

ISRU250 **Four char. year invalid - The MVS system must be MVS/XA, level MVS/SP 2.2.0 or higher.**

Explanation: This MVS system is not a level that will support the 4 character year that has been entered.

User Response: Enter a valid date that is supported by this MVS system.

ISRU251 **Value too large - The maximum retention period allowed is 9999.**

Explanation: The retention period that has been entered is greater than 9999. A retention period value must be less than or equal to 9999 days.

User Response: Enter a value for the retention period less than or equal to 9999 days.

ISRU252 **Invalid date - The date specified contains invalid values.**

Explanation: The date that has been entered into the expiration date field has invalid values. These values could be an invalid day or month, or a character entered into the day, month, or year field.

User Response: Correct the incorrect value that has been entered for the day, month, or year.

ISRU253 **Date not allowed - The date specified is only valid with 4 character year support.**

Explanation: The date that was entered in Julian format is not supported on the level of MVS that is on your system.

User Response: Correct the Julian date, or enter the date in character form using a 2 character year.

ISRU254 **Compress successful - The data set was successfully compressed by the compress exit.**

Explanation: This is an informational message. The data set that the compress was requested for has completed successfully.

ISRU256 **Severe error - A severe error was returned by ISPF compress.**

Explanation: ISPF ran a compress on a data set and a return code that was greater than or equal to 20 was returned.

User Response: See what data set the compress was done against and check the the data set characteristics to see if there is any problem with the data set.

ISRU257 Data set not partitioned - The data set for compress must be partitioned.

Explanation: The data set that the compress was issued against is not a partitioned data set, so the compress cannot be executed. To do a compress, the data set must be partitioned.

User Response: Do not compress data sets that are not partitioned.

ISRU258 Member aaaaaaaaa saved - bbbbbbbb was edited and saved.

Explanation: This is an informational message. The data set listed was saved.

ISRU259 Data set not deleted - Delete request for "aaaaaaaa" was cancelled by user.

Explanation: This is an informational message. The data set was not deleted. The confirmation of the data set delete was cancelled.

ISRU260 Retrieving data set information to process your aaaaaaaa request.

Explanation: This is an informational message. Your request is being processed.

ISRU261 Invalid operand - Valid SHOWCMD operands are ON and OFF.

Explanation: An invalid operand has been entered with the SHOWCMD command. Valid operands are ON and OFF.

User Response: Enter the SHOWCMD command with an ON or OFF operand.

ISRU262 Panel not found - The specified data set list panel could not be found.

Explanation: The data set list panel requested could not be found.

User Response: Contact your system programmer.

System Programmer Response: Check to see that the specified data set list panel exists and can be displayed.

ISRU263 Table processing error - An error occurred during control table processing.

Explanation: There is a problem in creating the table needed to store the program state.

User Response: Contact your system programmer.

System Programmer Response: Check to see why the requested table was not created.

ISRU264 No previous command - The '=' command cannot be used until a line command has been entered.

Explanation: A previous line command has not been issued so the "=" command cannot be used.

User Response: Enter the line command you were attempting to retrieve.

ISRU265 Data set does not exist - 'aaaaaaaa' was deleted or uncataloged.

Explanation: The data set requested is not cataloged, not uncataloged, not a GDG, or on a tape. It does not exist.

User Response: Check to see if the data set has been removed from the system.

ISRU266 Member too long - A member name/pattern must be 8 or less characters in length.

Explanation: The member name is greater than 8 characters.

User Response: Enter a valid member name or pattern that is 8 characters or fewer.

ISRU267 Data set not found - "aaaaaaaa" not found on volume bbbbbbbb.

Explanation: The requested data set is not on the specified volume.

User Response: Either enter the correct volume for the data set, or enter just the the data set name.

ISRU268 Command too long - Command expansion caused the command to exceed 255 characters.

Explanation: The command that was entered exceeds the maximum length of 255 characters.

User Response: Reenter the command with fewer than 255 characters.

ISRU269 Invalid DSORG - Data set organization must be either partitioned or sequential.

Explanation: This is an informational message. The data set organization is invalid. In order to execute a FREE command, the data set organization must be partitioned or sequential.

ISRU273 Delete confirmation on - A confirmation panel will be displayed for data set deletion requests.

Explanation: This is an informational message. Confirmation has been set to ON for data set deletion

PDF Messages

requests. A confirmation panel will be displayed for deletion requests unless confirmation is set to OFF.

ISRU274 Delete confirmation off - Data set deletion requests will not be confirmed.

Explanation: This is an informational message. Confirmation has been set to OFF for data set deletion request. A confirmation panel will not be displayed for a deletion request. Set Confirm ON to display the delete confirmation panel.

ISRU275 Commands will be shown - Line commands will be displayed before being processed.

Explanation: This is an informational message. SHOWCMD is set to ON so line commands will be displayed before being processed. Set SHOWCMD to OFF to if you do not want to see the line commands before they are processed.

ISRU276 SHOWCMD off - Line commands will be processed immediately.

Explanation: This is an informational message. SHOWCMD is turned OFF so line commands will not be displayed before being processed. Issue the SHOWCMD ON command if you want to see line commands before they are processed.

ISRU277 Numeric out of range - Partitioned data sets cannot have a primary quantity of 0.

Explanation: A value of 0 was entered into the Primary Quantity field, but the Primary Quantity field of a partitioned data set cannot be set to 0.

User Response: Enter a value greater than 0 in the Primary Quantity field.

ISRU278 Numeric out of range - Primary quantity cannot be 0 when secondary quantity is also 0.

Explanation: The Primary Quantity field and the Secondary Quantity field are both set to 0. The Primary Quantity field cannot be 0 if the Secondary Quantity field is 0.

User Response: Change either the Primary Quantity or the Secondary Quantity field to a value greater than 0. The Primary Quantity field cannot be set to 0 for a partitioned data set.

ISRU279 Invalid combination - Partitioned data sets require a value >0 for directory blocks.

Explanation: A value of 0 was entered for the number of directory blocks for a partitioned data set.

User Response: Enter a value greater than 0 for the number of directory blocks.

ISRU280 Recovery processed - Pending recovery processed, cancelled, or deferred.

Explanation: This is an informational message. The pending error recovery has been processed.

ISRU281 Job - aaaaaaaaa - Submitted

Explanation: This is an informational message. The job has been submitted for processing.

ISRU282 Listing deleted - aaaaaaaaa has been deleted.

Explanation: This is an informational message. The listing file is deleted.

ISRU283 Listing kept – aaaaaaaaa has been kept.

Explanation: This is an informational message. The listing file is being kept.

ISRU284 aaaaaaaaa will be printed and bbbbbbbb by job - cccccccc.

Explanation: This is an informational message. The listing file is being printed, and will be deleted when the print function is finished.

ISRU285 Data set not opened – aaaaaaaaa is a compressed data set that has not been opened. ISPF does not know the blocksize that will be used by DFSMS and therefore shows the primary quantity in tracks.

Explanation: This is an informational message. The listing file is being printed, and will be deleted when the print function is finished.

ISRU286 MSGN Utility - Com print – SUBMIT failed - aaaaaaaaa has been kept

Explanation: The job that was submitted has not processed, but the list file will be kept.

User Response: Check the job to determine what caused the error.

ISRU287 **Utility - Com print – aaaaaaaa directed to local printer bbbbbbbb and cccccccc**

Explanation: This is an informational message. The list file is directed to the specified local printer ID.

ISRU288 **SMS not active – SMS is not active. Enhanced data set allocation is unavailable.**

Explanation: SMS is not active on your MVS system.

User Response: Use the A fastpath command, or the space pull-down to allocate the data set as a non-SMS data set.

Programmer Response: Informational.

ISRU289 **20 or more volumes – The information displayed is for the first 20 volumes of this data set. If there are more than 20 volumes, the information may be incorrect.**

Explanation: No explanation available at this time.

ISRU290 **Data set not printed. – aaaaaaaa has been kept. See the ISPF Messages and Codes or Help for Local Print RC = bbbbbbbb.**

Explanation: The attempt to print the data set on a local printer was unsuccessful. The listing data set will be kept. Possible return codes are:

- 2 The user cancelled local print.
- 4 ISPF issued the TSO PRINTDS command, but the user pressed ATTENTION during PRINTDS.
- 6 Local print has been disabled by the system programmer. Your system programmer has set the LOCALPRT field in ISRCNFIG to blank, which disables local print.
- 8 ISPF issued the TSO PRINTDS command, but TSO PRINTDS abended. Further information may be available from TSO PRINTDS by setting WTPMSG and MSGID in your TSO profile.
- 12 TSO PRINTDS had a return code greater than zero. Further information may be available from TSO PRINTDS by setting WTPMSG and MSGID in your TSO profile.
- 16 Unexpected return code from local print.

User Response: Contact your system programmer.

System Programmer Response: Verify that the local print function is set up correctly.

ISRU291 **Job skeleton not found - Job card skeleton "ISRSCHPJ" was not found.**

Explanation: The job card skeleton, ISRSCHPJ, cannot be found.

User Response: Contact your system programmer.

System Programmer Response: Verify that you have the PDF skeletons in your system concatenations.

Problem Determination: The ISPF/PDF skeletons are not in your system concatenations.

ISRU292 **Enter option - Enter one of the listed options.**

Explanation: One of the highlighted options displayed below on this panel should be entered.

User Response: Enter one of the highlighted options.

ISRU293 **Data set not printed - An uncataloged data set cannot be printed using option 3.6 with a print mode of LOCAL if there exists a cataloged data set by the same name.**

Explanation: The hardcopy utility cannot process an uncataloged data set if a cataloged data set by the same name exists on the system.

User Response: Use another method to print the data set.

ISRU294 **Unexpected return code - Return code "aaaaaaa" from the print utility exit. The listing is kept.**

Explanation: An unexpected return code was received while attempting to exit from the print utility. The listing data set will be kept.

User Response: Contact your system programmer.

System Programmer Response: Check the print utility exit.

ISRU295 **TSO/E ICF not installed - The TSO/E information center facility (TSO/E ICF) is not installed.**

Explanation: The TSO/E Information Center Facility is not installed on your system.

User Response: Contact your system programmer.

System Programmer Response: Verify that the Information Center Facility (TSO/E ICF) is installed.

PDF Messages

ISRU296 **Print utility exit - The print utility exit produced a return code of aaaaaaaa.**

Explanation: This is an informational message. The print utility exit produced a return code that was received on on the print utility exit.

ISRU297 **Submit error - An error occurred while submitting JCL generated by the print utility exit.**

Explanation: An error occurred when the JCL generated by the print utility exit was submitted.

User Response: Check the JCL for the error.

ISRU298 **Utility - TSO/E ICF - aaaaaaaa printed by TSO/E ICF and bbbbbbbb.**

Explanation: This is an informational message. The TSO/E Information Center Facility print was invoked to print the list file.

ISRU299 **Data set not renamed - The data set rename request was cancelled by the user.**

Explanation: This is an informational message.

ISRU301 **List data set not found - List data set aaa(44) cannot be found.**

Explanation: The list data set specified for printing (aaa(44)) does not exist; therefore, it cannot be printed.

User Response: Regenerate the listing and resubmit the print job.

ISRU302 **JCL generated - JCL generated by the print exit was placed in aaaaaaaa.**

Explanation: This is an informational message. The print utility exit successfully generated the JCL for the requested print operation.

ISRU303 **TSO/E ICF CLIST error - CLIST ICQCPC00 error. Contact your system programmer.**

Explanation: The CLIST used for processing ICF print requests (ICQCPC00) returned an error.

User Response: Contact your system programmer.

System Programmer Response: Refer to the ICF documentation for problem determination.

ISRU304 **TSO/E ICF msg not found - TSO/E ICF message variable not found. Contact your system programmer.**

Explanation: TSO/E ICF encountered an error while processing the specified print request, but no message was found in ICF dialog variable QCPMSGID.

User Response: Contact your system programmer.

System Programmer Response: Refer to the ICF documentation for problem determination.

ISRU305 **Data set not deleted - Data set does not exist or not sufficient authority**

Explanation: PDF received a return code 8 from the SCRATCH macro, indicating that the data set to be deleted either does not exist, or you do not have sufficient RACF authority to delete the data set.

User Response: Verify that the data set exists. If it does not, it has already been deleted and no further action is needed. If the data set does exist, you do not have sufficient RACF authority to delete it. In this case, either have the data set deleted by someone that does have sufficient RACF authority, or contact your RACF administrator to have your authority level changed.

ISRU306 **RECFM not supported - Standard records are not supported for the FREE command.**

Explanation: The PDF FREE command (the F line command from an option 3.4 data set list) is not supported for Fixed Standard record formats.

User Response: Find an alternate way to free the space in the data set.

ISRU307 **Rename failed. The data set could not be renamed, but the catalog entry for the new name could not be removed from the catalog. The uncatalog return code was aaaaaaaa. Enter the Help command for further information.**

Explanation: When PDF renames a data set, a 3 step process is followed:

1. The new data set name is cataloged.
2. The data set is renamed.
3. The old data set name is uncataloged.

PDF successfully cataloged the new data set name, but could not rename the data set from the old name to the new name. PDF then attempted to uncatalog the new data set name to restore the system to its original state, but the uncatalog failed as well. Currently, catalog entries exist for both the old and new names, and the data set itself has the old name.

User Response: Contact your system programmer.

System Programmer Response: Remove the catalog entry.

ISRU308 Data set not deleted - Data set was copied, but was not deleted due to insufficient authority.

Explanation: You requested that the Move/Copy utility move a sequential data set. This involves 2 steps:

1. The data is copied.
2. The data set is deleted.

PDF was unable to delete the data set because you do not have sufficient access authority to request the delete.

User Response: Have your system programmer either grant you authority to delete the data set, or delete the data set for you.

ISRU319 Severe error in exit - Severe error in user exit. Compress aborted.

Explanation: An unexpected return code was received from the compress exit, indicating a severe error has occurred. PDF will abort the compress request.

User Response: Contact the responsible programmer.

System Programmer Response: Refer to *ISPF Planning and Customizing* for a discussion of the return codes expected from the compress exit, then modify the exit to return an appropriate return code.

ISRU322 Reset failed - Reset will not resequence packed data.

Explanation: The PDF reset utility cannot resequence data that is in packed format.

User Response: Use the edit RENUM command to resequence the data.

ISRU323 ESTAE macro error - ESTAE macro failed with return code - aaaa

Explanation: The PDF Move/Copy processor (ISRU323) received a non-zero return code from the ESTAE macro.

User Response: Contact your system programmer.

System Programmer Response: Consult the appropriate MVS documentation for problem determination.

ISRU324 System abend 'aaaa' - A system abend occurred. Press Help key for further information.

Explanation: The PDF Move/Copy routine (ISRU324) received an abend *aaaa* when processing your request.

User Response: Contact your system programmer.

System Programmer Response: Consult the appropriate MVS documentation for problem determination.

ISRU325 Reset failed - Member aaaaaaaa has packed data. Reset completed for bbbb members.

Explanation: The PDF reset utility cannot process members that contain packed data; PDF will abort the reset request. *bbbb* members were successfully processed before the error was encountered.

User Response: If the members need to be processed, use the PDF editor to unpack them.

ISRU327 GETMAIN failed - Cannot GETMAIN enough work area to proceed.

Explanation: PDF could not obtain the minimum size (64K) it needs to process a Data Set List utility request.

User Response: Try one of the following:

- Log off, log back on, and retry the request.
- Increase your region size and retry the request.
- Have your system programmer increase your maximum allowable region size and retry the request.

ISRU328 GETMAIN failed - Unable to issue GETMAIN.

Explanation: PDF received a return code greater than 4 from the GETMAIN macro while attempting to obtain a work area to process your Data Set List utility request.

User Response: Contact your system programmer.

System Programmer Response: Consult the appropriate MVS documentation for problem determination.

ISRU329 Cannot pack data - ISPF will not pack data for RECFM=U.

Explanation: ISPF and PDF do not support packed data for record format U data sets. Only record formats F and V are supported.

User Response: Either move the data to a record format F/V data set and pack it, or leave the data unpacked.

ISRU330 Invalid record format - S is not valid if data set organization is partitioned.

Explanation: Partitioned data sets with Fixed Standard or Variable Spanned record formats are not supported.

User Response: Choose another record format and retry the function.

PDF Messages

ISRU331 **Invalid record format - U is not valid with B or S.**

Explanation: Undefined format records cannot be Blocked, Standard, or Spanned.

User Response: Choose another record format and retry the function.

ISRU332 **Numeric out of range - Record length of zero is valid only if record format is U.**

Explanation: When allocating a data set using Fixed or Variable format records, a non-zero record length is required. A zero record length is only valid for Undefined format records.

User Response: Specify a non-zero record length, or use record format U.

ISRU334 **Invalid disposition - Packing data is invalid if DISP=MOD is specified.**

Explanation: When copying to a sequential data set with disposition MOD (which appends the copied data to the existing data in the data set), the data being copied cannot be packed. If the data being copied is packed, data will be created that ISPF cannot process.

User Response: Either use a disposition of OLD, or specify a pack option of NO to have ISPF unpack the data before writing it to the target data set.

ISRU335 **aaaaaaaa failed - Specifying DISP=MOD is invalid if "to" data set has packed data.**

Explanation: When copying to a sequential data set that already contains packed data, you cannot specify a disposition of MOD (which appends the copied data to the existing data in the data set) because data will be created that ISPF cannot process.

User Response: Either use a disposition of OLD, or unpack the target sequential data set before attempting the COPY command.

ISRU336 **Unable to read data set - An error was encountered while reading the "to" data set.**

Explanation: When copying to a sequential data set using a disposition of MOD, ISPF reads the first record of the target sequential to determine whether or not the data set contains packed data. An I/O error was encountered while attempting to read that first record.

User Response: Contact your system programmer.

ISRU337 **Invalid combination - Copy request incomplete due to invalid pack combination. When copying to a sequential data set with disposition of mod and pack option of asis, you cannot copy both packed and unpacked data, nor can you copy multiple packed members. aaaa members were successfully copied during this operation.**

Explanation: One of the two following conditions occurred during an attempt to copy multiple members of a PDS (or concatenation of PDSs) to a sequential data set, using a disposition of MOD:

- Both packed and unpacked members were selected to be copied.
- Multiple packed members were selected to be copied.

Either of these cases results in data that cannot be processed by ISPF.

User Response: To copy multiple PDS members to a sequential data with a disposition of MOD, all PDS members must either be unpacked or copied with a pack option of NO. In addition, the target sequential data set must either be empty or contain unpacked data.

ISRU338 **Invalid member name - The member name is invalid for a partitioned data set.**

Explanation: A member name containing invalid characters was specified for processing.

User Response: Correct the member name. A valid member name must be 1-8 characters in length, start with an alphabetic or special character, and contain only alphabetic, numeric, and special characters.

ISRU339 **"From" data set empty - Empty "from" PDS member or sequential data set has been requested.**

Explanation: A request was made to copy from a PDS member or sequential data set that does not contain any data.

User Response: Specify a member or data set that contains data.

ISRU340 **Error during list print - An error was encountered trying to put list into 'aaa(44).'**

Explanation: ISPF encountered an internal table services error while processing the SAVE command.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRU341 **List not printed - The list data set for the option 3.4 SAVE command must be a sequential data set with logical record length greater than or equal to 132 for RECFM F and greater than or equal to 136 for RECFM V.**

Explanation: The option 3.4 SAVE command was issued, specifying a list-id to have the data set list information written to a data set named userid.list-id.DATASETS. If this data set already exists, it must be a sequential data set with logical record length greater than or equal to 132 for RECFM F and greater than or equal to 136 for RECFM V.

User Response: Use a different list-id to have ISPF write the data set list information to another data set, or delete and reallocate the existing data set to have the proper characteristics.

ISRU342 **Data set list printed - The listing of data sets was placed in the ISPF list data set.**

Explanation: This is an informational message. The option 3.4 SAVE command was successfully processed and the requested information has been written to the ISPF list data set.

ISRU343 **Invalid list-id - "aaaaaaaa" contains invalid characters.**

Explanation: The option 3.4 SAVE command was invoked with a list-id parameter, indicating that the data set list information should be written to a data set. The list-id parameter, used as the middle qualifier of the data set, did not conform to ISPF naming conventions.

User Response: Correct the specified parameter and reenter the command. The parameter specified must be 1-8 characters in length; start with an alphabetic character, or @, #, or \$; and all remaining characters must be alphabetic, numeric, or @, #, \$, or X'CO' (right brace).

ISRU344 **List-id too long - The list-id must be less than or equal to 8 characters in length.**

Explanation: The option 3.4 SAVE command was invoked with a list-id parameter, indicating that the data set list information should be written to a data set. The list-id parameter, used as the middle qualifier of the data set, did not conform to ISPF naming conventions.

User Response: Correct the specified parameter and reenter the command. The parameter specified must be 1-8 characters in length; start with an alphabetic character, @, #, or \$; and all remaining characters must be alphabetic, numeric, @, #, \$, or X'CO' (right brace).

ISRU345 **Free failed - aaaa failed for data set 'bbb(44)'.**

Explanation: ISPF could not free the unused space for data set *bbb(44)* due to a failure in either the OPEN or RDJFCB macro (as indicated by *aaaa* above).

User Response: Contact your system programmer.

System Programmer Response: Follow normal problem determination procedures.

ISRU346 **Utility - free - Any unused space freed for data set 'aaa(44)'.**

Explanation: This is an informational message. The ISPF data set list FREE command has been completed successfully.

ISRU347 **Free completed - Any unused space freed for data set 'aaa(44)'. Enter HELP for further information on when space may not be freed from the data set.**

Explanation: This is an informational message. The ISPF data set list FREE command has been completed successfully.

ISRU348 **Internal program error - ESTAE failed during initialization in module ISRUAf.**

Explanation: ISPF encountered an error from the ESTAE macro while processing the data set list FREE command.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRU349 **Free failed with abend - Abend code of 'aaaa' during open. See system message for details.**

Explanation: ISPF encountered an abend while processing the data set FREE command.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRU352 **aaaaaaaa issued - aaaaaaaaa issued for bbb(44)**

Explanation: This is an informational message. The deletion of a migrated data set was requested. ISPF has issued the command specified in the configuration table to be used for deleting migrated data sets (*aaaaaaaa*).

PDF Messages

ISRU353 "From" data set in use - "From" data set is being updated by you or another user.

Explanation: A Move, Copy, Copy/Lock, or Promote request was issued, but the data set specified as the source of the operation is currently in use by you or another user.

User Response: Identify the person using the data set and request that they release it, or try again later.

ISRU354 "To" data set in use - "To" data set is being updated by you or another user.

Explanation: A Move, Copy, Copy/Lock, or Promote request was issued, but the data set specified as the target of the operation is currently in use by you or another user.

User Response: Identify the person using the data set and request that they release it, or try again later.

ISRU355 "From" member in use - "From" member is being updated by you or another user.

Explanation: A Move, Copy, Copy/Lock, or Promote request was issued, but one or more of the members specified as the source of the operation are currently in use by you or another user.

User Response: Identify the person(s) using the member(s) and request that they release them, or try again later.

ISRU356 "To" member in use - "To" member is being updated by you or another user.

Explanation: A Move, Copy, Copy/Lock, or Promote request was issued, but one or more of the members specified as the target of the operation are currently in use by you or another user.

User Response: Identify the person(s) using the member(s) and request that they release them, or try again later.

ISRU358 aaaaaaaa failed - "From" record length is greater than "to" block size for record format U.

Explanation: When copying or moving members between 2 record format U libraries, the block size of the target library must be equal to or greater than that of the source data set.

User Response: Reallocate the target library so that it has an appropriate block size, or copy the member to a different library.

ISRU359 Incomplete list - Insufficient work space. Press Help key for additional information.

Explanation: The work area required to process the current data set list request exceeds the area currently available.

User Response: Try one of the following:

- Reenter the %DSNAME LEVEL+ with an additional full qualifier before any defaulted or partial qualifiers. (As an example, specify ABC.XYZ instead of ABC.XYZ* or ABC.XY*.)
- Increase the region size.

ISRU360 SCLM warning - The project being updated is an SCLM controlled project.

Explanation: This is an informational message. ISPF has identified the data set you are processing as a possible SCLM-controlled library. If the library is indeed SCLM-controlled and you continue with the request, you will invalidate the SCLM accounting information stored in its VSAM database. This will not result in a loss of data, but will require you to use either the SCLM Migrate utility (option 10.3.3) or SCLM Edit (option 10.2) to correct the accounting information before building or promoting the member.

ISRU361 No changes made - No updates have been made to the member statistics.

Explanation: This is an informational message. The user responded that no updates should be done after being prompted with a warning that the library being processed may be an SCLM-controlled data set.

ISRU362 Duplicate data set - Requested data set was allocated and found to be cataloged on a volume other than aaaaaa. The subsequent attempt to free the data set failed with SVC 99 error code bbbb, information code cccc.

Explanation: The user specified a data set and volume combination, but SVC 99 allocated a data set by the same name on a different volume. This usually indicates that a data set with the same name as the data set requested by the user exists on an SMS controlled disk. To protect data set integrity, ISPF will not allow the request to be completed. However, when attempting to free the incorrect allocation, an SVC 99 error was encountered. SVC 99 returned an error code of bbbb, information code of cccc.

User Response: Contact your system programmer.

ISRU363 Recursion error - ISPF recursion error invoking the compress function.

Explanation: ISPF does not support the recursive invocation of functions that use file tailoring. An attempt was made to invoke the ISPF compress function while another file tailoring function is already active on a previous command nesting level. The other file tailoring functions monitored for recursion are:

- Foreground (option 4)
- Batch (option 5)
- Hardcopy utility (option 3.6)
- Outlist utility (option 3.8)
- SuperC (options 3.12, 3.13 and 3.14).

User Response: Complete the previously nested file tailoring function, then retry the compress request.

ISRU366 Delete not supported - "aaaaaaaa" is an uncataloged SMS data set. The delete command is not supported for an uncataloged SMS data set.

Explanation: SMS data sets should always be cataloged. The scratch macro does not support uncataloged SMS data sets.

User Response: Contact your system programmer.

ISRU367 Incomplete list - Catalog error. SVC 26 CAMLST locate RC = aaaaaaaaa dec., reason code = bbbbbbbb dec.

Explanation: A catalog error occurred during a CAMLST locate. The return code and reason code are in the message. System message IDC3009I documents return and reason codes for the CAMLST macro.

User Response: Contact your system programmer.

ISRU368 Catalog error - SVC 26 CAMLST locate RC = aaaaaaaaa dec., reason code bbbbbbbb dec.

Explanation: A catalog error occurred during a CAMLST locate. The return code and reason code are specified in the message. System message IDC3009I documents return and reason codes for the CAMLST macro.

User Response: Contact your system programmer.

ISRU369 Select options - Select the options needed for processing.

Explanation: Informational message for SuperC and Search-For issued from the ISPF Workplace.

ISRU370 aaaa failed - aaaa failed for member bbbbbbbb.. Failure in IEWBIND cccccccc, return code dddd reason code eeee.

Explanation: When processing a Move/Copy request for load data on a DFSMS 1.1 or later system, ISPF invokes the binder to do the actual copy. ISPF encountered an error during the cccccccc phase of the binder invocation. The following flow describes the binder calls made during a Move/Copy operation:

- IEWBIND STARTD - Start a binder dialog
- IEWBIND CREATEW - Create a binder workmod
- For each member to be copied:
 - IEWBIND INCLUDE - Specify the input member to be processed
 - IEWBIND SAVEW - Save the member to the output library
 - IEWBIND RESETW - Reset the workmod for the next member
- IEWBIND DELETEW - Delete the workmod
- IEWBIND ENDD - End the binder dialog

User Response: Refer to the appropriate DFSMS documentation for an explanation of the return code and reason code from the binder, and follow the recommended diagnostic steps to correct the problem.

ISRU371 Invalid input data - You cannot concatenate load and non-load data sets for Move/Copy.

Explanation: Move/Copy does not support concatenating load and non-load data sets as input.

A load data set is defined by ISPF as:

- A PDS with record format U
- A PDSE that contains program objects (as determined by invoking the DFP ISITMGD macro).

All other data is considered non-load.

User Response: Correct the input data sets to specify either all load data, or all non-load data.

ISRU372 Input/output mismatch - The input and output data sets for Move/Copy must either be all load data sets, or all non-load data sets.

Explanation: The user specified input and output data sets that do not agree. If the input is a load data set the output must be as well. If the input is a non-load data set, the output must also be a non-load data set.

A load data set is defined by ISPF as:

- A PDS with record format U
- A PDSE that contains program objects (as determined by invoking the DFP ISITMGD macro).

PDF Messages

All other data is considered non-load.

User Response: Correct the input and output data sets to specify either all load data, or all non-load data.

ISRU373 **Incomplete aaaaaaaa - One or more aliases were not bbbbbbbb to the output data set because members by those names already existed in the target data set and "Replace like-named members" was not selected.**

ISRU374 **Must be numeric. - The number of volumes must be a number in the range of 1-20.**

ISRU375 **Dsname/volume modified. - The Data Set List Filter exit generated a return code of 4 indicating that the Dsname Level and/or the Volume Serial was modified.**

Explanation: The Data Set List Filter exit specified in the ISPF Configuration Table returned a 4, indicating that it had modified either the Dsname Level or Volume Serial specified. The data set list presented was built using the modified data.

ISRU376 **List not displayed. - The Data Set List Filter exit generated a return code other than 0 or 4 resulting in the data set list not being displayed.**

Explanation: The Data Set List Filter exit specified in the ISPF Configuration Table returned a code other than 0 or 4. This causes ISPF to stop building the data set list and redisplay the Data Set List Utility panel.

ISRU377 **Partial list displayed. - The Data Set List Filter exit generated a return code of 4 for one or more data set names resulting in the display of a partial data set list.**

Explanation: The Data Set List Filter exit specified in the ISPF Configuration Table returned a code of 4 for one or more data sets. These data sets are not added to the list.

ISRU378 **Empty list. - The Data Set List Filter exit generated a return code of 4 for all data set names, resulting in an empty data set list.**

Explanation: The Data Set List Filter exit specified in the ISPF Configuration Table returned a code of 4 for all of the data sets matching the Dsname Level and/or Volume Serial specified, resulting in no list to display.

ISRU379 **List terminated. - The Data Set List Filter exit generated a return code other than 0 or 4, resulting in termination of the list build process.**

Explanation: The Data Set List Filter exit specified in the ISPF Configuration Table returned a code other than 0 or 4 for one of the data sets. This causes ISPF to stop building the data set list and to display the list as it currently exists.

ISRU400 **TBSKIP failure - Return code aaaa received from TBSKIP command.**

Explanation: The data set list processor encountered an internal error while invoking the TBSKIP service.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRU402 **TBTOP failure - Return code aaaa received from TBTOP command.**

Explanation: The data set list processor encountered an internal error while invoking the TBTOP service.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRU403 **TBEND failure - Attempted to free data set name table. Return code=aaaa.**

Explanation: The data set list processor encountered an internal error while invoking the TBEND service.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRU404 **No data set names found. There is a possibility of matching entries that did not fit in the maximum allowed input area for CVOL catalogs.**

Explanation: A data set list request was issued that required ISPF to search a CVOL catalog. Due to interface restrictions, ISPF may not be able to retrieve all the data sets in the CVOL. ISPF searched through the data sets that were retrieved, but found no data sets matching the dsname level specified.

User Response: ISPF retrieves data sets by passing any fully specified qualifiers to the system to retrieve a set of data sets. It then scans this set for data sets matching any partial qualifiers that were specified. Passing a more specific name will cause the system to retrieve a smaller initial set of data sets, increasing the likelihood that all possible data sets will be scanned.

For example, specify SYS1.XYZ.* instead of SYS1.XYZ*. This causes the system to retrieve only those data sets

starting with SYS1.XYZ, rather than all data sets starting with SYS1.

ISRU405 Uncatalog failed – The uncatalog request finished with a return code of 0, but the data set still exists in the catalog.

Explanation: A request was issued to uncatalog a data set that is SMS managed. PDF could not determine that the data set was SMS controlled, so the uncatalog request was issued. A return code 0 was received from the uncatalog, but upon further checking it was determined that the data set was still listed in the catalog.

ISRU406 No aaaaaaaaa bbb(44) found – aaaaaaaaa bbb(44) - not found in any non X'ed data set names.

Explanation: This is an informational message. A FIND or RFIND command was entered to cause the data set list processor to search the entire data set list for the specified target string. The search was completed, but the target string was not found.

ISRU407 No aaaaaaaaa bbb(44) found – aaaaaaaaa bbb(44) - not found in any data set names.

Explanation: This is an informational message. A FIND or RFIND command was entered to cause the data set list processor to search the entire data set list for the specified target string. The search was completed, but the target string was not found.

ISRU408 Delete volume required. – The name of the volume that contains the entry to be deleted is required for a DELETE NVR or DELETE VVR.

Explanation: The DELETE NVR or DELETE VVR function requires the name of the volume that contains the entry (NVR or VVR) to be deleted.

User Response: Enter the name of volume that contains the entry (NVR or VVR) to be deleted.

Programmer Response: None.

ISRU409 Volume not allowed. – Delete volume is allowed only for DELETE NVR or DELETE VVR.

Explanation: The delete volume is used only for the DELETE NVR or DELETE VVR functions. It is not allowed for any other VSAM DELETE function.

User Response: Blank the delete volume field.

Programmer Response: None.

ISRU410 Enter character string – Enter the string of characters to be found.

Explanation: The FIND command was entered on an option 3.4 data set list, but no parameter was specified to indicate what the search target was.

User Response: Specify a target string on the FIND command.

ISRU411 Invalid keyword – Check spelling of keywords used with the FIND command.

Explanation: The FIND command was entered, passing a quoted string as the target string to find, but an additional parameter was specified that was not recognized as a valid FIND keyword. Valid keywords are: ALL, FIRST, LAST, NEXT, PREV, CHARS, PREFIX, SUFFIX, and WORD.

User Response: Correct the specified keyword and retry the command.

ISRU412 Put string in quotes – Put quotes (' ') around the string of characters to be displayed.

Explanation: The FIND command was entered, passing multiple words as parameters that were not recognized as valid keywords. It is assumed that the words were intended to be an argument to the FIND command and, if so, must be enclosed in quotation marks.

User Response: Add quotation marks around the string and retry the command.

ISRU413 Invalid keyword – The keywords 'aaaaaaaa' and 'bbbbbbbb' cannot both be used. Delete one.

Explanation: The FIND command was entered, passing conflicting keywords. Only one of these keywords may be specified. Two types of keywords are supported by the FIND command: direction keywords and type keywords. No more than one of each type of keyword may be specified on the FIND command. The keywords are:

Direction

ALL, FIRST, NEXT, PREV, and LAST

Type

CHARS, PREFIX, SUFFIX, and WORD

The defaults are NEXT and CHARS

User Response: Correct the keywords specified and retry the command.

PDF Messages

ISRU414 **Enter character string – A character string for FIND has not been entered (so * is invalid).**

Explanation: An asterisk (*) used as the target string of the FIND command indicates that the previous target string should be reused. An asterisk was entered but no previously entered a valid target string was found, making the use of the asterisk invalid.

User Response: Enter a valid target string. Once a target string is entered, the asterisk may then be used on subsequent FIND commands.

ISRU415 **FIND string too long – The FIND string cannot be longer than 44 characters.**

Explanation: The FIND command searches for the specified target string within the list of data set names. Since the maximum length of a data set in the list is 44 characters, the target string may not exceed 44 characters.

User Response: Retry the command, entering a target string that is equal to or less than 44 characters in length.

ISRU416 **Invalid character string - The FIND string cannot be a null (") string.**

Explanation: The FIND target string must be a minimum of 1 character in length. A target string of 0 characters was entered.

User Response: Retry the command, entering a target string that is equal to or greater than 1 character in length.

ISRU417 **Enter a FIND command - The RFIND key works only after a FIND character string is entered.**

Explanation: The RFIND command reissues the last FIND command that was entered. RFIND cannot be issued until at least one FIND command has been processed.

User Response: Enter a valid FIND command. Once entered, the RFIND command may be used to reissue the same FIND command.

ISRU418 *aaaa - bbbbbb ccc(44) - bbbbbb ccc(44)
found on aaaa line(s)*

Explanation: This is an informational message. A FIND ALL command was entered on a data set list, and the specified target string was successfully located.

ISRU419 *aaaaaaaa bbb(44) found - Search for
aaaaaaaa bbb(44) was successful.*

Explanation: This is an informational message. A FIND command was entered on a data set list, and the string was successfully located.

ISRU420 ***Bottom of list reached* - aaaaaaaaa
bbb(44) not found. Press the RFIND key
to continue the search from the top for
the data set list.**

Explanation: This is an informational message. The data set list FIND command searches from the top of the displayed data to the bottom of the list to find the target string. FIND has searched and reached the bottom of that list without finding the target string. Entering the RFIND command continues the search, starting from the top of the data set list.

ISRU421 *** Top of list reached * - aaaaaaaaa bbb(44)
not found. Press the RFIND key to
continue the search from the bottom for
the data set list.**

Explanation: This is an informational message. When the PREV keyword is specified, the data set list FIND command searches from the top of the displayed data to the top of the list to find the target string. FIND has searched and reached the top of that list without finding the target string. Entering the RFIND command continues the search, starting from the bottom of the data set list.

ISRU422 **No aaaaaaaaa bbb(44) found - aaaaaaaaa
bbb(44) - not found in any X'ed data set
names.**

Explanation: This is an informational message. A FIND or RFIND command was entered to cause the data set list processor to search the entire data set list for the specified target string. The search was completed, but the target string was not found.

ISRU423 **Invalid string type - Data set list FIND
command does not process picture
(P'...'), hex (X'...'), text (T'...') or char
(C'...') strings.**

Explanation: The data set list FIND command does not support all of the keywords supported by the editor FIND command. The following are not supported:

- Picture strings (P'...')
- Hex strings (X'...')
- Text strings (T'...')
- Character strings (C'...')

All FIND commands are treated as text strings (T'...'), meaning that strings are matched regardless of case.

User Response: Remove the unsupported keyword and reenter the command.

ISRU424 Data set list saved - The listing of data sets was placed in the ISPF list data set.

Explanation: This is an informational message. The data set list SAVE command was entered without any parameters, indicating that the data set list information should be written to the ISPF list data set. The information has been successfully written.

ISRU425 Invalid line command - The data set list line command exit has restricted the entered command.

Explanation: This is an informational message. A data set list line command exit is specified in the configuration table you are currently using. This exit has returned a return code indicating that the command entered is a restricted command and should not be executed.

ISRU426 Severe error occurred - The data set list line command exit issued a return code of 20.

Explanation: A data set list line command exit is specified in the configuration table you are currently using. This exit has returned a return code of 20, indicating a severe error has been encountered.

User Response: Contact the author of the exit for help in determining the cause of the error.

ISRU427 Unknown return code - The data set list line command exit issued a return code of *aaaa*.

Explanation: A data set list line command exit is specified in the configuration table you are currently using. This exit has returned an unsupported return code of *aaaa*. Supported return codes from the exit are 0, 4, 8, and 20.

User Response: Contact the author of the exit for help in determining the cause of the unsupported return code.

ISRU428 LOCATE failed - The LOCATE for '*aaa(44)*' failed, RC = *bbbb*.

Explanation: The data set list processor issued a LOCATE macro to gather information on data set *aaa(44)*, but the LOCATE failed with a return code of *bbbb*.

User Response: Contact your system programmer.

ISRU429 Incomplete VTOC list - Index entry not included because VTOC entry does not exist.

Explanation: An entry was found in the VTOC index but the entry did not point to an actual DSCB, indicating that the data set does not actually exist on the volume. The name in the index has not been added to the data set list.

User Response: Contact your system programmer.

System Programmer Response: Correct the VTOC index.

ISRU430 Severe error – Severe error occurred in subsystem request services.

Explanation: ISPF invoked the IEFSSREQ macro to determine whether the SMS subsystem is active on your system. The macro returned a return code of either 16 or 20, indicating that a severe error was encountered.

User Response: Contact your system programmer.

ISRU431 Invalid space units – Must be TRKS, BLKS, CYLS, KB, MB, BYTES, or RECORDS.

Explanation: When creating a data set under ISPF option 3.2, the space to be allocated must be specified as Tracks, Blocks, Cylinders, Kilobytes, Megabytes, Bytes, or Records. An unsupported value was entered.

User Response: Correct the value for space units and retry the request.

ISRU432 Invalid request – Managed data sets cannot be cataloged.

Explanation: Data sets managed by the SMS subsystem cannot be cataloged or uncataloged.

User Response: Verify that the data set name entered is correct. If not, correct it and retry the request.

ISRU433 Invalid request – Managed data sets cannot be uncataloged.

Explanation: Data sets managed by the SMS subsystem cannot be cataloged or uncataloged.

User Response: Verify that the data set name entered is correct. If not, correct it and retry the request.

ISRU434 VSAM data set alloc. – VSAM data set successfully allocated.

Explanation: This is an informational message. You requested that a VSAM data set be created by ISPF, and the data set was successfully created.

PDF Messages

ISRU435 **Request failed – Allocation/deallocation request failed. Press Help for more information.**

Explanation: ISPF received an unexpected error from SVC 99 while trying to allocate or deallocate a data set. Any error messages generated by the system should have been written to the screen as TSO line messages.

User Response: If you did not see any messages, use the TSO PROFILE WTPMSG command to ensure your ID is set up to receive "write to programmer" messages, then retry the request. Once you get the messages, follow normal debugging steps for those messages.

ISRU436 **Invalid DSN type – Enter LIBRARY for a PDSE, PDS for a PDS, or blank.**

Explanation: The only supported values for the Data Set Name Type field are:

LIBRARY

Indicates a PDSE should be created

PDS Indicates a PDS should be created

Blank Indicates either a PDS or sequential data set should be created, based on the value of the Directory Blocks field.

User Response: Correct the Data Set Name Type field and retry the command.

ISRU437 **Not all members *aaaaaaaa* – *bbbb* members not *aaaaaaaa*, *cccc* members *aaaaaaaa*.**

Explanation: This is an informational message. The Move/Copy request is completed, but not all the members were successfully processed. *cccc* indicates the number of members successfully processed, *bbbb* indicates the number of members that could not be processed. *aaaaaaaa* indicates whether this was a Move or Copy request.

ISRU439 **Invalid DSN type – Enter LIBRARY for a PDSE, PDS for a pds, HFS for hfs, or blank.**

Explanation: The only supported values for the Data Set Name Type field are:

LIBRARY

Indicates a PDSE should be created

HFS Indicates an HFS data set should be created

PDS Indicates a PDS should be created

Blank Indicates either a PDS or sequential data set should be created, based on the value of the Directory Blocks field.

User Response: Correct the Data Set Name Type field and retry the command.

ISRU440 **VSAM Utility - Delete – An IDCAMS delete command has completed with an RC=0.**

Explanation: This is an informational message.

ISRU441 **IDCAMS delete completed – An IDCAMS delete command has completed with an RC=0.**

Explanation: This is an informational message.

ISRU442 **Enter a decimal percentage between 0 and 100.**

Explanation: The CI-percent and CA-percent values must be a valid percentage between 0 and 100. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU443 **Enter a decimal value between 1 and 32768.**

Explanation: The control interval size must be a decimal number between 1 and 32768. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU445 **Enter 1, 2, 3, or 4.**

Explanation: Valid share options are 1, 2, 3 or 4 for Region, 3 or 4 for System. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU446 **Enter decimal number between 1 and 16776704.**

Explanation: The buffer space value must be a decimal number between 1 and 16776704. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU447 **Enter a number between 3 and 255.**

Explanation: The BUFND and BUFNI values must be a decimal number between 3 and 255. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU448 **Enter a number between 2 and 255.**

Explanation: The STRNO value must be a decimal number between 2 and 255. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU455 Command canceled - Profile command has been canceled.

Explanation: This is an informational message. Changes made to the name of the profile data set have not been made because the CANCEL command was performed.

ISRU457 Enter a number 1 to 9999.

Explanation: The file sequence field values must be a number between 1 and 9999. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU458 Member not found - The member you are trying to get does not exist.

Explanation: The member cannot be retrieved because it does not exist.

User Response: Enter a member that exists, or enter a GET command with no parameters and a list of existing members will be displayed.

ISRU459 List action de-selected - List action erased. Any additional list actions will be ignored.

Explanation: An invalid list action was de-selected and an action was requested against a different list entry. Only one list may be processed at a time.

User Response: Select a new list action or enter a list action to perform.

ISRU460 Data ignored - Erroneous data has been ignored.

Explanation: This is an informational message. There are more parameters entered than the command requires. The extra parameters will be ignored.

ISRU461 Severe error - A severe error has occurred saving profile member.

Explanation: The profile member could not be saved due to a system error. The most probable error is that the profile data set is full or has run out of directory blocks.

User Response: Reallocate the profile data set with more space or directory blocks.

ISRU462 Type mismatch - The request type of the member you are trying to get does not match the request type being defined.

Explanation: You cannot get a member if the data in the member does not match the request being created. For example, if you are defining a cluster, the member

you are getting must have been saved from a previous cluster define.

ISRU463 Profile read error - A failure has occurred reading profile member.

Explanation: A LMGET call for data in the profile data set has failed.

User Response: Contact your system programmer.

System Programmer Response: Contact IBM support.

ISRU464 Allocate error - Unable to allocate the profile data set: The data set must be a variable partitioned data set with an LRECL of 203.

Explanation: The profile data set must be a variable partitioned data set with an LRECL of 203.

User Response: Enter an unallocated data set (PDF will allocate the data set) as the profile data set, or allocate a profile data set with the correct allocations.

ISRU465 Enter a numeric value between '0' and '16777215'.

Explanation: The primary and secondary quantity value must be between 1 and 16777215.

ISRU466 Data saved - Data has been saved to profile.

Explanation: This is an informational message.

ISRU467 Get error - There are no members in the profile data set to get.

Explanation: This is an informational message.

ISRU468 Enter a decimal percentage between 0 and 100.

Explanation: The values for the CI-percent and CA-percent must be a decimal percentage between 0 and 100. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU469 Enter a decimal value between 1 and 32768.

Explanation: The value for control interval size must be a decimal number between 1 and 32768. Refer to the appropriate IDCAMS documentation for specific information on these options.

PDF Messages

ISRU471 **Enter 1, 2, 3, or 4.**

Explanation: Valid Share Options for Region are 1, 2, 3 or 4. Refer to the appropriate IDCAMS documentation for specific information on this options.

ISRU472 **Enter 3 or 4**

Explanation: Valid Share Options for System are 3 or 4. Refer to the appropriate IDCAMS documentation for specific information on this options.

ISRU473 **Enter between 1 and 9999 days.**

Explanation: Valid DAYS value is a decimal number of days between 1 and 9999. Refer to the appropriate IDCAMS documentation for specific information on this options.

ISRU474 **Enter decimal number between 1 and 16776704.**

Explanation: Valid Buffer Space value is a decimal number between 1 and 16776704. Refer to the appropriate IDCAMS documentation for specific information on this options.

ISRU475 **Enter a year between 1993 and 2099.**

Explanation: The year value of the Days To field must be between 1993 and 2099. Refer to the appropriate IDCAMS documentation for specific information on this options.

ISRU476 **Enter a day between 1 and 365.**

Explanation: The day value of the Days To field must be between 1 and 365. Refer to the appropriate IDCAMS documentation for specific information on this options.

ISRU477 **Return Code 0 - The IDCAMS command processed for aaaaaaaa was successful.**

Explanation: This is an informational message.

ISRU479 **Enter a decimal number between 1 and 255.**

Explanation: The length value of the Keys field must be between 1 and 255. Refer to the appropriate IDCAMS documentation for specific information on this options.

ISRU482 **Enter one to six characters, beginning with a letter.**

Explanation: This message is self-explanatory.

ISRU483 **Return Code 0 - aaaaaaaa was successfully deleted.**

Explanation: This is an informational message.

ISRU484 **The information request has been completed.**

Explanation: This is an informational message.

ISRU485 **Days cannot be specified as both a for number of days and a to date.**

Explanation: When specifying the Days option, you must specify either the retention period in days (the For value) or the ending data (the To value), but not both. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU486 **IDCAMS has returned a non-zero return code.**

Explanation: This is an informational message.

User Response: See IDCAMS output for details.

ISRU487 **Request canceled - Process request has been canceled.**

Explanation: This is an informational message.

ISRU489 **Enter Noerase or Erase.**

Explanation: Valid values for this field are ERASE or NOERASE. Refer to the appropriate IDCAMS documentation for specific information on this options.

ISRU490 **Enter Noforce or Force.**

Explanation: Valid values for this field are FORCE and NOFORCE. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU491 **Enter Nopurge or Purge.**

Explanation: Valid values for this field are PURGE and NOPURGE. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU492 **Enter Norecovery or Recovery.**

Explanation: Valid values for this field are RECOVERY and NORECOVERY. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU493 Enter Scratch or Noscratch.

Explanation: Valid values for this field are SCRATCH and NOSCRATCH. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU494 Enter Unordered or Ordered.

Explanation: Valid values for this field are ORDERED and UNORDERED. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU495 Enter Recovery or Speed.

Explanation: Valid values for this field are RECOVERY and SPEED. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU496 Enter Noreuse or Reuse.

Explanation: Valid values for this field are REUSE and NOREUSE. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU497 Enter Nonspanned or Spanned.

Explanation: Valid values for this field are SPANNED and NONSPANNED. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU498 Enter Noreplicate or Replicate.

Explanation: Valid values for this field are REPLICATE and NOREPLICATE. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU499 Enter Noimbed or Imbed.

Explanation: Valid values for this field are IMBED and NOIMBED. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU499A Enter ICFCATALOG, VSAMCATALOG or VOLCATALOG.

Explanation: Valid values for this field are ICFCATALOG, VSAMCATALOG, and VOLCATALOG. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU500 Enter Norecatalog or Recatalog.

Explanation: Valid values for this field are RECATALOG and NORECATALOG. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU501 Enter Indexed, Nonindexed, Linear, or Numbered.

Explanation: Valid values for this field are INDEXED, NONINDEXED, LINEAR and NUMBERED. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU502 Enter Noempty or Empty.

Explanation: Valid values for this field are EMPTY and NOEMPTY. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU503 Enter Noscratch or Scratch.

Explanation: Valid values for this field are SCRATCH and NOSCRATCH. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU504 Enter Noswap or Swap.

Explanation: Valid values for this field are SWAP and NOSWAP. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU505 Enter Nonuniquekey or Uniquekey.

Explanation: Valid values for this field are UNIQUEKEY and NOUNIQUEKEY. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU506 Enter Upgrade or Noupgrade.

Explanation: Valid values for this field are UPGRADE and NOUPGRADE. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU508 Enter All, Allocation, History, Name, Volume or leave blank.

Explanation: Valid values for this field are ALL, ALLOCATION, HISTORY, NAME, VOLUME or blank. Refer to the appropriate IDCAMS documentation for specific information on these options.

PDF Messages

ISRU509 **Enter Unlock or Lock.**

Explanation: Valid values for this field are LOCK and UNLOCK. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU510 **In order to list data sets cataloged in a CVOL or VSAM catalog, a high-level qualifier is required. Matching data sets cataloged in ICF catalogs are displayed.**

Explanation: A catalog search on a CVOL or VSAM catalog cannot be done with a generic high-level qualifier. If there are matching entries in ICF catalogs, these are displayed.

User Response: Enter a full high-level qualifier to generate a list of data sets cataloged in a CVOL or VSAM catalog.

ISRU511 **In order to list data sets cataloged in a CVOL or VSAM catalog or when running a version of DFP prior to 3.2, a high level qualifier is required.**

Explanation: A catalog search on a CVOL or VSAM catalog cannot be done with a generic high-level qualifier. When running a version of DFP prior to 3.2, a full high-level qualifier is also required. If you are running with DFP 3.2 or later and there are matching entries in ICF catalogs, they are displayed.

User Response: Enter a full high-level qualifier to generate a list of data sets cataloged in a CVOL or VSAM catalog.

Problem Determination: Verify the sort operand.

ISRU512 **List may be incomplete. - Entries in catalogs that the user has authority to are listed. There may be other entries that match the data set name level that are in catalogs the user has no authority to.**

Explanation: The user does not have RACF or other authority to the master catalog and possibly some user catalogs. Data sets in catalogs that the user has authority to are listed.

ISRU513 **List may be incomplete - Cannot GETMAIN enough workarea to process list of entries that match the data set name level in a non-ICF catalog.**

Explanation: There are more entries in a non-ICF catalog that match the data set name level than will fit in available storage.

User Response: Qualify the data set name more fully in order to list the entries.

ISRU514 **Enter one of the listed values.**

Explanation: This is an ISPF-supplied message displayed as the result of a LIST,value1,value2,... verification failure.

User Response: Enter one of the listed values in the field pointed to by the cursor.

ISRU515 **Enter required field at the cursor position.**

Explanation: This is an ISPF-supplied message displayed as the result of a verification failure.

User Response: Enter the appropriate data into the field at the cursor position.

ISRU516 **The choice selected is not valid for the request type selected.**

Explanation: The VSAM Data Type selected is not valid for the Process Request entered.

User Response: Correct either the VSAM Data Type or the Process Request, then retry the request.

ISRU517 **No data set names found - No data sets are cataloged that match pattern 'aaaaaaaa'.**

Explanation: The pattern entered for dsname level does not match any data sets in the catalog.

User Response: Change the dsname level.

ISRU518 **No data set names found - There were no entries in catalogs that the user has authority to that match the pattern 'aaaaaaaa'.**

Explanation: This is an informational message. The user does not have RACF or other authority to the master catalog and possibly some user catalogs. There are no matching entries for the pattern in catalogs that the user has access to.

ISRU519 **Invalid Dsname Level - In order to list catalog entries, you must specify at least one partial qualifier. Any Dsname Level that contains only asterisks is invalid.**

Explanation: If you specify only asterisks for a dsname level, a search is made of all the catalogs on the system. This severely impairs performance, so at least one partial qualifier is required.

User Response: Partially qualify at least one dsname level qualifier.

ISRU520 **Invalid Dsname Level - Two or more adjacent asterisks within a Dsname Level qualifier is invalid. A single asterisk indicates 0 or more letters may occupy that position in the qualifier.**

Explanation: Two or more adjacent asterisks means 0 or more qualifiers may occupy that position. This is invalid within a single qualifier. Double asterisks may be used as a qualfier with no other characters.

User Response: Change the adjacent asterisks to a single asterisk.

Programmer Response: None.

ISRU521 **Invalid length qualifier - All Dsname Level qualifiers must be 1 to 8 characters in length.**

Explanation: There is a qualifier of 0 or more than 8 characters in the Dsname Level entered.

User Response: Correct the Dsname Level qualifier.

Programmer Response: None.

Problem Determination: Verify the Dsname levels, each must be 1 to 8 characters in length.

ISRU522 **Invalid VSAM delete - Delete is an invalid command for VSAM data and index components. Delete is only allowed on the cluster component.**

Explanation: If you want to delete a VSAM data set, issue the delete command against the VSAM cluster.

Programmer Response: None.

ISRU523 **Catalog search cancelled - Enter a Dsname Level with a high level qualifier other than '*' or '**'.**

Explanation: A high level qualifier of "*" (asterisk) or "**" (double asterisk) requires a search of all the catalogs on the system. This may require a great deal of time. You have chosen to cancel this search. Continue by entering another dsname level.

User Response: Change the Dsname Level.

Programmer Response: None.

Problem Determination: Change the first level of the Dsname to some thing other than '*' or '**'.

ISRU524 **RDJFCB failed - The RDJFCB macro failed for data set 'aaa(44)'.**

Explanation: An attempt to read the JFCB for the the multivolume data set specified was not successful.

User Response: Contact your system programmer.

Programmer Response: None.

Problem Determination: Verify the sort operand.

ISRU525 **Data set 'aaaaaaaa' - Data set 'bbb(44)' 'aaaaaaaa' to data set 'ccc(44)'**

Explanation: This is an informational message.

Programmer Response: None.

ISRU526 **Data set 'aaaaaaaa' - Data set 'bbb(44)' 'aaaaaaaa' to data set 'ccc(56)'**

Explanation: This is an informational message.

Programmer Response: None.

ISRU527 **Data set 'aaaaaaaa' - Data set 'bbb(44)' 'aaaaaaaa' to library 'cccccccc'.**

Explanation: This is an informational message.

Programmer Response: None.

ISRU528 **Catalog search error - The return code for a catalog search on 'aaaaaaaa' was bbbbbb, the reason code was ccccccc, and the module id was dddddddd.**

Explanation: The catalog search to find the requested data set names failed.

User Response: Refer to the appropriate DFP documentation for an explanation of the error.

Programmer Response: None.

ISRU529 **List may be incomplete. - Catalog search error. The return code for a catalog search on 'aaaaaaaa' was bbbbbb, the reason code was ccccccc, and the module id was dddddddd.**

Explanation: The catalog search to find the requested data set names failed.

User Response: Refer to the appropriate DFP documentation for an explanation of the error.

Programmer Response: None.

ISRU530 **Data retrieved - The GET command completed. Data from the profile was retrieved and stored into the panel input fields.**

Explanation: This is an informational message.

ISRU531 **Profile name set - The profile data set name has been set and the data set was allocated if it did not previously exist.**

Explanation: This is an informational message.

PDF Messages

ISRU532 Enter a decimal value between 0 and 32768.

Explanation: Valid values for the Length value of the Keys option are a decimal number between 0 and 32768. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU533 Enter a decimal value between 1 and 32768.

Explanation: Valid values for Average Record Size are a decimal number between 0 and 32768. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU534 Enter Unique or Suballocation

Explanation: Valid values for this field are UNIQUE and SUBALLOCATION. Refer to the appropriate IDCAMS documentation for specific information on these options.

ISRU535 Member name not allowed - Use "NEW" member name field to rename "TO" member.

Explanation: A member name is not allowed as part of the TO data set name.

User Response: Remove member name from TO data set name.

ISRU536 Settings saved - Workplace Settings have been saved to aaaaaaaa profile.

Explanation: Workplace settings were updated and saved to the ISPF profile.

ISRU537 Settings canceled - Workplace settings canceled.

Explanation: Workplace settings were not updated or saved.

ISRU538 DSLIST processed - DSLIST has been successfully processed.

Explanation: The DSLIST action has completed successfully.

ISRU539 List no longer defined - The personal list selected has been previously deleted by you or another user. Select another list.

Explanation: The DSLIST action has completed successfully.

ISRU540 Enter Command name - Enter command name to invoke in the Prompt action field.

Explanation: No explanation available at this time.

ISRU541 Invalid Value - Enter a number from 1 to 8 for direct selection of a library entry. Enter a "/" and press enter to display Personal list. Enter "DL" to display a DSLIST based on Library entries.

ISRU542 Invalid Value - Enter A (Save As), O (Open), D (Delete), E (Edit), L (DSLIST) or / (Prompt).

ISRU543 Confirm delete aaaaaaaa - Confirm member delete has been set to aaaaaaaa.

Explanation: No explanation available at this time.

ISRU544 Action "=" invalid - The "=" (repeat) action is not valid when used with the primary select command.

Explanation: No explanation available at this time.

ISRU545 Welcome to the ISPF Workplace. Default view has been set to Data Set. Enter Action "ListView" to change view to ISPF Library. Default settings have been established for Applid 'aaaaaaa'. Select "Workplace Settings" from Option action bar to change Workplace settings at any time.

Explanation: No explanation available at this time.

ISRU546 Severe Exit Error - The member list line command exit issued a return code of 20.

Explanation: Account member list user exit returned a RC=20.

ISRU547 Unknown Exit Error - The member list line command exit issued a unknown return code.

Explanation: Account member list user exit returned a RC that was not 0,8 or 20.

ISRU548 Invalid Value - Enter a number from 1 to 30 to directly select a data set entry. Enter a "/" and press enter to display personal list. Enter "DL" to display a DSLIST based on data set entries.

ISRU549 *aaaaaaaa new append(s) - The currently displayed DSLIST has been appended with aaaaaaaa additional data set(s).*

Explanation: Informational only

ISRU541A **No new appends - No additional data sets were appended to the DSLIST.**

Explanation: Informational only

ISRU541B **Entry not defined - The list entry selected is blank or entry number is out of range.**

Explanation: Informational only

ISRU550 **Enter character string - Enter the string of characters to be excluded.**

Explanation: The EXCLUDE command was entered on an option 3.4 data set list, but no parameter was specified to indicate what the exclude target was.

User Response: Specify a target string on the EXCLUDE command.

ISRU551 **Invalid keyword - Check spelling of keywords used with the EXCLUDE command.**

Explanation: The EXCLUDE command was entered, passing a quoted string as the target string to EXCLUDE, but an additional parameter was specified that was not recognized as a valid EXCLUDE keyword. Valid keywords are: ALL, FIRST, LAST, NEXT, PREV, CHARS, PREFIX, SUFFIX, and WORD.

User Response: Correct the specified keyword and retry the command.

ISRU552 **Put string in quotes - Put quotes (' ') around the string of characters to be excluded.**

Explanation: The EXCLUDE command was entered, passing multiple words as parameters that were not recognized as valid keywords. It is assumed that the words were intended to be an argument to the EXCLUDE command and, if so, must be enclosed in quotation marks.

User Response: Add quotation marks around the string and retry the command.

ISRU553 **Invalid keyword - The keywords 'aaaaaaaa' and 'bbbbbbbb' cannot both be used. Delete one.**

Explanation: The EXCLUDE command was entered, passing conflicting keywords. Only one of these keywords may be specified. Two kinds of keywords are

supported by the EXCLUDE command: direction keywords and type keywords. No more than one of each kind of keyword may be specified on the EXCLUDE command. The keywords are:

Direction

ALL, FIRST, NEXT, PREV, and LAST

Type

CHARS, PREFIX, SUFFIX, and WORD

The defaults are NEXT and CHARS

User Response: Correct the keywords specified and retry the command.

ISRU554 **Enter character string - A character string for EXCLUDE has not been entered and '*' is invalid until a character string is entered.**

Explanation: An asterisk (*) used as the target string of the EXCLUDE command indicates that the previous target string should be reused. An asterisk was entered but no previously entered valid target string was found, making the use of the asterisk invalid.

User Response: Enter a valid target string. Once a target string is entered, the asterisk may then be used on subsequent EXCLUDE commands.

ISRU555 **EXCLUDE string too long - The EXCLUDE string cannot be longer than 44 characters.**

Explanation: The EXCLUDE command searches for the specified target string within the list of data set names. Since the maximum length of a data set in the list is 44 characters, the target string may not exceed 44 characters.

User Response: Retry the command, entering a target string that is equal to or less than 44 characters in length.

ISRU556 **Invalid character string - The EXCLUDE string cannot be a null (' ') string.**

Explanation: The EXCLUDE target string must be a minimum of 1 character in length. A target string of 0 characters was entered.

User Response: Retry the command, entering a target string that is equal to or greater than 1 character in length.

ISRU557 **All data sets excluded - All data sets in the data set list have been excluded.**

Explanation: The command EXCLUDE ALL causes all data sets in the data set list A to be excluded.

PDF Messages

ISRU558 *aaaa - bbbbbbbb ccc(44) - bbbbbbbb ccc(44)*
excluded on aaaa line(s)

Explanation: This is an informational message. An EXCLUDE ALL command was entered on a data set list, and the specified target string was successfully located.

ISRU559 *aaaaaaaa bbb(44)* **excluded - Search for**
aaaaaaaa bbb(44) **was successful.**

Explanation: This is an informational message. An EXCLUDE command was entered on a data set list, and the string was successfully located.

ISRU560 ***Bottom of list reached* - aaaaaaaaa**
bbb(44) **not found. Press the RFIND key**
to continue the search from the top of
the data set list.

Explanation: This is an informational message. The data set list EXCLUDE command searches from the top of the displayed data to the bottom of the list to find the target string. EXCLUDE has searched and reached the bottom of that list without finding the target string. Entering the RFIND command continues the search, starting from the top of the data set list.

ISRU561 *** Top of list reached * - aaaaaaaaa bbb(44)**
not found. Press the RFIND key to
continue the search from the bottom of
the data set list.

Explanation: This is an informational message. When the PREV keyword is specified, the data set list EXCLUDE command searches from the top of the displayed data to the top of the list to find the target string. EXCLUDE has searched and reached the top of that list without finding the target string. Entering the RFIND command continues the search, starting from the bottom of the data set list.

ISRU562 **No aaaaaaaaa bbb(44) found - aaaaaaaaa**
bbb(44) **- not found in any NON-X'ED**
data set names.

Explanation: This is an informational message. An EXCLUDE command was entered to cause the data set list processor to search the entire data set list for the specified target string. The search was completed, but the target string was not found in any unexcluded data set names.

ISRU563 **Invalid string type - Data set list**
EXCLUDE command does not process
picture (P'...'), hex (X'...'), text (T'...') or
char (C'...') strings.

Explanation: The data set list EXCLUDE command does not support all of the keywords supported by the

editor EXCLUDE command. The following are not supported:

- Picture strings (P'...')
- Hex strings (X'...')
- Text strings (T'...')
- Character strings (C'...')

All EXCLUDE commands are treated as text strings (T'...'), meaning that strings are matched regardless of case.

User Response: Remove the unsupported keyword and reenter the command.

ISRU564 **Invalid line command - The only line**
commands that are valid on excluded
lines are 'NX', 'NXF', and 'NXL'.

Explanation: Informational

User Response: Remove the line command from the excluded line.

ISRU565 -

Explanation: This message is for the ISPF Workplace scrollable section and contains a X'00' so no text will display with this message.

ISRU566 **Invalid parameter - Line command**
aaaaaaaa **has an invalid parameter**
specified.

Explanation: The exclude (X) and unexclude (NX, NXF, NXL) do not accept any parameters.

User Response: Remove the extra parameter or change the command.

ISRU567 **Invalid Library Action - The selected**
action is not valid for ISPF Library view.
Change View to "Data Set" to perform
this action.

Explanation: No explanation available at this time.

ISRU568 **Invalid Data Set Action - The selected**
action is not valid for Data set view.
Change View to "Library" to perform
this action.

Explanation: No explanation available at this time.

ISRU569 **Volume not available - Volume 'aaaaaaaa'**
not mounted or not authorized for your
use.

Explanation: PDF received one of the following return codes while processing volume *aaaaaaaa*, indicating that the volume specified is not available for your use:

- Return code 4 from the OBTAIN macro

- SVC 99 return code 4 with one of the following error codes: X'0214', X'0218', X'0220', X'0248', X'0498', X'049C', or X'6704'.

User Response: Verify that the correct data set name and volume were specified to PDF, and correct them if necessary. If the data specified looks correct, contact your system programmer.

ISRU570 **Workstation file saved - The workstation file has been successfully saved.**

Explanation: Informational only. Workstation has been saved.

ISRU571 **Data Set Saved - Data set - 'aaaaaaa' - Saved.**

Explanation: Informational only. The sequential data set was saved.

ISRU572 *aaaaaaa members bbbbbbbb - to data set ccccccc. One or more members was passed to the Binder for processing but was found not to be a load module (Binder message IEW2522S). These members were successfully copied using an alternate method.*

Explanation: ISPF passes all members of a record format U PDS data set to the Binder for processing as a load module. If the Binder detects that the member is not a load module, it issues message IEW2522S and returns an error code of '83000523' to ISPF. ISPF will reprocess these members using a read-write loop and the IEW2522S message should be ignored.

ISRU573 **Some entries not used - One or more names in the specified personal list could not be found. The data set list was built using the entries that do match existing data sets.**

Explanation: One or more of the data sets specified in the reference list passed to the DSLIST command do not exist and have therefore not been added to the data set list.

ISRU574 **Catalog error - Catalog/uncatalog request via SVC 26 failed, return code = aaaaaaa, reason code = bbbbbbbb, module id = ccccccc.**

Explanation: The catalog search to process the requested data set failed.

User Response: Refer to the appropriate DFP documentation for an explanation of the error.

Programmer Response: None.

ISRU576 **to aaaaaaaa**

Explanation: This is an informational message written to the ISPF log data set.

ISRU578 **Copy failed - Copied failed for member aaaaaaaa. Members whose directory entries contain user TTRs cannot be copied into a PDSE. Move/Copy completed for bbbbbbbb members.**

Explanation: You attempted to copy a member that contained user TTRs into a PDSE data set. PDSE's do not support user-supplied TTRS in the user data field of the directory entry.

ISRU579 **Copy failed - Members whose directory entries contain user TTRs cannot be copied into a PDSE.**

Explanation: You attempted to copy a member that contained user TTRs into a PDSE data set. PDSE's do not support user-supplied TTRS in the user data field of the directory entry.

ISRU580 **IEBCOPY setup failed - The allocation of the IEBCOPY input data sets failed.**

Explanation: The allocation of the specified input libraries to separate DDNAMES needed for invocation of IEBCOPY failed.

User Response: Contact your system administrator for assistance.

System Programmer Response: Contact IBM service for assistance.

ISRU581 **IEBCOPY setup failed - The allocation of the IEBCOPY output data sets failed.**

Explanation: The allocation of the specified output library to a separate DDNAMES needed for invocation of IEBCOPY failed.

User Response: Contact your system administrator for assistance.

System Programmer Response: Contact IBM service for assistance.

ISRU582 *aaaaaaa members bbbbbbbb - to data set ccccccc..One or more members was passed to the Binder for processing but was found not to be a load module (Binder message IEW2522S). These members were successfully copied using an alternate method.*

Explanation: ISPF passes all members of a record format U PDS data set to the Binder for processing as a load module. If the Binder detects that the member is

PDF Messages

not a load module, it issues an error code of '83000523' to ISPF. ISPF will reprocess these members using a read-write loop and the IEW2522S message should be ignored.

ISRU583 List incomplete – One or more names in the specified reflist could not be found.

Explanation: One or more of the data sets specified in the reference list passed to the DSLIST command do not exist and have therefore not been added to the data set list.

ISRU584 IEBCOPY interface failed – The Move/Copy processor could not allocate the SYSPRINT data set needed for invocation of IEBCOPY.

Explanation: The Move/Copy processor allocates a data set named 'prefix.SPFnnn.IEBCOPY' to hold the IEBCOPY SYSPRINT output. ISPF will make 50 attempts to create a data set before failing.

User Response: Delete any unneeded 'zprefix.SPFnnn.IEBCOPY' data sets.

Programmer Response: None.

ISRU585 Catalog error – Catalog/uncatalog request via SVC 26 failed, return code=aaaaaaaa, reason code=bbbbbbbb, module id=ccccccc.

Explanation: The catalog search to process the requested data set failed.

User Response: Refer to the appropriate DFP documentation for an explanation of the error.

Programmer Response: None.

ISRU588 Copy failed – Copy failed for member aaaaaaaa.. Members whose directory entries contain user TTRs cannot be copied into a PDSE. Move/Copy completed for bbbbbbbb members.

Explanation: You attempted to copy a member that contained user TTRs into a PDSE data set. PDSE's do not support user-supplied TTRs in the user data field of the directory entry.

ISRU589 Copy failed – Members whose directory entries contain user TTRs cannot be copied into a PDSE.

Explanation: You attempted to copy a member that contained user TTRs into a PDSE data set. PDSE's do not support user-supplied TTRs in the user data field of the directory entry.

ISRU590 File not replaced — Workstation file 'aaaaaaaa' already exists and was not replaced.

Explanation: A file transfer request was issued from ISPF option 3.7.4 with the REPLACE option not selected. The target workstation file already exists and is therefore not replaced. Select the "Replace existing member/file" choice to replace the workstation file.

ISRU591 Member not replaced — Member 'aaaaaaaa' already exists and was not replaced.

Explanation: A file transfer request was issued from ISPF option 3.7.4 with the REPLACE option not selected. The target dataset member already exists and is therefore not replaced. Select the "Replace existing member/file" choice to replace the workstation file.

ISRV000 Invalid combination - You have selected Allocate Multiple Volumes. The directory blocks field must be zero to allocate a multivolume data set. Multivolume data sets are sequential data sets.

Explanation: The directory blocks field must be 0 to allocate a multivolume data set. Multivolume data sets are sequential data sets.

User Response: Either change the directory block field to 0 or blank out the field to allocate multivolume data sets.

ISRV001 Duplicate volumes - Duplicate volumes have been entered for multivolume allocation. Correct or remove the duplicate volume.

Explanation: An attempt to allocate a multivolume data set has been made using the volume name of a volume that has been already entered.

User Response: Correct or remove the duplicate volume name.

ISRV002 More than 20 volumes - ISPF does not support multivolume data sets with more than 20 volumes. Information is displayed about the first 20 volumes.

Explanation: This is an informational message. The multivolume data set contains more than 20 volumes. ISPF supports up to 20 volumes for a multivolume data set. The information displayed is for the first 20 volumes.

ISRV003 **Invalid multivolume cmd - The data set that this command has been issued against is a multivolume data set. The command is invalid for multivolume data sets.**

Explanation: This is an informational message. The data set that this command has been issued against is a multivolume data set. The command is invalid for multivolume data sets.

ISRV004 **Invalid multivolume cmd - The data set that this command has been issued against is a multivolume data set. The command is invalid for multivolume data sets that are displayed using a VTOC list.**

Explanation: The data set that this command has been issued against is a multivolume data set. The command is invalid for multivolume data sets that are displayed using a VTOC list.

User Response: Remove the volume name from the Volume Serial field and reissue the command.

ISRV005 **Invalid multivolume cmd - The data set that this command has been issued against is a multiple volume data set. The command is invalid for a multivolume data set using the volume serial.**

Explanation: The data set that this command has been issued against is a multivolume data set. The command is invalid for multivolume data sets using the volume serial.

User Response: Remove the volume name from the Volume Serial field and reissue the command.

ISRV006 **Multivolume data set - The data set that is being edited is a multivolume data set. Edit does not support the input of a volume in the Volume Serial field for multivolume data sets.**

Explanation: The data set that is being edited is a multivolume data set. Edit does not support the ability to edit data on one volume of a multivolume data set.

User Response: Remove the volume name from the Volume Serial field when you are attempting to edit a multivolume data set.

ISRV007 **Volume ignored - The data set that is being viewed is a multivolume data set. The volume entered was ignored. All of the data set can be viewed, not just one volume's data. If you wish to see the data on one volume only, use browse instead of view.**

Explanation: For a multivolume data set, view always allocates all volumes even when a specific volume is specified. The data presented begins with volume one.

ISRV008 **Volume ignored - This data set is an SMS managed multivolume data set. The volume entered was ignored. You cannot allocate just one volume of an SMS managed multivolume data set. The data displayed begins with volume one.**

Explanation: For an SMS managed multivolume data set, you cannot allocate just one volume's worth of data. The whole data set is allocated and the display begins with the data on volume one.

ISRX000 **Unknown return code - The installation accounting exit issued a return code of *aaaa*.**

Explanation: The only valid return code from the installation exit is 0.

User Response: Contact the responsible programmer.

Programmer Response: Correct the exit so that it returns a return code of 0.

ISRYM012 **Invalid class - Enter a valid class option. *"aaaaaaaa"* is invalid**

Explanation: The value entered on the model class panel or on the edit primary MODEL CLASS command is not a valid model class.

User Response: Specify a valid model class and retry the request.

ISRYM013 **Invalid option - Enter a valid option. *"aaaaaaaa"* is invalid**

Explanation: An invalid model (*aaaaaaaa*) was requested on one of the PDF edit language model panels.

User Response: Specify a valid model and press Enter.

ISRZ000 *aaaaaaaa - bbbbbbbb*

Explanation: This is an informational message. This message may be used if an error is returned from a PDF edit macro command.

PDF Messages

ISRZ001 *aaaaaaaa - bbbbbbbb*

Explanation: This is an informational message. This message may be used if an error is returned from a PDF edit macro command.

ISRZ002 *aaaaaaaa - bbbbbbbb*

Explanation: This is an informational message. This message may be used if an error is returned from a PDF dialog service. Variable &ZERRMSG indicates the message ID that is the source of the message text for ISRZ002.

ISRZ003 *aaaaaaaa - bbbbbbbb*

Explanation: This is an informational message. This message may be used if an error is returned from a PDF dialog service. Variable &ZERRMSG will indicate the message id that is the source of the message text for ISRZ003.

Chapter 3. SCLM Messages

This chapter provides a complete listing and description of messages issued by the SCLM functions. Abend codes are issued with associated error messages.

SCLM macro messages (MNOTEs) are listed in “Chapter 4. Macro Messages (MNOTEs)” on page 521.

FLMQ000 **Data set unavailable — Data set *aaaaaaaa* could not be found or is not available for your use. Correct the data set name and press Enter.**

Explanation: The data set entered on the SCLM Sample Project Create panel does not exist or is not available for your use. The data set may be enqueued exclusively to another user or you may not have authority to use the data set.

User Response: Correct the data set name or determine why the data set is not available for your use.

FLMQ001 **Allocation error — Error allocating data set *aaaaaaaa*. TSO messages should have been written to your screen, check the setting of WTPMSG in your TSO PROFILE. Names of data sets created for this project are in data set *bbbbbbbb..PROJDEFS.DATASETS*.**

Explanation: An error occurred creating a data set for the sample SCLM project. TSO messages should have been written to the screen describing the error.

User Response: Correct the problem described in the TSO messages.

FLMQ002 **Initialization error — Error initializing VSAM file *aaaaaaaa* .. TSO messages should have been written to your screen describing the error. If TSO messages were not written to your screen, check the setting of WTPMSG in your TSO PROFILE.**

Explanation: An error occurred initializing the VSAM data base file for the sample SCLM project. TSO messages should have been written to the screen describing the error.

User Response: Correct the problem described in the TSO messages.

FLMQ003 **LINIT error — Error for LINIT of data set *aaaaaaaa* .. LINIT Return Code = *bbbbbbbb*.**

Explanation: An error occurred on the ISPF LINIT service for the data set listed in the message.

User Response: Consult the ISPF Services Guide for an explanation of the return code. Correct the problem and retry the operation.

FLMQ004 **LMCOPY error — Error for LMCOPY of member *aaaaaaaa* from data set *bbbbbbbb*. LMCOPY return code = *cccccccc*.**

Explanation: An error occurred on the ISPF LMCOPY service for the data set and member listed in the message.

User Response: Consult the ISPF Services Guide for an explanation of the return code. Correct the problem and retry the operation.

FLMQ005 **A fully qualified data set name enclosed in quotes is required.**

Explanation: You entered a data set name that is not fully qualified. The SCLM Sample Project Create function requires all data set names except the High Level Assembler Location be fully qualified and enclosed in single quotes.

User Response: Correct the data set name.

FLMQ006 **A fully qualified data set name enclosed in quotes or LINKLIB without quotes is required.**

Explanation: You entered a data set name that is not fully qualified and is not LINKLIB without quotes. The SCLM Sample Project Create function requires the data set name for the High Level Assembler Location be a fully qualified data set name enclosed in quotes or the term LINKLIB.

User Response: Correct the entry.

SCLM Messages

FLMQ007 **Assembly error — Error assembling project definition**
aaaaaaaa.PROJDEFS.SOURCE(aaaaaaaa)
with the ISPF Macros Data set and
aaaaaaaa.PROJDEFS.SOURCE as
SYSLIB. The output is in *bbbbbbbb.*

Explanation: Assembly of the project definition resulted in a non-zero return code.

User Response: Attempt to assemble the project definition member using the ISPF Macros data set and the project.PROJDEFS.SOURCE as SYSLIB. Use option 4.1 or batch. Correct the ISPF Macros data set name if it is incorrect.

FLMQ008 **Link error — Error linking project definition**
aaaaaaaa.PROJDEFS.OBJ(aaaaaaaa) **The output is in** *bbbbbbbb.*

Explanation: Link Edit of the project definition resulted in a non-zero return code.

User Response: Attempt to link edit the project definition member using the ISPF Macros data set and the project.PROJDEFS.OBJ to project.PROJDEFS.LOAD. Use option 4.7 or batch. Correct any errors you find.

FLMQ009 **MIGRATE failed — Error migrating members into project** *aaaaaaaa*. **Error messages are contained in**
aaaaaaaa.MIGRATE.MESSAGES.

Explanation: The SCLM MIGRATE of members into the project failed.

User Response: Correct the errors described by the messages in project.FLMMSGGS.

FLMQ010 **BUILD failed — Error building the project** *aaaaaaaa*. **Messages are in**
aaaaaaaa.BUILD.MESSAGES. **Listings are in** *aaaaaaaa.BUILD.LISTINGS.* **The BUILD report is in**
aaaaaaaa.BUILD.REPORT.

Explanation: Build of the sample project failed.

User Response: Correct the errors in the messages and listings data sets. Complete the sample project using the instructions in the SCLM Project Manager's Guide, Preparing the Example Project Data, by completing the BUILD and PROMOTE steps.

FLMQ011 **PROMOTE failed — Error promoting the sample application from** *aaaaaaaa* **to** *bbbbbbbb*. **Messages are in**
ccccccc.PROMOTE.MESSAGES. **Listings are in** *ccccccc.PROMOTE.LISTINGS.*
The PROMOTE report is in
ccccccc.PROMOTE.REPORT.

Explanation: Promote of the sample application failed.

User Response: Correct the errors in the messages and listings data sets. Complete the sample project using the instructions in the SCLM Project Manager's Guide, Preparing the Example Project Data, by completing the BUILD and PROMOTE steps. You may have to repeat the BUILD step.

FLMQ012 **Project** *aaaaaaaa* **was successfully deleted. All data sets for the project were deleted.**

Explanation: Deletion of the sample project was successful.

FLMQ013 **Incomplete delete —Errors occurred deleting data sets for project** *aaaaaaaa*. **TSO messages should have been written to your screen describing the errors. If TSO messages were not written to your screen, check the setting of WTPMSG in your TSO PROFILE.**

Explanation: No explanation available at this time.

FLMQ014 **Project not deleted —You did not confirm deletion of project** *aaaaaaaa*. **Project** *aaaaaaaa* **was not deleted.**

Explanation: No explanation available at this time.

FLMQ015 **Project delete failed —Errors occurred allocating or reading the data set** *aaaaaaaa.PROJDEFS.DATASETS* **that contains the list of data sets for project** *aaaaaaaa*. **The project cannot be deleted without this data set.**

Explanation: Data set *aaaaaaaa.PROJDEFS.DATASETS* contains the list of data sets for the project. It is required to delete the project.

User Response: Correct the project name or determine why the required data set is not available.

FLMQ016 **Duplicate project —Data set** *aaaaaaaa.PROJDEFS.DATASETS* **already exists. This data set is used to record the names of data sets in the project.**

Explanation: Data set *aaaaaaaa.PROJDEFS.DATASETS* used to contain the list of data sets for the project already exists. This project was already created or the

data set exists for some other purpose.

User Response: Delete or rename the
aaaaaaa.PROJDEFS.DATASETS data set.

FLM090 Unable to display panel - Unable to display panel aaaaaaaa.

Explanation: The panel either does not exist in the linked panel libraries, or the panel contains an error.

User Response: Make sure the correct panel libraries are concatenated to ISPLIB. Use the TSO LISTALC command to display concatenated libraries. If the panel exists in the library concatenation, see your system programmer.

System Programmer Response: termine if the panel has been altered at your site. If not, contact IBM support.

FLM090A An error has occurred. Enter HELP for a detailed description of the error.

Explanation: This is an informational message.

**FLM090B SCLM - Promote -
aaaaaaa..bbbbbbb..ccccccc(dddddddd) - RC=:**

Explanation: This is an informational message.

User Response: See the promote messages for return codes greater than zero.

**FLM090C SCLM - Build -
aaaaaaa..bbbbbbb..ccccccc(dddddddd)- RC=:**

Explanation: This is an informational message.

User Response: For return codes greater than zero, see the build messages.

FLM090D Volume should be blank - Leave VOLUME blank for command SUB and LISTINGS destination data set.

Explanation: Do not specify a volume name when submitting a batch build in SCLM. SCLM uses the default volume.

User Response: Blank out the volume name field.

**FLM090F SCLM - Utility -
aaaaaaa..bbbbbbb..ccccccc(dddddddd) - Del**

Explanation: This is an informational message. SCLM completed the request to delete member aaaaaaa.

**FLM090G SCLM - Saved -
aaaaaaa..bbbbbbb..ccccccc(dddddddd) - Mem**

Explanation: This is an informational message.

**FLM090H SCLM - Utility -
aaaaaaa..bbbbbbb..ccccccc(dddddddd) - Aut**

Explanation: This is an informational message.

**FLM090I SCLM - Promote -
aaaaaaa..bbbbbbb..ccccccc(dddddddd)- MODE**

Explanation: This is an informational message.

**FLM090J SCLM - Build -
aaaaaaa..bbbbbbb..ccccccc(dddddddd)- MODE**

Explanation: This is an informational message.

FLM090K Job submitted - Data set aaaaaaaa submitted for printing and deletion.

Explanation: This is an informational message.

FLM090L Data set deleted - SCLM deleted data set aaaaaaaa without printing it.

Explanation: This is an informational message.

FLM090M Vol aaaaaaaa not found - Volume aaaaaaaa is not mounted or is not authorized for your use.

Explanation: The volume could not be found or an error occurred obtaining information about the volume.

User Response: Request that the volume be mounted if it is not. Otherwise, request the proper authorization.

FLM090N Vol aaaaaaaa not mounted - Volume aaaaaaaa is not mounted or is not authorized for your use.

Explanation: The volume could not be found or an error occurred obtaining information about the volume.

User Response: Request that the volume be mounted if it is not. Otherwise, request the proper authorization.

FLM090P Data set kept - Data set aaaaaaaa submitted for printing; data set kept.

Explanation: This is an informational message.

SCLM Messages

FLM090Q **Job submission error - Job submission error. Invalid request.**

Explanation: This is an informational message.

FLM090R **Job submitted – SCLM submitted the job request to the specified output control.**

Explanation: This is an informational message.

FLM090S **Promote completed – The return code from the Promote processor is aaaaaaaa.. Enter the HELP command for a description of common errors.**

Explanation: This is an informational message.

FLM090T **Build completed – The return code from the Build processor is aaaaaaaa.. Enter the HELP command for a description of common errors.**

Explanation: This is an informational message.

FLM090U **Job queued - The job request is queued for later submission as a batch job.**

Explanation: This is an informational message.

FLM090V **Invalid option - The option you entered is invalid.**

Explanation: An invalid option was specified on the command line.

User Response: Enter a valid option.

FLM090W **Invalid value - You cannot select PRINTER for EXECUTE.**

Explanation: You can only request output to be routed to the printer if you submit the job to batch.

User Response: Either submit the job to batch, or route the output to TERMINAL or data set.

FLM090X **Invalid value - You cannot select TERMINAL for SUBMIT.**

Explanation: You can only request output to be routed to the terminal if you execute the job in foreground.

User Response: Either route the output to PRINTER or data set, or execute the job in foreground.

FLM090Y **Enter option - Enter one of the listed options.**

Explanation: No option was selected.

User Response: Choose one of the options listed and press Enter.

FLM090Z **Invalid option - Enter one of the listed options.**

Explanation: An invalid option was selected.

User Response: Choose one of the options listed and press Enter.

FLM091 **Arch report completed – The return code from the Architecture Report processor is aaaaaaaa. Enter the HELP command for a description of common errors.**

Explanation: This is an informational message.

FLM091B **I/O error on Xref – An I/O error occurred while retrieving a cross-reference record.**

Explanation: SCLM could not read a record from the VSAM cross-reference file.

User Response: Contact your project administrator.

Project Manager Response: Isolate the failure using IDCAMS after making sure the cross-reference file exists as defined for this project.

FLM091C **Xref not found - Cannot find the cross-reference record for selected Compilation Unit.**

Explanation: This is an informational message.

User Response: Save or migrate the member.

FLM091D **Xref mismatch - Mismatch of xref/dependency information or xref/code version.**

Explanation: The member and dependency information are out of synch.

User Response: Parse the member and rebuild.

FLM091E **Xref file missing - The project definition does not include a Cross-reference file.**

Explanation: The cross-reference file as specified by the project definition does not exist, or the project does not have a cross-reference file defined to it.

User Response: Contact your project administrator.

Project Manager Response: If the file does not exist,

allocate it; otherwise, define the cross-reference file to the project.

FLM091F **Requested accounting record is not in the accounting file. Enter HELP for a detailed description.**

Explanation: SCLM could not find the accounting record in the accounting VSAM file defined to this project.

User Response: You can generate the accounting record for the member using the SCLM migrate utility, or by editing the member and issuing the SPROF command.

FLM091G **Info/version mismatch - Mismatch of Acct/seg dependency info or acct rec/executing code version.**

Explanation: The accounting segment dependency information or accounting executing code version are mismatched.

User Response: Parse and rebuild the member to correct.

FLM091H **I/O error - An I/O error occurred while reading from the accounting file.**

Explanation: A failure occurred either on OPEN or READ of the accounting VSAM file.

User Response: Contact your project administrator.

Project Manager Response: Check that the accounting VSAM file for the project exists. If it does, use IDCAMS or a similar tool to isolate the I/O failure. If the accounting VSAM file is unrecoverable, consider retrieving a backup, or use the secondary accounting file if one was specified for the project.

FLM091I **Database I/O error - An I/O error occurred during a database operation.**

Explanation: SCLM could not read or update one of the VSAM files defined to the project.

User Response: Contact your project administrator.

Project Manager Response: Check all VSAM files defined to the project using the IDCAMS utility. If an alternate to the failing VSAM data set exists, use it. Otherwise, consider using a previous backup version.

FLM091J **Acct file I/O error - An I/O error occurred while writing to the accounting file.**

Explanation: A failure occurred while writing to the accounting VSAM file.

User Response: Contact your project administrator.

Project Manager Response: Verify that the accounting VSAM file for the project exists. If it does, use IDCAMS or a similar tool to isolate the I/O failure. If the accounting VSAM file is unrecoverable, consider retrieving a backup or use the secondary accounting file if one was specified for the project.

FLM091K **Xref file I/O error - An I/O error occurred while writing to the cross-reference file.**

Explanation: A failure occurred while writing to the cross-reference VSAM file.

User Response: Contact your project administrator.

Project Manager Response: Determine if the cross-reference VSAM file for the project exists. If it does, use IDCAMS or a similar tool to isolate the I/O failure. If the cross-reference VSAM file is unrecoverable, consider replacing it with a previous backup version.

FLM091L **Acct. file I/O error - Error occurred while updating the accounting file. Return code = aaaaaaaaaa..**

Explanation: A failure occurred on updating the accounting VSAM file.

User Response: Contact your project administrator.

Project Manager Response: Check that the accounting VSAM file for the project exists. If it does, use IDCAMS or a similar tool to isolate the I/O failure. If the accounting VSAM file is unrecoverable, consider retrieving a backup file, or use the secondary accounting file, if one was specified for the project.

FLM091M **Parsing error - Source contains too many includes, compools, or change codes.**

Explanation: More information was found by the parser than the project allows to be stored.

User Response: If the member you are attempting to parse contains many include directives, consider dividing the member into two or more members. Otherwise, contact your project administrator.

Project Manager Response: A restriction of the \$list_info pointer parameter has been exceeded. See *SCLM Services Guide* for more information.

FLM091N **Parser not specified - Language definition does not include a parser or parser data set name.**

Explanation: Either SCLM could not locate the parser as specified in the language definition, or a parser was not specified in the language definition.

User Response: Contact your project administrator.

SCLM Messages

Project Manager Response: If the parser was correctly specified by name, make sure the parser exists in one of the user's concatenated libraries. Otherwise, specify the data set where the parser can be found using the DSNAME= parameter on the FLMTRNSL macro command.

FLM091O **Parsing error – Source contains too many compilation unit dependencies.**

Explanation: The source member exceeded the space available for associating a member's compilation unit dependencies.

User Response: Consider breaking the member into two or more members.

FLM091P **Authorization code warning – Enter HELP for a detailed description.**

Explanation: WARNING. Member exists at a lower group with an authcode not equal to the new authcode which could overlay the current member.

FLM091Q **Data set kept - SCLM kept data set *aaaaaaaa* without printing it.**

Explanation: This is an informational message.

FLM092A **Default job information – The cursor is placed at a default value; verify the value as correct.**

Explanation: This message is self-explanatory.

FLM092B **Invalid job information – The cursor is placed at the incorrect value. Enter a correct value.**

Explanation: The value at the cursor location is not valid.

User Response: Update the value at the cursor location to be a valid value.

FLM092C **Batch - Submit – Job *aaaaaaaa* submitted.**

Explanation: This is an informational message.

FLM092E **Invalid value - Enter one of the listed values, YES or NO.**

Explanation: This message is self-explanatory.

FLM092F **Enter required field - Enter CU Qualifier Name or enter HELP for more information.**

Explanation: The CU Qualifier Name must be entered to proceed.

User Response: Enter a CU Qualifier Name.

FLM092G **Invalid option - Enter one of the option numbers listed or enter HELP.**

Explanation: No option from the menu was selected.

User Response: Select an option to proceed.

FLM092H **Invalid option - Enter A, B, C, D, E, M, U, V or blank. Enter the HELP command for further information.**

Explanation: The option entered is not a valid Library Utility command.

User Response: Choose one of the options listed or enter the HELP command for additional information.

FLM092I **Invalid command - Command *aaaaaaaa* is undefined. Enter END to cancel.**

Explanation: An invalid command was entered on the command line.

User Response: Enter END to cancel and try again with a valid command.

FLM092J **Invalid command - Enter either EXECUTE or SUBMIT for a valid command or enter HELP.**

Explanation: You are only allowed to enter EXECUTE, SUBMIT, or END here.

User Response: Choose a valid response.

FLM092K **Invalid member name - Enter a valid member name which consists of alphanumeric characters.**

Explanation: An invalid member name was entered.

User Response: Enter a valid member name.

FLM092L **Enter option - Enter one of the option numbers listed or enter HELP.**

Explanation: No option from the menu was selected.

User Response: Select an option to proceed.

FLM092M **Enter option - Enter A, B, D, M, U, V or blank, or enter HELP for more information.**

Explanation: No option was entered.

FLM092N **Enter command - Command *aaaaaaaa* is undefined. Enter END to cancel.**

Explanation: The command that was entered is not valid on this panel.

User Response: Correct the command.

FLM092O **Enter command - Enter either EXECUTE or SUBMIT for a valid command or enter HELP.**

Explanation: Enter EXECUTE, SUBMIT, or END.

User Response: Choose the proper command.

FLM092P **Invalid member - Accounting information for member not found.**

Explanation: SCLM could not find the accounting record in the accounting VSAM file defined to this project.

User Response: You can generate the accounting record for the member using the SCLM migrate utility, or by editing the member and issuing the SPROF command.

FLM092S **Enter required field - Enter the data specified in the required field.**

Explanation: Enter a value for the field where the cursor is positioned.

User Response: Enter a valid value.

FLM092T **Invalid promote to-group - Promote to-group must be a group in the project.**

Explanation: The promote service was invoked with an invalid group name for the promote-to-group.

User Response: Correct the name of the promote-to-group and reissue the command.

FLM092V **Enter required field - Enter a valid member name which consists of alphanumeric characters.**

Explanation: An invalid member name was entered.

User Response: Enter a valid member name.

FLM092W **Member aaaaaaaa of bbbbbbbb - Member aaaaaaaa of bbbbbbbb**

Explanation: No explanation available at this time.

FLM092X *aaaaaaa*

Explanation: A single error occurred during SCLM processing.

User Response: For further information about the message, an SCLM message id appears at the beginning of the message. The format of the message id is FLMxxxxx, where xxxxx is a five digit number.

FLM290 *aaa(24) - bbb(512)*

Explanation: An error occurred in a non-SCLM service. The text of this message contains the message returned by the failing service.

User Response: For further information about the message, an SCLM message id appears at the beginning of the message. The format of the message id is FLMxxxxx, where xxxxx is a five digit number.

FLM290A **Invalid macro parameter – Invalid macro parameter aaa(80)..**

Explanation: An invalid parameter was specified for an edit macro. The long description contains the parameter in error.

User Response: Correct the invalid parameter.

FLM290B **Parser error. Enter HELP for a detailed description of the error.**

Explanation: The parse of the member that occurs while saving the member was not successful.

User Response: Enter HELP to display a panel with any messages that were generated by the parser.

System Action: The member data is saved to the PDS data set and an accounting record with LOCKOUT state is saved, but accounting statistics and dependency information that may have been returned by the parser are not saved.

Problem Determination: Refer to the parser messages to determine the actions to be taken to correct the problem.

FLM290C **Member in use – Either you or another user is updating member aaaaaaaa..**

Explanation: The member is currently being used in another operation. The member may be in use by:

- Another user
- The other section of a split screen
- A recursive edit session.

User Response: The user's action cannot be performed until the current operation using the member has been completed.

FLM290D **Recursion unavailable – SCLM View or Edit cannot be invoked while the current SCLM edit session is active. Use split screen or end the current SCLM edit session.**

Explanation: An attempt was made to enter SCLM View or Edit while an SCLM edit session was active.

User Response: Return to the current edit session and end the edit, or use the View or Edit primary

SCLM Messages

commands. Alternatively, use split screen to perform the intended operation.

FLM290E **Save warnings. aaaaaaaaa has been stored. Enter HELP to display the warning messages.**

Explanation: The member was saved but warning messages were generated while saving the member.

User Response: Enter HELP to display the warning messages and determine the actions to be taken based on the messages displayed.

System Action: The member aaaaaaaaa was saved and the accounting information was updated.

FLM290F **aaaaaaaa macro error - Edit initial macro requested is unknown or returned a non-zero return code.**

Explanation: The initial edit macro from the edit panel could not be found or invoked or the macro returned a non-zero return code.

User Response: Change the field on the edit panel to specify a valid edit macro name or leave the field blank.

FLM290G **Group warning - Group aaaaaaaaa is not in the hierarchy view for group bbbbbbbb..**

Explanation: The hierarchy view for group bbbbbbbb is the list of groups from bbbbbbbb to the top of the hierarchy as defined in the project definition. This message is a warning that the group aaaaaaaaa is not in that list of groups. Specifying groups out of the hierarchy view may result in other error messages when you attempt to edit a particular member.

User Response: Verify that the groups entered on the edit panel are in the desired order.

FLM290H **aaaaaaaa saved - Member aaaaaaaaa has been parsed and stored by SCLM.**

Explanation: This is an informational message. The edit, parse, and store of member aaaaaaaaa were all completed successfully.

FLM290I **Invalid dev group - Group aaaaaaaaa is not the lowest group in the hierarchy.**

Explanation: The operation being requested may result in the update of an SCLM-controlled member, but the specified group is not a development group in the project hierarchy. A development group is a group which has no other groups promoting into it. This operation can only be performed on members that are in a development group.

User Response: Specify a development group for the operation.

FLM290J **Library not specified – You must specify group aaaaaaaaa on the SCLM Entry Edit panel.**

Explanation: The user requested to edit a member found in a group that was not specified on the edit panel. This can occur if:

- The user has changed the groups listed on the edit panel.
- The hierarchy is more than 4 groups in depth.

SCLM uses the hierarchical view defined in the project definition when searching for members' accounting information. If the accounting information is found in the hierarchical view but the group where it is found is not specified on the edit panel, this message is issued. The group aaaaaaaaa is the group where the accounting information was found.

User Response: Update the groups listed on the edit panel to include group aaaaaaaaa.

FLM290K **Invalid label – You must specify a label parameter no longer than 6 characters.**

Explanation: The label specified for CREATE, REPLACE, or MOVE was longer than 6 characters in length. Edit labels must be 6 characters or fewer in length.

User Response: Enter the command specifying a valid edit label.

FLM290L **Invalid group – This project does NOT include group aaaaaaaaa.**

Explanation: The group, aaaaaaaaa, specified by the user is not a group defined in the project definition.

User Response: Specify a group defined in the project definition.

FLM290M **Invalid library order - Groups not in hierarchical order. Enter HELP to display group list.**

Explanation: A group higher in the hierarchy cannot be specified before a group lower in the hierarchy on the edit panel. At least one of the groups specified on the edit panel is not in hierarchical order.

User Response: Specify the groups in hierarchical order.

Problem Determination: Enter HELP to display up to 16 groups from the hierarchy in hierarchical order, beginning with the development group from the edit panel.

FLM290N Invalid member name - The member name parameter is limited to 8 characters.

Explanation: A member name was entered that is longer than 8 characters.

User Response: Enter a valid member name.

FLM290O Authorization code *aaaaaaaa* is invalid for group *bbbbbbbb*. Enter HELP to display an authorization code list.

Explanation: Authorization code *aaaaaaaa* was not defined as a valid authorization code for group *bbbbbbbb* in the project definition. The authorization code was specified on the SCLM edit panel.

User Response: Either specify a valid authorization code for the group, or leave the authorization code field blank on the edit panel.

Problem Determination: Enter HELP to display a list of 30 valid authorization codes for group *bbbbbbbb*.

FLM290P NLS table error – An error occurred while retrieving the NLS ID; code = *aa*.

Explanation: The NLS ID could not be retrieved when running a macro. The error codes are:

- 4 The ID is not loaded.
- 8 The ID is not valid.
- 12 The ID is not initialized.

User Response: Exit SCLM and PDF, and retry the operation. If the problem persists, contact the system programmer.

Project Manager Response: Contact IBM support.

System Action: The macro is not run.

FLM290Q Invalid parameter - Command format is 'SCREATE|SREPLACE member {label1 label2}'.

Explanation: An invalid parameter was specified on an SCREATE or SREPLACE macro command.

User Response: Make sure that a member name was specified. If labels are specified, then both label1 and label2 must be specified and the labels must have a "." (period) as the first character.

FLM290S Promotion restricted – Member can only be promoted to group *aaaaaaaa* with auth. code *bbbbbbbb*.

Explanation: The member being edited can only be promoted to group *aaaaaaaa* using authorization code *bbbbbbbb*. This is an informational message and no action needs to be taken unless there will be a need to

promote the member past group *aaaaaaaa*.

User Response: If the member needs to be promoted past group *aaaaaaaa*, change the authorization code using the SCLM library management utility.

FLM290T Command conflict – You entered incomplete or conflicting line commands.

Explanation: The current edit line commands are incomplete or conflicting. For example, an incomplete line command might have the beginning of a block to be copied specified by "CC" but no end line specified. An example of a conflicting edit line command is a block copy where the target of the copy is within the block being copied.

User Response: Ensure that the line commands in the current edit session are complete and do not conflict. The RESET edit command can be used to reset the line commands within the current edit session. Enter HELP when this message is displayed to get more information on the edit line commands.

System Action: The SCREATE, SMOVE, or SREPLACE operation is not performed.

FLM290U No members found – The hierarchy contains no members, or no members match the pattern.

Explanation: If a pattern was specified on the panel, then no members were found in the hierarchy of groups from the panel that match the pattern. If no pattern was specified, then no members were found in any of the groups.

User Response: To browse or edit an existing member, ensure that the groups, type, and pattern will find the desired member. To edit a new member in an empty data set, specify the member name on the edit entry panel.

FLM290V Invalid language – The project definition does not include language *aaaaaaaa..*

Explanation: The language specified for the member being edited is not defined to the project.

User Response: Enter a language from the project definition. Enter HELP to display a list of 30 languages from the project definition.

FLM290W Member already exists - *aaaaaaaa* exists at a higher group in the hierarchy.

Explanation: The member *aaaaaaaa* exists at a higher group in the hierarchy but does not exist at the group where the edit is taking place. SCREATE requires that the member not exist, and SREPLACE requires that either the member not exist or that it exist at the group

SCLM Messages

where the edit is taking place.

User Response: To use SCREATE to create a new SCLM member, make sure that the member name being specified does not exist. To use SREPLACE, ensure that either the member does not exist or that the member is at the group where the edit is taking place.

FLM290X Recovery failed - Edit recovery failed for
aaa(44)(bbbbbbbb).

Explanation: Edit recovery failed for member *bbbbbbbb* in data set *aaa(44)*.

User Response: Review the Edit Recovery documentation for possible reasons that edit recovery has failed.

FLM290Y Invalid language - You cannot use
language aaaaaaaaa for editable members.

Explanation: Language *aaaaaaaa* is not defined as editable in the project definition. Members that are edited must be specified as editable in the project definition.

User Response: Specify a language that was defined as editable in the project definition. Enter HELP to display a selectable list of editable languages from the project definition.

FLM290Z Invalid parameter - Command format is
'SMOVE member {AFTER|BEFORE
label}'.

Explanation: An invalid parameter was specified on an SMOVE macro command.

User Response: Make sure that a member name was specified. If AFTER or BEFORE was specified, then a label must be specified and the label must have a "." (period) as the first character. Enter HELP for more information on the SMOVE macro command.

FLM291 Allocation error - SCLM cannot allocate
the libraries you requested on the Edit
or View panel, or from the Edit service.

Explanation: SCLM is unable to allocate or open the data set(s) associated with the hierarchy specified on the Edit or View panel.

User Response: Check that the data sets are not allocated exclusively to another user.

Project Manager Response: Ensure that the data sets are properly allocated and that the users have sufficient authority.

FLM291A Change code unavailable - No previous
change code exists for this member.

Explanation: Either the member did not previously exist or the accounting information for the member does not contain any change codes.

User Response: Specify a change code instead of entering "=" to retrieve the previous change code.

FLM291B Invalid command - Command aaa(65) is
invalid.

Explanation: The command *aaa(65)* is not a valid command.

User Response: Enter a valid change code or language and press Enter to update the language or change code of the member. Enter CANCEL to cancel the update. Enter a valid command on the command line to have the command processed.

FLM291C Command ignored - A RETURN or
EXIT command was ignored in order to
display the SCLM Edit Profile panel.

Explanation: SCLM must have the language for a member in order to save it. The RETURN or EXIT command was ignored in order to obtain the language for the member.

User Response: Enter a valid language for the project.

FLM291D This member cannot be promoted using
auth. code aaaaaaaaa.

Explanation: Authorization code *aaaaaaaa* is not allowed for the next group in the hierarchy. This member cannot be promoted using this hierarchy unless the authorization code is changed.

User Response: If the member needs to be promoted using this hierarchy, the authorization code needs to be changed prior to promoting the member. The SCLM library utility can be used to change the authorization code.

FLM291E aaaaaaaaa replaced - Member aaaaaaaaa has
been replaced, parsed, and stored by
SCLM.

Explanation: This is an informational message. Member *aaaaaaaa* was replaced using the SREPLACE macro command.

FLM291F aaaaaaaaa moved - Member aaaaaaaaa has
been moved and associated accounting
information deleted.

Explanation: This is an informational message. Member *aaaaaaaa* was moved using the SMOVE macro

command. The new member has been created and the old member deleted.

FLM291G *aaaaaaaa* created - Member *aaaaaaaa* has been created, parsed, and stored by SCLM.

Explanation: This is an informational message. Member *aaaaaaaa* was created using the SCREATE macro command.

FLM291H Member is empty - Member *aaaaaaaa* contains no data.

Explanation: View, SCREATE, or SREPLACE was attempted for an empty member. These operations require a non-empty member.

User Response: Enter data into the member prior to using View, SCREATE, or SREPLACE.

FLM291I Member was not found - The specified member, *aaaaaaaa*, was not found.

Explanation: Member *aaaaaaaa* was not found in the specified hierarchy. Members must exist prior to viewing them.

User Response: Specify the name of an existing member for View.

FLM291J External group - Group *aaaaaaaa* is under control of an external library.

Explanation: Group *aaaaaaaa* is defined as the group of an external library in the project definition. Groups from external libraries cannot be accessed from within SCLM.

User Response: Specify a group that is not part of an external library.

Project Manager Response: The EXLIBID parameter on the FLMGROUP macro indicates that a group is part of an external library. This parameter should not be specified if the group is to be accessed from within SCLM. Have the SCLM administrator correct the project definition.

FLM291K Group(s) unallocated - Unallocated groups specified. Press HELP for LIB number information.

Explanation: At least one data set for a group in the hierarchy does not exist although the data set(s) for group(s) above it do exist. This will result in the LIB numbers not matching the group numbers from the panel where the hierarchy of groups was specified.

User Response: Do not use the LIB numbers to determine the position of a member in the hierarchy. Enter HELP when the message is displayed to receive more information.

Project Manager Response: Have the SCLM administrator allocate all data sets if the LIB numbers need to match the member's position in the hierarchy.

FLM291M All groups unallocated - At least one group must be allocated.

Explanation: At least one group must have an allocated data set in order to perform this operation.

User Response: Contact the project administrator to allocate the needed data sets.

Project Manager Response: Have the SCLM administrator ensure that all needed data sets are allocated.

FLM291N Group1 not cataloged - The data set for the first group '*aaa(44)*' must be cataloged.

Explanation: Edit requires that the data set for the first group in the hierarchy be allocated. The data set name is *aaa(44)*.

User Response: Contact the project administrator to allocate the data set.

Project Manager Response: Have the SCLM administrator ensure that development groups in the hierarchy have the proper data sets allocated.

FLM291O Locate string too long - Locate string "name" must be fewer than or equal to 8 characters.

Explanation: The name to be located was longer than a valid member name.

User Response: Specify a valid locate name of 8 characters or fewer in length.

FLM291P Locate string too long - Locate string "name" must be less than or equal to 110 characters.

Explanation: The name to be located was longer than a valid compilation unit name.

User Response: Specify a valid locate name of 110 characters or fewer in length.

FLM291Q Type is too long - The type must be fewer than or equal to 8 characters.

Explanation: The type name specified is longer than 8 characters.

User Response: Either specify a type name pattern (that may be longer than 8 characters), or specify a valid type name of 8 characters or fewer.

SCLM Messages

FLM291R **Data set not cataloged - 'aaa(44)' was not found in catalog.**

Explanation: A non-SCLM controlled group was specified, but no data set exists for the group.

User Response: Either specify an SCLM group name, or allocate the data set *aaa(44)*.

FLM291T **SCLM internal error - Contact IBM support for assistance.**

Explanation: There was an error while allocating or opening a data set for View.

User Response: Contact the project administrator.

Project Manager Response: Contact IBM support.

FLM291U **Data loss warning - aaaaaaaa has been locked. Enter HELP to display the warning messages.**

Explanation: The accounting and PDS data for the member being edited are not in sync.

User Response: Enter HELP to display the panel with additional messages.

System Action: Edit continues.

FLM291V **Group name is too long - The group name must be fewer than or equal to 8 characters.**

Explanation: The group name is longer than 8 characters.

User Response: Either specify a group name pattern (that may be longer than 8 characters), or specify a valid group name of 8 characters or fewer.

FLM291W **Parameter required - A member name must be specified after the LOCATE command.**

Explanation: The member name parameter is required for LOCATE commands.

User Response: Specify a complete or partial member name on the LOCATE command.

FLM291X **Invalid command - Command aaa(65) is invalid.**

Explanation: The command *aaa(65)* is not a valid command.

User Response: Specify a valid command. Enter HELP when this message is displayed for command information.

FLM291Y **Invalid authcode - Commas are not allowed in authorization codes.**

Explanation: The authorization code specified contains one or more commas. The authorization code is not valid.

User Response: Specify a valid authorization code. Contact the project administrator to obtain valid authorization codes, if necessary.

FLM291Z **Invalid change code - Commas are not allowed in change codes.**

Explanation: The change code specified contains one or more commas. The change code is not valid.

User Response: Specify a change code that does not contain commas.

FLM292A **Invalid data set name - Member names are not allowed for retrieval data sets.**

Explanation: Member names are not allowed for non-SCLM controlled retrieval data sets.

User Response: Enter either a sequential data set name or a partitioned data set name without a member name.

FLM292B **Invalid sort field - The sort field name must match a heading on the panel.**

Explanation: The field name specified on the sort command must match one of the field headings displayed on the panel.

User Response: Specify a valid field heading from the panel.

FLM292C **Invalid language - The language you are locating cannot be more than eight characters long.**

Explanation: The language parameter of the locate command must have eight or fewer characters.

User Response: Specify a valid language on the locate parameter.

FLM292D **Enter a language - Enter a language to locate.**

User Response: The locate command requires a language parameter.

Specify a valid language on the locate parameter.

FLM292E Language not found - The language you are locating is not found.

Explanation: The language specified is not in the list of valid languages.

User Response: Verify that the language name was typed correctly. If not, retype the command with the correct language. If so, see your project administrator.

FLM292F Invalid command - Valid commands are CANCEL, LOCATE, and END.

Explanation: The command is not valid.

User Response: Enter a valid command.

FLM292G Select a language - One and only one language can be assigned to a member.

Explanation: More than one language was selected from the list.

User Response: Delete all but one S from the selection field.

FLM292H No languages - There are no languages defined in the project. See your project administrator.

Explanation: SCLM must have the languages defined for a project in order to save members.

User Response: See your project administrator.

Programmer Response: Add a language definition for each programming language in the project.

FLM390 Invalid type - The project does NOT include type aaaaaaaa..

Explanation: The type specified by the user is not a type defined in the project definition.

User Response: Specify a type defined in the project definition.

FLM390A No connection - This option requires the TCP/IP or APPC address of the workstation to be connected for the build. SCLM was unable to obtain this information from your profile. Select the Start GUI pull-down choice from the GUI action bar pull-down on the ISPF Settings panel to connect the ISPF session to a workstation.

Explanation: SCLM requires the TCP/IP or APPC address of the workstation to be connected for a workstation build. Establishing a GUI connection will place the information from the Initiate GUI Session panel into your profile. Once this is done, you will no longer need to be GUI connected in order to submit a

batch build for the workstation.

User Response: Start a session with a workstation before performing this action.

FLM390B Invalid selection - Use A, B, C, D, E, M, U, or V.

Explanation: The selection entered is not a valid Library Utility command.

User Response: Choose one of the selections listed, or enter the HELP command for further information.

FLM390C View error - SCLM is unable to view requested member aaaaaaaa..

Explanation: An error occurred in attempting to view the member. This message may be issued for any of the following reasons:

- A zero-length member of a partitioned data set was found.
- A specified member was not found.
- No members matched the specified pattern, or no members exist in the partitioned data set.
- Severe error; unable to continue.

User Response: Verify that the member exists in the library specified. If the problem persists, contact the project administrator.

Project Manager Response: Contact IBM support.

FLM390E Work completed - The Library Utility completed with a return code of aaaaaaaa..

Explanation: This is an informational message. The user has exited the library utility member list.

FLM390G Member list error - A severe error occurred while retrieving member list.

Explanation: SCLM was unable to read the directory for the data set specified by the user.

User Response: Contact the project administrator.

Project Manager Response: Contact IBM support.

FLM390H Invalid group - The project does NOT include group aaaaaaaa..

Explanation: The group specified by the user is not a group defined in the project definition.

User Response: Specify a group defined in the project definition.

SCLM Messages

FLM390J **Invalid selection - Use S (only valid selection).**

Explanation: The selection entered is invalid. The only valid selection is S.

User Response: Enter an S in the Select field for each compilation unit that you want to review.

FLM390M **Unable to review - Data set *aaaaaaaa* is in use by another logical screen.**

Explanation: The build map contents for the requested member are currently in use by another logical screen.

User Response: Exit the build map contents on the other logical screen.

FLM390N **Allocation failed - Data set *aaaaaaaa* already exists.**

Explanation: SCLM is attempting to create a temporary data set to hold the build map contents. A data set with that name already exists. SCLM was unable to delete the existing data set.

User Response: Delete the existing copy of the specified data set.

FLM390P **Invalid selection - SCLM has already deleted the requested member *aaaaaaaa..***

Explanation: SCLM has already deleted the version and the audit information you selected.

User Response: Make another selection.

FLM390Q **Invalid command - *aaaaaaaa* is not a valid command.**

Explanation: Primary commands, scroll commands, or the LOCATE command are the only commands that can be entered on the command line of this panel. The LOCATE command can be specified by L, LOC, or LOCATE followed by the name of the member to be located.

User Response: Specify a valid command on the command line.

FLM390T **No records found - SCLM cannot find any records for type *aaaaaaaa..***

Explanation: No Ada intermediate records were found for the type specified.

User Response: Enter another type or * (asterisk) to view the Ada intermediate records for all types.

FLM390U **Invalid selection - Use D (only valid selection).**

Explanation: Delete is the only valid selection on this panel.

User Response: Enter D in the selection field for the items to be deleted.

FLM390W **Verification error - Xref record type, member, date, or time does not match accounting record.**

Explanation: The accounting and cross-reference records for the member are out of sync.

User Response: Edit and save or migrate the member. This will cause new accounting and cross-reference information to be generated for the member.

FLM390Y **Unable to delete member – Member does not exist or the user is not authorized to update it. Enter HELP for a detailed description.**

Explanation: An error occurred in deleting the text, accounting, or build map for the member being moved or deleted.

User Response: Enter the HELP command for additional information on the cause of the error.

FLM391 **Delete failed - Delete of intermediate record was unsuccessful.**

Explanation: The intermediate code was successfully deleted, but the delete of the intermediate accounting record failed. This may have occurred for any of the following reasons:

- The record was not found.
- SCLM was unable to purge the record from the cross-reference database.
- The VSAM cross-reference database was enqueued.
- The cross-reference database is not defined to the project.

User Response: Contact the project administrator.

Project Manager Response: Verify that the VSAM database is operational and has been defined to the project currently in use. Determine whether the database has been enqueued.

FLM391B **Delete failed - Delete of intermediate form was unsuccessful. Browse *aaaaaaaa..***

Explanation: The delete of the intermediate code failed.

User Response: Browse the file specified in the long message for additional information on the cause of the failure.

FLM391C **Invalid type - Specify a type other than "*" to delete intermediate form.**

Explanation: A delete cannot be done when the type field on the Sublibrary Management Utility entry panel is * (asterisk).

User Response: Return to the Sublibrary Management Utility entry panel and specify the desired type.

FLM391E **Update not confirmed - You used the END or RETURN command to request termination.**

Explanation: This is an informational message.

FLM391F **Acct list I/O error - A severe I/O error occurred while retrieving accounting member list.**

Explanation: This message can be issued for any of the following reasons:

- The accounting information is not in sync with the member information.
- An invalid group was specified.
- A severe error occurred in accessing the VSAM database.

User Response: Exit SCLM and PDF then retry the operation. If the problem persists, contact the project administrator.

Project Manager Response: Verify that the VSAM database is operational.

FLM391G **Build map list I/O error - A severe I/O error occurred while retrieving build map list.**

Explanation: This message can be issued for any of the following reasons:

- The map information could not be decoded and is in an invalid format.
- An invalid group was specified.
- A severe error occurred in accessing the VSAM database.

User Response: Exit SCLM and PDF then retry the operation. If the problem persists, contact the project administrator.

Project Manager Response: Verify that the VSAM database is operational and has not been corrupted.

FLM391H **Table error - An error occurred in the TBCREATE routine; return code = aaaaaaaa..**

Explanation: An error occurred when SCLM attempted to create a table to display the member list data.

User Response: Contact the project administrator.

Project Manager Response: Contact IBM support.

FLM391I **Delete not confirmed - You used the END or RETURN command to request termination.**

Explanation: This is an informational message.

FLM391J **Invalid auth. code - You must enter an authorization code; a blank is not valid.**

Explanation: A blank value was entered in the New Authorization Code field.

User Response: Enter a valid authorization code.

FLM391K **Delete failed - SCLM cannot find any records at group aaaaaaaa for member bbbbbbbb..**

Explanation: No text, accounting, or build map data was found for the requested member. The member does not exist at the group specified. When this message occurs while in the member list, the member selected has been deleted by another logical screen or user since the Library Utility member list was built.

User Response: Specify another member name. Exit and reenter the member list in order to display a more current list of members.

FLM391L **Records not found - SCLM cannot find any records at group aaaaaaaa..**

Explanation: No records were found at the specified group.

User Response: Specify another group.

FLM391M **Records not found - SCLM cannot find any records for compilation unit qualifier aaaaaaaa..**

Explanation: No records were found for the specified CU Qualifier.

User Response: Specify another Compilation Unit Qualifier.

FLM391N **Compilation unit deleted - The compilation unit you requested has been deleted.**

Explanation: This is an informational message.

FLM391O **Display failed - SCLM cannot find the panel, message, or cursor field.**

Explanation: SCLM could not find panel FLMUA.

User Response: Verify that panel FLMUA exists in the panel library, and that this library appears in your data set concatenation.

SCLM Messages

FLM391P **Enter required field - Enter unique letters of member name followed by * for all remaining letters.**

Explanation: The member name field was blank.

User Response: Enter a member name or a pattern in the member field. An asterisk (*) entered in this field will process all members of the specified group and type.

FLM391Q **Invalid value - Select one of the available utilities.**

Explanation: The user entered an invalid option.

User Response: Specify one of the options listed.

FLM391S **Enter required field - You must specify at least one group; all others are optional.**

Explanation: The group field was left blank. At least one group must be specified.

User Response: Enter a valid group in the group field.

FLM391T **Invalid value - Enter the type name you want or enter * for all types defined.**

Explanation: The type field was left blank.

User Response: Enter a valid type in the type field. A pattern can be used. An asterisk (*) entered in this field will process all types defined to the project.

FLM391U **DB Utility completed - The return code from the DB Contents Utility is**
aaaaaaaa..

Explanation: This is an informational message.

User Response: See Database Contents Utility messages for return codes greater than zero.

FLM392A **Invalid value - Use IN, OUT, or NOT USED.**

Explanation: The value specified for architecture control is invalid.

User Response: Specify IN to select members controlled by the specified architecture definition, or OUT to select members not controlled by the architecture definition. Specify NOT USED if no architecture definition is to be used to select members.

FLM392C **Cancelled by user - Your request to use the additional selection criteria panel is cancelled.**

Explanation: This is an informational message.

FLM392E **Cancelled by user - Your request to use the customization panel has been cancelled.**

Explanation: This is an informational message.

FLM392F **Invalid value - You cannot select TERMINAL for both TAILORED OUTPUT and REPORT.**

Explanation: TERMINAL cannot be specified as the output destination for both the tailored output and the report.

User Response: Specify a different output destination for either the tailored output or the report.

FLM392G **Auth code update denied - You cannot update the authorization code in a non-editable acct. record.**

Explanation: An attempt is being made to update an authorization code for a non-editable type. Authorization codes are not valid for non-editable types.

User Response: Update an authorization code for an editable type.

FLM392I **Report name invalid – Commas are not allowed in the tailored output report name.**

Explanation: Commas cannot be used in the tailored output report name.

User Response: Remove the commas from the report name.

FLM393A **Migrate completed – The return code from the Migration utility is** *aaaaaaaa.*
Enter the HELP command for a description of common errors.

Explanation: This is an informational message.

User Response: See the Migration Utility messages for return codes greater than zero.

FLM393B **SUBLIB manager completed - The Sublibrary Management Utility completed with return code =** *aaaaaaaa.*

Explanation: This is an informational message.

FLM393C **Record not found – SCLM cannot find any record for compilation unit name**
aaaaaaaa.

Explanation: There is no intermediate accounting record for this compilation unit.

User Response: Regenerate the compilation unit using SCLM build.

FLM394A **Export completed – The return code from the Export Utility is aaaaaaaa. Enter the HELP command for a description of common errors.**

Explanation: This is an informational message.

User Response: See the Export Utility messages for return codes greater than zero.

FLM395A **Import completed – The return code from the Import Utility is aaaaaaaa. Enter the HELP command for a description of common errors.**

Explanation: This is an informational message.

User Response: See the Import Utility messages for return codes greater than zero.

FLM396A **Record not found – Specified record was not found in the audit VSAM database.**

Explanation: This is an informational message.

FLM396B **Delete failed - An error occurred while attempting to delete the Version / Audit VSAM record**

Explanation: The Version / Audit VSAM record could not be deleted.

User Response: Contact the project administrator.

Project Manager Response: Verify that the VSAM database is operational and has been defined to the project currently in use. Determine whether the database has been enqueued.

FLM396C **Duplicate retrieve - Selected member has already been retrieved.**

Explanation: This is an informational message.

FLM396E **Retrieval error - An error occurred while attempting to retrieve the versioned member.**

Explanation: The versioned member could not be retrieved.

User Response: See the version messages for an explanation and correct the problem if possible. Contact the project administrator for assistance.

Project Manager Response: Assist the user in correcting the problem.

FLM396F **Display failed - An error occurred while attempting to display accounting information.**

Explanation: The accounting information could not be displayed.

User Response: See the version messages for an explanation and correct the problem if possible. Contact the project administrator for assistance.

Project Manager Response: Assist the user in correcting the problem.

FLM396I **No records selected - No records were selected for specified selection.**

Explanation: This is an informational message.

FLM396J **Selection list error - A severe error occurred while retrieving selection list.**

Explanation: The selection list could not be retrieved.

User Response: See the version messages for an explanation, and correct the problem if possible. Contact the project administrator for assistance.

Project Manager Response: Assist the user in correcting the problem.

FLM396K **Invalid selection - Use A, D, or R.**

Explanation: An invalid selection was typed.

User Response: Type A, D, or R.

FLM396L **Invalid selection - "R" is not valid. No Version exists for selected member.**

Explanation: An R was entered, but there is no version to retrieve for this member.

User Response: Specify R for a member that has a version.

FLM396M **Invalid date - The Year, Month, and/or Day is invalid for required date format.**

Explanation: An invalid date was entered. The year, month, or day is invalid.

User Response: Enter a valid date. Valid values are:

Year	01-99
Month	01-12
Day	01-31

FLM396N **Invalid selection - No Retrieval Data Set Specified.**

Explanation: Retrieve was selected, but no retrieval data set was specified.

User Response: Return to the Audit/Version panel

SCLM Messages

and specify a retrieval data set.

FLM396O **Invalid dates - "FROM" date must be less than or equal to "TO" date**

Explanation: The FROM date is greater than the TO date.

User Response: Specify a FROM date that is less than or equal to the TO date.

FLM396P **Invalid request - Auditing not defined for Group aaaaaaaaa Type bbbbbbbb in Project ccccccc.**

Explanation: Auditing is not defined for the specified group and type in the project definition.

User Response: Verify that the group and type are correct. If auditing is needed for the group and type, contact the project manager.

Project Manager Response: Enable auditing for the group and type, then reassemble and link the project definition.

FLM396Q **Delete group completed – The return code from the Delete Group Utility is aaaaaaaaa. Enter the HELP command for a description of common errors.**

Explanation: This is an informational message.

User Response: See the Delete Group Utility messages for return codes greater than zero.

FLM396R **Enter required field – Enter a valid TYPE name or pattern.**

Explanation: The TYPE field is a required field.

User Response: Enter a name or pattern in the TYPE field.

FLM396S **Enter required field - Enter a valid MEMBER name or pattern.**

Explanation: The MEMBER field is a required field.

User Response: Enter a name or pattern in the MEMBER field.

FLM396T **Enter required field – Select one of the listed values: Build map, Account, Text or Output.**

Explanation: The Delete Flag field is a required field. Entering a value of Build map will delete all build map records that match the pattern. Entering a value of Account will delete all accounting records, cross-reference records, intermediate records, and build map records that match the pattern. Entering a value of Text will delete everything that is deleted when

Account is specified plus any text members that match the pattern. Entering a value of Output will delete all build map records, intermediate records and code, and all non-editable accounting records, their cross-reference records, and associated text members that match the pattern.

User Response: Select either Build map, Account, Text, or Output.

FLM396U **Enter required field - Enter one of the listed values: EXECUTE or REPORT.**

Explanation: The DELETE MODE field is a required field.

User Response: Select EXECUTE or REPORT for the DELETE MODE field.

FLM396W **Invalid value – Enter one of the listed values: Build map, Account, Text, or Output.**

Explanation: The value entered for the DELETE FLAG field is invalid.

User Response: Select Build map, Account, Text, or Output for the Delete Flag field.

FLM396X **Invalid value – Enter one of the listed values: EXECUTE or REPORT**

Explanation: The value entered for the DELETE MODE field is invalid.

User Response: Select EXECUTE or REPORT for the DELETE MODE field.

FLM396Y **VSAM I/O error - An error occurred trying to access the cross-reference database.**

Explanation: The cross-reference data set could not be accessed for one of the following reasons:

- No cross-reference data set was defined in the project definition.
- User does not have read access to the data set.
- The data set has the wrong key size.
- The data set has not been initialized.

User Response: Contact the project manager.

Project Manager Response: Verify that the cross-reference data set is defined in the project definition. If not, specify it and reassemble and relink the project definition. If it does exist, verify that the key size is correct and that the data set has been initialized. Verify that the user has read access to the data set.

FLM397A Invalid group - aaaaaaaa is not a valid group name.

Explanation: The group name is not valid.

User Response: Enter a valid group name.

FLM397I Invalid request - Auditing not defined for Group aaaaaaaa Type bbbbbbbb in Proj Def cccccccc.

Explanation: Auditing is not defined for the specified group and type in the alternate project definition.

User Response: Verify that the group and type are correct. If auditing is needed for the group and type, contact the project manager.

Project Manager Response: Enable auditing for the group and type, then reassemble and link the alternate project definition.

FLM398 Update not allowed - Member must exist at the initial group "aaaaaaa." to update authcode.

Explanation: The member is not at the initial group specified.

User Response: Draw down the member to the group specified, or specify the group the member exists in on the Library Utility panel.

FLM398A Delete completed - The return code from the Delete Command is aaaaaaaa.

Explanation: This is an informational message.

FLM398B Update completed - The return code from the Update Command is aaaaaaaa.

Explanation: This is an informational message.

FLM398C Acct record displayed - The return code from the Browse Accounting Record Command is aaaaaaaa.

Explanation: This is an informational message.

FLM398D Member viewed - The return code from the View Text Command is aaaaaaaa.

Explanation: This is an informational message.

FLM398E Build map displayed - The return code from the Browse Build Map Command is aaaaaaaa.

Explanation: This is an informational message.

FLM398F Equal not allowed - The equal symbol "=" is not a supported pattern symbol.

Explanation: An equal symbol was specified in the pattern. The equal symbol is not valid for this function.

User Response: Specify an * (asterisk) or a ^ (NOT) as the pattern symbol.

FLM398H Build completed - The return code from the Build command was aaaaaaaa..

Explanation: This is an informational message.

FLM398J Build map not found - Build Map record not found for member aaaaaaaa..

Explanation: No build map record was found for the member at the specified group.

FLM398L No data to display - There were no aaaaaaaa. to display.

Explanation: There were no records of the type requested to display. If text (T) was requested, either the data set is empty or the data set does not exist. If accounting records (A) were requested, there are no accounting records to display. If build maps (M) were requested, there were no build maps to display.

User Response: Make sure the data set exists and that it contains members if text was requested. Contact the project manager for assistance, if necessary.

Project Manager Response: Assist the user in determining that the data set exists and contains members. If the data set does not exist but is needed, then allocate it.

FLM398M Edit completed - The return code from the Edit command was aaaaaaaa..

Explanation: This is an informational message.

FLM398N Library not specified - Specify "/" for Hierarchy view on the Library Utility Panel.

Explanation: The member you are attempting to edit has an accounting record at a higher level than the group specified on the Library Utility panel. The hierarchy must be specified in order to do the drawdown processing.

User Response: Specify "/" for hierarchy view on the Library Utility panel.

SCLM Messages

FLM398O **Invalid option string - String characters T, A, M, e.g. A, TA, MAT.**

Explanation: The option string you entered was not valid.

User Response: Enter a valid combination of T (for text), A (for accounting records), and M (for build maps).

FLM398P **Processing terminated - You used the END or RETURN command to request termination.**

Explanation: This is an informational message.

FLM398R **Allocation failed - SCLM is unable to allocate data set aaaaaaaa..**

Explanation: Allocation failed for a data set in the hierarchy because a type name was not found in the hierarchy, or a group is undefined in the project definition.

User Response: Contact the project manager.

Project Manager Response: Correct the project definition.

FLM398S **Build failed - Build failed for member aaaaaaaa..**

Explanation: The build was not completed successfully.

User Response: See the build messages for an explanation of the failure.

FLM398T **Enter processing mode - Enter EX or SU on the command line or select Execute or Submit in the Process field to invoke this function. If you enter a value in the Process field, it will be saved between sessions. Entering EX or SU on the command line overrides the Process field value.**

Explanation: This function requires a processing mode.

User Response: Specify EX or SU on the command line, or select Execute or Submit in the Process field.

FLM00000 **MESSAGE ID aaaaaa IS NOT DEFINED**

Explanation: An attempt to display a message failed because the message ID does not exist.

User Response: Contact the project manager.

Project Manager Response: Contact IBM support; this is an SCLM internal error.

FLM00101 **MEMBER NAME IS BLANK**

Explanation: The Member field was left blank.

User Response: Verify that the member parameter was specified and is in the correct position.

FLM00102 **SCLM INTERNAL ERROR OCCURRED AT aaa CODE: bbb.**

Explanation: An unexpected situation occurred during program execution. The message identifies the name of the SCLM routine that failed unexpectedly, and the return code.

User Response: Contact the project manager with *aaa* and *bbb*. This information will be needed by IBM support.

Project Manager Response: Report this message (including the message ID, the *aaa* text field, and the *bbb* text field) to IBM support.

FLM00201 **PROCESSING BASED ON CHANGE CODE.**

Explanation: A build or promote by change code is in progress. This message will be followed by a message indicating whether the change codes processed will be included (FLM00202) or excluded (FLM00203) and a list of the change codes processed (FLM00204). This message is provided for information only.

FLM00202 **THE FOLLOWING CHANGE CODES WILL BE INCLUDED:**

Explanation: The change codes processed had a Y include flag value. Members with the listed change code(s) will be included from the build or promote group. Refer to messages FLM00201 and FLM00204. This message is provided for information only.

FLM00203 **THE FOLLOWING CHANGE CODES WILL BE EXCLUDED:**

Explanation: The change code(s) processed had a 'N' include flag value. Members with the listed change code(s) will be excluded at the build or promote group. Refer to messages FLM00201 and FLM00204. This message is provided for information only.

FLM00204 *aaaaaaa*

Explanation: Change code *aaaaaaa* has been processed. Refer to message FLM00201. This message is provided for information only.

FLM01001 ERROR RETRIEVING ACCOUNTING INFORMATION,**CODE:** *aaa* **TYPE:** *bbbbbbbb***MEMBER:** *ccccccc***STARTING AT GROUP:** *ddddddd*

Explanation: No accounting information exists or could be retrieved for member *ccccccc* within the hierarchy beginning at group *ddddddd*.

User Response: Possible return codes are:

- 4 SCLM did not find the member's accounting information at this level in the hierarchy, but it did find it at a higher level.
- 8 SCLM did not find the member's accounting information. Make sure member *ccccccc* exists starting at group *ddddddd* type *bbbbbbbb*. Register the member with SCLM using the SCLM editor, migration utility, or the SAVE service. Run the processor again.

When received during a build or promote by change code, this message can indicate that a member excluded at the build or promote group based on change code does not exist at a higher group. In this case, update the change codes specified so that the required member is included.
- 12 SCLM successfully retrieved the member's accounting and dependency information. However, either the dependency information failed a verification check or the accounting record version does not match the member's version.

To determine the nature of the verification error, use the library utility to browse the member's accounting and dependency information.

To correct the problem, update the member by using the SCLM editor, migration utility, or the SAVE service.
- 16 The specified group was not found in the project definition. This error can occur when you use alternate project definitions or when you modify a project definition. Contact the project administrator.
- 20 A severe I/O error occurred. Contact the project administrator.
- 28 The type is not defined by the project definition being used.

Project Manager Response: If the return code is:

- 16 Correct and reassemble the project definition. Submit the job again, and verify that no errors occurred.

- 20 Run IDCAMS against the accounting data set(s) starting at group *ddddddd* to determine the problem.

- 28 Verify that the type specified is defined in the project definition. If necessary, add the type to the project definition and reassemble it. Submit the job again.

FLM01002 ERROR UPDATING ACCOUNTING INFORMATION,**CODE:** *aaa* **GROUP:** *bbbbbbbb***TYPE:** *ccccccc* **MEMBER:** *ddddddd*

Explanation: An error occurred while attempting to write the accounting information for member *ddddddd*.

User Response: Possible return codes are:

- 4 An I/O error occurred while writing the member's accounting information to the secondary accounting data set. Because the primary accounting data set was correctly updated, SCLM will use the correct information for all references. However, the two accounting data sets are no longer identical. Contact the project administrator.
- 8 The number of dependent members (compoools, included members, and/or compilation units) referenced in the source member plus the change codes and user data associated with the dependent members exceeds the SCLM maximum accounting record size of 32000 characters. Consequently, the accounting information was not written.

Change the member so that the number of referenced dependents is decreased. Delete unnecessary change codes and user data in the accounting information.
- 12 SCLM internal error. Contact the project administrator.
- 20 An I/O error occurred while writing the member's accounting information to the primary accounting data set. The failure to create accounting information implies that SCLM will not be able to track the member. Submit the job again and if the error recurs, contact the project administrator.

Project Manager Response: If the return code is:

- 4 An I/O error occurred while writing the member's accounting information to the secondary accounting data set. Run IDCAMS against the secondary accounting data set. If it is damaged, reallocate it and initialize it with data from the primary accounting data set. Use the IDCAMS REPRO service to copy the

SCLM Messages

accounting data from the primary accounting data set to the new secondary accounting data set.

- 12 SCLM internal error. Report this message (including the message ID and all text fields) to IBM support.
- 20 An I/O error occurred while writing the member's accounting information to the primary accounting data set. Run IDCAMS against the accounting data set to determine the problem.

FLM01003 ERROR PURGING ACCOUNTING INFORMATION,

CODE: aaa **GROUP:** bbbbbbbb
TYPE: ccccccc **MEMBER:** dddddddd

Explanation: A VSAM error occurred while attempting to purge accounting information for member dddddddd.

User Response: Possible return codes are:

- 4 The member's accounting record was not found. The accounting record would have been deleted anyway, so no action is required. However, to determine why the accounting record was not found, view the audit record if audit information is available for the deleted record. Another SCLM user running a concurrent job might have deleted the record.
- 8 An I/O error occurred while attempting to purge the accounting record from the secondary accounting data set. The record was successfully purged from the primary accounting data set, but the primary and secondary accounting data sets are no longer identical. Contact the project manager.
- 12 Unable to purge the accounting record from the primary accounting data set or an error occurred during versioning. If a versioning error occurred, investigate the accompanying versioning message. Otherwise, submit the job again. If the problem occurs again, contact the project manager.
- 16 Primary accounting VSAM data set enqueued. Submit the job again after the data set is no longer exclusively in use by another job.
- 20 An I/O error occurred while purging the accounting record. Submit the job again. If the problem occurs again, contact the project manager.

Project Manager Response: If the return code is:

- 8 The primary and secondary accounting data sets are no longer identical. Reinitialize the secondary data set from the primary data set.

12 or 20

Run IDCAMS against the accounting data set to determine the problem.

FLM01004 ERROR RETRIEVING ACCOUNTING INFORMATION,

CODE: aaa **GROUP:** bbbbbbbb
TYPE: ccccccc **MEMBER:** dddddddd

Explanation: No accounting record exists or could be retrieved for member dddddddd in group bbbbbbbb.

User Response: Possible return codes are:

- 8 The member's accounting information was not found. Introduce the member to SCLM using the SCLM editor, migration utility, or SAVE service. Run the processor again.
- 12 The member's accounting and dependency information was successfully retrieved; however, some of the dependency information failed a verification check. To determine the nature of the verification error, browse the member's accounting and dependency information using the SCLM library utility. To correct the problem, edit and save the member.
- 20 A severe I/O error occurred. Contact the project administrator.

Project Manager Response: For a return code of 20, run IDCAMS against the accounting data set to determine the problem.

FLM01005 ERROR RETRIEVING ACCOUNTING INFORMATION,

CODE: aaa **GROUP:** bbbbbbbb

Explanation: An error occurred trying to access information from the VSAM accounting data set for group bbbbbbbb.

User Response: Possible return codes are:

- 8 An error occurred attempting to access the VSAM data set for group bbbbbbbb, because group bbbbbbbb could not be found. Verify that group bbbbbbbb is valid and that the accounting data set for that group has not become corrupted.
- 12 The member's accounting and dependency information was successfully retrieved; however, some of the dependency information failed a verification check. To determine the nature of the verification error, browse the member's accounting and dependency information using the SCLM library utility. To correct the problem, edit and save the member.
- 20 A severe I/O error occurred, or the VSAM

data set for the specified group could not be opened. Contact the project administrator.

Project Manager Response: For a return code of 20, verify that the VSAM data set for the specified group exists, or run IDCAMS against the accounting data set to determine the problem.

FLM01006 ERROR RETRIEVING BUILD MAP INFORMATION,

CODE: *aaa* **GROUP:** *bbbbbbbb*

Explanation: An error occurred trying to access information from the VSAM accounting data set for group *bbbbbbbb*.

User Response: Possible return codes are:

- 8 An error occurred attempting to access the VSAM data set for group *bbbbbbbb*, because group *bbbbbbbb* could not be found. Verify that group *bbbbbbbb* is valid and that the accounting data set for that group has not become corrupted.
- 12 The member's accounting and dependency information was successfully retrieved; however, some of the dependency information failed a verification check. To determine the nature of the verification error, browse the member's accounting and dependency information using the SCLM library utility. To correct the problem, edit and save the member.
- 20 A severe I/O error occurred, or the VSAM data set for the specified group could not be opened. Contact the project administrator.

Project Manager Response: For a return code of 20, verify that the VSAM data set for the specified group exists, or run IDCAMS against the accounting data set to determine the problem.

FLM01009 ERROR, UNABLE TO RESTORE VERSIONED MEMBER FOR

GROUP: *aaaaaaaa* **CODE:** *bbb*

Explanation: An error occurred trying to restore a version of a member for for group *aaaaaaaa*.

Explanation: An error occurred while attempting to update the accounting information for a member or an inconsistency in the accounting information was detected.

User Response: Possible return codes are:

- 4 An I/O error occurred while writing the member's accounting information to the secondary accounting data set. Because the primary accounting data set was correctly updated, SCLM will use the correct information for all references. However, the

two accounting data sets are no longer identical. Contact the project administrator.

- 8 The number of dependent members (compoools, included members, and/or compilation units) referenced in the source member plus the change codes and user data associated with the dependent members exceeds the SCLM maximum accounting record size of 32000 characters. Consequently, the accounting information was not written.
Change the member so that the number of referenced dependents is decreased. Delete unnecessary change codes and user data in the accounting information.
- 12 SCLM internal error. Contact the project administrator.
- 20 An I/O error occurred while writing the member's accounting information to the primary accounting data set. The failure to create accounting information implies that SCLM will not be able to track the member. Submit the job again and if the error recurs, contact the project administrator.

Project Manager Response: If the return code is:

- 4 An I/O error occurred while writing the member's accounting information to the secondary accounting data set. Run IDCAMS against the secondary accounting data set. If it is damaged, reallocate it and initialize it with data from the primary accounting data set. Use the IDCAMS REPRO service to copy the accounting data from the primary accounting data set to the new secondary accounting data set.
- 12 SCLM internal error. Report this message (including the message ID and all text fields) to IBM support.
- 20 An I/O error occurred while writing the member's accounting information to the primary accounting data set. Run IDCAMS against the accounting data set to determine the problem.
- 112 accounting information does not match dependency information for the member
- 120 version of the accounting record does not match version of the code

Project Manager Response: Return codes 112 and 120 indicate that the accounting records are not synchronized with the source code. An alternate project definition may be in use that references a different VSAM cluster for the accounting records.

SCLM Messages

FLM01011 ERROR RETRIEVING ACCOUNTING OR CROSS-REFERENCE INFORMATION,

CODE: aaa **ERROR GROUP:** bbbbbbbb
TYPE: ccccccc **MEMBER:** dddddddd

Explanation: An error occurred while attempting to retrieve the accounting or dependency information for member dddddddd.

User Response: Possible return codes are:

- 8 The member's accounting information was not found. Introduce the member to SCLM using the SCLM editor, migration utility, or SAVE service. Run the processor again.
- 12 The member's accounting and dependency information was successfully retrieved; however, some of the dependency information failed a verification check. To determine the nature of the verification error, browse the member's accounting and dependency information using the SCLM library utility. To correct the problem, edit and save the member.
- 16 The specified group was not found in the project definition. This error can occur when you use alternate project definitions or when you modify a project definition. Examine the project definition for the missing group. Contact the project administrator.
- 20 A severe I/O error occurred. Contact the project administrator.
- 24 SCLM could not find the accounting or the cross-reference data set.

Project Manager Response: If the return code is:

- 16 Correct and reassemble the project definition. Submit the job again, and verify that no errors occurred.
- 20 Run IDCAMS against the accounting or cross-reference data set to determine the problem.

FLM01012 ERROR UPDATING ACCOUNTING OR CROSS-REFERENCE DATA SET INFORMATION,

CODE: aaa **ERROR GROUP:** bbbbbbbb
TYPE: ccccccc **MEMBER:** dddddddd

Explanation: An error occurred while attempting to write the accounting and dependency information for member dddddddd.

User Response: Possible return codes are:

- 8 An I/O error occurred while writing the member's accounting information and no attempt was made to write the dependency

information. Errors can occur if SCLM attempts to reference this member. Submit the job again, and if the error recurs, contact the project administrator.

- 12 An I/O error occurred while writing dependency information for a compilation unit. Errors can occur if SCLM attempts to reference this member. Submit the job again, and if the error recurs, contact the project administrator.

Project Manager Response: For a return code of 20, run IDCAMS against the accounting and cross-reference data sets to determine the problem.

FLM01013 ERROR PURGING ACCOUNTING OR CROSS-REFERENCE DATA SET INFORMATION

CODE: aaa **ERROR GROUP:** bbbbbbbb
TYPE: ccccccc **MEMBER:** dddddddd

Explanation: A VSAM error occurred while attempting to delete the accounting or cross-reference information for member dddddddd.

User Response: Possible return codes are:

- 4 The member's accounting record was not found. The accounting record would have been deleted anyway, so no action is required. To determine why the accounting record was not found, view the audit record if audit information is available for the deleted record. Another SCLM user running a concurrent job might have deleted the record.
- 8 Unable to purge the cross-reference record or an error occurred writing an audit record. The accounting record is not deleted. If an error occurred writing an audit record, investigate the accompanying message.
- 20 Unable to purge the accounting record or an error occurred during versioning. If a versioning error occurred, investigate the accompanying versioning message. Otherwise, submit the job again. If the problem occurs again, contact the project manager.

Project Manager Response: If the return code is:

- 8 or 20 Run IDCAMS against the VSAM data sets to determine the problem.

FLM01020 CHANGE CODE PROCESSING WARNING: MORE RECENT CHANGE CODES EXIST FOR MEMBER: aaaaaaaa

Explanation: The member has more than one change code. A request has been made to build or promote by a change code that is not the most recent. This is potentially a problem when processing architecture

definitions that contain more than one member. The results might not be what you would expect.

User Response: If some of the parts for the most recent change code have not been built because they were not requested by this archdef, build more than one change code in the architecture definition.

**FLM01030 BUILD BY CHANGE CODE COPY
ERROR LMCOPY FAILED WITH
RETURN CODE: aaa FOR GROUP:
bbbbbbb TYPE: cccccc**

Explanation: During change code processing, an attempt was made to copy members from the build group to a temporary data set. The LMCOPY service completed with return code aaa.

User Response: Try the build again. If it fails again, contact IBM support.

FLM01072 ERROR UPDATING ACCOUNTING

**INFORMATION FOR GROUP: aaaaaaaa
TYPE: bbbbbbbb MEMBER: cccccc
MEMBER MUST EXIST
AT GROUP: dddddddd**

Explanation: The VERIFY translator indicates that the accounting information for the member must be updated, but the member has not been drawn down to the group at which the build or promote was invoked.

User Response: Draw the member down to a development group, rebuild and attempt the build or promote again. If the problem recurs, contact the project administrator.

Project Manager Response: Run IDCAMS against the data set(s) associated with group dddddddd.

**FLM01501 ERROR RETRIEVING BUILD MAP
INFORMATION**

**CODE: aaa GROUP: bbbbbbbb
TYPE: cccccc MEMBER: dddddddd**

Explanation: No &bmap information could be retrieved for member dddddddd.

User Response: Possible return codes are:

- 8 The specified build map record does not exist. Build the appropriate architecture member. Invoke the processor again.
- 12 The format of the data retrieved was incorrect. Delete the build map using the SCLM DELETE or DELGROUP services, and build again to regenerate it.
- 16 The specified group was not found in the project definition. This error can occur when you use alternate project definitions or when

you modify a project definition. Examine the project definition for the missing group. Contact the project administrator.

- 20 A large architecture definition may cause this error. A severe I/O error occurred. Contact the project administrator.

Project Manager Response: If the return code is:

- 16 Correct and reassemble the project definition. Submit the job again, and verify that no errors occurred.
- 20 If an architecture definition member was being built and the architecture definition member is large (exceeding 800 statements) then split the architecture definition member into two or more high level architecture definition members. These new architecture definition members may then be referenced by a high level architecture definition member. If this is not the problem, then run IDCAMS against the accounting data set to determine the problem.

**FLM01502 ERROR UPDATING BUILD MAP
INFORMATION,**

**CODE: aaa GROUP: bbbbbbbb
TYPE: cccccc MEMBER: dddddddd**

Explanation: An error occurred during an attempt to write the build map information for member dddddddd. The build maps are stored in the accounting data set.

User Response: Possible return codes are:

- 4 An I/O error occurred while attempting to write the member's build map information to the secondary accounting data set. Because the primary accounting data set was correctly updated, SCLM will use the correct information for all references. However, the two accounting data sets are no longer identical. Contact the project administrator.
- 8 The length of the &bmap exceeds the maximum size (113,660 entries on each build map) allowed by the accounting data set.
- 20 A severe I/O error occurred. Contact the project administrator.

Project Manager Response: Possible return codes are:

- 12 SCLM internal error. Report this message (including the message ID and all text fields) to IBM support.
- 20 A severe I/O error occurred. Run IDCAMS against the accounting data set to determine the problem.

SCLM Messages

FLM01503 ERROR PURGING BUILD MAP INFORMATION,

CODE: aaa **GROUP:** bbbbbbbb
TYPE: ccccccc **MEMBER:** dddddddd

Explanation: A VSAM error occurred while attempting to delete the build map information for member dddddddd.

User Response: Possible return codes are:

- 4 The member's accounting record was not found. Determine why the accounting record was not found.
- 8 An I/O error occurred while attempting to purge the build map record from the secondary accounting data set. The record was successfully purged from the primary accounting data set, but the primary and secondary accounting data sets are no longer identical.
- 12 Unable to purge the build map record from the primary accounting data set. Submit the job again. If the problem occurs again, contact the project manager.
- 16 Primary accounting VSAM data set enqueued. Submit the job again after the data set is no longer exclusively in use by another job.
- 20 An I/O error occurred while purging the build map record. Submit the job again. If the problem occurs again, contact the project manager.

Project Manager Response: If the return code is

- 12 or 20 Run IDCAMS against the accounting data set to determine the problem.

FLM02000 ERROR WRITING AUDITING INFORMATION,

CODE: aaa **GROUP:** bbbbbbbb
TYPE: ccccccc **MEMBER:** dddddddd
ACTION DATE: eeeeeee
ACTION TIME: ffffffff

Explanation: An error occurred while attempting to write the auditing information for member dddddddd.

User Response: Possible return codes are:

- 8 The accounting record portion of the auditing record exceeds the maximum amount of dependent members (compoools, included members, and/or compilation units) allowed by SCLM. Consequently, the auditing record was not written.

Change the member so that the number of referenced dependents is decreased below the

maximum supported. Delete unnecessary change codes and user data.

- 16 An I/O error occurred while attempting to write the auditing record to the secondary auditing data set. The primary auditing data set was correctly updated, but the two auditing data sets are no longer identical. Contact the project manager.
- 20 An I/O error occurred while writing the auditing record to the primary auditing data set. Submit the job again. If the problem occurs again, contact the project manager.

Project Manager Response: If the return code is:

- 16 Run IDCAMS against the auditing data set to determine the problem. If the secondary auditing data set has been damaged, reallocate it and initialize with data from the primary auditing data set.
- 20 Run IDCAMS against the auditing data set to determine the problem. If the primary auditing data set has been damaged, reallocate it and initialize with data from the secondary auditing data set. If no secondary auditing data set exists, initialize the primary auditing data set with a backup copy of the primary auditing data set.

FLM02001 ERROR RETRIEVING AUDITING INFORMATION,

CODE: aaa **TYPE:** bbbbbbbb
MEMBER: ccccccc
ACTION DATE: ddddddd
ACTION TIME: eeeeeeee

Explanation: An error occurred while attempting to retrieve auditing information for member ccccccc.

User Response: Possible return codes are:

- 8 The member's audit record was not found. Examine the information above and determine if any values need to be modified (such as the action date). Submit the job again with the modified values.
- 12 The member's audit record was successfully retrieved, but the current version of the code does not match the code version of the retrieved audit record. Contact the project manager.
- 16 The specified group was not found in the project definition. This error can occur when you use alternate project definitions or when you modify a project definition. Examine the project definition for the missing group. Contact the project administrator.

- 20 A severe I/O error occurred. Contact the project administrator.

Project Manager Response: If the return code is:

- 12 The version data set could have been tampered with outside of SCLM or, an alternate project definition specifies the same audit VSAM data set but a different VERPDS to store member versions. Correct the project definition in use.
- 16 Correct and reassemble the project definition. Submit the job again, and verify that no errors occurred.
- 20 Run IDCAMS against the accounting data set to determine the problem.

FLM02002 ERROR PURGING AUDITING INFORMATION,

CODE: *aaa* **GROUP:** *bbbbbbb*
TYPE: *ccccccc* **MEMBER:** *ddddddd*
ACTION DATE: *eeeeeee*
ACTION TIME: *fffffff*

Explanation: An error occurred while attempting to purge auditing information for member *ddddddd*.

User Response: Possible return codes are:

- 4 The member's audit record was not found. Examine the information above and determine if any values need to be modified (such as the action date). Submit the job again with the modified values.
- 8 An I/O error occurred while attempting to purge the auditing record from the secondary auditing data set. The record was successfully purged from the primary auditing data set, but the primary and secondary auditing data sets are no longer identical.
- 12 An I/O error occurred while purging the auditing record from the primary auditing data set. Submit the job again. If the problem occurs again, contact the project manager.
- 16 Primary audit VSAM data set enqueued. Submit the job again after the data set is no longer exclusively in use by another job.
- 20 An I/O error occurred while purging the auditing record. Submit the job again. If the problem occurs again, contact the project manager.

Project Manager Response: If the return code is:

12 or 20

Run IDCAMS against the auditing data set to determine the problem.

FLM03001 ERROR RETRIEVING CROSS-REFERENCE INFORMATION,

CODE: *aaa* **CU NAME:** *bbb(55)ccc(55)*
CU TYPE: *dddd*
CU QUALIFIER: *eeeeeeee*
GROUP: *fffffff*

Explanation: SCLM could not retrieve cross-reference information for compilation unit *bbb(55)ccc(55)*.

User Response: Possible return codes are:

- 8 The accounting information for the compilation unit was not found. Register the member with SCLM using the SCLM editor, migration utility, or the SAVE service. Run the processor again.
- 12 The member's accounting and dependency information was successfully retrieved; however, some of the dependency information failed a verification check. To determine the nature of the verification error, browse the accounting and dependency information for the compilation unit using the library utility. To correct the problem, edit and save the member.
- 16 The specified group was not found in the project definition. This error can occur when you use alternate project definitions or when you modify a project definition. Examine the project definition for the missing group. Contact the project administrator.
- 20 A severe I/O error occurred. Contact the project administrator.
- 24 The cross-reference data set was not defined in the project definition. Contact the project administrator.

Project Manager Response: If the return code is:

- 16 Correct and reassemble the project definition. Submit the job again, and verify that no errors occurred.
- 20 Run IDCAMS against the accounting data set to determine the problem.
- 24 Identify the cross-reference data set on the FLMCNTRL macro of the project definition. More information on the FLMCNTRL Macro can be found in *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM03002 ERROR UPDATING CROSS-REFERENCE INFORMATION

CODE: *aaa* **CU NAME:** *bbb(55)ccc(55)*
CU TYPE: *dddd*
CU QUALIFIER: *eeeeeeee*
GROUP: *fffffff*

SCLM Messages

Explanation: An error occurred while attempting to insert or update information for compilation unit *bbb(55) ccc(55)* in the cross-reference data set.

User Response: Possible return codes are:

- 8 The length of the cross-reference information exceeds the maximum size allowed by the cross-reference data set. The maximum number of combined compilation unit dependencies (upward and downward) is 286. Reduce the number of dependencies for the compilation unit.
- 12 SCLM internal error. Contact the project administrator.
- 20 A severe I/O error occurred. Contact the project administrator.
- 24 The cross-reference data set was not defined in the project definition. Contact the project administrator.

Project Manager Response: If the return code is:

- 12 SCLM internal error. Report this message (including the message ID and all text fields) to IBM support.
- 20 Run IDCAMS against the accounting data set to determine the problem.
- 24 Define the cross-reference data set on the FLMCNTRL macro of the project definition. More information on the FLMCNTRL macro can be found in *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM03003 ERROR PURGING CROSS-REFERENCE INFORMATION,

CODE: *aaa* **CU NAME:** *bbb(55) ccc(55)*
CU TYPE: *dddd*
CU QUALIFIER: *eeeeeeee*
GROUP: *ffffff*

Explanation: An I/O error occurred while attempting to delete cross-reference information for compilation unit *bbb(55) ccc(55)*

User Response: Possible return codes are:

- 8 A severe I/O error occurred. Contact the project administrator.
- 16 The cross-reference data set is enqueued. Try the job again later.
- 24 The cross-reference data set was not defined in the project definition. Contact the project administrator.

Project Manager Response: If the return code is:

- 8 A VSAM error occurred. Run IDCAMS against the cross-reference data set to determine the problem.

- 24 Define the cross-reference data set on the FLMCNTRL macro of the project definition. More information on the FLMCNTRL macro can be found in *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM03021 ERROR ACCESSING ACCOUNTING INFORMATION FOR DEPENDENT COMPILATION UNIT,

CU NAME: *aaa(55) bbb(55)* **CU TYPE:** *dddd*
CU QUALIFIER: *dddddddd* **CODE:** 20

Explanation: An I/O error occurred while attempting to retrieve accounting information for the dependent compilation unit *aaa(55) bbb(55)*.

User Response: Submit the job again. If the problem recurs, contact the project administrator.

Project Manager Response: Run IDCAMS against the cross-reference data set to determine the problem.

FLM03501 ERROR RETRIEVING ACCOUNTING INFORMATION FOR INTERMEDIATE FORM OF

CU NAME: *aaa.(55) bbb.(55)*
CU TYPE: *ccc.*
CU QUALIFIER: *dddddddd*
CODE: *eee*
STARTING WITH GROUP: *ffffff*
TYPE: *gggggggg* **MEMBER:** *hhhhhhhh*

Explanation: An error occurred while attempting to retrieve accounting information for the specified intermediate form, starting at group *ffffff* and searching up through the hierarchy.

User Response: Possible return codes are:

- 8 The accounting information for the intermediate form of the compilation unit was not found in any group in the hierarchy defined, starting with group *ffffff*. This means that the compiled intermediate form is missing or out of date. The member containing the compilation unit needs to undergo an SCLM build.
- 12 SCLM internal error. Contact the project administrator.
- 16 The specified group was not found in the project definition. This error can occur when you use alternate project definitions or when you modify a project definition. Examine the project definition for the missing group. Contact the project administrator.
- 20 A severe I/O error occurred. Contact the project administrator.

- 24 The cross-reference data set was not defined in the project definition. Contact the project administrator.

Project Manager Response: If the return code is:

- 12 SCLM internal error. Report this message (including the message ID and all text fields) to IBM support.
- 16 Correct and reassemble the project definition. Submit the job again, and verify that no errors occurred.
- 20 Run IDCAMS against the accounting data set to determine the problem.
- 24 Define the cross-reference data set on the FLMCNTRL macro of the project definition. More information on the FLMCNTRL Macro can be found in *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM03502 ERROR UPDATING ACCOUNTING INFORMATION FOR INTERMEDIATE FORM OF

CU NAME: aaa(55) bbb(55)
CU TYPE: cccc
CU QUALIFIER: dddddddd
CODE: eee.
STARTING WITH GROUP: fffffff
TYPE: gggggggg **MEMBER:** hhhhhhhh

Explanation: An error occurred while attempting to update accounting information for the specified intermediate form.

User Response: Possible return codes are:

- 12 The record format of the member's intermediate accounting data is incorrect for the current version of SCLM. Contact the project administrator.
- 20 An I/O error occurred while updating the member's intermediate accounting data. Contact the project administrator.
- 24 The cross-reference data set was not defined in the project definition. Contact the project administrator.

Project Manager Response: If the return code is:

- 12 Verify that the cross-reference data set is compatible with the current release of SCLM.
- 20 Run IDCAMS against the cross-reference data set to determine the problem.
- 24 Define the cross-reference data set on the FLMCNTRL macro of the project definition. More information on the FLMCNTRL Macro can be found in *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM03503 ERROR PURGING ACCOUNTING INFORMATION FOR INTERMEDIATE FORM OF

CU NAME: aaa(55) bbb(55)
CU TYPE: cccc
CU QUALIFIER: dddddddd **CODE:** eee
GROUP: fffffff **TYPE:** gggggggg
MEMBER: hhhhhhhh

Explanation: An error occurred while attempting to purge accounting information for intermediate form aaa(55) bbb(55).

User Response: Possible return codes are:

- 8 An I/O error occurred while purging. Submit the job again and if the error recurs, contact the project administrator.
- 16 Target data set enqueued. Submit the job again after the data set is no longer exclusively in use by another job.
- 24 The cross-reference data set was not defined in the project definition. Contact the project administrator.

Project Manager Response: If the return code is:

- 8 Run IDCAMS against the cross-reference data set to determine the problem.
- 24 Define the cross-reference data set on the FLMCNTRL macro of the project definition. More information on the FLMCNTRL Macro can be found in *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM03504 ERROR RETRIEVING ACCOUNTING INFORMATION FOR INTERMEDIATE FORM OF

CU NAME: aaa (55) bbb (55)
CU TYPE: cccc
CU QUALIFIER: dddddddd
CODE: eee
GROUP: fffffff **TYPE:** gggggggg
MEMBER: hhhhhhhh

Explanation: An error occurred while attempting to retrieve accounting information for intermediate form of aaa(55) bbb(55).

User Response: Possible return codes are:

- 8 The accounting information for the intermediate form of the compilation unit was not found in the specified group. This means that the compiled intermediate form is missing or is out of date. The member containing the compilation unit needs to be rebuilt.
- 12 SCLM internal error. Contact the project administrator.

SCLM Messages

- 20 An I/O error occurred while retrieving the accounting information for the intermediate form of the compilation unit. Contact the project administrator.
- 24 The cross-reference data set was not defined in the project definition. Contact the project administrator.

Project Manager Response: If the return code is:

- 12 SCLM internal error. Report this message (including the message ID and all text fields) to IBM support.
- 16 Correct and reassemble the project definition. Submit the job again, and verify that no errors occurred.
- 20 Run IDCAMS against the accounting data set to determine the problem.
- 24 Define the cross-reference data set on the FLMCNTRL macro of the project definition. More information on the FLMCNTRL Macro can be found in *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM03505 ERROR PURGING INTERMEDIATE FORM OF

CU NAME: aaa(55) bbb(55)
CU TYPE: cccc
CU QUALIFIER: dddddddd
CODE: eee
GROUP: fffffff **TYPE:** gggggggg
MEMBER: hhhhhhhh

Explanation: An error occurred while attempting to purge the intermediate code for the specified intermediate form.

User Response: Possible return codes are:

- 8 Unable to purge the intermediate code. Check to see if the sublibrary is missing or a data set security error occurred. Contact the project manager.
- 16 The cross-reference data set was enqueued. Submit the job again after the data set is no longer exclusively in use by another job.
- 24 The cross-reference data set was not defined in the project definition. Contact the project manager.

Project Manager Response: If the return code is:

- 8 Run IDCAMS against the cross-reference data set to determine the problem.
- 24 Define the cross-reference data set on the FLMCNTRL macro of the project definition. More information on the FLMCNTRL Macro can be found in *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM04001 GROUP: aaaaaaaaa IS NOT DEFINED IN THE PROJECT DEFINITION.

Explanation: Group aaaaaaaaa is not defined to the project definition.

User Response: Verify that aaaaaaaaa is the intended group. Verify that the correct &libdef name was specified. Contact the project administrator.

Project Manager Response: Add the group to the project definition. More information on defining the project environment can be found in *ISPF Software Configuration and Library Manager (SCLM) Project Manager's Guide*

FLM04002 SPECIFIED GROUP: aaaaaaaaa IS NOT A DEVELOPMENT GROUP

Explanation: The specified group is not valid for the function requested and must be defined to SCLM as a development group. Contact the project manager for a list of valid groups.

User Response: Select a group that is defined in the project definition as a development group.

FLM04003 TYPE: aaaaaaaaa IS NOT DEFINED IN THE PROJECT DEFINITION.

Explanation: Type aaaaaaaaa has not been defined in the current project definition.

User Response: Verify that aaaaaaaaa is a type that is supposed to contain SCLM data. If so, contact the project administrator.

Project Manager Response: Add the type to the project definition.

FLM04005 AUTHORIZATION CODE: aaaaaaaaa IS NOT DEFINED TO GROUP: bbbbbbbb

Explanation: Authorization code aaaaaaaaa has not been defined to SCLM as a valid authorization code for group bbbbbbbb.

User Response: Use an &authcode that has been defined to the specified group. Contact the project administrator for a list of valid authorization codes. If the specified authorization code is valid, contact the project administrator.

Project Manager Response: Check the project definition that defines the specified group. The valid authorization codes for the group are defined there. If authorization groups are used, reference the FLMAGRP macros in the &libdef as well. If the &authcode is valid, add it to the project definition.

FLM04006 LANGUAGE: *aaaaaaaa* IS NOT
DEFINED IN THE PROJECT
DEFINITION

Explanation: Language *aaaaaaaa* is not defined in the project definition used.

User Response: Verify that the language of the member is defined in the project definition. Specify a valid language and submit the job again. Contact the project manager for a list of valid languages.

Project Manager Response: Check the project definition for valid language names.

FLM04007 LANGUAGE: *aaaaaaaa* IS NOT
DEFINED FOR MEMBER: *bbbbbbbb*
TYPE: *ccccccc*

Explanation: Language, *aaaaaaaa*, is not defined in the project definition used. If this message is received for an existing member, the &libdef has probably changed since the last time the source member was modified.

User Response: Verify that the language of the member is defined in the project definition. If it is not, specify a valid language and submit the job again. Contact the project manager for a list of valid languages.

Project Manager Response: Check the project definition for valid language names.

FLM04008 ACCOUNTING RECORD FOR
MEMBER: *aaaaaaaa* TYPE: *bbbbbbbb* IS IN
STATE: INITIAL

Explanation: The accounting record processing has not completed for this member. This error can occur when there is an active edit session for the member or when an active edit session terminates abnormally. This error can also occur when the LOCK or SAVE service terminates abnormally.

User Response: Use a new member name or have the owner of the specified member free it. If you have an active edit session for member *aaaaaaaa*, complete the session. If you do not have an active edit session, use SCLM option 3.1 to look at the accounting record for the member. If the Accounting Status is not INITIAL, accounting record processing has completed and the error will not occur again. If the Accounting Status is INITIAL, look at the **Change User ID** field in the accounting record to identify the person who created the record. Have the person who created the record complete the requested processing or delete the accounting record.

FLM04009 ACCOUNTING RECORD FOR
MEMBER: *aaaaaaaa* TYPE: *aaaaaaaa* IS IN
STATE: LOCKOUT

Explanation: The member has been locked.

User Response: You must unlock the member before it can be edited. Also, it must not exist in another development library with an accounting record. You cannot lock a member in one library if the member has been drawn down to another library with an authorization code that allows it to be promoted into a group that is part of the first library's hierarchical view. To correct the problem, change the authorization code of the existing member so that it cannot be promoted, or promote the member so that it can be drawn down.

FLM04010 GROUP CONTROLLED BY LIBRARY
aaaaaaaa.

Explanation: An attempt was made to access a group that is under control of an external library. The failure occurred because the group must be accessed via the external library's services.

User Response: Specify a group that is under SCLM control.

FLM04011 DATA SET NAME: *aaa(44)* FOR
GROUP: *bbbbbbbb* TYPE: *ccccccc* IS
LONGER THAN ALLOWED. LENGTH:
ddd

Explanation: The sublibrary name created by concatenating the CU qualifier suffix with the physical data set name is too long.

User Response: Contact the project manager.

Project Manager Response: Adjust the dsname parameter on the FLMGROUP or FLMALTC macro for the group specified. The parameter should be adjusted to reduce the size of the data set name pattern to allow for the Ada sublibrary suffix to be concatenated.

FLM04029 PROJECT VSAM DATA SET NOT
DEFINED GROUP *gggggggg*,
DATABASE *ddddddd*, MACRO
mmmmmmmm

Explanation: A VSAM data set of type *ddddddd* is needed to complete the operation requested by the user, but there is no data set of that type defined for the group *gggggggg*. The VSAM data sets for group *gggggggg* were defined on the *mmmmmmmm* macro in the project definition used by the user. The values for *mmmmmmmm* will be either *FLMCNTRL if the VSAM data sets from the FLMCNTRL macro were being used or the name specified on FLMALTC macro referenced by group *gggggggg*.

User Response: Verify that the operation is being run against the proper group and project definition.

SCLM Messages

Project Manager Response: Update the project definition to specify a VSAM data set of type dddddd for group gggggggg.

FLM04030 ERROR OPENING PROJECT VSAM DATA SET GROUP: gggggggg, DATABASE: dddddd, INTENT: iiiiii, CODE: cccc, MACRO: mmmmmmmmm, DATA SET: mmmmmmmmm.mmmmmmmmm.mmmmmmmmm

Explanation: The VSAM data set mmmmmmmmm.mmmmmmmmm.mmmmmmmmm could not be opened for iiiiii access (where iiiiii is either READ or UPDATE). The VSAM data set was defined on the mmmmmmmmm macro (where mmmmmmmmm is either *FLMCNTRL if the data set was defined on the FLMCNTRL macro, or the name of the FLMALTC macro referenced by group gggggggg).

The reason for the failure is indicated by the code:

- | | |
|----|---|
| 8 | Unable to allocate the data set to a ddname |
| 10 | Unable to open the data set |
| 12 | Invalid key size for the data set |
| 14 | Unable to read from the data set |

User Response: Ensure that you have sufficient access to the VSAM data sets in the project and that the correct project definition is being used.

Project Manager Response: Check the data set mmmmmmmmm.mmmmmmmmm.mmmmmmmmm to ensure that it has been properly allocated, initialized and protected and that the data set is not allocated exclusively to another user of the system.

Check the following items:

Code	Items to Check
------	----------------

- | | |
|----|--|
| 8 | <ul style="list-style-type: none">• Check that the data set exists and the name matches the name specified in the project definition.• Check that the data set is not allocated exclusively to another user.• Check that the device where the data set is allocated is online. |
| 10 | <ul style="list-style-type: none">• Check that the user has sufficient access to the data set.• Check that the data set is a valid VSAM data set.• Check that the data set has been initialized. |
| 12 | Verify the key length of the data set with the key length required by SCLM. More information on the correct key lengths for the |

VSAM data sets can be found in *ISPF Software Configuration and Library Manager (SCLM) Project Manager's Guide*

- | | |
|----|--|
| 14 | Check that the data set has been initialized with at least one VSAM record |
|----|--|

FLM04031 IMPORT/EXPORT DATA SET NAME DUPLICATES PREVIOUSLY DEFINED DATA SET NAME. DATA SET: mmmmmmmmm.mmmmmmmmm.mmmmmmmmm MACRO: mmmmmmmmm DATABASE: dddddd,

Explanation: The import/export data set mmmmmmmmm.mmmmmmmmm.mmmmmmmmm could not be used because it duplicates a VSAM data set that was defined for the dddddd database on the mmmmmmmmm macro (where mmmmmmmmm is either FLMCNTRL if the data set was defined on the FLMCNTRL macro, or the name of the FLMALTC macro).

User Response: Select a unique name for the import/export data set name, specified in the mmmmmmmmm macro.

FLM05001 EXISTING MEMBER'S AUTHORIZATION CODE IS NOT DEFINED TO THE GROUP

**GROUP: aaaaaaaa TYPE: bbbbbbbb
MEMBER: cccccccc
ERROR GROUP: dddddd
AUTHORIZATION CODE: eeeeeeee**

Explanation: The member's authorization code, eeeeeeee, is not defined to group aaaaaaaa. The member exists at a higher level in the hierarchy, but it cannot be drawn down because the authorization code assigned to it is not allowed in group aaaaaaaa. You must change the member's authorization code before drawing it down to that group.

User Response: It is possible that the function will succeed with a different authorization code. Contact the &dbc for a list of authorization codes that are valid for the group. If none of the authorization codes defined to the group work, try the same function at a different group. Contact the project administrator if all attempts fail.

Project Manager Response: The FLMGROUP macro lists the valid authorization codes defined for this group in the project definition. Do not attempt to add authorization codes to the project definition unless you are familiar with the risks associated with using authorization codes to control SCLM operations as outlined in *ISPF Software Configuration and Library Manager (SCLM) Project Manager's Guide*

FLM05002 PREDECESSOR VERIFICATION FAILED INPUT GROUP : aaaaaaaaa
TYPE: bbbbbbbb **MEMBER:** cccccccc
ERROR GROUP1: dddddddd **DATE:** eeeeeeee **TIME:** ffffffff **ERROR GROUP2:** gggggggg **DATE:** hhhhhhhh **TIME:** iiiiii

Explanation: The version of the member in error group1 dddddddd was not based on the member in error group2 gggggggg. During a promotion, this usually means that a version of the member between these two groups has been deleted. If the &authcode is being changed, changes to the member in gggggggg will be lost if the version in dddddddd is promoted.

The predecessor Date and Time fields in the accounting information for the member in dddddddd should contain the last modified Date and Time fields for the next occurrence of the member within the hierarchy.

For more information on specific contents of the predecessor Date and Time fields, see *ISPF Software Configuration and Library Manager (SCLM) Developer's Guide*

For the promote processor, if gggggggg is not the group being promoted into, this message is a warning. However, the promote processor, in conditional mode, prevents the member in aaaaaaaa from replacing the member in gggggggg. This problem can also occur if the authorization codes are changed from other groups in the project definition.

User Response: For the promote processor, verify that the member in aaaaaaaa contains all of the required changes present in the member in gggggggg. If it does, and no other promote verification errors are present, promote again in unconditional mode. If other promote verification errors are present, either correct the errors or use an architecture member that controls as few members as possible.

If you have tried to change the authorization code, and the member is in a development group, verify that all of the changes from the version in gggggggg have been incorporated in aaaaaaaa. Then delete and recreate the accounting information for the member using the SCLM editor or the SAVE service. If aaaaaaaa is not in a development group, the member must be drawn down to a development group, and you must delete the member in aaaaaaaa before using the procedure outlined above. If you are not able to correct the problem with the SCLM editor or SAVE service, contact the project manager.

Project Manager Response: To locate and correct authorization code problems, see *ISPF Software Configuration and Library Manager (SCLM) Project Manager's Guide* for more information.

FLM05010 MEMBER LOCKED AT ANOTHER GROUP INPUT GROUP: aaaaaaaa **TYPE:** bbbbbbbb **MEMBER:** cccccccc **ERROR GROUP:** dddddddd **AUTHORIZATION CODE:** eeeeeeee

Explanation: Member cccccccc has already been updated in another hierarchy. The changes reside in error group dddddddd, which is not in your hierarchy. You cannot update the member because you would not be working with the most current version of the member.

User Response: Have the member promoted into a group that is in your hierarchy (that is, one that appears on the SCLM Edit - Entry panel). If the member cannot be promoted, the member and its accounting information must be deleted in error group dddddddd using the SCLM library utility or the DELETE service. You can also change the authorization code to restrict promotion.

FLM05020 ERROR ALLOCATING HIERARCHY VIEW FOR TYPE: aaaaaaaa **FROM GROUP:** bbbbbbbb **CODE:** ccc

Explanation: An error occurred during an attempt to allocate all data sets that compose the hierarchical view for the current SCLM function. The hierarchical view is for type aaaaaaaa, and begins with the corresponding data set at group bbbbbbbb

Possible return codes are:

- 4 A certain number of groups in the group hierarchy was requested for allocation. The number of requested groups exceeds the number of available groups in the hierarchy starting with group bbbbbbbb.
- 8 Type aaaaaaaa is not defined for the project.
The SCLM type aaaaaaaa might not be defined in the project definition. The undefined type is usually generated by SCLM when an asterisk (*) is specified in the DFLTTP parameter on an FLMALLOC macro in the language definition of the member being built.
- 12 A group in the requested hierarchy view is not defined for the project.
- 16 No data sets are physically allocated for this hierarchical view.
- 20 An error occurred during an attempt to dynamically allocate a data set in the hierarchy.

User Response: For return codes:

- 4 No action is required. A hierarchical view was created starting at group bbbbbbbb, and continuing up through all the higher level defined in the current project definition.

SCLM Messages

- 8 Determine if type *aaaaaaaa* has been incorrectly specified as input. Determine if type *aaaaaaaa* is not defined in the project definition (see the project manager).
- 12 Determine if group *bbbbbbbb* has been incorrectly specified as input. Determine if group *bbbbbbbb* is not defined in the project definition (see the project manager).
- 16 No data sets have been physically allocated in the hierarchy for type *aaaaaaaa* starting at group *bbbbbbbb*. Determine if data sets should be allocated, and allocate them if necessary. See the project manager for assistance.
- 20 An error occurred during an attempt to dynamically allocate a data set in the hierarchical view to a ddname. Verify that data sets in the hierarchical view are not allocated exclusively to another job, and resubmit the job again.

Project Manager Response: Allocate the necessary data sets.

FLM06501 TRANSLATOR RETURN CODE FROM ====> *aaa(16)* ====> *bbb*

Explanation: This message identifies the return code received from translator *aaaaaaaaaaaaaaaa*. If the return code indicates success as defined on the FLMTRNSL macro, all output is saved in the hierarchy and no response is necessary. If the return code from the translator did not meet the GOODRC specified for the translator, SCLM saves translator output, such as compiler listings, in the listings data set for the processor if requested in the language definition.

User Response: Use the listings data set to locate and correct all errors identified by the translator. If the translator is supplied with SCLM, check the return codes for the translator. (More information about translators can be found in *ISPF Software Configuration and Library Manager (SCLM) Referenc*.) If the return code from the translator is acceptable and the build function indicates that the translator failed, contact the project manager.

Project Manager Response: Change the GOODRC parameter of the FLMTRNSL macro, which is defined in the project definition.

Note: SCLM provides some translators and parsers for which return codes are documented in *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM06502 ERROR INVOKING TRANSLATOR: *aaaaaaaa*, CODE: *bbb*

Explanation: SCLM could not invoke the *aaaaaaaa* translator. The load module containing the translator might be allocated exclusively to another job. There is a

possible error in the language definition that defines the translator.

User Response: If the translator has been used successfully in the past and no changes were anticipated (for example, a new compiler release), invoke the processor again. If the translator is new or the problem recurs, contact the project administrator.

Project Manager Response: Verify that the parameters of the FLMTRNSL macro, which are defined in the project definition, are correct. More information on the FLMTRNSL macro can be found in *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM06503 PROBABLE SYSTEM/USER ABEND FOR TRANSLATOR: *aaaaaaaa* HEXADECIMAL VALUE OF RETURN CODE: *bbbbbbbb*

Explanation: SCLM issues this message when an abend occurs for translator *aaaaaaaa*. To determine the cause of the abend, look up the return code in the *MVS/Extended Architecture Message Library: System Codes* manual.

User Response: Use the information provided in this message to correct the cause of the abend, and submit the job again.

FLM06504 NO TRANSLATORS DEFINED FOR SCLM EXECUTION LANGUAGE: *aaaaaaaa*.

Explanation: The translators defined for the language definition do not contain any translators defined for SCLM. If any translators are defined, they are defined for use in external libraries.

User Response: Execute the function against languages defined with translators for SCLM execution.

Project Manager Response: Define translators for the languages that are executable for SCLM.

FLM06510 ERROR ALLOCATING DATA SET: *aaa(44)* FOR USER EXIT: *bbbbbbbb* CODE: *ccc*

Explanation: An error occurred while attempting to allocate data set *aaa(44)* for user exit *bbbbbbbb*. This data set should contain the user exit routine to be invoked.

Possible return codes are:

- <65 SCLM internal error.
- 65-4097 SVC 99 error code (decimal).
- >4098 System abend code (decimal).

User Response: Contact the project administrator.

Project Manager Response: For return codes:

- <65 Report this message (including the message ID and all text fields) to IBM support.

65-4097 SVC 99 error codes are described in *OS/390 System Codes, GC28-1780*

>4097 Report this message (including the message ID and all text fields) to IBM support.

FLM06511 ERROR INVOKING USER EXIT ROUTINE: *aaa(16)*, CODE: 32

Explanation: SCLM could not invoke the user exit. The load module containing the user exit might be allocated exclusively to another job. There is a possible error in the project definition that defines the user exit.

User Response: If the user exit has been used successfully in the past, submit the job again. If the user exit is new or the problem recurs, contact the project administrator.

Project Manager Response: Verify that the user exit executes correctly outside of SCLM. Verify that the user exit is defined correctly in the project definition. For more information on user exits, see *ISPF Software Configuration and Library Manager (SCLM) Project Manager's Guide*

FLM06512 VERIFICATION ERROR FROM USER EXIT ROUTINE: *aaa(16)*, CODE: *bbb*

Explanation: The return code from user exit *aaa(16)* did not meet the acceptable criteria specified for the user exit. The output produced depends on the user exit routine.

User Response: Review the local software configuration management for information about the user exit.

Project Manager Response: For more information on user exits, see *ISPF Software Configuration and Library Manager (SCLM) Project Manager's Guide*

FLM06513 PROBABLE SYSTEM/USER ABEND FOR USER EXIT ROUTINE: *aaa(16)* HEXADECIMAL VALUE OF RETURN CODE: *bbbbbbbb*

Explanation: SCLM issues this message when an ABEND (user exit return code greater than 4096) occurs. SCLM also provides the hexadecimal value of the user exit return code.

User Response: Contact the project administrator.

Project Manager Response: Use the information provided in this message to correct the cause of the ABEND. See *OS/390 MVS System Codes, GC28-1780* for complete information on the return codes.

FLM07001 AUTHORITY CODE: *aaa* ON DATA SET: *bbb(44)* RESULTED FROM ATTEMPT TO UPDATE DATA. ATTR: *c* MACRO RC: *ddd* EXIT RC: *eee* EXIT REASON: *fff*

Explanation: An attempt was made to perform an SCLM function without the proper authority. Users cannot update SCLM control data, using SCLM functions, unless they have the authority to update the data set to which the control data is related.

DSNAME

Data set being accessed.

ATTR R: READ, U: UPDATE, C: CONTROL, A: ALTER.

MACRO RC

For a code of 8, either the LOCATE macro failed to find the data set, or the RACROUTE macro failed. Otherwise, the MACRO RC contains the return code from the LOCATE macro or the RACROUTE macro.

EXIT RC

For a MACRO RC of 8, this value contains the return code from a data set security or the SAF router exit routine. For RACF, this is the RACHECK return code. Otherwise it is set to zero.

EXIT REASON

For a MACRO RC of 8, this value contains the reason code from a data set security or the SAF router exit routine. For RACF, this is the RACHECK reason code. Otherwise it is set to zero.

Note: For the INIT service call using a program, only the first line will appear, indicating the user does not have READ access to the project definition data set.

User Response: Verify that you specified the correct group and type for the function you are requesting. Also verify that the requested data set exists. If the request was valid, get update authority to the data set identified in the message.

FLM07002 ERROR PERFORMING AN ENQUEUE

CODE: *aaa* QNAME: *bbbbbbbb* RNAME LENGTH: *ccc* RNAME: *ddd(60)*

Explanation: The requested resource was enqueued by another job. The enqueued resource, which is usually a data set, is identified by RNAME. The code refers to the return code from the enqueue macro. RNAME LENGTH identifies the size of RNAME in bytes because RNAME can contain trailing blanks. QNAME is the name of the queue used for the enqueue operation.

SCLM Messages

User Response: Try the job again later.

FLM07004 ERROR ALLOCATING A TEMPORARY DATA SET

CODE: *aaa* **DDNAME:** *bbbbbbbbb*
LRECL: *ccccccc* **RECFM:** *ddddddd*
NUMRECS: *eeeeee* **DISP:** *fff*
DSNAME: *ggg(44)*

Explanation: An error occurred while attempting to allocate a temporary data set.

Possible return codes are:

- | | |
|------|---|
| 4 | Data set name omitted from input. |
| 8 | SVC 99 error. See <i>OS/390 System Codes, GC28-1780</i> for complete information on the return codes. |
| 12 | SCLM internal error. Report this message (including the message ID and all text fields) to IBM support. |
| 16 | Missing or incorrect data set name. |
| 20 | Invalid file attribute specified. |
| 24 | A member of a PDS was requested but the data set is not partitioned. |
| 28 | The requested member could not be found. |
| 32 | The requested member was not available. |
| >64 | SVC 99 error, reason code (decimal): |
| 528 | Requested data set unavailable. The data set is allocated to another job and its usage attributes conflict with this request. |
| 5896 | Data set does not exist. |

User Response: Submit the job again. If the error recurs, contact the project administrator.

Project Manager Response: Verify that all data set names are correctly defined and exist. For additional assistance, contact IBM support.

FLM07005 ERROR RETRIEVING DIRECTORY INFORMATION FOR TYPE: *aaaaaaaa* **CODE:** *bbb*

Explanation: An error occurred during an attempt to retrieve the directory information for a member in type *aaaaaaaa*.

Possible return codes are:

- | | |
|----|---|
| 16 | There are two possible reasons for this error: <ul style="list-style-type: none">• The hierarchy is not defined.• Data sets required by the current operation are not allocated. |
|----|---|

- | | |
|----|---|
| 20 | A data set in type <i>aaaaaaaa</i> could not be opened, possibly because: |
|----|---|

- The hierarchy contains more than the maximum allowed 123 extents
- A data set required by the current operation could not be opened, possibly because the data set is allocated exclusively to another job, or because of a data set security protection error.

User Response: Contact the project manager.

Project Manager Response: If the return code is:

- | | |
|----|--|
| 16 | A hierarchy error might have occurred. Reassemble the project definition and make certain that a return code of 0 is returned. Determine if all data sets required by the current operation are allocated. If not, allocate them, exit, and reenter SCLM. |
| 20 | Verify that data sets in type <i>aaaaaaaa</i> are not allocated exclusively to another job. Verify that the user has the appropriate data set security access. Check the number of extents used for all data sets allocated to type <i>aaaaaaaa</i> in the hierarchy. If the total number of extents used is greater than 123, some of the data sets must be reallocated with a larger block size. |

FLM07006 ERROR ACCESSING MEMBER: *aaaaaaaa* **TYPE:** *bbbbbbbbb*, **ACCOUNTING GROUP:** *ccccccc* **DATA SET NAME:** *ddd(44)* **CODE:** *eee*

Explanation: One of the following has occurred:

- The type *bbbbbbbbb* is not defined in the project definition.
- The accounting record for the member exists, but the corresponding data set for group *ccccccc* and type *bbbbbbbbb* does not.
- The data set *ddd(44)* might be allocated exclusively to another job.
- The member *aaaaaaaa* does not exist in data set *ddd(44)*.

Possible return codes are:

- | | |
|----|---|
| 8 | The member is not registered with SCLM, the data set <i>ddd(44)</i> does not exist, or member <i>aaaaaaaa</i> does not exist within data set <i>ddd(44)</i> . |
| 16 | SCLM cannot retrieve the directory information for the member. |

User Response: If the return code is:

- | | |
|---|--|
| 8 | Verify that data set <i>ddd(44)</i> exists and contains member <i>aaaaaaaa</i> . If group <i>ccccccc</i> is a development group, you can use the SCLM Editor to add the member into the data set. If the member should not exist in group <i>ccccccc</i> , |
|---|--|

use the SCLM Library Utility or the DELETE service to remove the accounting information for the member.

- 16 Check the input parameters and verify that the type exists in the project definition. Verify that data set *ddd(44)* is not allocated exclusively to another job.

Project Manager Response: Determine if the data set should be allocated, and allocate it if necessary. After reallocating the data set, exit and reenter SCLM. Delete the accounting record for the member at that group and type. Be aware that an inconsistency in the hierarchy occurred because an accounting record existed for a member that does not exist.

FLM07007 ACCOUNTING INFORMATION IS NOT ACCURATE FOR MEMBER:
aaaaaaaa TYPE: bbbbbbbb ACCOUNTING GROUP: cccccccc MEMBER GROUP: dddddddd

Explanation: One of the following has occurred:

- Member *aaaaaaaa* is out of date. The accounting information for the member does not match the contents of the member. If neither group is a development library, it is possible that the member has been updated outside of SCLM control.
- The member exists in *ddddddd* and the accounting record exists in *ccccccc*, but the data set corresponding to *ccccccc.bbbbbbbb* does not exist.

It is also possible that all groups in the hierarchy (for this type) are not of the same record format.

User Response: If the member is editable, register the member with SCLM using the SCLM editor, migration utility, or the SAVE service. If the member is non-editable, delete the member with the SCLM library utility or the DELETE service and regenerate the member with the SCLM build function.

Verify that the data set for *ccccccc.bbbbbbbb* is allocated. If it is not, contact the project administrator.

If the groups are not all the same record format, have the project manager allocate all data sets with the same record format

Project Manager Response: If the data set for *ccccccc.bbbbbbbb* is allocated verify that all groups associated with the type are of the same record format. If the data set is not allocated, allocate it, exit, and reenter SCLM. Delete the accounting record for the member at *ccccccc.bbbbbbbb*. Be aware that an inconsistency in the hierarchy occurred, because an accounting record existed for a non-existent member.

FLM07008 ERROR ACCESSING MEMBER:
aaaaaaaa GROUP: bbbbbbbb, TYPE: cccccccc, DATA SET NAME: ddd(44) CODE: eee

Explanation: Member *aaaaaaaa* could not be retrieved. Data set *ddd(44)* might be empty, or could not be opened.

Possible return codes are:

- 32 Member *aaaaaaaa* could not be found in the data set
- 36 Type *ccccccc* could not be found

User Response: For return codes:

- 32 The member is not registered with SCLM, or was deleted. Edit the member under SCLM, or use the Migrate or Save service.
- 36 Contact the project manager for assistance.

Project Manager Response: Determine if the type is defined in the project definition. If not, determine if it must be defined and re-assemble the project definition if necessary. Provide other assistance as needed.

FLM07009 ERROR ACCESSING MEMBER:
aaaaaaaa, FOR GROUP: bbbbbbbb, TYPE: cccccccc, DATA SET NAME: ddd(44) CODE: eee

Explanation: A possible I/O error occurred for data set *ddd(44)* while attempting to access member *aaaaaaaa*, or data set *ddd(44)* does not exist.

Possible return codes are:

- 8 Enqueue error for data set *ddd(44)*.
- 12 Type *ccccccc* not found in hierarchy or the data set is not allocated.
- 20 An error occurred during an attempt to allocate data set *ddd(44)*.

User Response: Verify that the data set is not allocated exclusively to another job. Contact the project manager.

Project Manager Response: For return code:

- 8 Verify that the data set is not allocated exclusively to another job.
- 12 Determine if the type *ccccccc* is defined in the project definition. If not, determine if the type is required for the project and add it to the project definition if necessary. Determine if data set *ddd(44)* exists. If it does not, allocate it, exit, and reenter SCLM. Then attempt the operation again.
- 20 Verify that the data set exists and that it is not allocated exclusively to another job.
- | 36 The unit was not specified

SCLM Messages

FLM07010 ERROR UPDATING DIRECTORY INFORMATION AT GROUP: *aaaaaaaa*
TYPE: *bbbbbbbb* **MEMBER:** *ccccccc* **DATA SET NAME:** *ddd(44)* **CODE:** *eee*

Explanation: SCLM could not update the data set directory for this member.

Possible return codes are:

- 4 Unable to update the directory information of a data set allocated with RECFM=U.
- 8 Unable to get member name from the directory.
- 12 The file is not closed.
- 16 The file control block is NIL.
- 20-36 Indicates that an I/O error occurred.
- 24 This can also indicate that the target data set could not be accessed.
- 41 BINDER STARTDialog failed
- 42 BINDER CREATEWorkmod failed
- 43 BINDER INCLUDE failed
- 44 BINDER SETOption failed
- 45 BINDER SAVEWorkmod failed
- 46 BINDER DELETEWorkmod failed

User Response: Contact the project administrator. For codes 41 through 46, refer to IEW messages for information on the failure and corrective response.

Project Manager Response: Contact IBM support. For codes 41 through 46, refer to IEW messages for information on the failure and corrective response.

FLM07011 ERROR ALLOCATING TEMPORARY DATA SET FOR TRANSLATOR: *aaa*.
DATA SET NUMBER: *bbb* **CODE:** *ccc*

Explanation: An error occurred in allocating a temporary data set for translator *aaa*. The data set number identifies the relative position of the FLMALLOC macro used to allocate the data set for that translator.

Possible return codes are:

- 8 SVC 99 error.
- 12 SCLM internal error. Report this message (including the message ID and all text fields) to IBM support.
- 16 Missing or incorrect data set name.
- 20 Invalid file attribute specified.
- 24 A member of a PDS was requested but the data set is not partitioned.
- 28 The requested member could not be found.

32 The requested member was not available.

36 The unit was not specified..

>64 SVC 99 error, reason code (decimal).

528 Requested data set unavailable. The data set is allocated to another job and its usage attributes conflict with this request.

1040 Specify ddname unavailable.

1156 Not enough space on any available pack. Decrease the value specified for the RECNUM parameter on the FLMALLOC macro and try again.

5896 Data set does not exist. If a user supplied data set naming convention is used, try replacing the data set name for the FLMCPYLB macro with variable @@FLMDSN.

38656 A data set could not be allocated. Contact the project manager.

User Response: This message indicates that an error occurred while allocating a data set to be used by a translator.

If you receive a return code of 8, 32, or >64, you should try the operation again. If the problem recurs or you receive any other return codes, contact the project manager.

Project Manager Response: If the return code is :

8 Retry the operation. If the same problem occurs, contact IBM support.

12 SCLM internal error. Contact IBM support.

Note: For the next set of codes, you should know that the data set number corresponds to an FLMALLOC macro associated with the specified translator (the first FLMALLOC is data set 1, the second is data set 2 and so on).

16 Check FLMALLOC to ensure that the data set name has been specified correctly.

20 Check FLMALLOC to ensure that all data set attributes have been specified correctly.

24 Check FLMALLOC to ensure that a sequential data set was not specified when a partitioned data set was expected.

28 Check FLMALLOC to ensure that the correct member name was specified.

32 See return code 8 for information.

>64 An error was received from SVC 99 during the allocation. The SVC 99 return code is specified in the message (ccc). Reference *OS/390 System Codes, GC28-1780* for a description of the SVC 99 return codes.

If the return code is 38656, check to see if the FLMALLOC statement specifies DSNTYPE=LIBRARY. If so, and your system or project is requesting that temporary data

sets be allocated to VIO, then try adding
CATLG=Y to the FLMALLOC statement.

FLM07012 ERROR SAVING MEMBER *aaaaaaaa* **TO**
GROUP: *bbbbbbbb* **TYPE:** *ccccccc*, **DATA**
SET NAME: *ddd(44)* **CODE:** *eee*

Explanation: An error occurred during an attempt to copy member *aaaaaaaa* to data set *ddd(44)*. This message can be preceded by an MVS system error message. Common errors are:

D37 Primary space is full and secondary space is not requested for data set *ddd(44)*

B37 or E37

The directory is full, or the maximum number of extents (123) was exceeded, or the volume and VTOC of data set *ddd(44)* are full and secondary volumes are not available.

SVC99 error

RECFM of target data set not the same as RECFM as of source data set.

RACF error

Error accessing data set *ddd(44)* due to a data set security protection error.

Possible return codes:

- 12** A ddname is not allocated properly. A PDS was allocated without a member name, a sequential data set was allocated with a member name, or some other allocation error occurred.
- 16** The output data set is full.
- 20** RACF failed or the input member was not found.
- 24** An input parameter was not valid.
- 28** A member entry could not be created because the input member is an alias or has TTR notes.
- 32** Open failed or TSOLNK failed.

User Response: Check the MVS system error messages for detailed information. Refer to *MVS/XA Message Library: System Messages* for a description of the MVS error messages and the problem resolutions. If this message was not preceded by an abend code, verify that the language definition in use does not contain a DDNAME that is used more than once. Verify that the language definition does not include member names on sequential data sets. Verify that partitioned data sets have member names where necessary.

Project Manager Response: Provide assistance as needed.

FLM07013 COPY FAILED AT GROUP: *aaaaaaaa*,
TYPE: *bbbbbbbb*, **FOR DATA SET NAME:**
ccc(44) **CODE:** *ddd*

Explanation: An error occurred during an attempt to copy one or more members to data set *ccc(44)*.

Possible return codes are:

- 4** One or more members specified to be copied to data set *ccc(44)* were not present in the source data set(s), or the number of directory blocks allocated for data set *ccc(44)* is inadequate.
- 8** The data set *ccc(44)* might be allocated exclusively to another job.
- 12, 16** The data set *ccc(44)* does not exist or is not allocated with the same attributes as data sets for type *bbbbbbbb*.
- 28** Three possibilities exist:
 1. IEBCOPY attention interrupt error
 2. A member to copy could not be found
 3. A member entry could not be created

User Response: For return codes:

- 4** Do the following:
 1. Determine if all members that must be copied in the current operation are present in their source data sets.
 2. Reallocate data set *ccc(44)* with more directory blocks.
- 8** Determine if the data set is allocated exclusively to another job. When the data set is available resubmit the job.
- 12, 16** Determine if the data set exists and is allocated with the correct attributes. Contact the project manager if needed.
- 28** Make sure that all members to copy exist. Determine if the data set has free directory entries.

Project Manager Response: Provide assistance as needed.

FLM07014 COPY FAILED FOR GROUP: *aaaaaaaa*,
TYPE: *bbbbbbbb*, **AT DATA SET NAME:**
ccc(44) **ABEND CODE:** *ddd*

Explanation: SCLM was unable to update data set *ccc(44)* because of an ABEND during the copy operation.

Common ABEND codes and their meanings are:

D37 Primary space is full and secondary space is not requested in the data set *ccc(44)*.

B37 or E37

The directory is full; the maximum number of

SCLM Messages

extents (123) was exceeded; or the volume and VTOC of the data set *ccc(44)* are full and secondary volumes are not available.

User Response: Check for MVS system error messages for detailed information. Submit the job again after performing the following operations:

1. Compress the data set *ccc(44)* or reallocate it with more space or directory blocks.
2. Verify that the volume and VTOC for the data set *ccc(44)* are not full. Move the data set if they are full.

FLM07015 ERROR ACCESSING DATA SET *aaa(44)* FOR GROUP: *bbbbbbbbb* TYPE: *cccccccc* RETURN CODE *ddd*.

Explanation: SCLM was attempting to access the data set *aaa(44)* for an operation at group *bbbbbbbbb* and type *cccccccc*, and a system error occurred.

User Response: Contact the project manager.

Project Manager Response: The LOCATE/CAMLST macro is used to access the data set. The return code *ddd* is the value returned from that macro. For each return code only some of the reasons are given here; for a complete list and for additional information on LOCATE see *OS/VS2 System Programming Library: Data Management*

Possible return codes are:

- | | |
|----|--|
| 12 | A possible reason for this error is: <ul style="list-style-type: none">• An alias data set name was found |
| 16 | Data set does not exist at the lowest catalog index level specified. |
| 20 | A syntax error exists in the data set name |
| 24 | Possible reasons for this error are: <ul style="list-style-type: none">• A permanent input/output error occurred.• An unrecoverable error occurred. |
| 28 | An input parameter address to LOCATE cannot be used |

FLM07016 MULTIPLE FLMCPYLBs CANNOT BE ALLOCATED WITH DISP: *ddd* FOR TRANSLATOR: *aaa* DATA SET NUMBER: *bbb*.

Explanation: The language definition contains an FLMALLOC with a disposition parameter *ddd* requesting allocation of multiple data sets. Multiple data set allocations must use disposition SHR. The disposition parameter is abbreviated as follows: S for SHR, M for MOD, O for OLD and N for NEW.

User Response: Contact the project administrator

Project Manager Response: Find the language definition that is causing the problem. For this message, *aaa* represents the occurrence of the FLMTRNSL macro

in the language definition and *bbb* represents the occurrence of the FLMALLOC macro defined for that translator. Either remove all but one FLMCPYLB macro for the allocation or change the DISP parameter on the FLMALLOC macro. Then reassemble and relink the project definition.

FLM07020 DATA SET *aaa(44)* DOES NOT EXIST FOR GROUP: *bbbbbbbbb* TYPE: *cccccccc*

Explanation: The data set specified by *aaa(44)* does not exist. This data set is needed for an operation in group *bbbbbbbbb* and type *cccccccc*.

User Response: Determine if data set *aaa(44)* should be allocated, and allocate it if necessary. Contact the project manager if you need the data set but are unable to allocate it.

Project Manager Response: Determine whether data set *aaa(44)* is needed for the function that issued the error message. (More information about function usage of data sets can be found in *ISPF Software Configuration and Library Manager (SCLM) Project Manager's Guide* .) Allocate the data set if necessary, or inform the user that the data set should not be used for the current function.

FLM07030 PURGE FAILED FOR GROUP: *aaaaaaaa* TYPE: *bbbbbbbbb* DATA SET NAME: *ccc(44)* CODE: *ddd*

Explanation: An error occurred while purging members from the specified group and type in data set *ccc(44)*

Possible return codes are:

- | | |
|----|---|
| 8 | The data set <i>ccc(44)</i> is allocated exclusively to another job. |
| 12 | An I/O error occurred while accessing the data set <i>ccc(44)</i> . |
| 16 | SCLM is unable to allocate data set <i>ccc(44)</i> . |
| 20 | An SCLM internal error occurred or the user does not have the proper security access to the data set. |

User Response: Verify that the data set *ccc(44)* exists and that it is not allocated exclusively to another job. Ensure that you have the proper security access to the data set. Submit the job again.

Project Manager Response: If the return code is 20 contact SCLM Program Support.

FLM07031 WARNING, UNABLE TO PURGE MEMBER(S) BECAUSE MEMBER(S) ARE MISSING FROM GROUP: *aaaaaaaa* TYPE: *bbbbbbbbb*

Explanation: One or more members in TYPE *bbbbbbbbb* are missing. Only accounting information exists in

group *aaaaaaaa*. The accounting information will be deleted.

User Response: Verify that no members involved in the promotion should have existed in GROUP *aaaaaaaa*.

FLM07032 ERROR BUILDING IOTYPE=S INPUT DATA SET FOR TRANSLATOR: *aaaaaaaa* DATA SET NUMBER: *bbb* CODE: *ccc*

Explanation: SCLM was unable to build the input data set possibly due to an out of space condition.

Possible return codes are:

16 Data set out of space.

20 Data set access failed.

User Response: If the return code is:

16 Compress the data set and resubmit the job. If the error is persistent, notify the project administrator.

20 Contact the project administrator.

Project Manager Response: If the return code is:

16 Increase the RECNUM size on the FLMALLOC macro. The data set number identifies the relative position of the FLMALLOC data set for that translator.

20 Assign the appropriate data set access security level.

FLM08500 ERROR PERFORMING VERSIONING

Explanation: A processing error occurred while performing versioning.

User Response: Examine the error messages printed with the current message to determine the cause of the problem.

FLM08501 ERROR COPYING MEMBER TO VERSION DATA SET CODE *aaa* GROUP *bbbbbbbb* TYPE *ccccccc* MEMBER *ddddddd* VERSION DATA SET *eeeeeee*

Explanation: An error occurred while copying an SCLM member to the versioning data set. The member was not versioned.

Possible codes for *aaa* are:

8 The LRECL, DSORG, or RECFM of the version PDS is invalid, a member within the version PDS is corrupt or a temporary version data set could not be allocated. See message FLM39203, FLM39222, or FLM39225.

Note: If this message is not accompanied by message FLM39203 or message FLM39222, check that the member has

not been modified in the versioning data set (VERPDS). If it has, create a new member by copying the text you want to save into the new member. Then cancel out of the edit session. The version data set has been tampered with. Point this out to your project manager, delete all versions associated with the member, and then recreate the member under its old name.

12 Versioning PDS could not be opened. See message FLM39200.

16 Source data set could not be opened. See message FLM39200.

20 Version PDS could not be opened. See message FLM39225.

1xx SuperCU not successful (100 + SuperCU return code). See message FLM39220. See SuperCU documentation for the meaning of the SuperCU return code.

In the message, *bbbbbbbb* is the GROUP being versioned, *ccccccc* is the TYPE being versioned, *ddddddd* is the MEMBER being versioned, and *eeeeeee* is the fully qualified data set name of versioning PDS.

User Response: See the referenced message for each return code to determine the action to be taken.

FLM08502 ERROR REBUILDING SOURCE FROM VERSION, CODE: *aaa*

Explanation: The retrieval process for the specified version failed.

Possible codes for *aaa* are :

8 Version, member, or retrieval data set not found.

32 Error freeing versioning data sets.

48 Corrupt version data.

1nn Error processing delta data. See message FLM39220 for possible values of nn.

User Response: Verify the data sets are allocated, cataloged, and accessible to SCLM; otherwise, contact the project manager.

Project Manager Response: Allocate, catalog, or make the data sets accessible to SCLM.

FLM09002 THE REPORT WILL APPEAR IN *aaa*(26)

Explanation: Data set *aaa*(26) will contain the report output. This message is provided for information only.

SCLM Messages

FLM09004 THE MESSAGES WILL APPEAR IN
aaa(26)

Explanation: Data set *aaa(26)* will contain the message output. This message is provided for information only.

FLM09006 THE LISTING WILL APPEAR IN
aaa(26)

Explanation: Data set *aaa(26)* will contain the listing output. This message is provided for information only.

FLM09008 RETURN CODE = *aaaaaaaa*

Explanation: The return code for this function is *aaaaaaaa*. This message is provided for information only.

**FLM20001 IF PARSER LISTINGS WERE
CREATED, THEY WILL APPEAR IN
DSN: *aaa(44)*.**

Explanation: Any listings generated by the parser will appear in data set *aaa(44)*.

User Response: If parser listings were created, review the parser listings for notification or error information and respond accordingly. If parser listings were not created but were expected, see your project manager.

Project Manager Response: If the dsname (DSN) value is blank and parser listings should have been created, check the language definition to ensure that the parser listings are allocated with the PRINT=I or PRINT=Y option.

**FLM20002 THE VERSION OF THE MEMBER YOU
ARE EDITING DOES NOT HAVE AN
ACCOUNTING RECORD AT THE
HIERARCHY LEVEL IN WHICH IT
WAS FOUND. ANOTHER VERSION
EXISTS IN THE SCLM CONTROLLED
HIERARCHY.**

Explanation: The member that you selected to edit exists in the hierarchy in two different places. The group at which the text of the member was found is not the same as the group at which the first occurrence of the accounting record was found. The version you are editing might be out of date. Someone might have copied a version of this member into a group in the hierarchy without doing a MIGRATE or a SAVE.

User Response: Verify that this is the correct version of the member that you wish to edit. If not, cancel from the current edit session, and use the Library Utility to delete the back-level version; then edit the member again. You should not promote the member without first checking to see whether the two versions need to be manually merged to prevent loss of data.

Project Manager Response: Check the project definition FLMALTC parameters. It is possible that you have two groups using the same data set to store

members, and accounting information. This could lead to data integrity problems. Either change the promote path for one of the groups so that they cannot affect each other, or change the dsname specified on the FLMALTC macro for one of the groups.

**FLM30001 CHANGE CODE DELETIONS NOT
SUPPORTED IN THIS UTILITY**

Explanation: A delete change code request was specified from a utility that does not support this request. The change code was not deleted.

**FLM30002 USER ENTRY DELETIONS NOT
SUPPORTED IN THIS UTILITY**

Explanation: A delete user entry request was specified from a utility that does not support this request. The user entry was not deleted.

FLM32101 MIGRATION UTILITY INITIATED -
aaaaaaaa ON bbbbbbbb

Explanation: The migration process has started. *aaaaaaaa* is the time of the message. *bbbbbbbb* is the date of the message. This message is provided for information only.

**FLM32102 INVALID MIGRATE MODE: X
SPECIFIED. VALID VALUES ARE C
(CONDITIONAL), U
(UNCONDITIONAL), OR F (FORCED).**

Explanation: The Migrate mode parameter on the FLMCMD service is not valid.

User Response: Verify that the proper number of parameters have been specified. Use one of the following values, and try again.

C	Conditional (default)
U	Unconditional
F	Forced

**FLM32201 UNABLE TO READ DIRECTORY FOR
DATA SET NAME: *aaa(44)* GROUP:
bbbbbbbb TYPE: *ccccccc* CODE: *ddd***

Explanation: An error occurred while attempting to read the directory of the data set *aaa(44)*.

Possible return codes are:

16	SCLM is unable to open the data set
20	An internal error occurred while attempting to read the data set directory.

User Response: Verify that the data set directory can be accessed by using the SCLM editor to browse the data set. If you cannot browse the data set, correct the problem and resubmit the job. Possible problems are that the data set is enqueued or the data set does not contain a valid directory.

**FLM32302 NO MEMBERS MATCHING
SELECTION CRITERIA**

Explanation: The migration utility did not attempt to migrate any members into SCLM control because there are no members that match the input parameters supplied for PROJECT, GROUP, TYPE, and MEMBER. SCLM could not find anything to migrate.

User Response: Verify that the PROJECT, GROUP, TYPE, and MEMBER parameters specified are correct. Verify that the information you expected to migrate is in the proper data set according to the parameters specified.

**FLM32303 NO MEMBERS MATCHING
SELECTION CRITERIA NEED
MIGRATION**

Explanation: The migration utility did not attempt to migrate any members into SCLM control because there are no members that are not under SCLM control that match the PROJECT, GROUP, TYPE, and MEMBER parameters. Members are considered under SCLM control if SCLM has accurate accounting information for them.

User Response: Verify that the members to be migrated are not already under SCLM control and that they match the PROJECT, GROUP, TYPE, and MEMBER parameters.

**FLM32304 WARNING, A NEW ACCOUNTING
RECORD WILL BE GENERATED FOR
MEMBER: aaaaaaaa GROUP: bbbbbbbb
TYPE: cccccccc BASED ON THE
ACCOUNTING RECORD AT GROUP:
dddddddd. CHANGES MAY NEED TO
BE MERGED BEFORE PROMOTING
THE MEMBER.**

Explanation: Migrate in forced mode will generate a new accounting record for the member aaaaaaaa at group bbbbbbbb and type cccccccc. The new accounting record will be based on this one. If the authorization code was changed by the migrate, ensure that any changes were merged with those at group dddddddd before promoting the member.

User Response: Check to see that any changes are merged before promoting the member.

**FLM32310 USER DEFINED DDNAME: aaaaaaaa
FOR MIGRATION MESSAGES IS NOT
ALLOCATED**

Explanation: The ddname specified for the migration messages was not allocated. If the migration function is invoked using the services, the ddname for the migration messages is optional. If not specified, the migration report is defaulted to the terminal. If the ddname is specified it must be allocated.

User Response: Verify that the user-supplied ddname for the migration messages is allocated. Resubmit the job.

**FLM32320 USER DEFINED DDNAME: aaaaaaaa
FOR MIGRATION LISTING IS NOT
ALLOCATED**

Explanation: The ddname specified for the migration listing was not allocated. If the migration function is invoked through the services, the ddname for the migration listing is optional. If not specified, the migration listing is defaulted to the terminal. If a ddname is specified it must be allocated.

User Response: Verify that the user-supplied ddname for migration listing is allocated. Resubmit the job.

FLM32401 MIGRATION UTILITY COMPLETED

Explanation: The migration utility finished processing.

User Response: See the accompanying messages that appear with this message on your screen for additional information regarding the status of this report.

FLM32501 INVOKING MIGRATION UTILITY

Explanation: This message is provided for information only.

FLM32502 INVOKING EXPORT UTILITY

Explanation: This message is provided for information only.

FLM32503 INVOKING IMPORT UTILITY

Explanation: This message is provided for information only.

FLM32504 INVOKING DELETE GROUP UTILITY

Explanation: This message is provided for information only.

**FLM35000 SNAPSHOT UTILITY INITIATED -
aaaaaaa ON bbbbbbbb**

Explanation: The RM Snapshot Utility was initiated successfully.

**FLM35001 USER DEFINED DDNAME: aaaaaaaa
FOR SNAPSHOT BATCH COMMAND
FILE NOT ALLOCATED**

Explanation: The ddname specified for the batch command file was not allocated to a data set.

User Response: Allocate the batch command file ddname to the userid.xxxxxxxx.CMDS data set (where

SCLM Messages

xxxxxxx correlates to the RM version and system naming conventions).

FLM35002 USER DEFINED DDNAME: *aaaaaaaa* FOR SNAPSHOT MESSAGES NOT ALLOCATED

Explanation: The ddname specified for the RM Snapshot Utility messages was not allocated to a data set.

User Response: Allocate the messages ddname to a data set with a record length of 80 characters, block size of 80 characters, and record format of fixed block.

FLM35003 ERROR RETRIEVING ACCOUNTING MEMBER NAMES FOR GROUP: *aaaaaaaa* TYPE: *bbbbbbbb*

Explanation: A VSAM error occurred retrieving the member name list for an SCLM type.

User Response: Verify integrity of the VSAM database.

FLM35004 ERROR RETRIEVING GROUP LIST FROM THE HIERARCHY

Explanation: An error occurred retrieving a list of primary groups from the hierarchy.

User Response: Verify that all groups are valid and are defined to the specified project.

FLM35005 BATCH DDNAME AND MESSAGE DDNAME MUST BE DIFFERENT

Explanation: The RM Snapshot Utility was invoked with the same ddname specified for both the batch command file and the messages file.

User Response: Specify different ddnames for the batch command file and the messages file.

FLM35006 SNAPSHOT *aaaaaaaa* FOR PROJECT: *bbbbbbbb* AND GROUP: *cccccccc* AT *ddddddd*, CODE: *eee*

Explanation: This message indicates the RM Snapshot Utility completion status. *aaaaaaaa* is the status field indicating if it completed successfully or not for the project *bbbbbbbb* and group *cccccccc*. The program return code is returned as *eeeeeee*.

User Response: If the return code is:

- 0 None
- 4 Look at the messages produced for further description of the warning condition.
- 8 Look at the messages produced for further description of the error condition.

12 Look at the messages produced for further description of the error condition.

>12 SCLM does not produce messages because it was unable to retrieve SCLM ID information.

FLM35007 APT SUBMODEL MAPPING TABLE CONTAINS NO VALID ENTRIES. PROCESSING HALTED

Explanation: The mapping table to map the SCLM types with the proper APT entity type is either empty or contains only invalid entries or comments.

User Response: Verify that the mapping table exists, is in the proper data set, and has at least one valid entry. Contact the project manager if you have additional questions.

FLM35008 WARNING FOR BUILD MAP: *aaaaaaaa* TYPE *bbbbbbbb* AT GROUP : *cccccccc* STATEMENT *ddddddd*, CODE *eee* BUILD MAP IGNORED.

Explanation: An error occurred processing Build Map *aaaaaaaa*, STATEMENT *ddddddd* with an error code *eeeeeee*. The error codes are:

- 1 Entry does not exist in the given SCLM type, or the SCLM type maps to an incorrect APT type.
- 2 SCLM types do not match (duplicate entries of the same APT type exist).
- 3 Multiple SINC Statements found in CC Build Map.
- 4 Multiple listing references exist in the Build Map (More than one keyword in the set of all OUTX and LIST keywords exist).
- 5 Multiple LOAD Statements found in LEC Build Map.
- 6 SCLM type in the Generic Build Map statement not found in the mapping table.
- 7 Build listing has already been referenced by another Build Map.
- 8 Object code has already been generated by another Build Map.
- 9 Output of Generic Build Map has already been generated by another Build Map.
- 10 Load module has already been referenced by another build map.

User Response: Verify the validity of the Build Map statement *ddddddd* based on the error code returned.

FLM35009 NO MEMBERS FOUND IN PROJECT:
 aaaaaaaaa STARTING AT GROUP:
 bbbbbbbb

Explanation: This is a warning message indicating that no members were found for project aaaaaaaaa starting at group bbbbbbbb.

User Response: Verify that no members exist for the project specified.

FLM35010 INPUT PARAMETER: aaaaaaaaa IS INVALID. VALID VALUES ARE LOAD, MERGE, OR DELETE.

Explanation: This message indicates that an invalid ACTION was specified when invoking the RM Snapshot Utility. The valid actions are LOAD, MERGE, or DELETE.

User Response: Invoke FLMCMD with either the default action (LOAD) or an explicit action of either LOAD, MERGE, or DELETE.

FLM35011 SCLM TYPE EXCEEDS 8 CHARACTERS IN LINE: aaa(72)

Explanation: This is a warning message indicating that a statement in the mapping table has an invalid SCLM type that exceeds eight characters. For a complete list of mapping table restrictions, see *ISPF Software Configuration and Library Manager (SCLM) Project Manager's Guide*

User Response: Contact the project manager to have the mapping table changed to adhere to the mapping table format rules.

Project Manager Response: Change the mapping table.

FLM35012 DUPLICATE SCLM TYPE: aaaaaaaaa FOUND IN MAPPING TABLE

Explanation: This error message informs the user that a duplicate SCLM type was found in the mapping table.

User Response: Contact the project manager to update the mapping table to remove the duplicate SCLM type.

Project Manager Response: Change the mapping table.

FLM35013 DUPLICATE BUILD MAP: aaaaaaaaa TYPE: bbbbbbbb LANGUAGE: cccccccc AT GROUP: dddddddd IGNORED

Explanation: Build Map aaaaaaaaa has been ignored because a duplicate Build Map with the same name aaaaaaaaa and the same APT type has already been processed by RM Snapshot Utility.

User Response: Verify that all Build Map members

that map to the same APT entity type are unique.

FLM35014 APT NAME: aaa(32) NOT SUPPORTED IN MAPPING TABLE

Explanation: The name aaa(32) specified as the APT entity is not supported in the mapping table.

User Response: Verify the APT name aaa(32) against the set of valid APT values listed in *ISPF Software Configuration and Library Manager (SCLM) Project Manager's Guide*

FLM35015 INVALID BUILD MAP LANGUAGE: aaaaaaaaa FOR BUILD MAP: bbbbbbbb

Explanation: The language on Build Map bbbbbbbb is invalid.

User Response: Verify that the Build Map language is one of the following: CCMAP, GLMAP, LECMAP, or HLMAP. If it is not, contact your customer support center.

FLM35016 WARNING FOR BUILD MAP: aaaaaaaaa TYPE: bbbbbbbb AT GROUP: cccccccc. REFERENCED BUILD MAP: dddddddd OF TYPE: eeeeeeee IGNORED.

Explanation: Build Map aaaaaaaaa has been ignored because it made a reference to Build Map dddddddd that was previously ignored by RM Snapshot Utility.

User Response: Verify that the Build Map being referenced by Build Map aaaaaaaaa is valid based on the RM Snapshot Utility assumptions and restrictions.

FLM35017 DUPLICATE MEMBER: aaaaaaaaa TYPE: bbbbbbbb IGNORED

Explanation: Member aaaaaaaaa has been ignored because a duplicate member with the same name aaaaaaaaa and the same APT type has already been processed by RM Snapshot Utility. If the member is a listing and is later referenced in a Build Map, the Build Map statement for the listing is ignored, but the remainder of the Build Map is supported.

User Response: Verify that all member names that map to the same APT entity type are unique.

FLM35018 ARCHITECTURE MEMBER FOR BUILD MAP: aaaaaaaaa TYPE: bbbbbbbb DOES NOT EXIST

Explanation: The architecture definition aaaaaaaaa for the Build Map referenced by RM Snapshot Utility was not found.

User Response: Verify that the archdef aaaaaaaaa that produced the Build Map still exists.

SCLM Messages

FLM35019 SCLM TYPE: aaaaaaaa IS MISSING AN APT NAME

Explanation: This is a warning message indicating that a statement in the mapping table has an invalid format. The SCLM type was not succeeded by an APT name. For more information about mapping table restrictions, see *ISPF Software Configuration and Library Manager (SCLM) Project Manager's Guide*

User Response: Contact the project manager to have the mapping table changed to adhere to the mapping table format rules.

Project Manager Response: Change the mapping table.

FLM35020 APT NAME EXCEEDS 32 CHARACTERS:
aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa

Explanation: This is a warning message indicating that a statement in the mapping table has an invalid APT name that exceeds 32 characters. For more information about mapping table restrictions and valid APT entity types, see *ISPF Software Configuration and Library Manager (SCLM) Project Manager's Guide*

User Response: Contact the project manager to have the mapping table changed to adhere to the mapping table format rules.

Project Manager Response: Change the mapping table.

FLM35021 INVALID CONSTRUCT NUMBER:
aaaaaaaa ENTERED ON SNAPSHOT SERVICE.

Explanation: A non-numeric or negative construct number was specified for the RM snapshot service.

User Response: Verify that the construct number is numeric.

FLM35022 ERROR ALLOCATING MAPPING TABLE DATA SET NAME.

Explanation: An error occurred allocating the ddname to the data set for the mapping table.

User Response: Verify that the mapping table data set specified is valid, and that the data set is specified in the SNAPMAP parameter on the FLMCNTRL macro.

FLM35298 SNAPSHOT BATCH COMMAND FILE WILL APPEAR IN aaa(36)(bbbbbbbb).

Explanation: The batch command file generated by the RM Snapshot Utility will appear in the data set aaa(36) as member name bbbbbbbb.

FLM35299 SNAPSHOT UTILITY COMPLETED - aaaaaaaa ON bbbbbbbb

Explanation: The RM Snapshot Utility completed.

FLM39002 VERSION / AUDIT RECORD NOT FOUND, CODE: aaa GROUP: bbbbbbbb TYPE: ccccccc MEMBER: dddddddd DATE: eeee TIME: ffff

Explanation: The audit record was either not found at the level specified on the SCLM Audit and Version Utility – Entry Panel or the VSAM record could not be retrieved. Possible return codes are:

- 8 Versioning record for member dddddddd could not be found.
- 12 VSAM record could not be properly decoded.
- 16 Invalid group specified on the SCLM Audit and Version Utility – Entry Panel.
- 20 I/O error reading the version data set.

User Response: For return code:

- 8 Verify that the member exists and is under SCLM control. If it is, contact the project administrator.
- 16 Specify a valid group on the SCLM Audit and Version Utility – Entry Panel.
- 20 Contact the project administrator.

Project Manager Response: For return code:

- 8 Verify that the user has the proper access authority for the versioning data set. Also verify that the proper versioning data set is being accessed by the project definition in use.
- 20 Run IDCAMS against the versioning data set to determine the problem.

FLM39003 VERSION / AUDIT RECORD NOT FOUND AT SPECIFIED LEVEL, CODE: aaa GROUP: bbbbbbbb TYPE: ccccccc MEMBER: dddddddd DATE: eeee TIME: ffff

Explanation: This is a warning message indicating that the audit record was not found at the level specified on the SCLM Audit and Version Utility – Entry Panel but was found at a higher level. Possible return codes are:

- 4 Record was found at higher level

FLM39010 ERROR UPDATING DIRECTORY INFORMATION FOR MEMBER: aaaaaaaa DATA SET NAME: bbb(44) CODE: ccc

Explanation: SCLM could not update the data set directory for this member in the version retrieve to data set.

Possible return codes are:

- 4 Unable to update the directory information of a data set allocated with RECFM=U.

- 8 Unable to get member name from the directory.
- 12 The file is not closed.
- 16 The file control block is NIL.
- 20-36 Indicates that an I/O error occurred.
- 24 This can also indicate that the target data set could not be accessed.

User Response: Contact the project administrator.

Project Manager Response: Contact IBM support.

FLM39011 MEMBER DOES NOT EXIST IN VERSION DATA SET, CODE: aaa GROUP: bbbbbbbb TYPE: cccccc MEMBER: dddddddd DATE: eeee TIME: ffff PDS: gggggggggg SYSTEM: hhhhhhhh

Explanation: The member dddddddd does not exist in the version gggggggggg data set. Code aaa will always be 8.

User Response: Contact the project manager.

Project Manager Response: Verify that the Version PDS file has not been restored independently. The Version VSAM file and the Version PDS file must stay in sync at all times. If the Version PDS has not been restored or altered through manual manipulation, then the file has been corrupted. Data has been lost.

FLM39012 ERROR RETRIEVING SELECTION LIST, CODE: aaa GROUP: bbbbbbbb TYPE: cccccc MEMBER: dddddddd DATE: eeee TIME: ffff

Explanation: An error occurred while attempting to create the versioning member selection list. Possible return codes are:

- 8 Logical error occurred while reading the audit database.
- 12 Physical I/O error occurred while reading the audit database.

User Response: Contact the project administrator.

Project Manager Response: Verify the integrity of the audit VSAM database. If problems with the database are discovered, reallocate the database using IDCAMS.

FLM39114 RECORD LENGTH OF THE VERSION RETRIEVAL DATA SET: aaa(44) INCOMPATIBLE WITH RECORD LENGTH OF SOURCE DATA SET: bbb(44)

Explanation: The retrieve to data set name specified on the SCLM AUDIT AND VERSION UTILITY - ENTRY PANEL has a logical record length that is smaller than the logical record length of the original

source data set of the member that was versioned. The retrieval is not allowed.

User Response: Contact the project manager.

Project Manager Response: Change the name of the retrieve to sequential data set to one that has an LRECL greater than or equal to the LRECL of the source data set, or allocate a data set that has an LRECL greater than or equal to the LRECL of the source data set.

FLM39200 ERROR RETRIEVING STATISTICS FOR DATA SET: aaa(44) CODE: bbb

Explanation: Error retrieving the attributes for the specified data set, aaa(44). Possible values for CODE bbb, are:

- 4 Error freeing data set
- 8 Error freeing DCB attributes list or getting directory block information
- 12 Could not obtain DCB attributes
- 16 Data set not found
- 20 Severe internal error.

User Response: Verify that data set exists and is cataloged.

FLM39203 ERROR RETRIEVING SYSTEM NAME FOR DDNAME: aaaaaaaa, CODE: bbb

Explanation: Cannot find ddname aaaaaaaa in system catalog. Possible values for CODE, bbb, are:

- 4 Ddname incorrect or not allocated for first temporary version file
- 8 Ddname incorrect or not allocated for second temporary version file
- 16 Ddname incorrect or not allocated for temporary new version file
- 20 Ddname incorrect or not allocated for temporary full source file
- 24 Ddname incorrect or not allocated for temporary delta file
- 1xx An LM service failed (called by FLMVSDSS). Contact IBM support.

User Response: Attempt the operation again. If the error persists, contact your project manager.

Project Manager Response: Verify that the user is allowed to allocate temporary data sets. This error could also be the result of DASD problems on the system.

SCLM Messages

FLM39218 MATCHING DATE NOT FOUND IN VERSION PDS

Explanation: A member with date/time specified on the version selection panel could not be found in the version data set. The version PDS is corrupt.

User Response: Contact the project manager.

Project Manager Response: Ensure that the version data set is protected by some data set security product. Verify that no one has edited the version data set. Contact IBM support.

FLM39219 1ST RECORD IN VERSION PDS IS NOT A HEADER/SEPARATOR RECORD

Explanation: The first record of the version data is not a header record.

User Response: Contact your project manager.

Project Manager Response: The version data has been altered. Ensure that other version data sets are protected by some data set security product.

FLM39220 ERROR in SUPERCU. CODE: *aaa*

Explanation: An error was received from SUPERCU. Possible values for CODE, *aaa*, are:

- | | |
|----|---|
| 16 | Error on temporary input data set |
| 24 | Error on temporary output data set |
| 26 | SVC 99 error |
| 28 | Output data set (ABEND E37) |
| 33 | Version data has been corrupted |
| 34 | Error hashing output file. It is likely that the version data has been tampered with. The integrity of the VERPDS data set is questionable. |
| | Error hashing output file |
| 48 | Insufficient storage to perform compare. |

User Response: Contact the project administrator.

Project Manager Response: If the above CODE does not help, contact IBM support.

FLM39222 INVALID LRECL, DSORG, OR RECFM FOR VERSION PDS

Explanation: The version data set has been incorrectly allocated.

User Response: Contact the project administrator.

Project Manager Response: Check that the version PDS exists. Make sure that the version PDS is allocated properly. For more information about versioning partitioned data sets, see *ISPF Software Configuration and*

Library Manager (SCLM) Project Manager's Guide

FLM39225 ERROR ALLOCATING AN OLD VERSION DATA SET CODE: *aaa*

Explanation: The member that contains the version does not exist or is corrupt in the version PDS. This can occur only if the version PDS has been corrupted manually. Possible values for CODE, *aaa*, are:

- | | |
|------|---|
| 8 | SVC 99 error |
| 24 | Data set organization is not PO |
| 28 | Member not found. |
| 32 | Versioning data set could not be opened. |
| >64 | SVC 99 error, reason code (decimal). |
| 528 | Requested data set unavailable. The data set is allocated to another job and its usage attributes conflict with this request. |
| 5896 | Data set does not exist. |

User Response: This message indicates that an error occurred while allocating a data set to be used by a translator.

If you receive a return code of 8, 32, or >64, you should try the operation again. If the problem recurs or you receive any other return codes, call the project manager.

Project Manager Response: Verify that the Version VSAM file or the version PDS has not been restored independently. They MUST stay in sync at all times. If one or the other has not been restored, then the file has been corrupted through manual manipulation. Data has been lost.

If the return code is :

- | | |
|-----|--|
| >64 | An error was received from SVC 99 during the allocation. The SVC 99 return code is specified in the message (<i>aaa</i>). Reference <i>MVS/ESA Programming: Authorized Assembler Service Guide</i> , for a description of the SVC 99 return codes. |
|-----|--|

FLM39226 ERROR ALLOCATING A TEMPORARY VERSION DATA SET CODE: *aaa*

Explanation: An error occurred while attempting to allocate a temporary data set.

Possible return codes are:

- | | |
|----|---|
| 4 | Data set name omitted from input. |
| 8 | SVC 99 error. See <i>OS/390 System Codes, GC28-1780</i> for complete information on the return codes. |
| 12 | SCLM internal error. Report this message (including the message ID and all text fields) to IBM support. |
| 16 | Missing or incorrect data set name. |

- 20 Invalid file attribute specified.
- 24 A member of a PDS was requested but the data set is not partitioned.
- 28 The requested member could not be found.
- 32 The requested member was not available.
- >64 SVC 99 error, reason code (decimal):
- 528 Requested data set unavailable. The data set is allocated to another job and its usage attributes conflict with this request.
- 5896 Data set does not exist.

User Response: Submit the job again. If the error recurs, contact the project administrator.

Project Manager Response: Verify that all data set names are correctly defined and exist. For additional assistance, contact IBM support.

FLM39228 ERROR ALLOCATING USER RETRIEVAL DATA SET CODE: *aaa*

Explanation: The data set that is to contain the retrieved version cannot be allocated. Possible values for CODE, *aaa*, are:

- 8 SVC 99 error.

User Response: Verify that the name is specified correctly on the SCLM AUDIT AND VERSION UTILITY - ENTRY PANEL under the heading **SCLM retrieve group and type** or **To other non-SCLM controlled retrieve data set**. If it is specified correctly verify that the data set is allocated and cataloged.

FLM39229 ERROR FREEING USER RETRIEVAL DATA SET CODE: *aaa*

Explanation: This indicates an operating system problem. While the data set was in use it became corrupted such that SVC 99 could not free it. While under exclusive control of SCLM Versioning, some other program gained access and renamed, erased, or otherwise defiled the retrieve to data set. Possible values for CODE, *aaa*, are:

- 8 SVC 99 error.

User Response: Contact the project administrator.

Project Manager Response: Call Operating system support.

FLM40501 NO TRANSLATOR INVOKED FOR LANGUAGE: *aaaaaaaa*

Explanation: No translator was invoked for language *aaaaaaaa*.

User Response: If a translation was expected, contact the project manager.

Project Manager Response: Examine the language definition to verify that a translation was expected for language *aaaaaaaa*. If the language contains translators, verify that at least one translator specifies the FUNCTN=BUILD parameter on the FLMTRNSL macro.

FLM40507 ERROR ALLOCATING DATA SET: *aaa(44)* FOR TRANSLATOR: *bbbbbbbb* DATA SET NUMBER: *ccc* CODE: *ddd*

Explanation: An error occurred while attempting to allocate data set *aaa(44)* for translator *bbbbbbbb*. The data set is being allocated for the data set number *ccc*. The data set number refers to the position of the FLMALLOC statement being used to allocate this data set. For example, if *ccc*=5, the error message is associated with the fifth FLMALLOC statement for this translator.

Possible problem:

- More than one IOTYPE=I might have been specified in the FLMALLOC list for a translator.

Possible return codes are:

- 8 SVC 99 error.
- 12 SCLM internal error. Report this message (including the message ID and all text fields) to IBM support.
- 16 Missing or incorrect data set name.
- 20 Invalid file attribute specified.
- 24 A member of a PDS was requested but the data set is not partitioned.
- 28 The requested member could not be found.
- 32 The requested member was not available.
- >64 SVC 99 error, reason code (decimal).
- 528 Requested data set unavailable. The data set is allocated to another job and its usage attributes conflict with this request.
- 5896 Data set does not exist.

User Response: This message indicates that an error occurred while allocating a data set to be used by a translator.

If you receive a return code of 8, 32, or >64, you should try the operation again. If the problem recurs or you receive any other return codes, call the project manager.

Project Manager Response: If the return code is :

- 8 Retry the operation. If the same problem occurs, contact IBM support. for advice.
- 12 SCLM internal error. Contact IBM support.

Note: For the next set of codes, you should know that the data set number corresponds to an FLMALLOC macro associated with the specified

SCLM Messages

translator (the first FLMALLOC is data set 1, the second is data set 2 and so on).

- 16 Check FLMALLOC to ensure that the data set name has been specified correctly.
- 20 Check FLMALLOC to ensure that all data set attributes have been specified correctly.
- 24 Check FLMALLOC to ensure that a sequential data set was not specified when a partitioned data set was expected.
- 28 Check FLMALLOC to ensure that the correct member name was specified.
- 32 See return code 8 for information.
- >64 An error was received from SVC 99 during the allocation. The SVC 99 return code is specified in the message (ddd). Reference *OS/390 System Codes*, GC281780 , for a description of the SVC 99 return codes.

FLM40510 ERROR ALLOCATING DATA SET:
aaa(44) FOR TRANSLATOR: bbb(16)
CODE: ccc

Explanation: An error occurred while attempting to allocate data set *aaa(44)* for translator *bbb(16)*. This data set should contain the translator to be invoked.

Possible return codes are:

- 8 SVC 99 error.
- 12 SCLM internal error. Report this message (including the message ID and all text fields) to IBM support.
- 16 Missing or incorrect data set name.
- 20 Invalid file attribute specified.
- 24 A member of a PDS was requested but the data set is not partitioned.
- 28 The requested member could not be found.
- 32 The requested member was not available.
- >64 SVC 99 error, reason code (decimal).
- 528 Requested data set unavailable. The data set is allocated to another job and its usage attributes conflict with this request.
- 5896 Data set does not exist.

User Response: Contact the project administrator.

Project Manager Response: Verify that data set *aaa(44)* exists and is cataloged.

FLM40516 MEMBER: aaaaaaaa TYPE: bbbbbbbb WAS UPDATED DURING THE BUILD

Explanation: The SCLM editor updated member *aaaaaaa* during build processing. SCLM does not save translator output because it might have been created from the previous version of the member.

User Response: Submit the job again.

FLM40517 DUPLICATE KEYREF=aaaaaaa NOT ALLOWED FOR TRANSLATOR OUTPUTS

Explanation: The translator invoked has two temporary output data sets, allocated with either IOTYPE=O or P, both targeted to the same output member (with the KEYREF parameter). The build processor cannot copy multiple output data sets produced by the translator to a single targeted member.

User Response: See the project administrator.

Project Manager Response: Verify in the language definition that no two FLMALLOC macro calls with either IOTYPE=O or P have the same KEYREF value for a single translator. Also verify in the language definition that two FLMTRNSL macros with the FLMTCOND macro and the same KEYREF values are not both executing in this particular situation.

FLM40519 NUMBER OF ALLOCATED DATA SETS FOR HIERARCHY SEARCH AS SPECIFIED IN DATA SET ccc FOR TRANSLATOR ddd(16) HAS BEEN EXCEEDED (aaa DATA SETS WERE ALLOCATED, MAXIMUM ALLOWED IS bbb)

Explanation: The number of data sets allocated for the translator hierarchy search has exceeded the maximum value for the system. This message is preceded with the call name of the translator in question. The ddname allocated for hierarchy search is specified by the FLMALLOC macro with IOTYPE=I.

User Response: For the translator in question, verify that all FLMALLOC macros with IOTYPE=I do not exceed the system limit for allocating data sets to a ddname. This error can be caused by the following:

- Defining too many groups for the project
- Using the extended type option (**Extend** field on the FLMTYPE macro)
- Specifying too many FLMCPYLBs for the ddname.

FLM41002 ERROR OCCURRED DURING INITIALIZATION

Explanation: An error occurred during the initialization phase of the build processor.

User Response: See the message data set for all the messages related to this error.

FLM42000 BUILD PROCESSOR INITIATED - aaaaaaaa ON bbbbbbbb

Explanation: The build process has started. This message is provided for information only.

FLM42004 INVALID INPUT PARAMETER

GROUP *aaaaaaaa*
 TYPE *bbbbbbbb*
 MEMBER *ccccccc*
 USER ID *ddddddd*
 BUILD MODE *e*
 BUILD SCOPE *f*
 ERROR LISTINGS ONLY *g*
 REPORT REQUEST *h*
 PREFIX USER ID *iii(17)*

Explanation: You specified an invalid input parameter to the build processor. The values of the parameters are listed. Only the first character is listed for build mode and build scope.

Valid values for build mode are CONDITIONAL, UNCONDITIONAL, REPORT, and FORCED. Valid values for build scope are LIMITED, NORMAL, SUBUNIT, and EXTENDED. Valid values for report request are Y and N.

If the build processor was invoked through the SCLM dialog panel, SCLM retrieves the user ID and prefix user ID input parameters from the ISPF shared and profile pools, respectively .

User Response: Verify that all input parameters are specified correctly and submit the job again. If the problem recurs, contact IBM support.

FLM42100 USER DEFINED DDNAME: *aaaaaaaa* FOR BUILD MESSAGE NOT ALLOCATED

Explanation: The ddname *aaaaaaaa*, which was specified for the build messages, was not allocated. If the build function is called through the SCLM services, the ddname for the build messages is optional. If not specified, the build messages are defaulted to the terminal. If a ddname is specified, it must be allocated.

User Response: Verify that the user-supplied ddname for build messages is allocated. Submit the job again.

FLM42104 USER DEFINED DDNAME&colon *aaaaaaaa* FOR BUILD REPORT NOT ALLOCATED

Explanation: The ddname *aaaaaaaa*, which was specified for the build report, was not allocated. If the build function is invoked through the SCLM services, the ddname for the build report is optional. If not specified, the build report is defaulted to the terminal. If a ddname is specified, it must be allocated.

User Response: Verify that the user-supplied ddname for build report is allocated. Submit the job again.

FLM42106 USER DEFINED DDNAME&colon *aaaaaaaa* FOR BUILD LISTING NOT ALLOCATED

Explanation: The ddname *aaaaaaaa*, which was specified for the build listing, was not allocated. If the build function is invoked through the SCLM services, the ddname for the build listing is optional. If not specified, the build listing is defaulted to the terminal. If the ddname is specified, it must be allocated.

User Response: Verify that the user-supplied ddname for build listing is allocated. Submit the job again.

FLM42108 USER DEFINED DDNAME: *aaaaaaaa* FOR USER EXIT DATA SET NOT ALLOCATED

Explanation: The ddname *aaaaaaaa*, which was specified for the user exit data set, was not allocated. If the build function is invoked through the SCLM services, the ddname for the user exit data set must be specified if a user exit routine has been specified. Otherwise the ddname is optional. If not specified, a user exit data set is allocated to NULLFILE. If a ddname is specified, it must be allocated.

User Response: Verify that the user-supplied ddname for user exit file is allocated. Submit the job again.

FLM42109 NO DDNAME SPECIFIED FOR USER EXIT FILE

Explanation: A ddname was not specified to the build function for the user exit file but the project definition specifies a build user exit. (See the BLDEXT1 parameter on the FLMCNTRL macro).

User Response: Include the ddname to be used for the user exit file on the FLMCMD or FLMLNK call to invoke build.

Project Manager Response: Remove the build user exit from the project definition if it is not needed.

FLM43001 ERROR RETRIEVING ACCOUNTING INFORMATION

CODE: *aaa* GROUP: *bbbbbbb*
 TYPE: *ccccccc* MEMBER: *ddddddd*
 (REFERENCED BY
 MEMBER: *eeeeeee* TYPE: *ffffff*)

Explanation: No accounting information exists or could be retrieved for member *ddddddd*. Member *eeeeeee* is either an architecture definition or a compilable source member. Member *ddddddd* could have been referenced directly in an architecture definition statement or via a parsed dependency such as an include, compool, or compilation unit.

Member *ddddddd* cannot be referenced directly by member *eeeeeee*. For example, member *ddddddd* might

SCLM Messages

be included by a member that is referenced with a SINC statement in member *eeeeeeee*.

Possible return codes are:

- | | |
|----|---|
| 8 | The accounting information for the specified member could not be found. |
| 12 | The accounting information for the specified member is out of date. |
| 16 | The group is not defined in the project definition being used. |
| 20 | A severe VSAM I/O error occurred. |
| 24 | An internal SCLM error occurred. |
| 28 | The type is not defined by the project definition being used. |

Possible problems:

- Member *dddddddd* has not been registered with SCLM. Use the SCLM Library Utility to verify that an accounting record exists for the member.
- Member *dddddddd* was excluded at the build group because of change code processing and the member could not be found at a higher group.
- Member was moved to another type after a previous successful build.
- If member *dddddddd* is a build output, the scope of the current build does not encompass the creation of the output. It should be added to the architecture definition you are building or it should be created with another build before attempting the current build again. This type of problem is likely to occur when the LINK architecture definition statement is used or when include and compool dependencies are used to reference build outputs.
- The accounting information for member *eeeeeeee* might not be accurate. This problem can be caused by making changes to SCLM data sets outside the SCLM environment. Alternatively, FLMSYSLB macros could have been added or removed from the project definition since the source members being built were last parsed or migrated.

User Response:

- If the accounting information is not accurate for a single member, use the SCLM Editor or Migrate Utility to correct the problem. If FLMSYSLBs have been changed, draw down and migrate all of the members that are affected.
- If member *dddddddd* is a build output, build the member that creates it before submitting this job again.

If the return code is:

- | | |
|---|--|
| 8 | Register both the specified member and the referencing source member with SCLM using the &sclm editor, SAVE service, or migration utility. Submit the job again. |
|---|--|

If member *dddddddd* was excluded based on change code, update the change codes specified so that the required member will be included in the build.

- | | |
|----|--|
| 12 | Register the specified member with SCLM using the SCLM editor, SAVE service, or migration utility. Submit the job again. |
|----|--|

Project Manager Response: If the return code is:

- | | |
|----|--|
| 16 | Verify that the specified group is defined in the project definition. If necessary, add the group to the project definition and reassemble it. Submit the job again. |
| 20 | A VSAM error occurred. Run IDCAMS against the accounting data set to determine the problem. |
| 24 | Contact IBM support. |
| 28 | Verify that the type specified is defined in the project definition. If necessary, add the type to the project definition and reassemble it. Submit the job again. |

FLM43002	Error retrieving member: <i>aaaaaaaa</i> Type: <i>bbbbbbbb</i>
-----------------	--

Explanation: Member *aaaaaaaa* in type *bbbbbbbb* could not be allocated.

User Response: Verify that the member exists and that the data set is not allocated exclusively to another job.

FLM43003	Error processing Member: <i>aaaaaaaa</i> Type: <i>bbbbbbbb</i>
-----------------	--

Explanation: An error was encountered when processing member *aaaaaaaa* in type *bbbbbbbb*. The member contains an invalid statement. Message FLM44201 is issued to indicate the invalid statement.

User Response: Refer to the actions associated with message FLM44201.

FLM43004	Copy loop detected member: <i>aaaaaaaa</i> Type: <i>bbbbbbbb</i>
-----------------	--

Explanation: The architecture member *aaaaaaaa* in type *bbbbbbbb* is involved in a recursive copy loop. Message FLM43005 will be issued for all members involved in the loop.

User Response: Remove one or more of the COPY statements in the listed architecture members to eliminate the recursive copy loop.

FLM43005	Referenced by member: <i>aaaaaaaa</i> Type: <i>bbbbbbbb</i>
-----------------	---

Explanation: The member *aaaaaaaa* in type *bbbbbbbb* referenced another architecture member that was in error.

User Response: Refer to the other messages to determine the cause of the error.

FLM43007 LANGUAGE SCOPE: *a* FOR MEMBER: *bbbbbbbbb* TYPE: *ccccccc* CONFLICTS WITH BUILD SCOPE SPECIFIED

Explanation: The scope *a* specified in project definition for member *bbbbbbbbb* is of greater range than the scope specified on the Build panel. The first letter of the scope defined in the project definition is listed.

User Response: You can specify the following four scopes (in ascending order): LIMITED, NORMAL, SUBUNIT, and EXTENDED. Verify that the range specified as input to the build processor is of equal or greater range than the scope specified in the project definition for the language of the source member being built.

FLM43008 ERROR PROCESSING DEPENDENCIES FOR MEMBER: *aaaaaaaa* TYPE: *bbbbbbbbb*

Explanation: Errors occurred while processing the dependencies for the specified member. Other messages preceding this one in the message data set provide more detail on the exact errors that occurred.

User Response: See the message data set for all the messages related to this error.

FLM43109 NO ACCOUNTING INFORMATION EXISTS FOR COMPILATION UNIT (CU):

CU NAME: *aaa.(55) bbb.(55)* **CU TYPE:** *cccc* **CU QUALIFIER:** *dddddddd*
(ACCOUNTING INFORMATION EXISTS FOR INTERMEDIATE FORM)

Explanation: Accounting information does not exist for the compilation unit; however, accounting information does exist for the associated intermediate form.

This error can be caused when you delete a source member (using the library utility) but forget to delete the intermediate forms produced by the compiler for those compilation units contained in the deleted source member.

User Response: Delete the intermediate form from all groups in the hierarchy used in the build, then resubmit the build.

FLM43111 SPECIFICATION MISSING FOR COMPILATION UNIT:

CU NAME: *aaa(55) bbb(55)*
CU TYPE: *cccc*
CU QUALIFIER: *dddddddd*

Explanation: The specified compilation unit has a dependency on an implicit specification. Implicit specifications are not allowed. For more information on implicit specifications, see the description of the IMPSPEC parameter on the FLMLANGL macro.

User Response: Create a specification for the compilation unit.

Project Manager Response: Depending on the compiler being used, the IMPSPEC parameter of the FLMLANGL macro for the language might need to be set differently. If IMPSPEC is changed, correct and reassemble the project definition. Submit the job again.

FLM43119 VERIFICATION ERROR OCCURRED FOR COMPILATION UNIT

CU NAME: *aaa(55) bbb(55)*
CU TYPE: *cccc*
CU QUALIFIER: *dddddddd*

Explanation: Accounting information for compilation unit *aaa(55) bbb(55)* does not match accounting information for the member that contains the source for the compilation unit. The member that contains the source for the compilation unit is indicated in a succeeding message in the message data set.

User Response: Register the member with SCLM by using the SCLM editor, the SAVE service, or the migration utility. Submit the job again.

FLM43120 ERROR PROCESSING DEPENDENCIES FOR COMPILATION UNIT:

CU NAME: *aaa(55) bbb(55)*
CU TYPE: *cccc*
CU QUALIFIER: *dddddddd*

Explanation: Errors occurred while processing the dependencies for compilation unit *aaa(55) bbb(55)*.

User Response: See the message data set for messages related to this error.

FLM44005 ERROR - A CIRCULAR DEPENDENCY EXISTS IN THE CURRENT BUILD TRACE BACK OF DEPENDENCIES: MEMBER *aaaaaaaa* TYPE *bbbbbbbbb*

Explanation: A circular set of dependencies exists in the scope of the current build. SCLM cannot complete the build because of the circular dependencies. The message contains a list of members and types containing the circular dependency.

User Response: Examine the list of specified members and remove the circular dependency.

SCLM Messages

FLM44009 ERROR CHECKING FOR CIRCULAR DEPENDENCIES

Explanation: This is an SCLM internal error checking for circular dependencies.

User Response: Notify project manager.

Project Manager Response: Contact IBM support.

FLM44031 WARNING, INTERMEDIATES NOT GENERATED FOR COMPILE UNITS REFERENCED BY MEMBER: *aaaaaaaa* TYPE: *bbbbbbbb* LANGUAGE: *ccccccc*

Explanation: The member being built contains the source for compilation units but no build translator is defined for the language being used to build the member. No intermediate members will be generated for the compilation units contained in the source. A build map will be created for the member and the build will continue, but no outputs are generated.

The member name will be an architecture definition if the source members are being included by SINC statements; otherwise, the member name will be the source member. If the member name is an architecture definition then the language is the language of the source member that is being used for the build. If the member name is a source member, the language is the language of that source member.

User Response: Verify whether or not intermediates should be generated for this build. If intermediates are to be generated either change the language of the source members to a language with a build translator or inform the project manager.

Project Manager Response: If intermediates are to be produced for the language then add a build translator to the language definition for the project.

FLM44032 WARNING, "COMP" KEYWORD NOT SPECIFIED FOR MEMBER: *aaaaaaaa* TYPE: *bbbbbbbb*

Explanation: The message is a warning indicating that you have not specified a COMP keyword for a JOVIAL compool. This missing keyword (COMP) will result in the data dictionary not being updated for the compool.

User Response: Verify that the translator to be invoked for the member contains an FLMALLO macro with IOTYPE=O and KEYREF=COMP. If the specified member is an architecture member, add a COMP keyword.

FLM44035 FLMALLO MACRO WITH KEYREF=*aaaaaaaa* DOES NOT EXIST FOR LANGUAGE *bbbbbbbb*

Explanation: The language definition for language *bbbbbbbb* does not contain an FLMALLO macro with

KEYREF *aaaaaaaa*. An architecture member contains the keyword *aaaaaaaa* and controls invocation of the translators for the language *bbbbbbbb*.

User Response: Verify that an FLMALLO macro with a KEYREF=*aaaaaaaa* parameter exists for the language; otherwise, remove the keyword from the architecture member.

FLM44036 THE *aaaaaaaa* KEYWORD WAS SPECIFIED FOR MEMBER: *bbbbbbbb* TYPE: *ccccccc* BUT THERE WAS NO FLMALLO MACRO WITH A MATCHING KEYREF FOR LANGUAGE *ddddddd*.

Explanation: This is an informational message. This message is issued if there is a CREF or SREF in the archdef or a DFLTCRF or DFLTSRF on the FLMLANGL but no FLMALLO referencing the CREF or SREF.

FLM44039 MULTIPLE "SINC" KEYWORDS MUST REFERENCE THE SAME TYPE SINCE COMPILE UNIT DEPENDENCIES ARE PRESENT

Explanation: Multiple SINC statements with different types were specified in the architecture member in which compilation dependencies existed for the members specified on the SINC statement. SCLM requires that all source members referenced with the SINC keyword reside in the same type if any of the members contain compilation units. The message that appears after this message identifies the architecture member in question.

User Response: If you specify multiple source inputs with the SINC keyword, verify that they reside in the same type.

FLM44050 ERROR, TYPE: *aaaaaaaa* MEMBER: *bbbbbbbb* EXCEEDS MAXIMUM INPUT LINES VALUE: *ccc*, CURRENT STATEMENT COUNT: *ddd*

Explanation: This message identifies that a single member exceeds the SLOCLMT value specified in the FLMLANGL macro. This member cannot be placed on any Input List for this language.

User Response: Modify the contents of the specified member to place it within the limits of the SLOCLMT or contact the project manager.

Project Manager Response: Modify the SLOCLMT value of the FLMLANGL macro in the project definition.

FLM44101 **ARCHITECTURE MEMBER: aaaaaaaa**
TYPE: bbbbbbbb NOT FOUND WITHIN
SCOPE OF ARCHITECTURE
DEFINITION BEING BUILT

Explanation: Member *aaaaaaa* is being referenced during the build; however, it was not predefined by build to be within the scope of processing. This error can occur if, for example, during the building of a system, a subsystem of that system is rebuilt by another build or promoted into the hierarchy (perhaps by another user).

The rebuilding of the subsystem can increase the scope of the build for the system. The building of the system might have proceeded too far to identify any more members within the scope.

User Response: Verify that no other builds or promotes are occurring within your hierarchy and submit the job again. as per RF comment 64505.

FLM44201 **INVALID ARCHITECTURE**
STATEMENT: aaa(80)

Explanation: The statment *aaa(80)* is not a valid architecture statement. Refer to message FLM43003 to determine the name of the architecture member containing the invalid statement.

Either an undefined keyword was found in the specified architecture member or there is a field missing on an architecture definition statement in the specified architecture member. For example:

SINC MEMBER

is incorrect because the TYPE field is missing from the statement.

SINCX MEMBER TYPE

is incorrect because SINCX is not a valid architecture definition statement.

SINC VERYLONGNAME SOURCE

is invalid because the member name is longer than 8 characters.

Correct the contents of the architecture member, and submit the job again.

User Response: Correct the invalid architecture statement.

FLM44202 **ARCHITECTURE MEMBER: aaaaaaaa**
TYPE: bbbbbbbb ALL CCODE
STATEMENTS MUST CONTAIN THE
SAME INCLUDE FLAG VALUE

Explanation: Member *aaaaaaa* in type *bbbbbbb* contains CCODE statements with conflicting include flag values. All of the change codes specified within an

architecture definition must have the same include flag value.

User Response: Update the CCODE statements in the architecture definition so that all of the change codes are either included (INCLUDE or default include flag) or excluded (EXCLUDE include flag).

FLM44203 **MEMBER: aaaaaaaa TYPE: bbbbbbbb IS**
INCORRECTLY REFERENCED BY
MEMBER: cccccc TYPE: dddddddd

Explanation: An incorrect dependency exists when this reference occurs. This error occurs when an LEC architecture member references a member that does not produce an output that matches the KREF keyword value. If no KREF was coded, the default KREF keyword values are OBJ and LOAD. Processing of member *cccccc* cannot continue.

User Response: Verify that member *aaaaaaa* in type *bbbbbbb* produces an output that matches the coded KREF keyword, or the default KREF keywords object or load. If the default KREF value is used, an object module must be identified by the OBJ keyword. A load module must be identified by the LOAD keyword. Other outputs must be identified by the output keyword coded for the KREF keyword.

FLM44204 **MEMBER: aaaaaaaa TYPE: bbbbbbbb**
CONTAINS MULTIPLE cccccc
ARCHITECTURE DEFINITION
KEYWORDS

Explanation: Multiple architecture definition keywords have been used in the architecture definition referenced. The following keywords cannot be used more than once in an architecture definition: OUT1, OUT2, OUT3, OUT4, OUT5, OUT6, OUT7, OUT8, OUT9, LOAD, LMAP, LIST, OBJ, COMPOOL, CREF, SREF, and LKED.

User Response: Examine the member *aaaaaaa* in type *bbbbbbb* and remove the extraneous architecture definition keywords referenced.

FLM44205 **ARCHITECTURE MEMBER: aaaaaaaa**
TYPE: bbbbbbbb REFERENCES MEMBER:
ccccc TYPE: dddddddd WITH
KEYWORD: eeeeeee, USE: fffffff
INSTEAD

Explanation: Member *ccccc* is referenced with the wrong architecture definition keyword. The architecture definition keyword INCL can only be used to reference a member that contains an architecture definition. The language of that architecture definition must be defined with the ARCH=Y parameter on the FLMLANGL macro. The referenced architecture definition must contain valid architecture definition keywords.

The architecture definition keyword INCLD can only be used to reference source members that can be built by

SCLM Messages

SCLM. The language of the member referenced with architecture definition keyword INCLD must be defined with the ARCH=N parameter on the FLMLANGL macro.

User Response: Verify that the correct language is assigned to member cccccccc. If the language is correct, change member aaaaaaaaaa to reference member cccccccc with keyword ffffffff. If changing the keyword will not produce the desired result, contact the project manager.

Project Manager Response: Verify that the ARCH parm on the language definition for the language assigned to member cccccccc is correct. Refer to the description of the ARCH parameter on the FLMLANGL macro in *ISPF Software Configuration and Library Manager (SCLM) Referenc* for more information.

**FLM44206 ARCHITECTURE MEMBER: aaaaaaaaaa
TYPE: bbbbbbbb MUST NOT CONTAIN
BOTH SINC AND LOAD KEYWORDS**

Explanation: Architecture member aaaaaaaaaa contains both a SINC and a LOAD keyword. These keywords are incompatible.

User Response: If the purpose of the architecture definition is to create a load module the SINC keyword should probably be replaced with an INCLD keyword. If the member referenced by the SINC keyword is correct, the LOAD keyword must be changed to a different output keyword (such as OBJ or OUTx). See *ISPF Software Configuration and Library Manager (SCLM) Developer's Guide* for more information on architecture definition keyword usage.

Project Manager Response: If the compile and linkedit translators are controlled by the same language, use one of the OUTx keywords in place of the LOAD keyword. Change the KEYREF=LOAD parameter on one of the FLMALLOC macros in the language definition to accomplish this. For more information on the FLMALLOC macro see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

**FLM44207 NO KEYWORD: aaaaaaaaaa SPECIFIED
FOR ARCHITECTURE MEMBER:
bbbbbbbb TYPE: cccccccc BUT
ALLOCATION FOR TRANSLATOR:
ddd(16) DATASET: eee SPECIFIES
KEYREF=ffffff**

Explanation: The language definition being used for the build of member bbbbbbbb in type cccccccc contains an allocation referencing the ffffffff keyword but member bbbbbbbb does not contain that keyword.

User Response: Take one of the following actions:

- Add the aaaaaaaaaa keyword to the bbbbbbbb member.
- Change the language being used to build the member to one that does not require the aaaaaaaaaa keyword.

- Contact the project manager to remove the reference to the ffffffff keyword from the language definition.

Project Manager Response: Update the FLMALLOC macro referred to in the message to remove KEYREF=ffffff or have the user perform one of the actions described under **User Response**.

**FLM44208 ARCHITECTURE MEMBER: aaaaaaaaaa
TYPE: bbbbbbbb MUST NOT CONTAIN
BOTH CCODE AND COPY
KEYWORDS**

Explanation: Architecture definition aaaaaaaaaa in type bbbbbbbb contains both CCODE and COPY statements. An architecture definition cannot contain both.

User Response: Create a new architecture definition to contain the CCODE statement and an include (INCL) of the architecture definition to contain the COPY statement.

**FLM44231 INVALID REFERENCE TO LOAD
MODULE: aaaaaaaaaa TYPE: bbbbbbbb**

Explanation: The load module referenced with the LINK keyword is a member that can be edited.

User Response: For the architecture member that contains the error, verify that the LINK keyword specifies a load module and not the architecture member that creates the link load module.

**FLM44240 ERROR: TWO BUILD MAPS ARE
PRODUCING TYPE: aaaaaaaaaa MEMBER:
bbbbbbb BUILD MAP 1 TYPE: cccccccc
MEMBER: dddddddd KEYWORD: eeeee
BUILD MAP 2 TYPE: fffffff MEMBER:
gggggggg KEYWORD: hhhhhh**

Explanation: Member bbbbbbbb is referenced as an output of two different build maps within the scope of the Build or by two different output keywords from the same build map. This condition will cause the output of one of the build maps to be overwritten by the output of the other build map. If one of the build maps is for a source member, member bbbbbbbb is defined as a default output in the language definition for the source member.

User Response: If either dddddddd or gggggggg is an architecture definition, change the reference to member bbbbbbbb to resolve the conflict. The reference to member bbbbbbbb might be in a member that is copied into the architecture definition.

If both dddddddd and gggggggg are source members, consider the following actions:

1. Verify that the correct language was specified for both source members.
2. Change the name of one of the source members.
3. Contact your project manager.

Project Manager Response: Use one of the following

techniques to resolve conflicting outputs within language definitions:

1. Remove the DFLTTYP=aaaaaaa parameter from an FLMALLOc macro in one of the language definitions to prevent the output from being created by Build. If this is done, SCLM will no longer create output for type aaaaaaaa when members of this language are built.
2. Change the DFLTTYP=aaaaaaa parameter to point to a different type. If dddddddd and gggggggg have the same language, consider using a pattern in the DFLTTYP parameter. See *ISPF Software Configuration and Library Manager (SCLM) Referenc* for a description of the DFLTYP parameter.
3. Create a new language definition that takes one of the actions listed above. Change the name of the language. Rebuild the project definition. Instruct the user to change the language of one of the source members.

FLM44241 ERROR: TWO ARCHITECTURES ARE PRODUCING THE INTERMEDIATE FORM OF: CU NAME: aaa(55) bbb(55) CU TYPE: cccc CU QUALIFIER: dddddddd ARCHITECTURE #1 TYPE: eeeeeeee MEMBER: fffffff ARCHITECTURE #2 TYPE: gggggggg MEMBER: hhhhhhhh

Explanation: The intermediate form of compilation unit aaa(55) bbb(55) is an output of two different architecture definitions within the scope of the build. This condition will cause the output of one of the architecture definitions to be overwritten by the output of the other architecture definition.

This problem is generally caused when the source member that contains compilation unit aaa(55) bbb(55) is referenced with a SINC in one architecture definition and a SINC or an INCLD in another architecture definition. The problem could also occur if the source member is referenced as an include by one of the source members referenced with a SINC in an architecture definition.

User Response: Remove one of the references to the source member that contains compilation unit aaa(55) bbb(55).

FLM44280 NO INPUT SPECIFIED IN ARCHITECTURE MEMBER: aaaaaaaa TYPE: bbbbbbbb

Explanation: The architecture definition aaaaaaaa in type bbbbbbbb was identified as an LEC or CC archdef but does not contain a keyword to identify the inputs.

User Response: Modify the architecture definition to contain input keywords such as INCL, INCLD, SINC, etc. and submit the job again.

FLM44281 INVALID KEYWORD FOR ARCHITECTURE MEMBER: aaaaaaaa TYPE: bbbbbbbb KEYWORD: ccccccc

Explanation: The architecture definition aaaaaaaa in type bbbbbbbb contains the invalid keyword ccccccc.

User Response: Modify the architecture definition to correct or remove the invalid keyword. Refer to *ISPF Software Configuration and Library Manager (SCLM) Developer's Guide* for a list of valid keywords for HL, LEC, CC and generic architecture members. Run the job again.

FLM44304 COMPOOL DEPENDENCY TYPE WAS NOT SPECIFIED FOR MEMBER: aaaaaaaa TYPE: bbbbbbbb

Explanation: Build processor could not find the CREF type for member aaaaaaaa

User Response: If the member is an architecture member then verify that a CREF keyword exists. If the member is source, verify that the language definition (FLMLANGL macro) specifies the DFLTCRF parameter.

FLM44306 ERROR RETRIEVING ACCOUNTING INFORMATION

CODE: aaa GROUP: bbbbbbbb TYPE: ccccccc COMPOOL: dddddddd

Explanation: No accounting information exists or could be retrieved for the specified member within the hierarchy beginning in group bbbbbbbb. The member in question is a compool reference where type is defined either by the CREF keyword in an architecture member or the DFLTCRF parameter (FLMLANGL macro) in the language definition.

User Response: Possible return codes are:

- 8 The member's accounting information was not found. Build the member that creates the specified compool.
- 12 The format of the member's accounting information was incorrect. Delete the accounting information for the specified compool and build the member that creates the compool to regenerate the accounting information.

Project Manager Response: If the return code is:

- 16 Verify that the specified group is in the project definition. If not, add it. Correct and reassemble the project definition.
- 20 A VSAM error occurred. Run IDCAMS against the accounting data set to determine the problem.

SCLM Messages

FLM44307 ERROR REFERENCING COMPOOL:
aaaaaaaa TYPE: bbbbbbbb

Explanation: The referenced compool is a member that can be edited. It must be a member that was created by the build function.

User Response: Delete the compool from the hierarchy. Rebuild the member that created the compool member. Submit the job again.

FLM44309 MEMBER: aaaaaaaaa TYPE: bbbbbbbb WAS FOUND AT GROUP: cccccc BUT IS BEING CROSS REFERENCED AT GROUP: dddddd

Explanation: A reference was made to a compilation unit contained in member *aaaaaaaa* in type *bbbbbbb* at group *ddddddd*. However, a more current version of the member exists at group *ccccc*. The member at group *ccccc* does not contain the compilation unit nor does any other member in the hierarchy below group *ddddddd*. This problem can occur when the language of member *aaaaaaaa* is changed to one that has no compilation units or uses a different Ada sublibrary qualifier. Use the sublibrary utility to purge the intermediate form. Check error messages for additional information. If the intermediate form is deleted outside of SCLM control, use the sublibrary utility to delete accounting information for the intermediate form.

User Response: Change the language of member *aaaaaaaa* if appropriate. Add a new member with the compilation units contained in member *aaaaaaaa* at group *ddddddd*. Remove the references to the compilation units in member *aaaaaaaa* at group *ddddddd*.

FLM44311 ERROR PROCESSING COMPILATION UNITS FOR MEMBER: aaaaaaa TYPE: bbbbbbb

Explanation: An error occurred during processing of the compilation units for the specified member. Other messages are generated that describe the exact errors that occurred.

User Response: See the message data set for all the messages related to this error.

FLM44315 PURGE ROUTINE FOR INTERMEDIATE FORM IS BEING INVOKED

CU NAME: *aaa.(55) bbb.(55)* **CU TYPE:** *cccc* **CU QUALIFIER:** *ddddddd*
OLD RECORD - TYPE: *eeeeeee*
MEMBER: *ffffff* **LANG:** *gggggggg*
NEW RECORD - TYPE: *hhhhhhh*
MEMBER: *iiiiiii* **LANG:** *jjjjjjj*

Explanation: The intermediate form is no longer valid. It was previously created by another source member, or the language of the source member was changed. A routine is being invoked to purge the intermediate form. This message is provided for information only.

FLM44319 UNABLE TO PURGE INTERMEDIATE FORM

CODE: *aaaa*

Explanation: The purge of the intermediate form was not successful.

User Response: Submit the job again. If the error recurs, contact the project administrator.

Project Manager Response: Verify that the sublibrary containing the intermediate form is not corrupted.

FLM44320 ERROR, ACCOUNTING RECORD DATA CHANGED DURING CURRENT BUILD FOR TYPE: aaaaaaa MEMBER: bbbbbbb

Explanation: During the course of the build a user modified the source for member *aaaaaaaa* and type *bbbbbbb* outside of SCLM. The SCLM accounting information did not match the new member.

User Response: Use the SCLM editor to create valid accounting information and restart the specified build. SCLM will continue where it left off.

FLM44321 ERROR, NEW UPWARD DEPENDENCIES FOUND THAT ARE NOT IN THE CURRENT BUILD FOR TYPE: aaaaaaa MEMBER: bbbbbbb

Explanation: A user has modified member *bbbbbbb* during the build process. SCLM has attempted to allow the build to continue, but has identified new dependencies that are outside the scope of the current build.

User Response: Restart the specified build, and SCLM will continue the build process where it left off.

FLM44322 WARNING, TYPE: aaaaaaa MEMBER: bbbbbbb WAS MODIFIED DURING THE CURRENT BUILD

Explanation: The user has modified member *bbbbbbb* during the build. However, the user modification did not affect the current build process. This message is provided for information only.

FLM44323 WARNING, MEMBER: aaaaaaaa IS SEPARATE DEPENDENCY THAT IS NOT IN THE CURRENT BUILD

Explanation: A user has modified member aaaaaaaa during the build process. SCLM has attempted to allow the build to continue but has identified new dependencies that are outside the scope of the current build.

User Response: Restart the specified build, and SCLM will continue the build process where it left off.

FLM44324 ERROR PROCESSING DYNAMIC INCLUDE GROUP: aaaaaaaa TYPE:bbbbbbbb MEMBER:cccccccc.

Explanation: A build translator returned member ccccccc in type bbbbbbbb as a dynamic include dependency for the member being built. This member could not be found in the project hierarchy when searching up the hierarchy from the group aaaaaaaa.

User Response: Determine if a statement in the source is causing the include dependency to be generated. If it is and the statement is incorrect then update the statement. If all of the source statements are correct then contact the project manager.

Project Manager Response: Check the build translator which is returning the list of dynamic includes to ensure that it only returns include names for members which exist in the hierarchy. Dynamic includes can be returned by build translators with @@FLMINC in the translator's options.

FLM44500 >> INVOKING aaaaaaaa TRANSLATOR(S) FOR TYPE: bbbbbbbb MEMBER: ccccccc

Explanation: The aaaaaaaa translators (where aaaaaaaa can be BUILD, COPY, PARSE, PURGE, or VERIFY) are being invoked for member ccccccc. This member can be either a source member or an architecture member. This message is provided for information only.

FLM44501 REPORT: INVOKING aaaaaaaa TRANSLATOR(S) FOR TYPE: bbbbbbbb MEMBER: ccccccc

Explanation: The translators aaaaaaaa would be invoked for member ccccccc if the build mode were not report-only.

FLM44502 >> INVOKING aaaaaaaa TRANSLATOR(S) FOR INPUT LIST LANGUAGE: bbbbbbbb.

Explanation: Translators are being invoked for input list language bbbbbbbb. The members of the input list will be specified by further messages. This message is provided for information only.

FLM44503 >> INVOKING aaaaaaaa TRANSLATOR(S) FOR LANGUAGE: bbbbbbbb

Explanation: The aaaaaaaa translators are being invoked for data related to members with language bbbbbbbb. This message is provided for information only.

FLM44504 ERROR PRINTING TO BUILD LISTING DATA SET FOR DATA SET NUMBER aa IN TRANSLATOR: bbb(16) CODE: ccc

Explanation: An error occurred during the printing of a translator data set to the build listing data set. The file number identifies the relative position of the FLMALLOC macro used to allocate the data set for that translator.

Note: Only data sets allocated with IOTYPE=O, W, and S can be printed to the build listing data set.

User Response: Contact the project administrator.

Project Manager Response: If the return code is:

- 12** The ddnames are not allocated properly. Verify that the build listing data set and the translator data set are allocated. The problem can be caused by conflicting attributes between the two data sets.
- 16** The build listing data set is full. Reallocate the data set with more storage.
- 20** Data access failed or SCLM did not find the input member. Verify that the type of access is allowed. Verify that the translator data set still exists after all translator steps in the language definition have been completed. A user-created translator might have purposely deallocated the data set.

ABEND

An ABEND can occur during the printing if the translator data set is allocated smaller than the total space required to hold all listings for the build, or allocated with PRINT=Y on the FLMALLOC macro and the data set is never opened by the translator. In such cases, specify PRINT=I on the FLMALLOC macro. This attribute forces the data set to be opened before the translator is invoked, and the data set will be targeted for printing to the build listing data set.

FLM44505 >> INVOKING aaaaaaaa TRANSLATOR(S) FOR TYPE: bbbbbbbb

Explanation: The aaaaaaaa translators (where aaaaaaaa can be COPY, PURGE, or VERIFY) are being invoked for the external dependencies that have a type of

SCLM Messages

bbbbbb. This message is provided for information only.

FLM44506 ERROR SAVING DATA SET NUMBER
aaaaaaaa FOR TRANSLATOR: bbbbbbbb
TO MEMBER: cccccc TYPE: ddddddd

Explanation: An error occurred while copying a translator data set to member *cccccc*. The data set number identifies the relative position of the FLMALLOC macro used to allocate the data set for that translator (The data set is a sequential data set allocated with IOTYPE=O, or a PDS data set allocated with IOTYPE=P and a member name specified by the MEMBER parameter on the FLMALLOC macro.).

User Response: See the message data set for all the messages related to this error.

FLM44507 ERROR SAVING DATA SET NUMBER
aa FOR TRANSLATOR: bbb(16) TO
MEMBER: cccccc TYPE: ddddddd

Explanation: An error occurred while copying a translator data set to member *cccccc*. The data set number identifies the relative position of the FLMALLOC macro used to allocate the data set for that translator. The data set is a PDS allocated with IOTYPE=P. The messages from IEBCOPY are written to all build listing for errors, except 913 abends.

This error can be caused by failure to specify the DCBS option on the FLMTRNSL macro. Refer to the IEBCOPY messages in the build listing to determine the reason for the failure. For more information on the FLMTRNSL macro, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

Note: The IBM linkage editor requires that the DCBS option parameter be passed in order for the SYSLMOD block size to be used in creating load modules. If the DCBS option is not specified, the linkage editor will create load modules using the maximum record size for the device type. Use the OPTIONS= variable on the FLMTRNSL macro to pass the DCBS option. Failure to do so can result in message FLM44507.

User Response: See the message data set for all the messages related to this error.

FLM44508 ERROR UPDATING STATISTICS OR
ACCOUNTING INFORMATION FOR
AN ALIAS OF LOAD MEMBER
:aaaaaaaa TYPE: bbbbbbbb

Explanation: An error occurred while updating the statistics or accounting information for an alias of load member *aaaaaaaa*. The alias member was copied successfully, but the SCLM control information could not be created or updated for the alias member.

User Response: See the message data set for all the

messages related to this error.

FLM44510 >> DELETING OUTPUT(S) FOR TYPE:
aaaaaaaa MEMBER: bbbbbbbb

Explanation: The output member *bbbbbbb* in type *aaaaaaaa* at the specified build group has been deleted.

FLM44511 REPORT: DELETING OUTPUT(S) FOR
TYPE: aaaaaaaa MEMBER: bbbbbbbb

Explanation: The output member *bbbbbbb* in type *aaaaaaaa* at the specified build group *would* have been deleted if the build was run in a non-report mode.

FLM44512 TRANSLATOR ERROR FOR INPUT
LIST LANGUAGE: aaaaaaaa

Explanation: A translator error occurred for input list language *aaaaaaaa*. The return code from the translator was not considered acceptable. The acceptable codes are specified on the FLMTRNSL macro with the GOODRC parameter.

User Response: Use the listings data set to locate and correct all errors identified by the translator. If the return code from the translator is acceptable and build indicated that the translator failed, contact the project manager.

Project Manager Response: Change the GOODRC parameter of the FLMTRNSL macro, which is defined in the project definition.

FLM44513 TRANSLATOR ERROR FOR MEMBER:
aaaaaaaa TYPE: bbbbbbbb

Explanation: A translator error occurred for member *aaaaaaaa*. The return code from the translator was not considered acceptable. The acceptable return codes are specified on the FLMTRNSL macro with the GOODRC parameter.

User Response: Use the listings data set to locate and correct all errors identified by the translator. If the return code from the translator is acceptable and build indicated that the translator failed, contact the project manager.

FLM44514 TARGET OUTPUT MEMBER: aaaaaaaa
TYPE: bbbbbbbb IS EDITABLE

Explanation: The build processor cannot copy the translator output data set. Member *aaaaaaaa* was created by the SCLM editor or registered with the migration utility or SAVE service. The build processor only updates members that were created through the build process (non-editables).

User Response: If the specified member is no longer to be used as an editable component in the system, delete it from the hierarchy. Otherwise, specify a new

target member. Submit the job again.

FLM44520 >> DELETING OBSOLETE OUTPUT(S)

Explanation: SCLM has detected output from a previous build that is out of date. The version of the output that exists at a higher group in your hierarchical view is up to date. Deleting the output is being performed rather than regenerating the output to save time and space. Only output found at the build group is considered for deletion. Complete details on the output deleted can be found in the build report.

This message is provided for information only.

FLM44521 REPORT: DELETING OBSOLETE OUTPUT(S)

Explanation: SCLM has detected output from a previous build that is out of date. The version of the output that exists at a higher group in your hierarchical view is up to date. The output would be deleted if the build mode were not report-only. Only output found at the build group is considered for deletion.

Complete details on the output deleted can be found in the build report.

This message is provided for information only.

FLM44600 >>>> INPUT LIST CONTENTS FOR LANGUAGE: aaaaaaaaa TRANSLATOR: bbb(16)

Explanation: The message is a header to the contents of an input list. The members of the input list will be specified by further messages. This message is provided for information only.

FLM44601 TYPE aaaaaaaaa MEMBER bbbbbbbb ==> ccc

Explanation: This message identifies the return code for each member in the input list. If the return code indicates success as defined in the FLMTRNSL macro, all outputs are being saved in the hierarchy, and no response is necessary. If the return code from the translator did not meet the MBRRC or GOODRC value specified for the translator, SCLM saves translator output, such as compiler listings, in the listings data set for the processor if requested in the language definition.

User Response: Use the listings data set to locate and correct all errors identified by the translator. If the return code from the translator is acceptable and build indicated that the translator failed, contact the project manager.

Project Manager Response: Change the MBRRC parameter of the FLMTRNSL macro, which is defined in the project definition.

FLM44602 TYPE aaaaaaaaa MEMBER bbbbbbbb NOT BUILT

Explanation: This message identifies members of the current input list that were not built. Members of the input list will not be built when an error occurs when the translator encounters an error processing an earlier member of the Input List. This message is provided for information only.

User Response: Use the listings data set to locate and correct all errors identified by the translator. If the return code from the translator is acceptable and build indicated that the translator failed, contact the project manager.

**FLM44609 >>>> TOTAL MEMBERS ==> aaa
TOTAL SLOC = bbb**

Explanation: This message describes the total number of members and the total source lines of code (SLOC) in the preceding input list. This message is provided for information only.

User Response: Contact the project manager if you want more members or SLOC per input list.

Project Manager Response: Change the MBRLMT parameter, the SLOCLMT parameter, or both parameters of the FLMLANGL macro for the desired translator. The FLMLANGL macro is located in the project definition.

FLM45000 ERROR PROCESSING CURRENT BUILD

Explanation: An error was encountered during the processing of the current build.

User Response: Examine the build messages file to determine the cause of the error during the build.

FLM46000 BUILD PROCESSOR COMPLETED - aaaaaaaaa ON bbbbbbbb

Explanation: The build processor completed.

User Response: See the message data set for all the messages related to the build.

FLM49000 INVOKING BUILD PROCESSOR

Explanation: This message is provided for information only.

FLM51000 PROMOTE PROCESSOR INITIATED - aaaaaaaaa ON bbbbbbbb

Explanation: This message is provided for information only.

SCLM Messages

FLM51001 **BLANK USERID IS SPECIFIED AS AN INPUT TO THE PROMOTE PROCESSOR.**

Explanation: The promote process has started. A blank user ID was specified as an input parameter. If the processor was invoked through the SCLM Promote panel, SCLM retrieves the user ID from the ISPF variable pool.

User Response: Verify that the user ID specified in the input parameter is correct and non-blank. For more information about the promote input parameters, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM51002 **INVALID SCOPE SPECIFIED.**

Explanation: The promote scope specified is invalid. Valid promote scopes are NORMAL, SUBUNIT, and EXTENDED.

User Response: Verify that the input parameters specified for the promote processor are correct.

FLM51003 **INVALID PROMOTE MODE SPECIFIED.**

Explanation: The promote mode specified is invalid. Valid promote modes are CONDITIONAL, UNCONDITIONAL, and REPORT.

User Response: Verify that the input parameters specified for the promote processor are correct.

FLM51004 **PROMOTE BYPASSED, GROUP: aaaaaaaaa IS TOP GROUP.**

Explanation: Group aaaaaaaaa has no group defined to promote to in this project definition. The promote report is created as if this were a report-only promote.

User Response: Verify that the group specified as an input parameter to the promote processor is the group containing the data to be promoted. Also verify that you specified the correct project definition as an input to the promote processor.

FLM51006 **SPECIFIED GROUP: aaaaaaaaa IS A PRIMARY NON-KEY GROUP**

Explanation: Group aaaaaaaaa is a primary non-key group. Promoting from a primary non-key group is not allowed. For a definition of primary non-key groups, see *ISPF Software Configuration and Library Manager (SCLM) Project Manager's Guide*

User Response: Verify that the group and project definition specified as inputs to the promote processor are correct. For more information about primary non-key groups, see *ISPF Software Configuration and Library Manager (SCLM) Project Manager's Guide*

FLM51007 **PROMOTE GROUP DATA SET NAMES NOT UNIQUE. GROUP 1: aaaaaaaaa GROUP 2: bbbbbbbb DATA SET NAME: aaa(44)**

Explanation: The two groups indicated have the same data set name specified for them in the project definition. Promote will not copy and/or purge data from the data sets because both of the data sets have the same name and the promote function could result in data loss.

Project Manager Response: Check the project definition FLMALTC parameters on the two groups specified. For one of the groups, either change the promote path or the dsname specified on the FLMALTC macro.

FLM51008 **USER DEFINED DDNAME: aaaaaaaaa FOR PROMOTE MESSAGES NOT ALLOCATED**

Explanation: The ddname aaaaaaaaa , which was specified for the promote messages, was not allocated. If the promote function is invoked through the SCLM services, the ddname for the promote messages is optional. If the ddname is not specified, the promote messages are sent to the terminal by default. If the ddname is specified, it must be allocated.

User Response: Verify that the user-supplied ddname for promote messages is allocated. Submit the job again.

FLM51009 **USER DEFINED DDNAME: aaaaaaaaa FOR PROMOTE REPORT NOT ALLOCATED**

Explanation: DDname aaaaaaaaa , which was specified for the report, was not allocated. If the promote function is invoked through SCLM services, the ddname for the promote report is optional. If the ddname is not specified, the promote report is sent to the terminal by default. If the ddname is specified, it must be allocated.

User Response: Verify that the user-supplied ddname for promote report is allocated. Submit the job again.

FLM51010 **USER DEFINED DDNAME&colon aaaaaaaaa FOR COPY ERROR MESSAGES NOT ALLOCATED**

Explanation: Ddname aaaaaaaaa , which was specified for the promote copy error messages, was not allocated. If the promote function is invoked through SCLM services, the ddname for the copy error messages is optional. If the ddname is not specified, the copy error messages are sent to the terminal by default. If the ddname is specified, it must be allocated.

User Response: Verify that the user-supplied ddname

for copy error messages is allocated. Submit the job again.

**FLM51011 USER DEFINED DDNAME: aaaaaaaaa
FOR USER EXIT FILE NOT
ALLOCATED**

Explanation: DDname aaaaaaaaa, which was specified for the user exit data set, was not allocated. If the promote function is invoked through the SCLM services, the ddname for the user exit data set is optional. If not specified, a user exit data set is allocated to NULLFILE. If the ddname is specified, it must be allocated.

User Response: Verify that the user-supplied ddname for user exit data set is allocated. Submit the job again.

**FLM51103 NO KEY GROUP EXISTS BELOW
GROUP: aaaaaaaaa**

Explanation: Group aaaaaaaaa is a non-key group and is defined as one of the lowest groups in the hierarchy. No key group is defined below group aaaaaaaaa in the hierarchy.

User Response: Contact the project administrator.

Project Manager Response: The lowest groups of the project hierarchy (the development groups) must be key groups. Modify the project definition to make the lowest group key and resubmit the job.

**FLM52000 INITIATING VERIFICATION PHASE -
aaaaaaaa ON bbbbbbbb**

Explanation: Indicates that the promote verification phase has been initiated. In this phase, SCLM verifies all members within the scope of the architecture definition. All members must be up to date (for example, source matches object) and must have correct accounting information. This message is for information only.

**FLM52001 VERIFICATION PHASE FOR GROUP:
aaaaaaaa**

Explanation: Indicates that the promote verification phase has been initiated for group aaaaaaaa. This message is for information only.

**FLM52103 ERROR RETRIEVING BUILD MAP
INFORMATION,**

CODE: aaa **TYPE:** bbbbbbbb
MEMBER: cccccccc
**REFERENCED BY BUILD MAP AT
TYPE:** dddddddd **MEMBER:** eeeeeeee

Explanation: SCLM could not retrieve build map information for member eeeeeeee.

User Response: Possible return codes are:

- 8 Determine if the member and type specified are correct. If the member and type are correct, then build the architecture member used as input for this promotion again. Otherwise, specify the correct member and type and invoke the promote function again. Submit the job again.
- 12 The format of the data retrieved was incorrect. Delete the build map and build again to regenerate it.
- 16 An invalid group was found in the project definition. Contact the project administrator.
- 20 A severe I/O error occurred. Contact the project administrator.

Project Manager Response: If the return code is:

- 16 Reassemble the project definition. Verify that no errors occurred. Relink the project definition. For more information about linking the project definition, see *ISPF Software Configuration and Library Manager (SCLM) Project Manager's Guide*
- 20 A VSAM error occurred. Run IDCAMS against the accounting data set to determine the problem. See *ISPF Software Configuration and Library Manager (SCLM) Project Manager's Guide*

**FLM52104 ERROR PROCESSING BUILD MAP
FOR MEMBER: aaaaaaaaa IN TYPE:
bbbbbbbb MEMBER REFERENCED IN
BUILD MAP: ccccccc TYPE OF
MEMBER REFERENCED IN BUILD
MAP: dddddddd BUILD MAP DATE:
eeeeee BUILD MAP TIME: ffffff**

Explanation: An error occurred during an attempt to process an undefined keyword in the Build Map for member aaaaaaaaa. The undefined keyword is associated with member ccccccc, in type dddddddd, as referenced in the Build Map. The Build Map might have been generated by a prior version of SCLM.

User Response: Rebuild member aaaaaaaaa in type bbbbbbbb to generate a new Build Map.

**FLM52105 VERSION MISMATCH FOR
LANGUAGE: aaaaaaaaa BUILD MAP
MEMBER: bbbbbbbb IN TYPE: ccccccc
LANGUAGE VERSION IN BUILD
MAP: dddddddd LANGUAGE
DEFINITION VERSION: eeeeeeee**

Explanation: Since the last build, a new version of the translator for the language was installed.

User Response: Rebuild the member using the member and type specified for the current promote operation. Once the member has been successfully

SCLM Messages

rebuilt, you can promote it again.

FLM52901 SCOPE: *a* SPECIFIED AS INPUT IS INCOMPATIBLE WITH SCOPE: *b* FOR LANGUAGE: *ccccccc* OF MEMBER: *ddddddd* IN TYPE: *eeeeeee*

Explanation: Scope *a* requested for this promote has a smaller range than the scope *b* specified in the project definition for the language *ccccccc* of member *ddddddd*. Promote accepts three values for scope: NORMAL, SUBUNIT, and EXTENDED. NORMAL has the smallest range; EXTENDED has the greatest range.

User Response: Specify an equal or a larger range scope than the scope of the member's language being promoted. If a non-Ada source is being promoted, NORMAL is usually sufficient for the promote scope. Otherwise, EXTENDED scope is always compatible with the languages. Verify that the architecture definition being promoted has been built with the scope used as input to the promote function.

FLM52904 THE SOURCE MEMBER: *aaaaaaaa* IN TYPE: *bbbbbbb* WAS COMPILED WITHOUT THE DEPENDENT COMPILATION UNIT:

CU NAME: *ccc(55) ddd(55)*
CU TYPE: *eeeeeee*
CU QUALIFIER: *ffffff*

Explanation: The compilation unit *ccc(55) ddd(55)* was added since the last build of source member *ccccccc*.

User Response: Rebuild the architecture definition using the specified scope. Resubmit the job.

FLM52905 ARCHITECTURE MEMBER: *aaaaaaaa* IN TYPE: *bbbbbbb* IS NOT CURRENT THE DOWNWARD DEPENDENCY COMPILATION UNIT:

CU NAME: *ccc(55) ddd(55)*
CU TYPE: *eeee* CU QUALIFIER: *ffffff*
OF MEMBER: *gggggggg* TYPE: *hhhhhhhh*
HAS NOT BEEN BUILT.

Explanation: Compilation unit *ccc(55) ddd(55)* has never been built. This error could occur for one of the following reasons:

- The specified compilation unit was introduced to the product after the architecture member was built.
- The specified member has never been built in EXTENDED scope.

User Response: Rebuild the specified architecture definition in EXTENDED scope, and submit the job again.

FLM53005 BUILD MAP FOR MEMBER: *aaaaaaaa* IN TYPE: *bbbbbbb* IS NOT CURRENT DATE/TIME MISMATCH ON MEMBER: *ccccccc* IN TYPE: *ddddddd* BUILD MAP ENTRY DATE/TIME: *eeeeeee* *ffffff* ACCOUNTING DATE/TIME: *gggggggg* *hhhhhhhh*

Explanation: Member *aaaaaaaa* will not be promoted. The build map for the member is not current. Possible causes:

- An input has changed since the last build.
- An output does not match the output produced by the build.
- The build was not run with extended scope.

User Response: Rebuild the member being promoted, then restart the promote. If the build was not done with extended scope, rerun the build using extended scope.

FLM53006 ARCHITECTURE MEMBER: *aaaaaaaa* IN TYPE: *bbbbbbb* IS NOT CURRENT VERSION MISMATCH ON MEMBER: *ccccccc* IN TYPE: *ddddddd* BUILD MAP VERSION: *eeeeeee* ACCOUNTING VERSION: *ffffff*

Explanation: The version number of member or Build Map *ccccccc* has changed since the last time the architecture member was built. Also, the version number of member *ccccccc* or Build Map *eeeeeee* has changed since the last time the architecture member was built.

User Response: Rebuild the architecture member being promoted and submit the job again.

FLM53106 PREDECESSOR VERIFICATION FAILED

INPUT GROUP : *aaaaaaaa* TYPE: *bbbbbbb* MEMBER: *ccccccc*
ERROR GROUP1: *ddddddd*
DATE: *eeeeeee* TIME: *ffffff*
ERROR GROUP2: *gggggggg*
DATE: *hhhhhhhh* TIME: *iiiiiii*

Explanation: The version of the member in *ddddddd* was not based on the member in *gggggggg*. This error usually means that a version of the member between the two groups has been deleted.

The predecessor Date and Time fields in the accounting information for the member in *ddddddd* should contain the last modified Date and Time fields for the next occurrence of the member within the hierarchy.

The promote processor, in CONDITIONAL mode, prevents the member in *gggggggg* from being replaced.

User Response: Verify that the member contains all of

the required changes present in the member in gggggggg. If it does, and no other promote verification errors are present, promote again in UNCONDITIONAL mode.

If other promote verification errors are present, either correct the errors or use an architecture member that controls as few members as possible.

FLM53108 **MEMBER:** aaaaaaaa **TYPE:** bbbbbbbb **AT GROUP:** ccccccc **IS NOT ELIGIBLE FOR PROMOTION**

Explanation: One or more of the accounting information fields for member aaaaaaaa has an invalid value, which prevents SCLM from promoting the member. The fields are:

- AUTHORIZATION CODE CHANGE
- ACCESS KEY
- ACCOUNTING RECORD TYPE.

If the Authorization Code Change field is not blank, an attempt to change the &authcode of the member did not complete successfully.

If the Access Key field is not blank, the member has been reserved for use outside the project hierarchy or blocked from promotion.

If the ACCOUNTING RECORD TYPE is INITIAL or LOCKOUT, a lock has been placed on the member but changes to the member have not been registered with SCLM. The source for the member either does not exist or does not match the accounting information.

User Response: Use the SCLM library utility to review the contents of the specified fields. If the Authorization Code Change field is not blank, verify that the &authcode for the member is correct. If it is, use the update capability of the utility to reset the field. If the field should be changed, use the utility to complete the change in progress or assign a new authorization code.

If the ACCESS KEY is not blank, refer to local &scm procedures to determine the cause of action based on the values of the access key. If the access key is eligible for removal, use the UNLOCK service to reset the access key to blanks.

If the ACCOUNTING RECORD TYPE is initial or lockout and the member is not present in the group you are promoting from, delete the accounting information using the library utility (or use an equivalent function such as the UNLOCK service).

If the member exists, use the SCLM editor or SAVE service to create correct accounting information. Rebuild the architecture member being promoted after the accounting information has been either deleted or updated.

FLM53109 **WARNING, PREDECESSOR VERIFICATION FAILED**

INPUT GROUP : aaaaaaaa **TYPE:** bbbbbbbb **MEMBER:** ccccccc
ERROR GROUP1: dddddddd
DATE: eeeeeeee **TIME:** fffffff
ERROR GROUP2: gggggggg
DATE: hhhhhhhh **TIME:** iiiiii

Explanation: The version of the member in dddddddd was not based on the member in gggggggg. This error usually means that a version of the member between the two groups has been deleted.

The predecessor date and time fields in the accounting information for the member in dddddddd should contain the last modified Date and Time fields for the next occurrence of the member within the hierarchy.

This message is a warning. However, the promote processor, in CONDITIONAL mode, prevents the member from replacing the member in gggggggg.

User Response: For this promote, no action is required. An attempt to promote member ccccccc to group gggggggg will fail in CONDITIONAL mode.

FLM53901 **ERROR RETRIEVING ACCOUNTING INFORMATION FOR INTERMEDIATE FORM OF:** CU **NAME:** aaa(55) bbb(55)
CU TYPE: cccc **CU QUALIFIER:** dddddddd **CODE:** eee **GROUP:** fffffff

Explanation: An error occurred while attempting to retrieve accounting information for the specified intermediate form. The error code associated with the error message provides specifics regarding the nature of the error.

User Response: Possible return codes are:

- | | |
|----|--|
| 8 | The accounting information for the intermediate form of the compilation unit was not found in the specified group in the hierarchical view. The compiled intermediate form might be missing or out of date. Build the member containing the compilation unit. |
| 12 | SCLM internal error. Report this message (including the message ID and all text fields) to IBM support. |
| 16 | The specified group was not found in the project definition. This error can occur when you use alternate project definitions or when you modify a project definition. Examine the project definition for the missing group. Contact the project administrator. |
| 20 | An I/O error occurred while retrieving the accounting information for the intermediate form of the compilation unit. Submit the job again. If the error recurs, contact the project administrator. |

SCLM Messages

- 24 The cross-reference data set was not defined in the project definition. Contact the project administrator.

Project Manager Response: If the return code is:

- 16 Correct and reassemble the project definition. Submit the job again, and verify that no errors occurred.
- 20 A VSAM error occurred. Run IDCAMS against the cross-reference data set to determine the problem.
- 24 Identify the cross-reference data set on the FLMCNTRL macro of the project definition. For more information, about the FLMCNTRL macro, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM53902 ARCHITECTURE MEMBER: aaaaaaaa IN TYPE: bbbbbbbb IS NOT CURRENT VERIFICATION ERROR FOR COMPILATION UNIT:

CU NAME: ccc(55) ddd(55)
CU TYPE: eeee
CU QUALIFIER: ffffff BUILD MAP
DATE/TIME: gggggggg hhhhhhhh
ACCOUNTING DATE/TIME: iiiiii jjjjjj

Explanation: A change has occurred since the last build of the &alist being promoted. The output of the build does not match the input. Build output for the specified compilation unit was based on the Build Map date and time indicated. The specified compilation unit has since been updated but the updates have not been built.

User Response: Rebuild the &alist being promoted and submit the job again.

FLM53903 WARNING, INTERMEDIATE FORM AND ACCOUNTING INFORMATION FOR THE FOLLOWING COMPILATION UNIT WILL BE PURGED FROM GROUP: aaaaaaaa CU NAME: bbb(55) ccc(55) CU TYPE: dddd CU QUALIFIER: eeeeeee FROM-GROUP MEMBER: ffffff TYPE: gggggggg LANGUAGE: hhhhhhhh ABOVE-GROUP MEMBER: iiiiii TYPE: jjjjjjj LANGUAGE: kkkkkkkk

Explanation: The source for compilation unit bbb(55) ccc(55) was moved to a different member. This move would cause the intermediate form of the compilation unit to exist in more than one sublibrary in the specified group unless the intermediate form is purged. SCLM does not allow multiple copies of a member's compilation unit to exist in one group of the hierarchy; therefore, the old compilation unit is purged.

User Response: No action is necessary unless the

promote fails to copy the compilation unit identified. If the copy failed, the group will not contain a copy of the compilation unit until the promote completes successfully.

FLM53905 ERROR RETRIEVING ACCOUNTING INFORMATION FOR INTERMEDIATE FORM OF: CU NAME: aaa(55) bbb(55) CU TYPE: cccc CU QUALIFIER: dddddd CODE: eee GROUP: ffffff

Explanation: An error occurred while attempting to retrieve accounting information for the intermediate form aaa(55) bbb(55).

User Response: Possible return codes are:

- 8 The accounting information for the intermediate form of the compilation unit was not found at the specified group. This error indicates that the compiled intermediate form is missing or out of date. You need to build the member containing the compilation unit.
- 12 SCLM internal error. Report this message (including the message ID and all text fields) to IBM support.
- 16 The specified group was not found in the project definition. This error can occur when you use alternate project definitions or when you modify a project definition. Examine the project definition for the missing group. Contact the project administrator.
- 20 An I/O error occurred retrieving the accounting information for the intermediate form of the compilation unit. Resubmit the job, and if the error recurs, contact the project administrator.
- 24 The cross-reference data set was not defined in the project definition. Contact the project administrator.

Project Manager Response: If the return code is:

- 16 Correct and reassemble the project definition. Submit the job again, and verify that no errors occurred.
- 20 A VSAM error occurred. Run IDCAMS against the cross-reference data set to determine the problem.
- 24 Identify the cross-reference data set on the FLMCNTRL macro of the project definition. For more information on the FLMCNTRL macro in *ISPF Software Configuration and Library Manager (SCLM) Referenc*
-

FLM53906 **ARCHITECTURE MEMBER: aaaaaaaa IN TYPE: bbbbbb IS NOT CURRENT. THE BUILD MAP NO LONGER REFERENCES COMPILATION UNIT: CU NAME: aaa(55) bbb(55) CU TYPE: cccc CU QUALIFIER: ddddddd**

Explanation: The Build Map specified no longer contains a reference to the compilation unit, although the compilation unit still exists.

User Response: If the compilation unit is outdated, then delete the compilation unit using the Sublibrary Management Utility (Option 3.2). Then perform another build at this group in EXTENDED mode. Otherwise, attempt a build in EXTENDED mode.

FLM55000 **INITIATING COPY PHASE - aaaaaaaa ON bbbbbb**

Explanation: The promote verification phase was successful. The copy phase has started. This message is provided for information only.

FLM55201 **ERROR OCCURRED DELETING ACCOUNTING INFORMATION FOR INTERMEDIATE FORM OF DISCREPANCY ITEMS**

Explanation: An error occurred while attempting to purge an intermediate form or intermediate accounting record in the “from” group. The intermediate form’s type or member name at the “from” group does not match the “to” group. Check that the source for a compilation unit was not moved to a different member.

User Response: See the message data set for all the messages related to this error.

FLM55904 **COPY OF INTERMEDIATE FORM FAILED FOR LANGUAGE: aaaaaaaa**

Explanation: An error occurred while copying an intermediate form of a compilation unit in language aaaaaaaa.

User Response: See the message data set for all the messages related to this error.

FLM55905 **ERROR PURGING CROSS REFERENCE INFORMATION FOR EXTRA COMPILATION UNIT:**

CU NAME: aaa(55) bbb(55)
 CU TYPE: cccc
 CU QUALIFIER: ddddddd CODE: eee
 GROUP: ffffff TYPE: gggggggg
 MEMBER: hhhhhhhh

Explanation: The promote processor deletes all the cross-reference information for extra compilation units in group ffffff before it copies new text and accounting

records of all the members. An extra compilation unit is a compilation unit that exists in the “to” group but does not exist in the “from” group for a member existing in both groups. This situation occurs when you modify a member with an extra compilation in a development library and then delete the extra compilation unit of the member from the development library.

While deleting the cross-reference information from the group for the compilation unit specified, an error occurred and SCLM issued a return code.

User Response: Possible return codes are:

- 8 A severe I/O error occurred. Contact the project administrator.
- 16 The cross-reference data set is enqueued. Try the job again later.
- 24 The cross-reference data set was not defined in the project definition. Contact the project administrator.

Project Manager Response: If the return code is:

- 8 A VSAM error occurred. Run IDCAMS against the cross-reference data set to determine the problem.
- 24 Identify the cross-reference data set on the FLMCNTRL macro of the project definition. For more information on the FLMCNTRL macro, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM57000 **INITIATING PURGE PHASE - aaaaaaaa ON bbbbbb**

Explanation: The promote verification and copy phases have completed successfully. The purge phase has started. This message is provided for information only.

FLM57001 **INITIATING PURGE FROM GROUP: aaaaaaaa**

Explanation: SCLM has started purging members beginning at group aaaaaaaa. Purge processing completes at one group before processing of the next group begins. This message is provided for information only.

FLM57101 **WARNING, ACCOUNTING INFORMATION IS NOT CURRENT FOR GROUP: aaaaaaaa TYPE: bbbbbb MEMBER: cccccc**

Explanation: The accounting information for member cccccc does not match the contents of the member. It is possible that the member has been updated outside of SCLM control.

User Response: Define the member to SCLM using

SCLM Messages

the SCLM editor or the SAVE service. If the member is not needed, delete it using the SCLM library utility or the DELETE service.

FLM57102 WARNING, ACCOUNTING INFORMATION EXISTS FOR GROUP:
aaaaaaaa TYPE: bbbbbbbb MEMBER: cccccccc. THE CORRESPONDING DATA SET: ddd(44) DOES NOT EXIST. THE ACCOUNTING INFORMATION WILL BE PURGED.

Explanation: SCLM has found accounting information for *aaaaaaaa.bbbbbbbb.cccccccc* and the corresponding data set *ddd(44)* does not exist. SCLM expected to find the data set and could not. Because the data set does not exist and there is no member that corresponds to the accounting information, the accounting information will be purged.

User Response: This message is for informational purposes only. No action is required.

FLM57201 PURGE OF INTERMEDIATE FORM FAILED FOR GROUP: *aaaaaaaa*

Explanation: Unable to purge intermediate form from the group.

User Response: See the message data set for all the messages related to this error.

FLM58000 PROMOTE PROCESSOR COMPLETED
aaaaaaaa ON bbbbbbbb

Explanation: The promote processor completed.

User Response: See the message data set for all the messages related to the outcome of this promote.

FLM59001 INVOKING PROMOTE PROCESSOR

Explanation: This message is provided for information only.

FLM61007 DATABASE CONTENTS UTILITY INITIATED - *aaaaaaaa ON bbbbbbbb*

Explanation: Database utility processing has started. This message is provided for information only.

FLM61008 NUMBER OF PAGES GENERATED FOR THE REPORT - *aaa(10)*

Explanation: This message is provided for information only.

FLM61009 NUMBER OF PAGES GENERATED FOR THE TAILORED OUTPUT - *aaa(10)*

Explanation: This message is provided for information only.

FLM61011 NO @@01 RECORDS FOUND

Explanation: SCLM cannot find a list of records in the VSAM data sets.

User Response: Contact the project administrator.

Project Manager Response: A VSAM error occurred while attempting to retrieve a list of records from the VSAM data sets. The type of record being retrieved is specified in the message text. Refer to the Access Method Services manual for help in determining the VSAM error.

FLM61012 VSAM I/O ERROR OCCURRED WHILE ACCESSING THE ACCOUNTING DATABASE

Explanation: There is a problem with the VSAM file that SCLM uses to store its accounting information.

User Response: Contact the project administrator.

Project Manager Response: Refer to the Access Method Services manual for help in determining the VSAM error.

FLM61015 ERROR RETRIEVING ACCOUNTING OR CROSS-REFERENCE INFORMATION

CODE: *aaa* **ERROR GROUP:** *bbbbbbbb*
TYPE: *cccccccc* **MEMBER:** *dddddddd*

Explanation: No accounting record exists or could be retrieved for member *dddddddd* within the hierarchical view beginning at group *bbbbbbbb*.

User Response: Possible return codes are:

- 8** SCLM did not find the member's accounting information. Register the member with SCLM using the edit function, migration utility, or the SAVE service. Run the processor again.
- 12** The member's accounting and dependency information was retrieved successfully; however, some of the dependency information failed verification processing. To determine the nature of the verification error, browse the member's accounting and dependency information by using the library utility. The utility performs this verification and displays the fields you want to validate. Edit and then save the member to correct the problem.
- 16** The specified group was not found in the project definition. This error can occur when

you use alternate project definitions or when you modify a project definition. Examine the project definition for the missing group. Contact the project administrator.

- 20 A severe I/O error occurred. Contact the project administrator.

Project Manager Response: If the return code is:

- 16 Correct and reassemble the project definition. Submit the job again, and verify that no errors occurred.
- 20 Run IDCAMS against the accounting data set to determine the problem.

FLM61020 NO MEMBERS MATCHING SELECTION CRITERIA

Explanation: SCLM could not find a match for project, group, type, and member.

User Response: Verify that the members matching the selection criteria are under SCLM control.

FLM61021 DATABASE CONTENTS UTILITY COMPLETED - aaaaaaaaa ON bbbbbbbb

Explanation: This message is provided for information only.

FLM61025 USER DEFINED DDNAME: aaaaaaaaa FOR DBUTIL REPORT NOT ALLOCATED

Explanation: DDname aaaaaaaaa, which was specified for the DBUTIL report, was not allocated. If you invoke the DBUTIL function using the services, the ddname for the DBUTIL report is optional. If you do not specify the ddname, the DBUTIL report is sent to the terminal by default. If you specify a ddname, you must allocate it.

User Response: Verify that the user-supplied ddname for DBUTIL output is allocated. Submit the job again.

FLM61028 USER DEFINED DDNAME: aaaaaaaaa FOR TAILORED OUTPUT NOT ALLOCATED

Explanation: Ddname aaaaaaaaa, which was specified for the tailored output, was not allocated. If you invoke the DBUTIL function using the services, the ddname for the tailored output is optional. If you do not specify a ddname, the tailored output is sent to the terminal by default. If you specify a ddname, you must allocate it.

User Response: Verify that the user-supplied ddname for the tailored output is allocated. Submit the job again.

FLM61030 USER DEFINED DDNAME: aaaaaaaaa FOR DBUTIL MESSAGES IS NOT ALLOCATED

Explanation: Ddname aaaaaaaaa, which was specified for the messages, is not allocated. If you invoke the DBUTIL function using the services, the ddname for the messages is optional. If you do not specify a ddname, the messages are sent to the terminal by default. If you specify a ddname, you must allocate it.

User Response: Verify that the user-supplied ddname for the messages is allocated. Submit the job again.

FLM61035 TAILORED OUTPUT LINE LENGTH EXCEEDS LIMIT

Explanation: The output line that is written to the tailored file exceeded the 2048-character limit.

User Response: Verify that the length of the lines being written as output to the tailored file is not greater than 2048. If it is greater than 2048, change your formatted report line to contain SCLM variables that write 2048 characters or less to the tailored file.

FLM62000 ARCHITECTURE REPORT PROCESSOR INITIATED - aaaaaaaaa ON bbbbbbbb

Explanation: Report processing has started. This message is provided for information only.

FLM62001 STARTING ARCHITECTURE MEMBER TYPE EXCEEDS CUTOFF

Explanation: The architecture report could not be generated because the type of architecture member specified exceeded the type of architecture definition given for the cutoff of the report. The report cutoff should be equal to or lower than the architecture member kind.

For information on architecture members, see *ISPF Software Configuration and Library Manager (SCLM) Developer's Guide*

User Response: Specify a lower report cutoff and submit the job again.

FLM62002 ACCOUNTING INFORMATION FOR MEMBER: aaaaaaaaa TYPE: bbbbbbbb IS IN INITIAL OR LOCKOUT STATE.

Explanation: A lock has been placed on member aaaaaaaaa but changes to the member have not been registered with SCLM. The source for the member either does not exist or does not match the accounting information.

User Response: If the member exists, use the SCLM editor or the SCLM SAVE service to create the correct accounting information.

SCLM Messages

FLM62008 INVALID CUTOFF PARAMETER:
aaa(24)

Explanation: The report cutoff for the architecture report is invalid.

User Response: Verify that the report cutoff parameter specified is:

CC For HL, LEC, and CC architecture members.

GEN For HL, LEC, and generic architecture members.

HL For HL architecture members.

LEC For HL and LEC architecture members.

NONE For all architecture members and source members (no cutoff).

TOP SOURCE
For all top source members and all architecture members.

FLM62010 REPORT DDNAME AND MESSAGE DDNAME MUST BE DIFFERENT

Explanation: A function was invoked with the same ddname specified for both the report file and the messages file.

User Response: Specify different ddnames for the report file and the messages file.

FLM62024 WARNING, MAXIMUM INDENTATION DEPTH EXCEEDED. REMAINDER OF MEMBERS NOT INDENTED.

Explanation: The maximum indentation depth has been exceeded while processing members for the architecture report. The architecture report continues; however, the remainder of the members are not indented to indicate included members.

FLM62025 USER DEFINED DDNAME: aaaaaaaaa FOR ARCHITECTURE REPORT NOT ALLOCATED

Explanation: Ddname *aaaaaaaaa*, which was specified for the architecture report, was not allocated. If you invoke the architecture function using the services, the ddname for the architecture report is optional. If you do not specify a ddname, the architecture report is sent to the terminal by default. If you specify a ddname, you must allocate it.

User Response: Verify that the user-supplied ddname for the architecture report is allocated. Submit the job again.

FLM62030 USER DEFINED DDNAME: aaaaaaaaa FOR ARCHITECTURE MESSAGES NOT ALLOCATED

Explanation: Ddname *aaaaaaaaa*, which was specified for the architecture messages, was not allocated. If you invoke the architecture function using the services, the ddname for the architecture messages is optional. If you do not specify a ddname, the architecture messages are sent to the terminal by default. If you specify a ddname, you must allocate it.

User Response: Verify that the user-supplied ddname for the architecture messages is allocated. Submit the job again.

FLM62104 INVALID STATEMENT IN ARCHITECTURE MEMBER: aaaaaaaaa TYPE: bbbbbbbb

Explanation: The architecture member *aaaaaaaaa* contains an invalid statement. The architecture member might contain keywords that are specific to both an LEC and a CC (for example, an OBJ keyword and a LOAD keyword). The architecture member might also have two LMAP statements or a COPY keyword with an LMAP statement in the copied member. Any of these errors can cause this message to occur.

User Response: This error does not affect the architecture report. Before attempting a build, check the specified architecture member for any of the above listed errors. Modify the architecture member to correct the errors.

FLM62108 ERROR RETRIEVING ACCOUNTING INFORMATION

CODE: *aaa* **GROUP:** *bbbbbbb*
TYPE: *ccccccc* **MEMBER:** *ddddddd*

Explanation: No accounting information exists or could be retrieved for member *ddddddd*.

User Response: If the report was being run simply to view the high-level architecture of the application, no response is necessary. Otherwise, take the action recommended for the return code received:

8 No accounting record exists for member *ddddddd*. Register the member using the SCLM editor, the migration utility, or the SAVE service.

Project Manager Response: If the return code is:

12 SCLM was unable to read the VSAM record containing the member's accounting information. Refer to the Access Method Services manual for help in determining the VSAM error.

16 The specified group *bbbbbbb* was not found in the project definition. This error can occur

	when an alternate project definition is used. The error can also be caused by a change to the project definition. Correct and reassemble the project definition.
20	An I/O error occurred while attempting to read an accounting record. This could also represent an open error on the VSAM accounting data set. Refer to the Access Method Services manual for help in determining the VSAM error.
FLM62200	NUMBER OF VARIABLE EXCEEDS THE MAXIMUM NUMBER OF VARIABLES ALLOWED, REPORT CONTINUES.
Explanation:	SCLM cannot display all of the SCLM variables that the user requested for the report.
User Response:	Check the variables specified and remove any unnecessary ones, or break the report up into smaller pieces.
FLM62900	ARCHITECTURE REPORT PROCESSOR COMPLETED
Explanation:	The architecture report processor finished executing.
User Response:	See the message data set for all the messages related to the completion of the process.
FLM69005	INVOKING ARCHITECTURE REPORT PROCESSOR
Explanation:	This message is provided for information only.
FLM69010	INVOKING DATABASE CONTENTS UTILITY
Explanation:	This message is provided for information only.
FLM69015	THE REPORT WILL APPEAR IN <i>aaa(26)</i>
Explanation:	This message is provided for information only.
FLM69020	THE MESSAGES WILL APPEAR IN <i>aaa(26)</i>
Explanation:	This message is provided for information only.
FLM69025	THE TAILORED OUTPUT WILL APPEAR IN <i>aaa(26)</i>
Explanation:	This message is provided for information only.

**FLM69030 DATABASE CONTENTS UTILITY
RETURN CODE = *aaa*.**

Explanation: The Database Contents utility ended with a return code of *aaa*. This message is provided for information only.

**FLM70002 PARAMETER STRING EXCEEDS
MAXIMUM SIZE ALLOWED FOR
TRANSLATOR *aaaaaaaa***

Explanation: The parameter string for the translator *aaaaaaaa* is greater than the allowed maximum of 512 characters. The parameter string is formed by concatenating the values of the OPTIONS parameter of the FLMTRNSL macro with the PARM and the PARMx architecture member keywords. All SCLM variables in the resulting string are then replaced with the variables' values. Any of the allowable sources for creation of the parameter string could cause the parameter string size to be exceeded.

User Response: Reduce the size of the parameter string passed through the PARM or the PARMx keyword in the architecture definition if possible. Otherwise, contact the project administrator.

Project Manager Response: Reduce the size of the OPTIONS parameter string on the FLMTRNSL macro for the specified translator.

**FLM70003 SUBSTITUTION LIST EXCEEDS
MAXIMUM SIZE ALLOWED FOR
TRANSLATOR *aaaaaaaa***

Explanation: The ddname substitution list for translator *aaaaaaaa* is greater than the maximum of 512 allowed. Every FLMALLOC macro for the translator causes an 8-character ddname to be put into the ddname substitution list.

User Response: Contact the project administrator.

Project Manager Response: Either reduce the number of FLMALLOC macro invocations for the specified translator or change the PORDER parameter of the FLMTRNSL macro to 0 or 1 so that SCLM will not attempt to pass a ddname substitution list.

FLM70101 INVALID COPYLIB NAME: *aaa(44)*

Explanation: The copylib name is too long.

User Response: Contact the project administrator.

Project Manager Response: The maximum size allowed is 44 characters. Reduce the size of the copylib name to 44 characters or less to allow for SCLM variable substitution if SCLM variables are used.

SCLM Messages

FLM70102 **UNSUPPORTED IOTYPE, UNABLE TO ALLOCATE DATA SET LANGUAGE**
aaaaaaaa TRANSLATOR: bbbbbbbb DATA SET: ccc IOTYPE: dddddddd

Explanation: An IOTYPE was specified in an FLMALLOC macro that is not supported by the associated translator.

User Response: Contact the project manager.

Project Manager Response: Correct the FLMALLOC statement in the language definition for the specified language. See *ISPF Software Configuration and Library Manager (SCLM) Referenc* for more information.

FLM70212 **INVOKING COPY ROUTINE(S) FOR LANGUAGE: aaaaaaaaa**

Explanation: Copy translator for language aaaaaaaaa has been called. This translator was defined in the language definition. This message is provided for information only.

FLM70214 **INVOKING PURGE ROUTINE(S) FOR LANGUAGE: aaaaaaaaa.**

Explanation: Purge routine for language aaaaaaaaa has been called. This program was defined in the language definition. This message is provided for information only.

FLM70216 **INVOKING TRANSLATORS FOR LANGUAGE: aaaaaaaaa**

Explanation: Translator for language aaaaaaaaa has been called. This message is provided for information only.

FLM70501 **ERROR COPYING ALLOCATION DATA SET *aaa* FOR TRANSLATOR *bbb* TO LISTINGS DATA SET, CODE: *ccc***

Explanation: One of the following might have occurred:

- The listing data set was not allocated.
- The listing data set had an insufficient amount of space allocated.

Possible return codes are:

- | | |
|----|---|
| 12 | There is no data to be copied to the listing data set or the data has already been deleted by the translator. |
| 16 | The output data set is full. |
| 20 | Data access failed due to the following: <ul style="list-style-type: none">• data set security protection• Input member was not found. |
| 24 | The input parameter is invalid. |
| 28 | Data sets with a RECFM value of U cannot be copied to the listings data set. |

User Response: If the return code is:

- | | |
|----|---|
| 12 | Verify that the translator really did create the file and did not delete it. Try running the translator outside SCLM and verify that the file is created. |
| 16 | Allocate a larger listings data set. |
| 20 | Verify that you have access authority to the listings data set. Verify that the translator really did create the file and did not delete it. Try running the translator outside SCLM and verify that the file is created. |
| 24 | Report this message (including the message ID and all text fields) to IBM support. |
| 28 | Correct the record format or change the target data set. |

FLM70502 **LISTINGS NOT COPIED BECAUSE BLANK LISTINGS DDNAME SPECIFIED**

Explanation: SCLM did not copy listings to the listings data set because you specified a blank ddname. Therefore, you will not be able to see any listings that the translators produced.

User Response: Specify the listings ddname for the given function and run the function again.

FLM70600 **DATE/TIME VERIFICATION FAILED FOR GROUP: aaaaaaaaa TYPE: bbbbbbbb MEMBER: cccccc**

Explanation: The VERIFY translator was invoked as part of Build or Promote verification, and returned a date/time indicating that the member cccccc is out of date.

User Response: Verify that the date is valid and submit the job again.

FLM70601 **VERIFICATION TRANSLATOR FAILED FOR LANGUAGE: aaaaaaaaa**

Explanation: The return code from the verification translator for language aaaaaaaaa exceeded the allowable maximum good return code.

User Response: Determine the reason for the bad return code from the verification translator and take appropriate action.

FLM70801 **ERROR DEALLOCATING DATA SET NUMBER: *aaa* FOR LANGUAGE: cccccc TRANSLATOR: *bbb* (16) CODE: *ddd***

Explanation: An error occurred while deallocating a data set for the translator *bbb* (16). The data set number *aaa* identifies the allocated data set for that translator.

Note: For the FREE and END services called using a program, only the first line will appear. This message indicates that a data set for one of the translators defined for the *ccccccc* language could not be deallocated. Because the condition occurs during cleanup, it can usually be treated as a warning. Verify that the program has not deallocated the data sets specified for the language.

Possible return codes are:

8	SVC 99 error.
12	SCLM internal error. Report this message (including the message ID and all text fields) to IBM support.
16	Missing or incorrect data set name.
20	Invalid file attribute specified.
24	A member of a PDS was requested but the data set was not partitioned.
28	The requested member could not be found.
32	The requested member was not available.
>64	SVC 99 error, reason code (decimal):
528	Requested data set unavailable. The data set is allocated to another job and its usage attributes conflict with this request.
5896	Data set does not exist.

User Response: Submit the job again. If the error recurs, report this message (including the message ID and all text fields) to IBM support.

FLM71002 ERROR INVOKING TRANSLATOR:
aaa(16)

Explanation: SCLM could not invoke translator *aaa(16)*. The load module containing the translator might be allocated exclusively to another job, or there is an error in the language definition that defines the translator.

User Response: If the translator has been used successfully in the past and changes were not anticipated (for example, a new compiler release), invoke the processor again. If the translator is new or the problem recurs, report this message (including the message ID and all text fields) to IBM support.

FLM71004 TRANSLATOR RETURN CODE FROM
====> *aaa(16)* ====> *bbbb*

Explanation: The return code from the invoked translator did not match the GOODRC parameter specified for the translator. Translator output, such as compiler listings, will be saved in the listings data set

for the processor if requested in the language definition.

User Response: Use the listings data set to locate and correct all errors identified by the translator. If the specified return code is acceptable for the translator, contact the project administrator.

Project Manager Response: Change the GOODRC parameter of the FLMTRNSL macro, which defines the specified return code, in the project definition.

FLM71006 ERROR ALLOCATING DATA SET:
DDNAME: *aaaaaaaa* CODE: *bbb*

Explanation: An error occurred while attempting to allocate a data set. Possible return codes are:

8	SVC 99 error.
12	Internal error. Report this message (including the message ID and all text fields) to IBM support.
16	Incorrect data set name.
20	Invalid file attribute specified.
24	A member of a PDS was requested but the data set is not partitioned.
28	The requested member could not be found.
32	The requested member was not available.
>64	SVC 99 error; reason code (decimal):
528	Requested data set unavailable. The data set is allocated to another job and its usage attributes conflict with this request.
5896	The data set does not exist.

User Response: Submit the job again. If the error recurs, report this message (including the message ID and all text fields) to IBM support.

Project Manager Response: Contact IBM support for assistance.

FLM71010 ERROR: FLMTCOND macro keywords
GROUP and NOTGROUP specified
together. FLMTCOND follows
FLMTRNSL with COMPILE=*aaaaaaaa*

Explanation: *aaaaaaaa* is the COMPILE keyword value on the FLMTRNSL associated with this FLMTCOND macro. This error should be trapped by the FLMTCOND macro and should not occur at runtime.

User Response: See the project administrator for correction of the project definition.

User Response: Remove GROUP or NOTGROUP in the FLMTCOND macro. The FLMTCOND macro will follow an FLMTRNSL macro with COMPILE=*aaaaaaaa*

SCLM Messages

in a language definition. Reassemble and link the project definitions that use the language definition.

FLM71011 ERROR: Previous translator label not found. Translator label=aaaaaaaa

Explanation: aaaaaaaaa is the label in the FLMTCOND WHEN keyword value that is not found on any previous FLMTTRNSL macros for build translators in the language definition.

User Response: See the project administrator for correction of the project definition.

User Response: Edit the language definition and adjust the FLMTTRNSL label and/or the label referenced by the WHEN keyword. Reassemble and link the project definitions that use the language definition.

FLM71012 ERROR: FLMTCOND macro keyword WHEN syntax invalid. FLMTCOND follows FLMTTRNSL with COMPILE=aaaaaaaa.

Explanation: aaaaaaaaa is the value of the COMPILE keyword on the FLMTTRNSL associated with the FLMTCOND macro. The value of the WHEN keyword does not contain valid syntax.

User Response: See the project administrator for correction of the project definition.

User Response: Edit the language definition and correct the WHEN keyword value on the FLMTCOND macro following the FLMTTRNSL with COMPILE=aaaaaaaa. Reassemble and link the project definitions that use the language definition.

FLM72001 INVALID OR MISSING VALUE FOR PARAMETER: aaaaaaaaa

Explanation: The parameter aaaaaaaaa has a invalid or missing value. This message is issued by the FLMTXFER translator.

User Response: Contact the project manager.

Project Manager Response: Update the call to the FLMTXFER translator to ensure that all required parameters are passed and that all parameters have valid values.

FLM72002 NO DATA SET ALLOCATED TO DD NAME: aaaaaaaaa

Explanation: The ddname aaaaaaaaa is not allocated, but is required for the FLMTXFER translator.

User Response: Contact the project manager.

Project Manager Response: Update the call to the FLMTXFER translator to ensure that all required ddnames are allocated. The ddname can be a ddname used directly by the FLMTXFER translator, or it can be

a ddname that was specified in the input data passed in the FILES ddname.

FLM72003 INVALID TRANSFER TYPE: a LINE NUMBER: bbbbbb

Explanation: The transfer type *a* is not a valid transfer type. The valid transfer types are A (ASCII), and B (BINARY). The invalid transfer type was specified on line *bbbbbb* of the FILES DD input to the translator.

User Response: Contact the project manager.

Project Manager Response: Ensure that the transfer types passed in the FILES ddname to the FLMTXFER translator are valid.

FLM72004 NO TRANSFER SOURCE SPECIFIED LINE NUMBER: aaaaa

Explanation: No source dataset, ddname, or file was specified for the transfer. Line *aaaaa* of the FILES DD input to the translator is missing the source.

User Response: Contact the project manager.

Project Manager Response: Ensure that the source of the transfer is specified on each line in the FILES DD input to the FLMTXFER translator.

FLM72005 INVALID SOURCE DATA SET NAME: aaa(56) LINE NUMBER: bbbbbb

Explanation: The source data set name for the transfer is invalid. Possible reasons for an invalid data set name are:

- the data set name is longer than 56 characters
- there is no ending quote on the data set name
- there are no characters between the beginning and ending quotes.

User Response: Contact the project manager.

Project Manager Response: Ensure that only valid data set names are being specified in the FILES DD input to the FLMTXFER translator.

FLM72006 CAN NOT GET DIRECTLY INTO AN SCLM MEMBER: aaaaaaaaa LINE NUMBER: bbbbbb

Explanation: The FLMTXFER translator does not support storing workstation files directly into SCLM members. Instead the file should be stored into a ddname with IOTYPE=O or IOTYPE=P.

User Response: Contact the project manager.

Project Manager Response: Update the call the FLMTXFER to ensure that data is not being stored directly into a member.

FLM72007 INVALID MEMBER OR TYPE NAME:
aaaaaaaa LINE NUMBER: bbbbbb

Explanation: Line *bbbbbb* contains a type name or member name that is not valid. Possible causes of this error are:

- the member name is too long
- the type name is too long
- a dataset name was specified without putting quotes around the name.

User Response: Contact the project manager.

Project Manager Response: Update the call the FLMTXFER to ensure that members being transferred to the workstation exist on the host prior to the transfer.

FLM72008 INVALID DD NAME OR MEMBER NAME: aaaaaaaaa LINE NUMBER: bbbbbb

Explanation: Line *bbbbbb* contains an invalid specification for a ddname or member name. Possible causes are:

- the member name is too long
- the ddname is too long
- a colon was specified before the member name without a ddname being specified.

User Response: Contact the project manager.

Project Manager Response: Update the call the FLMTXFER to ensure that valid statements are specified in the FILES ddname input.

FLM72009 INVALID SYNTAX IN SOURCE NAME: aaa(56) LINE NUMBER: bbbbbb

Explanation: Line *bbbbbb* contains an invalid specification for the transfer source. Possible causes are:

- specifying a data set name without the surrounding quotes
- specifying a ddname without the required colon
- specifying an SCLM member without the required period.

User Response: Contact the project manager.

Project Manager Response: Update the call the FLMTXFER to ensure that valid statements are specified in the FILES ddname input.

FLM72010 NO TRANSFER DESTINATION SPECIFIED LINE NUMBER: aaaaaa

Explanation: Line *aaaaaa* contains no target specification for the transfer.

User Response: Contact the project manager.

Project Manager Response: Ensure that each statement in the FILES ddname input contains a valid transfer destination.

FLM72011 TRANSFER MEMBER NOT IN BUILD SCOPE MEMBER: aaaaaaaaa TYPE: bbbbbbbbb

Explanation: Member *aaaaaaaa* in type *bbbbbbbb* is not in the scope of the build and will not be transferred.

User Response: Contact the project manager.

Project Manager Response: Ensure that each statement in the FILES ddname input that specifies an SCLM member name uses only members in the build scope. The FLMTBMAP translator can be used to obtain a list of inputs and outputs for a specific build.

FLM72012 UNABLE TO OBTAIN DATASET NAME FOR DD NAME: aaaaaaaaa

Explanation: The FLMTXFER translator could not obtain the data set name for ddname *aaaaaaaa*.

User Response: Contact the project manager.

Project Manager Response: Ensure that the ddname is being allocated to a cataloged data set.

FLM72013 FILE TRANSFER FAILED, RETURN CODE: aaaa, FROM FILE: bbbbbbbbb, TO FILE: ccccccc

Explanation: The ISPF FILEXFER service failed with a return code of *aaaa* in the transfer of file *bbbbbbbb* to file *ccccccc*.

User Response: Contact the project manager.

Project Manager Response: Refer to the ISPF FILEXFER service documentation for an explanation of return code *aaaa* and additional responses.

FLM75001 INVALID OR MISSING DATA FOR INPUT PARAMETER aaaaaaaaa

Explanation: In the Language Definition the input parameter *aaaaaaaa* is missing or is not valid.

User Response: Contact the project administrator.

Project Manager Response: Verify that the Language Definition contains all the input parameters, and that the parameters have the proper values.

FLM75002 ERROR: aaaaaaaaa TAG NOT FOUND IN PROXY FILE

Explanation: The *aaaaaaaa* tag was not found in the proxy file.

User Response: Verify that the CSP/370AD proxy contains a BUILD/EBUILD tag section. Optionally, if you have EZE and GROUP tags then they should have a corresponding EEZE or EGROUPE tag.

SCLM Messages

FLM75003 **ERROR: aaaaaaaa NOT SPECIFIED IN PROXY FILE**

Explanation: The aaaaaaaa element was not found in the proxy file.

User Response: Verify that the CSP/370AD proxy contains the parameter MEMBER(name) for the CSP/370AD* GENERATE command.

FLM75004 **ERROR: COULD NOT OPEN DDNAME = aaaaaaaa, PASCAL RUN-TIME ERROR = bbb**

Explanation: The ddname aaaaaaaa could not be opened.

User Response: Verify that the DDNAME = aaaaaaaa exists in your system. The codes for the PASCAL run-time error bbb are described in the *VS Pascal Application Programming Guide* A common error code is:

- 048 - Missing member in File: member_library

FLM75006 **WARNING: THE FOLLOWING PARAMETERS FOR THE CSP/370AD GENERATE COMMAND WILL BE USED: SYSTEM(TARGET_SYSTEM), MAPS(NONE), TABLES(NONE), AND BATCH(N). THE CORRESPONDING PARAMETERS IN THE PROXY FILE WILL BE IGNORED.**

Explanation: SCLM will append the CSP/370AD GENERATE command with a list of parameters that use specific values. If the user specifies one of these parameters, they will be ignored, and the SCLM specified ones will be used instead. The value for 'target_system' in SYSTEM(target_system) is obtained from the SYSTEM= value of the OPTIONS parameter for the FLMTRNSL macro. This is the FLMTRNSL macro for the CSP/370AD Lista/Generate translator for the language definition associated with the CSP/370AD proxy member.

User Response: Delete from the Proxy file any of the parameters mentioned in the message.

FLM75007 **END OF PROXY FILE REACHED BEFORE THE TAG aaaaaaaa WAS FOUND.**

Explanation: The tags in the CSP/370AD proxy file must come in pairs; for example, the :BUILD tag must have an :EBUILD tag. This message indicates that a corresponding end tag is missing.

User Response: Ensure that the tags are paired, such as :BUILD with :EBUILD.

FLM75008 **TAG NOT VALID OR NESTED TAGS FOUND IN PROXY FILE.**

Explanation: Either a tag is not a valid one (probably due to misspelling) or there are nested tags (which are not allowed).

User Response: Ensure that the tags are valid ones, and that there are no nested tags.

FLM75009 **ERROR: BUFSIZE PARAMETER IN FLMLANGL IS aaaa. IT SHOULD BE AT LEAST bbbb.**

Explanation: The BUFSIZE parameter is too small in the FLMLANGL macro of the language definition associated with the CSP/370AD proxy member being built.

User Response: Contact the project administrator.

Project Manager Response: Ensure that the value of BUFSIZE is at least bbbb. Then reassemble the project definition.

FLM75010 **ALLOCATION FAILED FOR aaaaaaaa, DDNAME = bbbbbbbb, DSNAME = cccccc**

Explanation: The ddname = bbbbbbbb could not be allocated to the cccccc DSNAME, while allocating aaaaaaaa or the ddname could have been allocated to another dsname.

User Response: Contact the project administrator.

Project Manager Response: Verify that both the ddname and the dsname are valid. Also verify that the dsname has not been allocated to another DSNAME.

FLM75011 **GROUP aaaaaaaa NOT FOUND IN SCLM HIERARCHY TABLE**

Explanation: The GROUP = aaaaaaaa does not exist in the SCLM hierarchy table.

User Response: Contact the project administrator.

Project Manager Response: Verify that the GROUP is a valid one.

FLM75012 **WARNING: NOT ALL MSLS IN MSL CONTROL FILE WILL BE USED.**

Explanation: SCLM concatenates the CSP/370AD MSLs described in the MSL Control File (project.PROJDEFS.MSLCTRL) according to the hierarchy defined in SCLM. The Library MSLs are then appended at the end of this concatenation of MSLs; if the total number of read/only MSLs is greater than 5, this warning message is issued (but SCLM does not truncate the MSLs concatenation), because only the first 5 read/only MSLs will be accepted by CSP/370AD.

User Response: Contact the project administrator.

Project Manager Response: Verify that the longest concatenation of MSLs does not exceed 6.

FLM75013 TOO MANY CSP/370AD WORK FILES IN MSL CONTROL FILE.

Explanation: There are more than 6 work files in the MSL Control File (project.PROJDEFS.MSLCTRL).

User Response: Contact the project administrator.

Project Manager Response: Verify that there are no more than 6 work files in the MSL Control File.

FLM75014 NUMBER OF MSL RECORDS IN THE MSL CONTROL FILE LESS THAN NUMBER OF GROUPS IN THE PROJECT DEFINITION.

Explanation: In the MSL Control File (project.PROJDEFS.MSLCTRL) the number of groups in the SCLM hierarchy should be the same as the number of MSLs in CSP/370AD.

User Response: Contact the project administrator.

Project Manager Response: Verify that the groups in SCLM match the MSLs specified in the MSL Control File (project.PROJDEFS.MSLCTRL).

FLM75015 READ/WRITE MSL IS NOT SPECIFIED.

Explanation: A valid Read/Write MSL was not specified for the current SCLM group in the MSL Control File (project.PROJDEFS.MSLCTRL).

User Response: Contact the project administrator.

Project Manager Response: Specify a Read/Write MSL.

**FLM75016 THE FOLLOWING CSP/370AD COMMAND WAS UNSUCCESSFUL:
aaaaaaaa**

Explanation: The CSP command *aaaaaaaa* was unsuccessful.

User Response: Verify the CSP/370AD log and output to determine the cause of the problem. Then, take any required action to fix the problem.

FLM80001 'END' RECORD NOT FOUND IN THE "ACCOUNTING LIST INFO ARRAY"

Explanation: The accounting \$list_info array has exceeded its buffer size.

User Response: Contact the project administrator.

Project Manager Response: Increase the size of the accounting \$list_info array defined for the language on

the FLMLANGL macro. For more information on the FLMLANGL macro and how to specify the size of the accounting \$list_info array, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM80002 INVALID RECORD TYPE FOUND IN THE "ACCOUNTING LIST INFO ARRAY" RECORD TYPE: aaaaaaaaa

Explanation: The record type is unknown.

User Response: Contact the project administrator.

Project Manager Response: Either the parser created or the user defined an accounting \$list_info array that contained an invalid record type. If a parser was used to create the array, check that the passed values are correct. For more information, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

**FLM80003 INVALID COMPOOL NAME FOUND IN THE "ACCOUNTING LIST INFO ARRAY" RECORD KIND: aaaa
COMPOOL NAME: bbbbbbbb**

Explanation: The accounting \$list_info array contained an entry for a compool with either an invalid or blank associated compool name.

User Response: If a parser was used, parse the members in question again. If the same error occurs or a parser was not used, contact the project administrator.

Project Manager Response: Either the parser created or the user defined an accounting \$list_info array that contained an invalid or blank compool name. If a parser was used to create the array, check that the passed values are correct. For more information, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

**FLM80004 INVALID INCLUDE NAME FOUND IN THE "ACCOUNTING LIST INFO ARRAY" RECORD KIND: aaaa
INCLUDE NAME: bbbbbbbb**

Explanation: The accounting \$list_info array contained an entry for an include with either an invalid or blank associated include name.

User Response: If a parser was used, parse the members in question again. If the same error occurs or a parser was not used, contact the project administrator.

Project Manager Response: Either the parser created or the user defined an accounting \$list_info array that contained an invalid or blank include name. If a parser was used to create the array, check that the passed values are correct. For more information, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

SCLM Messages

**FLM80005 INVALID CU DATA FOUND IN THE
"ACCOUNTING LIST INFO ARRAY"**

RECORD KIND: *aaaa*
CU NAME: *bbb(55) ccc(55)*
CU TYPE: *d* **GENERIC FLAG:** *e*
DEPEND NAME: *fff(55) ggg(55)*
DEPEND CU TYPE: *h*
DEPENDENCY TYPE: *i*

Explanation: The accounting \$list_info array contained invalid data for a compilation unit (CU).

User Response: If you used a parser, parse the members in question again. If the same error occurs or you did not use a parser, contact the project administrator.

Project Manager Response: Either the parser created or the user defined an accounting \$list_info array that contained the invalid CU data. If a parser was used to create the array, check that the passed values are correct. For more information, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

**FLM80006 AN EXTERNAL DEPENDENCY HAS A
BLANK NAME**

Explanation: An external program is using the SCLM LIST_INFO feature to return dependency information. The LIST_INFO record contains a blank name.

User Response: Determine the external program name and define a valid dependency name.

**FLM80007 INVALID INCLUDE SET NAME
FOUND IN THE "ACCOUNTING LIST
INFO ARRAY"**

RECORD KIND: *aaaa* **INCLUDE SET
NAME:** *bbbbbbbb*

Explanation: The accounting \$list_info array contained an include record that referenced include set bbbbbbbb. This include set is not defined in the language definition of the member being saved.

User Response: Notify the project manager of the problem.

Project Manager Response: Either update the language definition to include an FLMINCLS macro for the include set, or update the parser not to use include set bbbbbbbb in include records.

**FLM80008 INCONSISTENT DATE AND TIME
RETURNED FOR EXTERNAL
DEPENDENCY GROUP: aaaaaaaa TYPE:
bbbbbbbb NAME: c(43) REFERENCED
BY THE FOLLOWING BUILD MAPS:**

Explanation: More than one verify translator returned a date and time for this external dependency. The dates

and times returned by the translators are not the same.

User Response: Verify that the external dependency was not updated between calls to the verify translators. If the external dependency has changed, rebuild. If the external dependency has not changed, contact the project manager to determine why the translators are returning different dates and times.

Project Manager Response: If different verify translators are returning information for the same external dependency, verify that the same date and time is being returned by each translator. Refer to message FLM80009, which will accompany this message, for the list of languages with verify translators that are returning dates and times for this external dependency.

**FLM80009 aaaaaaaaa bbbbbbbb AT GROUP:
ccccccc LANGUAGE: dddddddd**

Explanation: This message lists the build maps referencing the external dependency in message FLM80008. The build map member name is aaaaaaaaa in type bbbbbbbb.

User Response: Refer to message FLM80008.

Project Manager Response: Refer to message FLM80008.

**FLM80010 CONFLICTING GENERIC FLAGS
FOUND FOR THE SAME CU IN THE
"ACCOUNTING LIST INFO ARRAY"**

RECORD KIND: *aaaa*
CU NAME: *bbb(55) ccc(55)*
CU TYPE: *d*

Explanation: Dependencies for the same CU have different generic flags. The generic flags must always be the same for all dependencies within a CU.

User Response: Contact the project administrator.

Project Manager Response: Either the parser created or the user defined an accounting \$list_info array that contained the invalid CU data. If a parser was used to create the array, check that the passed values are correct. For more information, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

**FLM80011 CONFLICTING DEPENDENCY TYPE
FLAGS FOUND IN THE
"ACCOUNTING LIST INFO ARRAY"**

RECORD KIND: *aaaa*
CU NAME: *bbb(55) ccc(55)*
CU TYPE: *d* **GENERIC FLAG:** *e*
DEPEND NAME: *fff(55) ggg(55)*
DEPEND CU TYPE: *h*

Explanation: Different type flags exist for the same CU

within the accounting \$list_info array. For example, the same CU is specified as a SPEC in one instance and a BODY in another.

User Response: Contact the project administrator.

Project Manager Response: Either the parser created or the user defined an accounting \$list_info array that contained the invalid CU data. If a parser was used to create the array, check that the passed values are correct. For more information, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM80012 ONLY ONE CU RECORD MAY BE PRESENT IN THE "ACCOUNTING LIST INFO ARRAY"

Explanation: If a CU record with a type of X exists in the accounting \$list_info array, it must be the only CU record in the array.

User Response: Contact the project administrator.

Project Manager Response: Either the parser created or the user defined an accounting \$list_info array that contains the invalid CU data. If a parser was used to create the array, check that the passed values are correct. For more information, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM80020 ERROR ALLOCATING THE CHANGE CODE VERIFICATION ROUTINE

DATA SET DSNAME: aaa(44)

Explanation: Data set aaa(44) could not be allocated. The data set might not exist or it might be allocated exclusively to another user or job.

User Response: Do one of the following, depending on which is appropriate:

- Allocate the required data set and move the change code verification routine into it.
- Free the data set so that it can be allocated in SHR mode.

FLM80021 ERROR INVOKING THE CHANGE CODE VERIFICATION ROUTINE

NAME: aaaaaaaa **DSNAME:** bbb(44)

Explanation: The change code verification routine aaaaaaaa could not be invoked.

User Response: Verify that the routine exists within data set bbb(44). If the routine does not exist, move it into the proper data set. If it does exist, report this message (including the message ID and all text fields) to IBM support.

**FLM80022 INVALID CHANGE CODE: aaaaaaaa
CHANGE CODE VERIFICATION
ROUTINE RETURN CODE: bbb**

Explanation: The change code verification routine completed with a return code > 0.

User Response: Contact the project administrator.

Project Manager Response: Check your change code verification routine for return code explanations. For more information on change code verification routine specification, see *ISPF Software Configuration and Library Manager (SCLM) Project Manager's Guide*

FLM80030 THE MAXIMUM SIZE OF THE "ACCOUNTING LIST INFO ARRAY" HAS BEEN EXCEEDED

Explanation: The accounting \$list_info array has insufficient space to contain the data specified. Dependency information, user data records, and change code information must fit into the array.

User Response: If possible, eliminate unneeded user data or change code information from the accounting record using the SCLM library utility. If all of the information is required, contact the project administrator.

Project Manager Response: Increase the size of the accounting \$list_info array defined for the language on the FLMLANGL macro. For more information on the FLMLANGL macro and how to specify the size of the accounting \$list_info array, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM80031 "ACCOUNTING LIST INFO ARRAY" MUST ONLY CONTAIN CHANGE CODE RECORDS

RECORD TYPE: aaaa

Explanation: An invalid record was found in the accounting \$list_info array. This message appears when the SAVE service is invoked using the FLMLNK interface. The SAVE service accepts only change code records in the \$list_info array; however, a record with type aaaa was passed as input.

User Response: If no change codes are to be added, set the \$list_info parameter to hex zeros. If change codes are to be added, an END record must appear after the last change code to terminate the list. Refer to the SAVE service for more information. If you received this message but you were not invoking the SAVE service using FLMLNK, contact the project administrator.

Project Manager Response: Report this message (including the message ID and all text fields) to IBM support.

SCLM Messages

FLM80035 A NON-BLANK CHANGE CODE IS REQUIRED

Explanation: The project definition indicates that change code verification is in effect, but no change code was specified.

User Response: Provide a non-blank change code.

Project Manager Response: Ensure that a change code verification routine is needed for the project. If so, inform all users that they are required to enter change codes. In addition, provide a list of valid values to your users.

FLM80500 ACCESS KEY INCORRECT

ACCESS KEY: *aaa(16)*

GROUP: *bbbbbbbb*

TYPE: *ccccccc* **MEMBER:** *dddddddd*

Explanation: Access key *aaa(16)* was invalid. Member *dddddddd* is locked out with an access key. The member can be saved in the SCLM hierarchy only if the correct access key is specified. Another explanation is that the member is checked out to the Workstation Platform and an edit at the host was requested.

User Response: If another user or the Workstation Platform has the member checked out, wait until it is checked in. Otherwise, specify the correct access key for the member. You can check the value of the access key by browsing the accounting record with the SCLM Library Utility option (Option 3.1). If you wish to delete member *ddddddd*, use the DELETE service specifying the proper access key.

FLM81001 INVALID APPLICATION ID: *aaaaaaaa*

Explanation: An INIT or END operation was attempted with an invalid application ID (*aaaaaaaa*) specified.

User Response: Make sure that the application ID passed back from the START function is used in the INIT and END functions.

FLM81201 INVALID PROJECT IDENTIFIER: *aaaaaaaa*

Explanation: An invalid project identifier (*aaaaaaaa*) was passed to an SCLM service. A valid project identifier is required by the SCLM service requested.

User Response: Supply a valid project identifier in the SCLM service parameter list.

FLM81202 INVALID PROJECT DEFINITION NAME: *aaaaaaaa*

Explanation: An invalid project definition name (*aaaaaaaa*) was passed to an SCLM service. A valid

project definition name is required by the SCLM service requested.

User Response: Supply a valid project definition name in the SCLM service parameter list.

FLM81203 MAXIMUM SCLM ID LIMIT EXCEEDED

Explanation: No more SCLM IDs are available at this time.

User Response: Free some previously allocated SCLM IDs. To do this, use the FREE service to free the SCLM IDs, and the END service will open SCLM IDs associated with a given application. You can also free SCLM IDs by backing out of all active SCLM dialogs.

FLM81204 ERROR INITIALIZING THE PROJECT DEFINITION, CODE: *aaa*

Explanation: The project definition could not be initialized.

User Response: Possible return codes are:

- 4 The specified project definition load module is not RMODE(24). Generate the project definition load module again and specify the RMODE(24) parameter to the linkage editor.
- 8 An error occurred while attempting to obtain the specified project definition or alternate project definition. Verify the project or alternate project definition.
- 12 The project definition is out of date. Reassemble the project definition with new SCLM macros. Submit the job again.
- 16 The project name specified does not match the project name in the project definition. Verify that the project name (on the FLMABEG macro) specified and the project name in the project definition are the same.

Another problem might be that SCLM is being invoked with an alternate project definition name, and this alternate project definition has the same name but different contents as another alternate project definition name that is being used. This can occur only with two different project names and when SCLM is being invoked from two different sessions (such as with a split screen). To alleviate the problem, cancel out of one session and rename the alternate project definition.

- 20 An attempt to open or close the project definition failed. Browse the project definition data set ('project_id.PROJEDEFS.LOAD'). Select the member whose name matches the alternate you are using, or the project ID, if

the alternate is blank. If the member appears, close the Browse panel and submit the job again.

- 24 The project definition data set could not be allocated. Verify that the project definition data set exists and is not allocated exclusively by another user. For more information about allocating the PROJDEFS data sets, see *ISPF Software Configuration and Library Manager (SCLM) Project Manager's Guide*

FLM81206 INVALID DATA SET NAME PATTERN DETECTED, GROUP: aaaaaaaa, CODE: bbb

Explanation: An invalid data set name pattern was detected for group aaaaaaaa.

User Response: Contact the project administrator.

Project Manager Response: Possible return codes are:

- 8 An invalid data set name was generated. Possible reasons for this failure are:
- The length of the data set name is greater than 44 characters.
 - The SCLM variable @@FLMTYP is missing on the DSNNAME parameter being used by the specified group. The variable @@FLMTYP must be used with each dsname parameter. Determine which FLMALTC or FLMCNTRL macro is being used by the group and add @@FLMTYP to the pattern specified by the DSNNAME parameter.

FLM81302 ERROR PROCESSING MEMBERS WITH ACCOUNTING INFORMATION TYPE: INITIAL

Explanation: During cleanup activities, SCLM changes the members that are in an INITIAL state to a LOCKOUT state. If the initial accounting record cannot be found in the database, or if an error is encountered while attempting to update the accounting record, SCLM issues this message. This error can be caused by concurrent access of a member in the database (for example, using split screens to work with a member).

User Response: Use SCLM option 3.1 to browse the accounting record and verify the state of the member. If an accounting record is not present for the member and this result was unexpected, submit the job again to correct the problem. If an accounting record is present but its accounting type is INITIAL, delete the record and submit the job again.

FLM82002 MEMBER IS NON-EDITABLE GROUP: aaaaaaaa TYPE: bbbbbbbb MEMBER: cccccccc

Explanation: The specified member cannot be edited because it is SCLM output. This member cannot be updated in this way.

User Response: SCLM does not allow you to edit non-editable members. If you need to edit a non-editable member, create a new member and copy the non-editable data into the new member. You cannot copy the modified data in the new member back into the original non-editable member within SCLM.

FLM82003 MEMBER IS NOT LOCKED GROUP: aaaaaaaa TYPE: bbbbbbbb MEMBER: cccccccc

Explanation: The UNLOCK service was called but member cccccccc was not locked. If this error occurred while you were using the STORE service, no accounting information was available. If this error occurred while you were using the editor, the accounting information created at the beginning of your edit session was lost.

User Response: For the STORE service, verify that the LOCK service completed successfully before calling the STORE service. For the UNLOCK service, this message is a warning and can be ignored. If you are in an edit session, your data has been saved. However, the accounting information is lost. Cancel this edit session and edit the member again. Then issue the SAVE command immediately to establish accurate accounting information.

FLM82004 LANGUAGE: aaaaaaaa CANNOT BE USED FOR EDITABLE MEMBERS

Explanation: The language aaaaaaaa specified to the PARSE routine is not a valid language. Check the list of valid languages in the project definition.

User Response: Use a language that is in the project definition. If the language that you need is not in the project definition, contact the project administrator.

Project Manager Response: Add the required language to the &libdef in the form of a language definition and reassemble. For more information on language definitions, see *ISPF Software Configuration and Library Manager (SCLM) Project Manager's Guide*

FLM82005 INPUT PARAMETER "ERROR_LISTINGS_ONLY" MUST BE 'Y' OR 'N' ERROR_LISTINGS_ONLY: a

Explanation: An invalid parameter was passed to an SCLM service.

User Response: Supply the valid parameter in the SCLM service parameter list.

SCLM Messages

FLM82006 INPUT PARAMETER "VERIFY_CC"
MUST BE 'Y' OR 'N', VERIFY_CC: *a*

Explanation: An invalid parameter was passed to an SCLM service.

User Response: Supply the valid parameter in the SCLM service parameter list.

FLM82008 INPUT PARAMETER
"SUB_DRAWDOWN_MODE" MUST BE
'C' OR 'U' SUB_DRAWDOWN_MODE:
a

Explanation: An invalid parameter was passed to an SCLM service.

User Response: Supply the valid parameter in the SCLM service parameter list.

FLM82203 THE MEMBER HAS ACCOUNTING
INFORMATION WITH TYPE:
EDITABLE AUTHORIZATION CODE
CANNOT BE UPDATED

GROUP: *aaaaaaaa* **TYPE:** *bbbbbbbb*
MEMBER: *ccccccc*

Explanation: The authorization code specified does not match the authorization code already assigned to the member.

User Response: Use the SCLM library utility to change the authorization code.

FLM82301 EDITABLE MEMBER'S ACCESS KEY
IS BLANK

GROUP: *aaaaaaaa* **TYPE:** *bbbbbbbb*
MEMBER: *ccccccc*

Explanation: You tried to unlock a member that has an editable accounting record and the access key was already blank.

User Response: If you want to unlock the member rather than just reset the access key, use the DELETE service to delete the member's accounting record.

FLM82401 ERROR PROCESSING SYSTEM
LIBRARIES FOR PARSING

CODE: *aaa* **LANGUAGE:** *bbbbbbbb*
ERROR DSNAME: *ccc(44)*

Explanation: SCLM was unable to allocate the system library defined in the language definition for the language *bbbbbbbb*.

User Response: Check that the system libraries specified in the language definition exist and are not allocated exclusively. If one or more do not exist, contact the project administrator.

Project Manager Response: Remove the invalid system libraries from the language definition and regenerate the project definition.

FLM82402 LANGUAGE IS DEFINED FOR
NON_EDITABLE MEMBERS ONLY

'LANGUAGE: *bbbbbbbb*

Explanation: You assigned a non-editable language to a member of an editable type.

User Response: Contact your project coordinator for the correct language to assign to this member.

FLM82403 UNABLE TO ALLOCATE MACRO
LIBRARIES FOR PARSING, CODE: *aaa*
LANGUAGE *bbbbbbbb*

Explanation: SCLM was unable to allocate the macro libraries associated with the parser for language *bbbbbbbb*.

User Response: Verify that the user has access to the macro libraries specified in the language definition.

12 Unable to read the directory for the system macro.

20 Unable to open one of the macro libraries.

Project Manager Response: Verify that the user has access to the macro libraries defined for the language.

Possible return codes are:

12 Unable to read the directory for the system macro.

20 Unable to open one of the macro libraries.

FLM82501 EXISTING CU'S AUTHORIZATION
CODE NOT DEFINED TO GROUP

CU NAME: *aaa(55) bbb(55)* **CU TYPE:**
cccc

CU QUALIFIER: *ddddddd*

GROUP: *eeeeeee*

ERROR GROUP: *ffffff*

AUTHORIZATION CODE: *gggggggg*

Explanation: The authorization code *aaa(55) bbb(55)* is not defined to the group. This implies that the CU is not authorized to replace the version of the member in the error group.

User Response: It is possible that the function will succeed with a different authorization code. Contact the &dbc for a list of authorization codes that are valid for this group. If none of the authorization codes defined to the group work, try the same function at a different group. Contact the &dbc if you need further assistance.

Project Manager Response: The list of valid authorization codes defined for *group* can be found in

the `&libdef` on the `FLMGROUP` macro. Do not attempt to add authorization codes to the project definition unless you are familiar with the risks associated with using authorization codes to control SCLM operations as outlined in *ISPF Software Configuration and Library Manager (SCLM) Project Manager's Guide*

FLM82502 INPUT PARAMETER "\$STATS_INFO" CANNOT BE NIL

Explanation: \$STATS_INFO has not been initialized with data. The SCLM service requested must have data in this record.

User Response: Initialize \$STATS_INFO and call the service again.

FLM82503 DUPLICATE CHANGE CODE RECORDS FOUND IN THE "ACCOUNTING LIST INFO ARRAY"

RECORD KIND: aaaa
CHANGE CODE: bbbbbb

Explanation: Change code bbbbbb was specified multiple times within the same accounting \$list_info array. A service call using a user-specified parser had duplicate entries for the change code.

User Response: Remove duplicate entries for the &cc in the SCLM services parameter list and call the service again.

Project Manager Response: Rewrite the involved parser to add logic that will remove duplicate entries. For more information on invoking user-defined parsers, see .. *ISPF Software Configuration and Library Manager (SCLM) Project Manager's Guide*

FLM82504 DUPLICATE COMPOOL RECORDS FOUND IN THE "ACCOUNTING LIST INFO ARRAY"

RECORD KIND: aaaa
COMPOOL NAME: bbbbbb

Explanation: Compool bbbbbb was specified multiple times within the same accounting \$list_info array. A service call to a user-specified parser generated duplicate entries for the compool.

User Response: If the STORE service was called, remove duplicate entries for the compool in the SCLM services parameter list and call the service again. If the SAVE service was called, or if data was passed to the STORE service as a result of the PARSE service, contact the project administrator.

Project Manager Response: Rewrite the involved parser to add logic that will remove duplicate entries. For more information on the STORE service, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM82505 DUPLICATE INCLUDE RECORDS FOUND IN THE "ACCOUNTING LIST INFO ARRAY"

RECORD KIND: aaaa
INCLUDE NAME: bbbbbb

Explanation: The include bbbbbb was specified multiple times within the same accounting \$list_info array. A service call to a user-specified parser generated duplicate entries for the include.

User Response: If the STORE service was called, remove duplicate entries for the include in the SCLM services parameter list and call the service again. If the SAVE service was called, or if data was passed to the STORE service as a result of the PARSE service, contact the project administrator.

Project Manager Response: Rewrite the involved parser to add logic that will remove duplicate entries. For more information on the STORE service, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM82506 DUPLICATE CU RECORDS FOUND IN THE "ACCOUNTING LIST INFO ARRAY"

RECORD KIND: aaaa
CU NAME: bbb(55) ccc(55)
CU TYPE: d
GENERIC FLAG: e
DEPEND NAME: fff(55) ggg(55)
DEPEND CU TYPE: h

Explanation: The CU bbb(55) ccc(55) was specified multiple times within the same accounting \$list_info array. A service call to a user-specified parser generated duplicate entries for the CU.

User Response: If the STORE service was called, remove duplicate entries for the CU in the SCLM services parameter list and call the service again. If the SAVE service was called, or if data was passed to the STORE service as a result of the PARSE service, contact the project administrator.

Project Manager Response: Rewrite the involved parser to add logic that will remove duplicate entries. For more information on the STORE service, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM82507 ERROR ALLOCATING THE SPECIFIED MEMBER

GROUP: aaaaaaaa **TYPE:** bbbbbb
MEMBER: ccccccc

Explanation: Member ccccccc does not exist in the group aaaaaaaa and type bbbbbb.

SCLM Messages

User Response: Put the member in the hierarchy, or remove the reference to the member source code or member lists.

FLM82508 CU LOCKED ELSEWHERE

CU NAME: *aaa(55) bbb(55)*
CU TYPE: *cccc*
CU QUALIFIER: *dddddddd*
ERROR GROUP: *eeeeeeee*
TYPE: *ffffff* MEMBER: *gggggggg*
ERROR AUTHORIZATION CODE:
hhhhhhhh

Explanation: CU *aaa(55) bbb(55)* has already been updated in another hierarchical view or the CU is in the current view but in another type. The changes reside in the group specified in this message. This group is not in your view of the hierarchy. You cannot update the member because you would not be working with the most current version of the member.

User Response: Promote the member into a group that is in your hierarchy (that is, one that appears on your SCLM Edit - Entry panel). If the member cannot be promoted, you must delete the member and its accounting information in the error group using the SCLM library utility or the DELETE service.

FLM82509 DRAWDOWN VERIFICATION ERROR

CODE: *aaa* CU NAME: *bbb(55) ccc(55)*
CU TYPE: *dddd*
CU QUALIFIER: *eeeeeeee*
GROUP: *ffffff*
AUTHORIZATION CODE: *gggggggg*

Explanation: One of the following errors has occurred:

- Group *ffffff* is an invalid SCLM group.
- An I/O error occurred in retrieving the XREF record from the accounting database.

User Response: Correct the group if it is incorrect. If the group is correct, contact the project administrator.

Project Manager Response: Verify that the cross-reference record in the accounting database is correct.

FLM82511 CU DRAWN DOWN FROM ANOTHER MEMBER

CU NAME: *aaa(55) bbb(55)*
CU TYPE: *cccc*
CU QUALIFIER: *dddddddd*
DRAWN DOWN FROM
GROUP: *eeeeeeee*
TYPE: *ffffff* MEMBER: *gggggggg*

Explanation: SCLM is now tracking two sessions of compilation unit *aaa(55) bbb(55)* in separate members.

This message is provided for information only.

FLM82601 INPUT PARAMETER "PARSE_MODE" MUST BE 'C' OR 'U',

PARSE_MODE: *a*

Explanation: An invalid parameter was passed to an SCLM service.

User Response: Supply the valid parameter in the SCLM service parameter list.

FLM82602 "LANGUAGE" CANNOT BE DEFAULTED AN EDITABLE ACCOUNTING RECORD DOES NOT EXIST FOR THE MEMBER

GROUP: *aaaaaaaa* TYPE: *bbbbbbbb*
MEMBER: *cccccccc*

Explanation: A valid language has not been assigned to member *cccccccc*. The language is obtained from SCLM accounting information.

User Response: Add a valid language to the service call or command.

FLM82603 WARNING: A PARSER ERROR OCCURRED BUT AN UNCONDITIONAL PARSE WAS REQUESTED

Explanation: An error occurred while parsing the member but you requested an unconditional parse. The SAVE service continues and saves the statistical and dependency information that the parser returned for the member.

User Response: If possible, you should try to correct the parser errors. A parser error can cause incorrect dependency information to be saved for the member. If the parser error cannot be corrected at this time, call the SAVE service for this member at a later date to correct the parser error.

FLM83100 UNABLE TO ALLOCATE THE *aaaa* GROUPS REQUESTED. *bbb*. GROUPS IN THE HIERARCHY VIEW FROM *ccccccc* WILL BE ALLOCATED

Explanation: The *total_groups* parameter passed to the DSALLOC service was either less than zero or greater than the total number of groups in the view of the hierarchy starting from group *ccccccc*. The DSALLOC service will allocate all of the groups in the hierarchical view. This message will result in a warning condition.

User Response: If allocating all groups in the hierarchy view is acceptable, no action is necessary. If this result was unexpected, verify that the *first_group*

parameter *ccccccc* was the value intended. If an alternate project definition was used, verify that the intended value was passed. If all parameters seem correct, use SCLM Browse to identify the groups SCLM considers part of the hierarchy view. This can be done by specifying *ccccccc* on the SCLM main panel and selecting option 1. If *bbb* is greater than 4, invoke SCLM Browse successively using the group name that appears at the end of the concatenation on the Browse panel.

FLM84101 INPUT PARAMETER "DELETE_FLAG" MUST BE 'BMAP', 'ACCT', OR 'TEXT'

DELETE_FLAG: *aaaa*

Explanation: An invalid parameter was passed to the DELETE service.

User Response: Supply the valid parameter in the SCLM service parameter list. For more information, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM84110 WARNING - BUILD MAP NOT DELETED BECAUSE IT DOES NOT EXIST

Explanation: The build map to be deleted does not exist.

FLM84111 WARNING - ACCOUNTING RECORD NOT DELETED BECAUSE IT DOES NOT EXIST

Explanation: The accounting record to be deleted does not exist.

FLM84112 MEMBER: *aaaaaaaa* TYPE: *bbbbbbb* GROUP: *ccccccc* IS IN USE BY YOU OR ANOTHER USER.

Explanation: Your attempt to delete member *aaaaaaaa* failed because the member is in use by you or another user (for example, the member is being edited.)

User Response: Verify that no one is using member *aaaaaaaa* before you attempt to delete it.

FLM84200 NEW AUTHORIZATION CODE IS EQUAL TO OLD AUTHORIZATION CODE. NO CHANGE IS REQUIRED FOR: GROUP: *aaaaaaaa* TYPE: *bbbbbbb* MEMBER: *ccccccc*

Explanation: The authorization code assigned to member *ccccccc* is equal to the new authorization code.

User Response: Verify that the new authorization code was specified correctly.

FLM84204 WARNING, MEMBER: *aaaaaaaa* COULD BE REPLACED BY MEMBER AT GROUP: *bbbbbbb* TYPE: *ccccccc* WITH AUTHORIZATION CODE: *ddddddd*

Explanation: The member that is being updated (*aaaaaaaa*) was found at a lower group. The member at the lower group is promotable, and, therefore, could replace the member that is being updated. The update is performed as requested.

User Response: Report this situation to the project administrator.

Project Manager Response: The authorization code for the lower group member should be updated to match the higher group member to avoid overlaying the update made in the higher group.

FLM84300 INPUT PARAMETER "PRESERVE" MUST BE 'Y' OR 'N' PRESERVE: *aaa*

Explanation: The preserve parameter of the Edit service must be Y to preserve the record length of variable length records, or N to remove trailing blanks. *aaa* is not a valid value.

User Response: Correct the preserve parameter.

FLM84305 INPUT PARAMETER "CONFIRM" MUST BE 'Y' OR 'N' CONFIRM: *aaa*

Explanation: The confirm parameter of the Edit service must be Y to confirm delete move, and replace operations within edit, or N to process without confirmation. *aaa* is not a valid value.

User Response: Correct the confirm parameter.

FLM84310 INPUT PARAMETER "MIX" MUST BE 'Y' OR 'N' MIX: *aaa*

Explanation: The mix parameter of the Edit service must be Y for mixed mode, or N to edit without mixed mode. *aaa* is not a valid value.

User Response: Correct the mix parameter.

FLM84315 INPUT PARAMETER "WS" MUST BE 'Y' OR 'N' WS: *aaa*

Explanation: The ws parameter of the Edit service must be Y to edit on a connected workstation, or N to edit on the host system. *aaa* is not a valid value.

User Response: Correct the ws parameter.

SCLM Messages

FLM84320 INPUT PARAMETER "ALL_HIER"
MUST BE 'N' WHEN GROUP 2,
GROUP 3, OR GROUP 4 IS SPECIFIED
ALL_HIER: *aaa*

Explanation: To allocate the entire hierarchy, set the all_hier parameter to 'Y'. To allocate only specific groups, put any desired group names in the group 1, group 2, group 3, and group 4 parameters, and set the all_hier parameter to 'N'. *aaa* is not a valid value.

User Response: Correct the all_hier parameter, or set group 2, group 3, and group 4 to blanks.

FLM84325 INPUT PARAMETER "ALL_HIER"
MUST BE 'Y' OR 'N' ALL_HIER: *aaa*

Explanation: The all_hier parameter of the Edit service must be 'Y' to allocate the entire hierarchy, or 'N' to allocate only specified groups. *aaa* is not a valid value.

User Response: Correct the all_hier parameter.

FLM84330 GROUP 1 MUST BE A
DEVELOPMENT GROUP GROUP1: *aaa*

Explanation: *aaa* is not a development group. The group 1 parameter for the Edit service must be a development group.

User Response: Correct the group 1 parameter.

FLM84335 USER DEFINED DDNAME: *aaa* FOR
EDIT MESSAGES NOT ALLOCATED

Explanation: The messages ddname of the Edit service must be allocated before executing the edit service. The ddname can be left blank to allocate the ddname to the default output device (such as the terminal).

User Response: Either allocate the data set before invoking the Edit service or set the ddname parameter to blank.

FLM84340 SCLM EDIT CANNOT BE INVOKED
WITHIN AN ACTIVE EDIT SESSION.
USE SPLIT SCREEN OR END THE
CURRENT SCLM EDIT SESSION.

Explanation: SCLM edit service cannot be invoked from within an SCLM edit session.

User Response: Either close the current edit session or split the screen and try again.

FLM84345 VOLUME IS NOT MOUNTED OR IS
NOT AUTHORIZED FOR YOUR USE.
VOLSER: *aaa*

Explanation: The parser volume is not mounted or you do not have authority to use it.

User Response: Verify that the volume is correct, and

that you have authority to access it.

FLM84350 AUTHCODE IS INVALID FOR GROUP.
AUTHCODE: *aaaaaaaa* GROUP: *bbbbbbbb*

Explanation: The requested authcode *aaaaaaaa* is not available for group *bbbbbbbb*.

User Response: Enter a valid authorization code for the group, or leave the authorization code blank to default.

FLM84355 VOLUME IS NOT MOUNTED OR IS
NOT AUTHORIZED FOR YOUR USE.
VOLSER: *aaaaaa*

Explanation: The requested parser volume could not be accessed.

User Response: Verify that the volume is correct.

Project Manager Response: Verify that the volume is available and online.

FLM85000 *aaaaaa* UTILITY INITIATED - *bbbbbbbb*
ON *ccccccc*

Explanation: This message is provided for information only.

FLM85001 EXPORT ACCOUNTING DATA SET
CONTAINED UNEXPECTED
INFORMATION

Explanation: You specified N, meaning that the export data set does not need to be purged because it is already empty. However, data was found in the accounting export data set defined for the export database.

User Response: Submit the export again, specifying Y.

FLM85002 ERROR PURGING EXPORT DATA SET

Explanation: A VSAM error occurred while attempting to delete records from the export database.

User Response: It is possible that the last export into this data set contained information that depends on both the accounting and cross-reference data sets, and the current definition of the export database does not contain a cross-reference data set. Delete and reallocate the export accounting data set, the cross-reference data set, or both. Submit the job again.

Project Manager Response: Run IDCAMS against the export data set to determine the problem.

FLM85003 I/O ERROR RETRIEVING LIST OF ACCOUNTING RECORDS.**GROUP:** aaaaaaaa **TYPE:** bbbbbbbb**Explanation:** An I/O error occurred while trying to retrieve a list of existing SCLM accounting records.**User Response:** Submit the job again. If the problem recurs, contact the project manager.**Project Manager Response:** Run IDCAMS against the export data set to determine the problem.

FLM85004 I/O ERROR RETRIEVING LIST OF BUILD MAP RECORDS. GROUP:
aaaaaaa **TYPE:** bbbbbbbb**Explanation:** An I/O error occurred while trying to retrieve a list of existing build map accounting records.**User Response:** Submit the job again. If the problem recurs, contact the project manager.**Project Manager Response:** Run IDCAMS against the export data set to determine the problem.

FLM85005 I/O ERROR RETRIEVING LIST OF INTERMEDIATE RECORDS.**Explanation:** An I/O error occurred while trying to retrieve a list of existing intermediate records.**User Response:** Submit the job again. If the problem recurs, contact the project manager.**Project Manager Response:** Run IDCAMS against the export data set to determine the problem.

FLM85007 USER DEFINED DDNAME: aaaaaaaa FOR IMPORT/EXPORT MESSAGES NOT ALLOCATED**Explanation:** The data set associated with ddname aaaaaaaa has not been allocated.**User Response:** Allocate the data set and submit the job again, or submit the job again without specifying a ddname for the file to which messages will be written. If you omit the ddname for the messages data set, the messages will be written to the terminal.

FLM85008 USER DEFINED DDNAME: aaaaaaaa FOR IMPORT/EXPORT REPORT NOT ALLOCATED.**Explanation:** The data set associated with ddname aaaaaaaa has not been allocated.**User Response:** Allocate the data set and submit the job again, or submit the job again without specifying a ddname for the data set to which reports will be written. If you omit the ddname for the reports data set, the reports will be written to the terminal.

FLM85009 INPUT PARAMETER: aaaaaaaa IS INVALID. VALID VALUES ARE "Y" OR "N".**Explanation:** The value entered to indicate whether or not the export data set should be purged before exporting is invalid.**User Response:** Enter either Y or N for the purge option, and submit the export job again.

FLM85010 MEMBER aaaaaaaa CONTAINS NON-BLANK AUTHCODE CHANGE FIELD. MEMBER NOT EXPORTED.**Explanation:** Member aaaaaaaa was in the process of having the authorization code changed when the tried to copy it.**User Response:** Submit the export job again.

FLM85011 SCLM DATABASE CONTAINED INTERMEDIATE RECORDS. NO CROSS-REFERENCE DATA SET DEFINED FOR EXPORT.**Explanation:** The regular SCLM VSAM database contained intermediate and cross-reference records for the specified group, but the export VSAM database does not have a data set defined for intermediate and cross-reference information.**User Response:** Define an export cross-reference database and submit the export job again.

FLM85012 SCLM ACCOUNTING RECORDS CONTAIN CROSS-REFERENCE RECORDS. NO CROSS-REFERENCE DATA SET DEFINED FOR EXPORT.**Explanation:** The regular SCLM VSAM accounting database contains links to cross-reference records, but the export VSAM database does not have a data set defined for intermediate and cross-reference information.**User Response:** Define an export cross-reference database and submit the export job again.

FLM85013 ERROR EXPORTING INTERMEDIATE RECORD FOR: CU NAME: a(110) CU TYPE: bbbbbbbb CU QUALIFIER: cccccccc CODE: ddd TYPE: eeeeeeee MEMBER: ffffff TO EXPORT DATABASE.**Explanation:** An error occurred when trying to write the intermediate record for a(110) to the export database.**User Response:** Possible return codes are:**12** The record format of the member's

SCLM Messages

intermediate accounting data is incorrect for the current release of SCLM. Contact the project manager.

20 An I/O error occurred while trying to write the intermediate record to the export data set. Submit the job again. If the error occurs again, contact the project manager.

24 The cross-reference data set was not defined for the export database. Contact the project manager.

Project Manager Response: If the return code is:

12 Verify that the cross-reference data set is compatible with the current release of SCLM.

20 Run IDCAMS against the export cross-reference data set to determine the problem.

24 Define the export cross-reference data set on the FLMCNTRL macro of the project definition. For more information on the FLMCNTRL macro see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM85014 ERROR RETRIEVING INTERMEDIATE RECORD: CU NAME: a(110) CU TYPE: bbbbbbbb CU QUALIFIER: cccccccc CODE: ddd GROUP: eeeeeeee MEMBER: fffffff FROM SCLM ACCOUNTING DATABASE.

Explanation: An error occurred while attempting to retrieve the accounting information for the intermediate record of a(110).

User Response: Possible return codes are:

8 The accounting information for the intermediate record of the compilation unit was not found in group eeeeeeee. This means that the compiled intermediate record is missing or out of date. Rebuild the member containing the compilation unit.

12 SCLM internal error. Contact the project manager.

20 An I/O error occurred while retrieving the accounting information for the intermediate form of the compilation unit. Submit the job again. If the error occurs again, contact the project manager.

24 The cross-reference data set was not defined in the project definition. Contact the project manager.

Project Manager Response: If the return code is:

12 Contact SCLM Program Support.

20 A VSAM error occurred.

24 Define the cross-reference data set on the FLMCNTRL macro of the project definition. For more information on the FLMCNTRL macro, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM85015 ERROR RETRIEVING ACCOUNTING OR CROSS-REFERENCE INFORMATION. CODE: aaa ERROR GROUP: bbbbbbbb TYPE: cccccccc MEMBER: dddddddd FROM SCLM ACCOUNTING DATABASE.

Explanation: An error occurred while attempting to retrieve a member's accounting or dependency information.

User Response: Possible return codes are:

8 The member's accounting information was not found. Introduce the member to SCLM using the SCLM editor, migration utility, or SAVE service. Run the processor again.

12 The member's accounting and dependency information was successfully retrieved; however, some of the dependency information failed a verification check. To determine the nature of the verification error, browse the member's accounting and dependency information using the SCLM library utility. To correct the problem, edit and save the member.

16 SCLM found an invalid group in the project definition. Contact the project manager.

20 A severe I/O error occurred. Contact the project manager.

Project Manager Response: Run IDCAMS against the accounting data set to determine the problem.

FLM85016 ERROR EXPORTING ACCOUNTING OR CROSS-REFERENCE DATA SET INFORMATION. CODE: aaa ERROR GROUP: bbbbbbbb TYPE: cccccccc MEMBER: dddddddd TO EXPORT DATABASE.

Explanation: An error occurred while attempting to write a member's accounting and dependency information.

User Response: Possible return codes are:

8 An I/O error occurred while writing the member's accounting information and no attempt was made to write the dependency information. Errors can occur if SCLM attempts to reference this member. Submit the job again. If the error occurs again, contact the project manager.

12 An I/O error occurred while writing dependency information for a compilation

unit. Errors can occur if SCLM attempts to reference this member. Submit the job again. If the error occurs again, contact the project manager.

Project Manager Response: Run IDCAMS against the accounting and cross-reference data sets to determine the problem.

FLM85017 ERROR RETRIEVING BUILD MAP INFORMATION, CODE: aaa GROUP: aaaaaaaaaa TYPE: bbbbbbbb MEMBER: cccccccc FROM SCLM ACCOUNTING DATABASE.

Explanation: No build map record could be retrieved for the member cccccccc.

User Response: Possible return codes are:

- 8 The specified build map record does not exist. Build the appropriate architecture member. Invoke the processor again.
- 12 The format of the data retrieved was incorrect. Delete the build map and build again to regenerate it.
- 16 An invalid group was found in the project definition. Contact the project manager.
- 20 A severe I/O error occurred. Contact the project manager.

Project Manager Response: If the return code is:

- 16 Reassemble the project definition. Verify that no errors occurred. Relink the project definition. For more information, see *ISPF Software Configuration and Library Manager (SCLM) Project Manager's Guide*
- 20 A VSAM error occurred. Run IDCAMS against the accounting data set to determine the problem.

FLM85018 ERROR EXPORTING BUILD MAP INFORMATION, CODE: aaaa GROUP: bbbbbbbb TYPE: cccccccc MEMBER: dddddddd TO EXPORT DATABASE.

Explanation: An error occurred while attempting to insert or update build map information in the accounting data set.

User Response: Possible return codes are:

- 4 An I/O error occurred while writing the member's accounting information to the secondary accounting data set. Because the primary accounting data set was correctly updated, SCLM will use the correct information for all references. However, the two accounting data sets are no longer identical. Contact the project manager.

- 8 The length of the build map exceeds the maximum size allowed by the accounting data set.

12 Contact SCLM Program Support.

- 20 A severe I/O error occurred. Contact the project manager.

Project Manager Response: Run IDCAMS against the accounting data set to determine the problem. If the return code is 8, contact SCLM Program Support.

FLM85020 ERROR PURGING INTERMEDIATE INFORMATION FROM EXPORT CROSS-REFERENCE DATA SET.

Explanation: An error occurred while attempting to purge accounting records of intermediate form from the export cross-reference VSAM data set.

User Response: Possible reasons are:

1. An I/O error occurred while purging. Submit the job again. Contact the project manager if the error occurs again.
2. Target data set enqueued. Submit the job after the data set is no longer exclusively in use by another job.
3. The export cross-reference data set was not defined in the project definition. Contact the project manager.

Project Manager Response: Check the project definition. If an export cross-reference data set is not defined, define one on the FLMCNTRL macro of the project definition. For more information on the FLMCNTRL macro, see *ISPF Software Configuration and Library Manager (SCLM) Referenc* If the data set is defined to the project definition, run IDCAMS against the export cross-reference data set to determine the problem.

FLM85021 ERROR PURGING CROSS-REFERENCE INFORMATION FROM EXPORT CROSS-REFERENCE DATA SET.

Explanation: An error occurred while attempting to purge cross-reference records from the export cross-reference VSAM data set.

User Response: Possible reasons are:

1. An I/O error occurred while attempting to purge the export cross-reference data set. Submit the job again. Contact the project manager if the error occurs again.
2. The target data set is enqueued. Submit the job again after the data set is no longer exclusively in use by another job.
3. The export cross-reference data set was not defined in the project definition. Contact the project manager.

Project Manager Response: Check the project

SCLM Messages

definition. If the export cross-reference data set is not defined, define one on the FLMCNTRL macro of the project definition. For more information on the FLMCNTRL macro, see *ISPF Software Configuration and Library Manager (SCLM) Referenc* If the data set is defined to the project definition, run IDCAMS against the export cross-reference data set to determine the problem.

FLM85022 EXPORT CROSS-REFERENCE DATA SET CONTAINED UNEXPECTED INFORMATION.

Explanation: You specified N, meaning that the export data set does not need to be purged because it is already empty. However, data was found in the cross-reference data set defined for the export database.

User Response: Specify Y in the **Purge** field, and submit the job again.

FLM85023 EXPORT - PURGE PHASE INITIATED.

Explanation: This message is provided for information only.

FLM85024 EXPORT - EXPORT PHASE INITIATED.

Explanation: This message is provided for information only.

FLM85025 WARNING - EXPORT DATABASE CONTAINS NO RECORDS.

Explanation: No records exist in the export database. For export, there were no records to be exported from the specified group. For import there were no records in the export database to be imported.

User Response: For export, check to be sure the correct group was specified and contained accounting information. For import, make sure the correct export database was defined in the project definition. Contact the &dba for assistance.

Project Manager Response: For import, assist the user in determining that the project definition contains the correct export database and that records exist.

FLM85101 INPUT PARAMETER "DELETE_FLAG" MUST BE 'BMAP', 'ACCT', 'TEXT' OR 'OUTPUT'.

Explanation: The DELETE_FLAG value entered in the DELGROUP input parameters is not valid. Valid values are: BMAP, ACCT, TEXT or OUTPUT.

User Response: Submit the delete group job with the correct input value for DELETE_FLAG.

FLM85102 USER DEFINED DDNAME: aaaaaaaa FOR DELETE GROUP LISTING NOT ALLOCATED.

Explanation: The ddname specified for the delete group listing was not allocated. If the delete group function is invoked using the DELGROUP service, the ddname for the delete group listing is optional. If you omit the ddname, the delete group listing is written to the terminal. If you specify a ddname, you must first allocate it.

User Response: Verify that the user-supplied ddname for the delete group listing is allocated. Submit the job again.

FLM85103 USER DEFINED DDNAME: aaaaaaaa FOR DELETE GROUP REPORT NOT ALLOCATED.

Explanation: The ddname specified for the delete group report was not allocated. If the delete group function is invoked using the DELGROUP service, the ddname for the delete group report is optional. If you omit the ddname, the delete group report is written to the terminal. If you specify a ddname, you must first allocate it.

User Response: Verify that the user-supplied ddname for the delete group report is allocated. Submit the job again.

FLM85104 USER DEFINED DDNAME: aaaaaaaa FOR DELETE GROUP MESSAGES NOT ALLOCATED.

Explanation: The ddname specified for the delete group messages was not allocated. If the delete group function is invoked using the DELGROUP service, the ddname for the delete group messages is optional. If you omit the ddname, the delete group messages are written to the terminal. If you specify a ddname, you must first allocate it.

User Response: Verify that the user-supplied ddname for the delete group messages is allocated. Submit the job again.

FLM85107 aaaaa ACCOUNTING RECORDS WERE DELETED.

Explanation: aaaaa accounting records were successfully deleted.

FLM85108 DELGROUP REPORT COMPLETED -- NO RECORDS DELETED.

Explanation: This message is provided for information only.

FLM85109 *aaaaa* BUILD MAP RECORDS WERE DELETED.

Explanation: *aaaaa* build map records were successfully deleted.

FLM85110 *aaaaa* INTERMEDIATE RECORDS WERE DELETED.

Explanation: *aaaaa* intermediate records were successfully deleted.

FLM85111 INPUT PARAMETER "DELETE_MODE" MUST BE 'REPORT' OR 'EXECUTE'.

Explanation: The value entered to indicate whether or not the delete group will actually delete data or only produce a report is not valid.

User Response: Enter either REPORT or EXECUTE for the delete_mode parameter, and resubmit the delete group job.

FLM85202 INVALID IMPORT MODE
PARAMETER: *aaaaa*

Explanation: The parameter specified for IMPORT MODE on the FLMCMD service is not valid.

User Response: Change the IMPORT MODE parameter to one of the accepted values (C, U, or R). Verify that the correct number of parameters have been specified and are in the proper order.

FLM85208 EXPORT DATABASE CONTAINS MULTIPLE GROUPS.

Explanation: The Import utility is attempting to retrieve SCLM accounting information for a group from the Export database, but the Export database has information for more than one group.

User Response: Run the Export utility again for the group you desire, and specify YES as the REPLACE EXPORT DATA option. This purges the Export database and writes the desired information to use for the Import utility.

FLM85212 'INITIAL' ACCOUNTING RECORD FOUND. TYPE: *aaaaaaaa* MEMBER: *bbbbbbbbb*

Explanation: An accounting record of type, INITIAL, was found in the export database.

User Response: Determine why an initial record has been exported. If this is not a redundant accounting record, save the record, submit the export job again, and then proceed with the import operation.

FLM85213 ERROR RETRIEVING ACCOUNTING RECORD LIST FROM EXPORT DATABASE, CODE: *aaa*

Explanation: An error occurred while trying to retrieve the list of accounting records from the export database.

User Response: Possible return code is:

20 A severe I/O error occurred. Contact the project manager.

Project Manager Response: Run IDCAMS against the accounting data set to determine the problem.

FLM85214 NORMALIZATION FAILURE FOR
TYPE: *aaaaaaaa*, MEMBER: *bbbbbbbbb*,
ACCOUNTING DATE: *cccccc*, TIME:
dddddd, PDS DIRECTORY DATE: *eeeeee*,
TIME: *fffff*

Explanation: The date and time stamps retrieved from the PDS directory information for the member do not match the accounting record **Change Date** and **Change Time** fields.

User Response: The member was edited after the export job was executed.

FLM85215 ERROR RETRIEVING BUILD MAP RECORD LIST FROM EXPORT DATABASE, CODE: *aaa*

Explanation: An error occurred while trying to retrieve the list of build map records from the export database.

User Response: Possible return code is:

20 A severe I/O error occurred. Contact the project manager.

Project Manager Response: Run IDCAMS against the accounting data set to determine the problem.

FLM85216 MEMBER: *aaaaaaaa* NOT FOUND IN
PDS DIRECTORY AT GROUP: *bbbbbbbbb*,
TYPE: *cccccccc*, FOR DATA SET NAME:
ddd(44)

Explanation: The member does not exist in the data set *ddd(44)*, which is the specified target data set.

User Response: Copy the source of the member into the data set *ddd(44)* and resubmit the job again.

FLM85218 INVALID ACCOUNTING INFORMATION FOR TYPE: *aaaaaaaa*,
MEMBER: *bbbbbbbbb*, AUTHORIZATION
CHANGE CODE: *cccccccc*

Explanation: An accounting record was found in the export database that has a non-blank value in its

SCLM Messages

Authorization_Change_Code field.

User Response: This field should be blank to verify the validity of the authorization code and to allow the user to change its value in the imported record.

FLM85219 AUTHORIZATION CODE: *aaaa* IS NOT DEFINED TO GROUP: *bbbbbbbb*

Explanation: Authorization code *aaaa* has not been defined to SCLM as a valid authorization code for group *bbbbbbbb*.

User Response: Use the authorization code that has been defined to the specified group. Contact the project manager for a list of valid authorization codes. If the specified authorization code is valid, contact the project manager.

Project Manager Response: Check the project definition that defines the specified group. The valid authorization codes for the group are defined there. If authorization codes are used, reference the FLMAGRP macros in the project definition, as well. If the authorization code is valid, add it to the project definition.

FLM85220 CU QUALIFIER MISMATCH FOR TYPE: *aaaaaaaa*, MEMBER: *bbbbbbbb*, CU QUALIFIER: *cccccccc*

Explanation: The CU qualifier found in the export accounting record is not defined to the corresponding language attributes.

User Response: Contact the project manager.

Project Manager Response: Update the language definition so that the CU qualifiers match.

FLM85222 ERROR RETRIEVING CROSS-REFERENCE RECORD FOR CU-NAME: *aaa(55) bbb(55)* CU-TYPE: *cccccccc* CU-QUALIFIER: *dddddddd* GROUP: *eeeeeeee*

Explanation: Severe I/O error occurred while retrieving cross-reference record for the dependent compilation unit.

User Response: Submit the job again. If the problem recurs, contact the project manager.

Project Manager Response: Run IDCAMS against the cross-reference data set to determine the problem.

FLM85224 CROSS-REFERENCE RECORD ALREADY EXISTS IN THE TARGET GROUP. CU NAME: *aaa(55) bbb(55)* CU TYPE: *cccccccc* CU QUALIFIER: *dddddddd* GROUP: *eeeeeeee* TYPE: *dddddddd* MEMBER: *eeeeeeee*

Explanation: The import operation attempted to introduce a cross-reference record that already exists in the target group.

User Response: Delete the record and submit the job again.

FLM85226 DRAW DOWN VERIFICATION FAILURE FOR A CU. TYPE: *aaaaaaaa* MEMBER: *bbbbbbbb*

Explanation: A draw down verification of the accounting record failed because of its dependent compilation unit.

User Response: Have the member promoted into a group that is in your hierarchy. If the member cannot be promoted, then the member and its accounting information must be deleted before submitting the import job again.

FLM85228 ERROR RETRIEVING BUILD MAP INFORMATION FROM EXPORT DATABASE, CODE: *aaa* TYPE: *bbbbbbbb* MEMBER: *cccccccc*

Explanation: An error occurred while attempting to retrieve a build map record from the export database.

User Response: Possible return codes are:

8 Unsuccessful in decoding VSAM record.

20 A severe I/O error occurred. Contact the project manager.

Project Manager Response: Run IDCAMS against the accounting data set to determine the problem.

FLM85230 BUILD MAP RECORD ALREADY EXISTS IN THE TARGET GROUP: *aaaaaaaa* FOR TYPE: *bbbbbbbb*, MEMBER: *cccccccc*

Explanation: The group *aaaaaaaa*, into which import tried to introduce the records, already contains the build map record for member *cccccccc*.

User Response: A build map record should not exist in the specified target group. Determine the reason for the existence of the record. Delete the record and submit the import job again.

FLM85232 ACCOUNTING RECORD ALREADY EXISTS IN THE TARGET GROUP:
aaaaaaaa FOR TYPE: bbbbbb MEMBER: ccccccc

Explanation: The group *aaaaaaaa*, into which import tried to introduce the records, already contains the accounting record for the member *ccccccc*.

User Response: An accounting record should not exist in the specified target group. Determine the reason for the existence of the record. Delete the record and submit the import job again.

FLM85235 ERROR OCCURRED RETRIEVING INTERMEDIATE RECORD LIST FROM EXPORT DATABASE, CODE: aaa

Explanation: An error occurred while trying to retrieve the list of intermediate records from the export database.

User Response: Possible return code is:

20 A severe I/O error occurred. Contact the project manager.

Project Manager Response: Verify that the export data set exists and is correctly allocated.

FLM85238 ERROR RETRIEVING INTERMEDIATE RECORD FROM EXPORT DATABASE, CODE: aaa CU NAME: aaa(55) bbb(55) CU TYPE: ccccccc CU QUALIFIER: dddddd GROUP: eeeeeee

Explanation: An error occurred while attempting to retrieve the intermediate record from the export database.

User Response: Possible return code is:

20 An I/O error occurred while retrieving the intermediate record from the export database. Submit the job again. If the error recurs, contact the project manager.

Project Manager Response: Verify that the export data set exists and is correctly allocated.

FLM85240 INTERMEDIATE RECORD ALREADY EXISTS IN THE TARGET GROUP:
aaaaaaaa CU NAME: bbb(55) ccc(55) CU TYPE: dddddd CU QUALIFIER: eeeeeee GROUP: ffffff

Explanation: The import operation attempted to introduce an intermediate record that already exists in the target group.

User Response: If this is an error condition, delete the record and submit the job again.

FLM85246 EDITABLE ACCOUNTING RECORD WITH NON-EDITABLE LANGUAGE:
aaaaaaaa FOR TYPE: bbbbbb MEMBER: ccccccc

Explanation: Import found an editable accounting record that has a non-editable language in the export database.

User Response: Contact the project manager.

Project Manager Response: Verify that the language of the member matches that of its exported counterpart.

FLM85254 CROSS REFERENCE DB NOT DEFINED IN PROJECT DEFINITION.

Explanation: One or more intermediate records were found in the export database; however, the cross-reference database is not defined in the project definition.

User Response: Contact the project administrator.

Project Manager Response: Define an export cross-reference data set for the project and regenerate the project definition.

FLM85260 ERROR RETRIEVING ACCOUNTING RECORD FROM EXPORT DATABASE, CODE: aaa FOR TYPE: bbbbbb MEMBER: ccccccc

Explanation: No accounting record exists or could be retrieved from the export database for member *ccccccc*.

User Response: Possible return codes are:

8 The accounting record was not found in the requested group. Introduce the member to SCLM using the SCLM editor, migration utility, or SAVE service. Run the processor again.

12 The member's accounting and dependency information was successfully retrieved; however, some of the dependency information failed a verification check. To determine the nature of the verification error, browse the member's accounting and dependency information using the SCLM library utility. To correct the problem, edit and save the member.

20 A severe I/O error occurred. Contact the project manager.

24 The cross-reference data set was not found in the project definition. Contact the project manager.

Project Manager Response: If the return code is:

20 A VSAM error occurred. Run IDCAMS against the accounting database to determine the problem.

SCLM Messages

24 Identify the cross-reference data set on the FLMCNTRL macro of the project definition. For more information on the FLMCNTRL macro, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM85266 TYPE: aaaaaaaaa MEMBER: bbbbbbbb WAS EDITED WHILE IMPORT HAS BEEN IN PROGRESS.

Explanation: This condition can occur if someone edits the member after import completes verification on the member. If this is the case, the change date/time of the import record will not be the same as the change date/time of the export record.

User Response: Delete the accounting record, then copy the original member and submit the import job again.

FLM85267 TYPE: aaaaaaaaa IS NOT DEFINED IN THE PROJECT DEFINITION FOR MEMBER: bbbbbbbb

Explanation: The accounting record belongs to a type that is not defined in the project definition.

User Response: Contact the project manager.

Project Manager Response: Redefine the project definition if the type is to be imported. Then submit the export and import jobs again.

FLM85270 ACCOUNTING INFORMATION MISMATCH FOUND. FOR TYPE: aaaaaaaaa, MEMBER: bbbbbbbb

Explanation: The export database contains an editable accounting record and the SCLM project contains a non-editable accounting record with the same member name in the hierarchical view, or vice versa.

User Response: Delete the member that is causing the mismatch, and submit the import job again.

FLM85299 aaaaaaaaa UTILITY COMPLETED - aaaaaaaaa ON bbbbbbbb.

Explanation: This message is provided for information only.

FLM87100 ERROR, PARAMETER STRING MUST BE SHORTER THAN aaa CHARS LONG

Explanation: The input parameter string exceeded the maximum length.

User Response: Shorten the input parameter string to a valid length.

FLM87103 RECURSIVE "FILE" COMMAND INVOCATIONS ARE NOT ALLOWED

Explanation: A FILE command cannot be invoked within another FILE.

User Response: Remove the recursive occurrence of the FILE command. The contents of the referenced data set can be copied directly into the original data set if desired.

FLM87105 THE COMMAND IS NOT SUPPORTED
COMMAND: aaa(60)

Explanation: The command is not supported by this release of SCLM.

User Response: For a list of and descriptions of valid SCLM service commands, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM87107 aaaaaaaaa bbb(24) FOR MEMBER ccccccc AT dddddddd, CODE: eee

Explanation: The FLMCMD command termination message aaaaaaaaa represents the service that was executed. bbb(24) represents the completion status of the command.

User Response: For information on the return code, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM87109 aaaaaaaaa bbb(24) FOR GROUP ccccccc AT dddddddd, CODE: eee

Explanation: This service operates on an SCLM controlled group rather than a member. The FLMCMD command termination message aaaaaaaaa represents the service that was executed. bbb(24) represents the completion status of the command. ccccccc is the group processed by the service. dddddddd is the time stamp when the service ended. eee is the return code. This return code is documented in the description for each service.

User Response: For information on the return code, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM87110 ERROR FOUND ON LINE aaaa OF bbbbbbbb DATA SET

Explanation: Check to see if another error message was printed. If it was, correct the error indicated by the other error message first. If the error message FLM87110 is the only error message printed, then an error was found on line number aaaa of data set bbbbbbbb. If FLMCMD FILE is used, the line number refers to the number of prompts that have been

displayed. The error occurred in the command issued at the last prompt.

User Response: The error should be corrected in the data set. For more information about SCLM services, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM87115 DBUTIL aaa(9) AT bbbbbbbb, CODE: ccc

Explanation: Completion message for DBUTIL. This message is provided for information only.

User Response: For information on the return code, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM87120 ERROR, aaa(24) PARAMETER IN COLUMN bbb IS TOO LONG

Explanation: The parameter *aaa(24)* is longer than the maximum allowed.

User Response: Shorten the parameter. For more details on the SCLM services, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM87125 ERROR, aaa(24) PARAMETER MUST BE SPECIFIED

Explanation: The parameter *aaa(24)* has not been specified.

User Response: Add the parameter to the SCLM service invocation. For more details on the SCLM services, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM87130 INVALID VALUE IN COLUMN aaa FOR bbb(24) PARAMETER

Explanation: The value for the *bbb(24)* parameter is invalid. The column number (*aaa(24)*) identifies the starting location of the invalid value with the command.

User Response: Correct the value of the parameter in the command data set. For more details on the SCLM services, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM87132 INVALID USER_HIER_VIEW (A) SPECIFIED. VALUE MUST BE 'A', 'P', OR ' '.

Explanation: You have specified an invalid value for the parameter that defines the type of hierarchy view to be allocated. Valid values are A for all groups, P or blank for primary (key) groups only.

User Response: Specify A, P, or blank and resubmit.

FLM87133 EXTRANEOUS PARAMETER(S) DETECTED IN SERVICE CALL

Explanation: An SCLM service was passed a parameter string that contained more parameters than it requires.

User Response: Remove the extra parameters from the SCLM service invocation. For more details on the SCLM services and their parameters, see *ISPF Software Configuration and Library Manager (SCLM) Referenc*

FLM87134 NON-NUMERIC CHARACTER DETECTED IN THE TOTALS_GROUPS PARAMETER OF THE DSALLOC SERVICE

Explanation: A character other than 0–9 was found in the *totals_groups* parameter of the DSALLOC service.

User Response: The user should remove the non-numeric character from the DSALLOC parameter and resubmit the job.

FLM87135 THE DDNAME: aaaaaaaa IS ALREADY IN USE

Explanation: The ddname *aaaaaaaa* is reserved for use by the command processor.

User Response: Change the ddname and submit the command again.

FLM87140 THE DDNAME: aaaaaaaa HAS NOT BEEN ALLOCATED

Explanation: The ddname *aaaaaaaa* specified was passed to SCLM as a parameter, but the ddname has not been allocated.

User Response: Allocate the ddname and submit the command again.

FLM87150 THE COMMAND INVOCATION IS TOO LONG

Explanation: The command invocation statement is longer than the maximum 512 characters allowed.

User Response: Edit the command and submit it again.

FLM87155 INVALID INPUT PARAMETER FIRST OCCURRENCE ONLY - aaaaaaaa

Explanation: Invalid data was entered as input in this field.

User Response: Correct the invalid input parameter.

SCLM Messages

FLM87160 **INVALID INPUT PARAMETER DATA TYPE - aaaaaaaaa**

Explanation: Invalid data was entered as input in this field.

User Response: Correct the invalid input parameter.

FLM87165 **INVALID INPUT PARAMETER ARCHITECTURE CONTROL - aaaaaaaaa**

Explanation: Invalid data was entered as input in this field.

User Response: Correct the invalid input parameter.

FLM87167 **INVALID INPUT PARAMETER ARCHITECTURE SCOPE - aaaaaaaaa**

Explanation: Invalid data was entered as input in this field.

User Response: Correct the invalid input parameter.

FLM87170 **INVALID INPUT PARAMETER PAGE HEADERS - aaaaaaaaa**

Explanation: Invalid data was entered as input in this field.

User Response: Correct the invalid input parameter.

FLM87175 **INVALID INPUT PARAMETER SHOW TOTALS - aaaaaaaaa**

Explanation: Invalid data was entered as input in this field.

User Response: Correct the invalid input parameter.

FLM87180 **ERROR - ARCHITECTURE GROUP, TYPE, AND MEMBER MUST BE SPECIFIED IF IN OR OUT IS SPECIFIED.**

Explanation: Values must be specified for architecture group, type, and member if IN or OUT is specified for the Database Contents utility.

User Response: Specify values for architecture group, type, and member or specify "*" (asterisk) instead of IN or OUT for architecture.

FLM87190 **RECOVER TO DATA SET OR GROUP AND TYPE MUST BE SPECIFIED**

Explanation: A value must be specified for the data set to receive the recovered version or values must be specified for the group and type in the SCLM project to receive the recovered member.

User Response: Specify a value for the recovery data set or specify values for the SCLM group and type to receive the recovered version.

FLM87191 **RECOVER TO DATA SET CAN NOT BE SPECIFIED WITH TARGET GROUP OR TYPE**

Explanation: A data set for recovery of a version and a group and/or type for recovery of a version may not be specified together.

User Response: Specify either a data set or a group and type, not both.

FLM87192 **BOTH TARGET GROUP AND TYPE MUST BE SPECIFIED**

Explanation: Values were not specified for both the target group and type in recovering a version of a member.

User Response: Specify values for both the target group and type to receive the version of a member.

FLM87193 **UNABLE TO STORE DATA IN REQUESTED TABLE: aaaaaaaaa**

Explanation: The VERINFO service encountered an error when storing change codes, includes, user entries, or compilation units from the accounting record into the user defined table.

User Response: Examine the user defined table that holds the values from the VERINFO service. The table may not be properly defined.

FLM87194 **INVALID DATA SET NAME - MEMBER NAMES ARE NOT ALLOWED FOR RETRIEVAL DATA SETS**

Explanation: The VERRECOV service does not allow member names to be specified for non-SCLM controlled retrieval datasets.

User Response: Enter either a sequential data set name or a partitioned data set name without a member name.

FLM87201 **SCLM ID: aaaaaaaaa IS NOT IN USE**

Explanation: The SCLM ID corresponds to members that have been locked but not freed by either the UNLOCK or the STORE service. These will be converted from initial state to lockout. This is just a warning message.

FLM87202 **INVALID SCLM ID: aaaaaaaaa**

Explanation: The syntax of the SCLM ID is not valid. SCLM IDs are generated in the format FLMdddd where d represents a digit from 0-9.

User Response: Check the SCLM ID specified for accuracy, or make sure you used the INIT service to

generate an SCLM ID before you try to use the FREE service on it.

FLM89001 NO ACCOUNTING INFORMATION FOUND IN HIERARCHY VIEW FOR GROUP: aaaaaaaaaa TYPE: bbbbbbbb MEMBER: cccccc

Explanation: No accounting information was found for the specified member in the hierarchy view beginning at the specified group.

User Response: Verify selection parameters are correct and resubmit.

FLM89002 ERROR ACCESSING PROJECT DATABASE FOR PROJECT: aaaaaaaaaa

Explanation: An error occurred while attempting to access the project database for the specified project.

FLM89004 INCOMPATIBLE ACCOUNT INFORMATION TYPES. CURRENT TYPE: a. SPECIFIED TYPE: b

Explanation: The member specified has a status (editable, non-editable, and so forth) that is incompatible with the status specified in the update accounting information.

User Response: Enter compatible type and resubmit.

FLM89005 CANNOT CREATE NEW ACCOUNTING RECORD OF ACCOUNT INFO TYPE: a

Explanation: No accounting information exists for the specified member. New accounting records can only have the status INITIAL or NON-EDITABLE. The status specified in the accounting information was other than INITIAL or NON-EDITABLE.

User Response: Enter valid type and resubmit.

FLM89006 ERROR UPDATING ISPF STATS FOR PROJECT: aaaaaaaaaa GROUP: bbbbbbbb TYPE: cccccc MEMBER: ddddddd

Explanation: The service encountered an unexpected error updating the ISPF statistics of the member.

User Response: Contact the System Administrator.

FLM89007 ERROR UPDATING PROJECT DATABASE FOR PROJECT: aaaaaaaaaa GROUP: bbbbbbbb TYPE: cccccc MEMBER: ddddddd

Explanation: The service encountered an unexpected error updating the SCLM project database containing the member's information.

User Response: Contact project manager.

Project Manager Response: Run IDCAMS against the data set to determine problem.

FLM89008 NO BUILD MAP INFORMATION FOUND IN HIERARCHY VIEW FOR GROUP: aaaaaaaaaa TYPE: bbbbbbbb MEMBER: cccccc

Explanation: No build map information was found for the specified member in the hierarchy view beginning at the specified group.

User Response: Verify selection parameters are correct and resubmit.

FLM89009 LIBRARY ID: aaaaaaaaa DOES NOT PROMOTE TO SCLM GROUP: bbbbbbbb

Explanation: The library indicated by the library id is not permitted to promote to the specified SCLM development group.

User Response: Reissue the command against an SCLM development group to which this library can promote.

FLM89010 LANGUAGE: aaaaaaaaa DOES NOT CONTAIN EXTERNAL TRANSLATORS

Explanation: An attempt to update an NON-EDITABLE accounting record failed because the language specified in the accounting information does not support external translators.

User Response: Place a valid language in the NON-EDITABLE member's accounting information and resubmit.

FLM89011 LANGUAGE: aaaaaaaaa NOT DEFINED FOR SCLM

Explanation: An attempt to update an accounting record failed because the language specified in the accounting information is not defined to SCLM.

User Response: Enter a valid language in the accounting information and resubmit.

Project Manager Response: Define the language specified to SCLM.

FLM89012 INVALID ACCOUNTING INFORMATION KEYWORD: aaaa

Explanation: A keyword specified in the dynamic portion of the accounting record is not valid. The list of valid keywords is: INCL, CODE, and USER.

User Response: Correct the invalid keyword in the dynamic portion of the accounting record and resubmit.

SCLM Messages

FLM89013 **INVALID BUILD MAP KEYREF:** *aaaa*

Explanation: A KEYREF specified in the dynamic portion of the build map information is not valid.

User Response: Correct the invalid keyword in the dynamic portion of the build map and resubmit.

Chapter 4. Macro Messages (MNOTEs)

Macro messages appear in alphabetical order. The Macro heading lists all macros pertaining to the error or warning message. A specific macro appears on the list for one of the following reasons:

- It issues the message.
- It must be corrected to remove the error or warning and prevent the message from being issued again.

DEFAULT VERPDS NAME GREATER THAN 44 CHARACTERS: *ds_name.VERSION*. DEFAULT VERPDS NAME WILL BE BLANK

Macro: FLMALTC, FLMCNTRL

Explanation: The default version PDS name, which is constructed from the DSNAMES value plus ".VERSION", is too long. The name has been set to blanks.

Project Manager Response: If versioning is active, add a VERPDS parameter and value to prevent the default from being used, and assemble the project definition again. If versioning is not active, no action is required.

ERROR - ACCT NAME AND ACCT2 NAME ARE THE SAME

Macro: FLMALTC, FLMCNTRL

Explanation: The name on the ACCT2 parameter must be different from the name on the ACCT parameter.

Project Manager Response: Change the name on the ACCT2 parameter and assemble the project definition again.

ERROR - ACCT AND EXPACCT NAMES SAME IN FLMCNTRL AND FLMALTC: *aaaaaaaa*

Macro: FLMAEND

Explanation: The export account data set and the primary account data set have the same names in the FLMCNTRL macro and FLMALTC macro *aaaaaaaa*. This is not allowed.

Project Manager Response: Change the name of the export account data set and regenerate the project definition.

ERROR - ACCT2 AND EXPACCT NAMES SAME IN FLMCNTRL AND FLMALTC: *aaaaaaaa*

Macro: FLMAEND

Explanation: The export account data set and the primary account data set have the same names in the

FLMCNTRL macro and FLMALTC macro *aaaaaaaa*. This is not allowed.

Project Manager Response: Change the name of the export account data set and regenerate the project definition.

ERROR - A NAME MUST BE SPECIFIED ON THE FLMAGRP MACRO

Macro: FLMAGRP

Explanation: No authorization code group name was specified on a FLMAGRP macro.

Project Manager Response: Place the authorization code group name to be defined in column 1, preceding the FLMAGRP macro, and assemble the project definition again.

ERROR - BUFSIZE MUST BE GREATER THAN 0

Macro: FLMLANGL

Explanation: The BUFSIZE parameter specified on the FLMLANGL macro was 0. This parameter must be greater than 0.

Project Manager Response: Specify a BUFSIZE parameter greater than 0 on the FLMLANGL macro for the language definition and regenerate the project definition.

ERROR - "COMPILE=SELECT" MUST BE SPECIFIED FOR "CALLMETH=ISPLNK".

Macro: FLMTRNSL

Explanation: The ISPLNK callmeth requires that SELECT be specified for the compile parameter. The program, clist, or rexx exec to be run is specified in the OPTIONS parameter using the ISPLINK PGM or CMD keywords.

System Programmer Response: Specify SELECT in the COMPILE parameter and the program, clist or rexx exec in the OPTIONS parameter.

Macro Messages

ERROR - DDNAME MAY NOT BE SPECIFIED FOR MULTIPLE ALLOC

Macro: FLMALLOC

Explanation: The same DDNAME value is specified on multiple FLMALLOC macros for a translator. DDNAMEs must be unique for each data set allocation for a translator.

Project Manager Response: Change the duplicate DDNAME value to a unique one for the translator, and assemble the project definition again.

ERROR - DDNAME MUST BE SPECIFIED IN FLMALLOC WHEN PORDER IN FLMTRNSL IS 0 OR 1

Macro: FLMALLOC, FLMTRNSL

Explanation: PORDER values of 0 or 1 on a FLMTRNSL macro require a DDNAME value on the corresponding FLMALLOC macro.

Project Manager Response: Supply a DDNAME value, or change the PORDER value, and assemble the project definition again.

ERROR - DFLTTYP KEYWORD MISMATCH: aaaaaaaa bbbbbbbb

Macro: FLMAEND

Explanation:

Programmer Response: Examine the additional messages to determine where the DFLTTYP keyword mismatch is located. The inconsistency can be corrected by editing the language definition and adjusting the FLMALLOC keyword values for DFLTTYPE and/or use of the FLMTCOND macro. Changes to a language definition require a reassembly and link of the project definitions that use the language definition.

ERROR - DINIT=Y NOT VALID FOR IOTYPE

Macro: FLMALLOC

Explanation: The value specified on the DINIT conflicts with the IOTYPE parameters of the FLMALLOC macro. DINIT=Y requests the initialization of an output data set and is only valid with IOTYPE values M, P, O, or W.

Project Manager Response: Remove the DINIT parameter, or change the IOTYPE value and assemble the project definition again.

ERROR - DSNTYPE IS ONLY VALID FOR IOTYPE=P

Macro: FLMALLOC

Explanation: The DSNTYPE parameter determines whether a temporary partitioned data set is allocated as

a PDS or PDSE. This parameter is only valid when the value for IOTYPE is P.

Project Manager Response: Remove the DSNTYPE parameter or change the IOTYPE value to P, and reassemble and link the project definition.

ERROR - DSNNAME VALUE > 44 CHARACTERS, IGNORED

Macro: FLMCNTRL, FLMTRNSL

Explanation: A value specified for the DSNNAME parameter on the FLMTRNSL macro exceeds the maximum length of 44 characters for a data set containing an SCLM-controlled translator.

Project Manager Response: Re-specify a data set name of the correct length, or add the EXLIBID parameter to the FLMTRNSL macro if the translator defined is specified for an external library and the EXLIBID parameter was omitted. Assemble the project definition again.

ERROR - DUPLICATE DECLARATION FOUND FOR LANGUAGE: "xxxxxxx"

Macro: FLMAEND, FLMLANGL

Explanation: Language xxxxxxxx is declared on multiple FLMLANGL macros.

Project Manager Response: Change one of the language names, and assemble the project definition again.

ERROR - ENDLESS LOOP FOR GROUP: xxxxxxxx

Macro: FLMAEND, FLMGROUP

Explanation: A promotion path of groups has created a loop. The groups must promote from beginning to end in a linear fashion.

Project Manager Response: Check the various PROMOTE keywords on the FLMGROUP macros, starting with the xxxxxxxx group and moving up the promotion hierarchy. Change the one that is causing the loop, and assemble the project definition again.

ERROR - EXPACCT IS REQUIRED WHEN EXPXREF SPECIFIED

Macro: FLMALTC, FLMCNTRL

Explanation: An export VSAM accounting data set must be specified on the EXPACCT parameter in order to use the EXPXREF parameter.

Project Manager Response: Remove the EXPXREF parameter, or define an EXPACCT data set, and assemble the project definition again.

ERROR - EXPACCT NAME AND ACCT NAME ARE THE SAME**Macro:** FLMCNTRL**Explanation:** The export account data set has the same name as the primary account data set. This is not allowed.**Project Manager Response:** Change the name of the export account data set and regenerate the project definition.

ERROR - EXPACCT NAME AND ACCT2 NAME ARE THE SAME**Macro:** FLMCNTRL**Explanation:** The export account data set has the same name as the primary account data set. This is not allowed.**Project Manager Response:** Change the name of the export account data set and regenerate the project definition.

ERROR - EXPACCT NAME IN FLMALTC: aaaaaaaa SAME AS ACCT NAME IN FLMALTC: bbbbbbbb**Macro:** FLMAEND**Explanation:** The export account data set in FLMALTC macro aaaaaaaa has the same name as the primary account data set in FLMALTC macro bbbbbbbb. This is not allowed.**Project Manager Response:** Change the name of the export account data set and regenerate the project definition.

ERROR - EXPACCT NAME IN FLMALTC: aaaaaaaa SAME AS ACCT2 NAME IN FLMALTC: bbbbbbbb**Macro:** FLMAEND**Explanation:** The export account data set in FLMALTC macro aaaaaaaa has the same name as the primary account data set in FLMALTC macro bbbbbbbb. This is not allowed.**Project Manager Response:** Change the name of the export account data set and regenerate the project definition.

ERROR - EXPXREF NAME AND XREF NAME ARE THE SAME**Macro:** FLMCNTRL**Explanation:** The export cross-reference data set has the same name as the cross-reference data set. This is not allowed.**Project Manager Response:** Change the name of the

export cross-reference data set and regenerate the project definition.

ERROR - EXPXREF NAME IN FLMALTC: aaaaaaaa SAME AS XREF NAME IN FLMALTC: bbbbbbbb**Macro:** FLMAEND**Explanation:** The export cross-reference data set in FLMALTC macro aaaaaaaa has the same name as the cross-reference data set in FLMALTC macro bbbbbbbb. This is not allowed.**Project Manager Response:** Change the name of the export cross-reference data set and regenerate the project definition.

ERROR - EXPXREF REQUIRED WHEN XREF AND EXPACCT SPECIFIED**Macro:** FLMALTC, FLMCNTRL**Explanation:** An export cross-reference VSAM data set must be specified on the EXPXREF parameter if the XREF and EXPACCT parameters are both specified.**Project Manager Response:** Remove the XREF and/or EXPACCT parameters, or define an EXPXREF data set and assemble the project definition again.

ERROR - EXTERNAL GROUP PROMOTES TO NON-DEV SCLM GROUP EXTERNAL GROUP: bbbbbbbb SCLM GROUP: aaaaaaaa**Macro:** FLMAEND, FLMGROUP**Explanation:** Externally controlled groups (groups with the EXLIBID parameter set in the FLMGROUP macro) cannot promote to groups other than development groups when they promote to the SCLM hierarchy.**Project Manager Response:** Change the FLMGROUP definition for the specified group so it does not promote to an SCLM group higher than a development group, and assemble the project definition again.

ERROR - EXTERNAL LIBRARY NAME MUST BE SPECIFIED**Macro:** FLMEXLIB**Explanation:** No name preceded the FLMEXLIB macro statement in the project definition.**Project Manager Response:** Insert a library name, or remove the FLMEXLIB macro, and assemble the project definition again.

Macro Messages

ERROR - EXTERNAL LIBRARY NOT DEFINED TO PROJECT EXTERNAL LIBRARY NAME: *aaaaaaaa*

Macro: FLMAEND, FLMEXLIB, FLMGROUP, FLMTRNSL

Explanation: The external library referenced by the EXLIBID parameter of the FLMGROUP macro or the FLMTRNSL macro must be defined by an FLMEXLIB macro statement.

Project Manager Response: Define the referenced external library with an FLMEXLIB macro, or change the referenced EXLIBID to one defined with FLMEXLIB, and assemble the project definition again.

ERROR - EXTERNAL LIB NAME MAY NOT MATCH LIB SYSTEM NAME EXTERNAL LIBRARY NAME: *aaaaaaaa*

Macro: FLMAEND, FLMCNTRL, FLMEXLIB

Explanation: External library referenced by the EXLIBID parameter of an FLMEXLIB macro statement matches the LIBID parameter of the FLMCNTRL macro statement.

Project Manager Response: Change either the external library referenced by the EXLIBID parameter of the FLMEXLIB, or the LIBID parameter of the FLMCNTRL macro statement. Then assemble the project definition again.

ERROR - FLMALLOC KEYREF AND/OR DFLTTYP INCONSISTENT

Macro: FLMAEND

Explanation: Inconsistent use of the KEYREF or DFLTTYP keywords on FLMALLOC macros in conjunction with the use of FLMTCOND macros was detected. Additional messages follow.

Programmer Response: Examine the additional messages to determine the inconsistency. Correct the inconsistency by editing the language definitions and adjusting the FLMALLOC keyword values for KEYREF and DFLTTYP and use of the FLMTCOND macro. Changes to a language definition require a reassembly and link of the project definitions that use the language definition.

ERROR - FLMINCLS FOUND BEFORE AN FLMLANGL MACRO

Macro: FLMINCLS

Explanation: An FLMINCLS macro was found before an FLMLANGL macro.

Project Manager Response: Move the FLMINCLS macro after the FLMLANGL macro of the language.

ERROR - FLMTCOND SPECIFIED WITHOUT MATCHING FLMTRNSL

Macro: FLMTCOND

Explanation: An FLMTCOND macro precedes an FLMTRNSL macro or more than the maximum FLMTCOND macros are specified for an FLMTRNSL macro.

Programmer Response: Examine the language definitions in the project definition for an FLMTCOND macro that precedes an FLMTRNSL macro or that is present with other FLMTCOND macros following an FLMTRNSL macro. Edit the language definition for correct use of the FLMTCOND macro. Reassemble and link the project definitions that use the language definition.

ERROR - FLMTOPTS MUST FOLLOW AN FLMTRNSL MACRO

Macro: FLMTOPTS

Explanation: An FLMTOPTS macro precedes an FLMTRNSL macro.

Programmer Response: Examine the language definitions in the project definition for an FLMTOPTS macro that precedes an FLMTRNSL macro. Edit the language definition for correct use of the FLMTOPTS macro. Reassemble and link the project definitions that use the language definition.

ERROR - FLMTYPE EXTEND PARM USED TO REFERENCE UNDEFINED TYPE: *xxxxxxxx*

Macro: FLMAEND, FLMTYPE

Explanation: Type name *xxxxxxxx* specified as the EXTEND parameter of an FLMTYPE macro is not a valid type defined in the project definition.

Project Manager Response: Make sure all EXTEND type names are defined in the project definition using FLMTYPE macros, and assemble the project definition again.

ERROR - FLMTYPE MUST NOT REFERENCE ITSELF VIA THE EXTEND PARM

Macro: FLMTYPE

Explanation: The type name on the FLMTYPE macro must not be used as the type name on the EXTEND keyword parameter.

Project Manager Response: Use a different type name on the EXTEND keyword parameter, and assemble the project definition again.

ERROR - GROUP NAME MUST ALSO BE DEFINED IN FLMGRP MACRO

Macro: FLMAEND, FLMATVER, FLMGROUP

Explanation: The value of the GROUP parameter on the FLMATVER macro is not a valid group defined in the project definition.

Project Manager Response: Change the value of the GROUP parameter to a valid group, or add the group with a FLMGROUP macro, and assemble the project definition again.

ERROR - GROUP: xxxxxxxx MUST BE A KEY GROUP (DEVELOPMENT GROUP)

Macro: FLMAEND, FLMGROUP

Explanation: The development group xxxxxxxx does not have the value of Y specified for the KEY parameter. Development groups must be key.

Project Manager Response: Change the value of the key parameter to Y, and assemble the project definition again.

ERROR - HIERARCHY ALLOCATION FROM GROUP: xxxxxxxx EXCEEDS MAXIMUM ALLOWED OF: 123

Macro: FLMAEND, FLMGROUP

Explanation: The hierarchical view from group xxxxxxxx has more than 123 groups. See *ISPF Software Configuration and Library Manager (SCLM) Developer's Guide* for more information.

Project Manager Response: Reduce the number of groups in the view from group xxxxxxxx, and assemble the project definition again.

ERROR - IF IOTYPE=L, PORDER IN FLMTRNSL MUST BE 2 OR 3

Macro: FLMALLOC, FLMTRNSL

Explanation: The value of PORDER in FLMTRNSL must be 2 or 3 when the IOTYPE value in FLMALLOC is L.

Project Manager Response: Change the IOTYPE or PORDER value in error, and assemble the project definition again.

ERROR - INVALID OR MISSING FUNCTION PARAMETER SPECIFIED

Macro: FLMTRNSL

Explanation: The specified value of the FUNCTN parameter is invalid or blank. Allowable values are PARSE, VERIFY, BUILD, COPY, or PURGE.

Project Manager Response: Change the value to an

allowable one, or remove the FUNCTN parameter to use the default of PARSE, and assemble the project definition again.

ERROR - INVALID OR UNSPECIFIED IOTYPE PARAMETER

Macro: FLMALLOC

Explanation: The value specified on the IOTYPE parameter is incorrect. IOTYPE parameter values are A, I, L, M, N, O, P, S, U, and W.

Project Manager Response: Correct the value, and assemble the project definition again.

ERROR - INVALID PROJECT DEFINITION - FLMxxxxx NOT SPECIFIED

Macro: FLMAEND, FLMGROUP, FLMTYPE

Explanation: At least one group and type must be defined to establish a valid SCLM project definition.

Project Manager Response: Define one or more groups and types using the FLMGROUP and FLMTYPE macros, and assemble the project definition again.

ERROR - INVALID SCOPE: aaaaaaaaa FOR LANGUAGE: bbbbbbbb

Macro: FLMLANGL

Explanation: The value specified on the SCOPE parameter (aaaaaaaa) is incorrect. SCOPE parameter values are LIMITED, NORMAL, SUBUNIT or EXTENDED.

Project Manager Response: Correct the value, and assemble the project definition again.

ERROR - INVALID VALUE FOR "ACTION" PARAMETER

Macro: FLMTOPTS

Explanation: A value other than APPEND or REPLACE was specified for the ACTION keyword.

Programmer Response: Change the value of the ACTION keyword to APPEND or REPLACE in the FLMTOPTS macro. The FLMTOPTS macro will follow an FLMTRNSL macro in a language definition. Reassemble and link the project definitions that use the language definition.

ERROR - INVALID VALUE FOR FIELD "ACTION"

Macro: FLMTCOND

Explanation: A value other than RUN or SKIP was specified for the ACTION keyword.

Programmer Response: Change the value of the

Macro Messages

ACTION keyword to RUN or SKIP in the FLMTCOND macro. The FLMTCOND macro will follow an FLMTRNSL macro in a language definition. Reassemble and link the project definitions that use the language definition.

ERROR - INVALID VALUE FOR FIELD "INPLIST", DEFAULTED

Macro: FLMTRNSL

Explanation: The value specified on the keyword parameter INPLIST is incorrect. INPLIST parameter values are Y or N. The default value of N was used.

Project Manager Response: Correct the value, and assemble the project definition again.

ERROR - INVALID VALUE FOR THE FIELD "KEY"

Macro: FLMGROUP

Explanation: The value specified on the keyword parameter KEY is incorrect. KEY parameter values are Y or N.

Project Manager Response: Correct the value to Y or N, and assemble the project definition again.

ERROR - INVALID VALUE SPECIFIED FOR FIELD "WHEN"

Macro: FLMTCOND

Explanation: An FLMTCOND macro was specified with the WHEN keyword that has an invalid value.

Programmer Response: Examine the language definitions in the project definition for an FLMTCOND macro that uses the WHEN keyword. Edit the language definition for a correct WHEN keyword value for the FLMTCOND macro. Reassemble and link the project definitions that use the language definition.

ERROR - KEY GROUP > 123 FOR GROUP: xxxxxxxx

Macro: FLMAEND, FLMGROUP

Explanation: The hierarchical view from group xxxxxxxx has more than 123 key groups. See *ISPF Software Configuration and Library Manager (SCLM) Developer's Guide* for more information.

Project Manager Response: Reduce the number of key groups in the view from group xxxxxxxx, and assemble the project definition again.

ERROR - KEYREF AND DFLTTYP NOT FOUND: aaaaaaaa bbbbbbbb

Macro: FLMAEND

Explanation: A language definition contains multiple translators with the FLMTCOND macro and a WHEN clause specified. An output allocation for a translator

with the DFLTTYP value aaaaaaaa does not match any of the output allocations specified for the first translator found in the language definition with FLMTCOND and the WHEN clause specified. Additional messages follow that identify the language definition and translator that contains the unmatched allocation statement.

Programmer Response: Examine all of the messages to determine the keyword mismatch. Edit the language definition and make the KEYREF and DFLTTYP keyword values consistent or change the use of FLMTCOND. Reassemble and link the project definitions that use the language definition.

ERROR - KEYREF KEYWORD NOT IN PREVIOUS FLMALLOC: aaaaaaaa

Macro: FLMAEND

Explanation:

Programmer Response: Examine all of the messages to determine the keyword mismatch. Edit the language definition and make the KEYREF values consistent or change the use of FLMTCOND for consistency. Reassemble and link the project definitions that use the language definition.

ERROR - KEYREF VALUE NOT VALID FOR IOTYPE VALUE

Macro: FLMALLOC

Explanation: When a value of S is specified for the IOTYPE parameter, the KEYREF parameter must be entered with SINC or INCL.

Project Manager Response: Change the IOTYPE or KEYREF values and assemble the project definition again.

ERROR - LANGUAGE IS ONLY VALID FOR IOTYPE=O OR P

Macro: FLMALLOC

Explanation: A language can be specified only on the LANG keyword parameter for IOTYPE values O and P. Different languages can only be assigned on build outputs.

Project Manager Response: Change the IOTYPE to O or P, and assemble the project definition again.

ERROR - LANGUAGE NAME REQUIRED

Macro: FLMLANGL

Explanation: A user-specified pseudonym language name was not specified on the LANG keyword parameter. See *ISPF Software Configuration and Library Manager (SCLM) Referenc* for more information.

Project Manager Response: Add a user-specified

pseudonym language name to the LANG keyword parameter and assemble the project definition again.

ERROR - LANGUAGE NOT SPECIFIED ON FLMxxxLB MACRO

Macro: FLMCMPLB, FLMLANGL, FLMSYSLB

Explanation: The first FLMCMPLB or FLMSYSLB macro must have a language specified. See *ISPF Software Configuration and Library Manager (SCLM) Referenc* for more information.

Project Manager Response: Add a language to the macro, which must correspond to the correct FLMLANGL language, and assemble the project definition again.

ERROR - MALLOC=Y NOT ALLOWED FOR IOTYPE VALUE

Macro: FLMALLOC

Explanation: When a value of Y is specified for the MALLOC parameter, the IOTYPE parameter must be entered with A or O.

Project Manager Response: Change the IOTYPE or MALLOC values and assemble the project definition again.

ERROR - MAXLINE MUST BE GREATER THAN THE MINIMUM VALUE OF 35

Macro: FLMCNTRL

Explanation: The value specified on the MAXLINE parameter must be greater than or equal to 35.

Project Manager Response: Increase the value and assemble the project definition again.

ERROR - MEMBER IS ONLY VALID FOR IOTYPE=P

Macro: FLMALLOC

Explanation: A value for the MEMBER parameter can be specified only when the IOTYPE value is P. Members can be written only to partitioned data sets, which are allocated using an IOTYPE value of P.

Project Manager Response: Remove the MEMBER parameter, or change the IOTYPE value to P, and assemble the project definition again.

ERROR - MISSING REQUIRED PARAMETER: ACCT

Macro: FLMALTC

Explanation: A VSAM accounting data set must be specified on the ACCT parameter.

Project Manager Response: Add the parameter and value, and assemble the project definition again.

ERROR - NOTGROUP AND GROUP CAN NOT BE SPECIFIED TOGETHER

Macro: FLMTOPTS

Explanation: The GROUP and NOTGROUP keywords were both specified in an FLMTOPTS macro.

Programmer Response: Remove GROUP or NOTGROUP in the FLMTOPTS macro. The FLMTOPTS macro will follow an FLMTRNSL macro in a language definition. Reassemble and link the project definitions that use the language definition.

ERROR - NOTGROUP SPECIFIED WITH GROUP, NOTGROUP IGNORED

Macro: FLMTCOND

Explanation: The NOTGROUP and GROUP keywords were both specified in an FLMTCOND macro. The NOTGROUP keyword value will be ignored and the macro will be used as though only the GROUP keyword value was specified.

Programmer Response: Remove GROUP or NOTGROUP in the FLMTCOND macro. The FLMTCOND macro will follow an FLMTRNSL macro in a language definition. Reassemble and link the project definitions that use the language definition.

ERROR - OPTIONS PARAMETER REQUIRED

Macro: FLMTOPTS

Explanation: The OPTIONS keyword must be specified.

Programmer Response: Examine the language definitions in the project definition for usage of the FLMTOPTS macro. Add the OPTIONS keyword to the FLMTOPTS macros that do not specify the OPTIONS keyword. Reassemble and link the project definitions that use the language definition.

ERROR - OUTPUT LANGUAGE NOT DEFINED

Macro: FLMAEND, FLMALLOC, FLMLANGL

Explanation: The language specified on the LANG parameter of an FLMALLOC macro is not defined. All languages used as values for the LANG parameter must be defined using the FLMLANGL macro.

Project Manager Response: Change the language specified for LANG, or define the specified language using FLMLANGL, and assemble the project definition again.

Macro Messages

ERROR - PDSDATA VALUE MUST BE "Y" FOR BUILD/PARSE

Macro: FLMTRNSL

Explanation: The specified value on the PDSDATA parameter is incorrect. The allowable value for build and parse translators is Y.

Project Manager Response: Change the PDSDATA value to Y, and assemble the project definition again.

ERROR - PRIMARY GROUPS > 123 FOR GROUP: xxxxxxxx

Macro: FLMAEND, FLMGROUP

Explanation: The hierarchical view from group xxxxxxxx has more than 123 groups. See *ISPF Software Configuration and Library Manager (SCLM) Developer's Guide* for more information.

Project Manager Response: Reduce the number of groups in the view from group xxxxxxxx, and assemble the project definition again.

ERROR - PROBLEM IN FLMTRNSL NUMBER: nnnn

Macro: FLMAEND

Explanation: This error occurs when all of the FLMTRNSL macros for BUILD translators in a language definition that use FLMTCOND with the WHEN keyword do not have identical KEYREF and DFLTTYP keywords on the FLMALLOC macros. The FLMTRNSL number is the ordinal of the FLMTRNSL macro in a language definition. This is one of several messages that describe the problem.

Programmer Response: Examine all of the messages to determine the keyword mismatch. Browse the project definition. The problem was found in FLMTRNSL number nnnn in a language definition. Edit the language definition and make the KEYREF and DFLTTYP keyword values consistent. Reassemble and link the project definitions that use the language definition.

ERROR - PROBLEM IN LANGUAGE DEFINITION NUMBER: nnnn

Macro: FLMAEND

Explanation: This error occurs when all of the FLMTRNSL macros for BUILD translators in a language definition that use FLMTCOND with the WHEN keyword do not have identical KEYREF and DFLTTYP keywords on the FLMALLOC macros. The language definition number is the language definition ordinal in the project definition. This is one of several messages that describe the problem.

Programmer Response: Examine all of the messages to determine the keyword mismatch. Browse the project

definition. The problem was found in language definition number nnnn in the project definition. Edit the language definition and make the KEYREF and DFLTTYP keyword values consistent. Reassemble and link the project definitions that use the language definition.

ERROR - RECURSIVE ENTRY CAUSED BY SPECIFIED AUTHCODE GROUP

Macro: FLMAGRP

Explanation: An authorization code specified on the AC parameter is also the authorization code group name on the same FLMAGRP macro.

Project Manager Response: Change the authorization code or the group name, and assemble the project definition again.

ERROR - SCLM GROUP PROMOTING TO EXTERNAL GROUP SCLM GROUP: aaaaaaaa EXTERNAL GROUP: bbbbbbbb

Macro: FLMAEND, FLMGROUP

Explanation: SCLM-controlled groups cannot promote to groups controlled by external libraries (groups with the EXLIBID parameter set on the FLMGROUP macro).

Project Manager Response: Change the FLMGROUP definition for the specified group so it does not promote to an externally controlled group. Then assemble the project definition again.

ERROR - SPECIFICATION OF THIS MACRO EXCEEDS MAXIMUM ALLOWED

Macro: FLMALLOC, FLMATVER, FL MCPYLB, FL MEXLIB, FL MGROU P, FL MLANGL, FL MTRNSL, FL MTYPE

Explanation: Each of these macros can be specified a limited number of times in a project definition. In each case, the maximum number is 32 000.

Project Manager Response: Reduce the number of instances of the macro producing the error, and assemble the project definition again.

ERROR - SPECIFIED ALTC HAS BEEN PREVIOUSLY DEFINED

Macro: FLMALTC

Explanation: The alternate control name specified has already been defined using an FLMALTC macro.

Project Manager Response: Change one of the duplicate names, and assemble the project definition again.

ERROR - SPECIFIED AUTHCODE ALREADY PROCESSED AS A MEMBER**Macro:** FLMAGRP**Explanation:** The name of the authorization code group has already been used as one of the authorization codes specified on the AC parameter of a previous FLMAGRP macro.**Project Manager Response:** Change the name of the group, or remove the bad authorization code from the AC parameter of a previous FLMAGRP macro, and assemble the project definition again.

ERROR - SPECIFIED AUTHCODE GROUP CONTAINS DUPLICATE MEMBERS**Macro:** FLMAGRP**Explanation:** The authorization code group name specified has already been used as a group name on a previous FLMAGRP macro.**Project Manager Response:** Change the name of the authorization code group, and assemble the project definition again.

ERROR - SPECIFIED AUTHCODE GROUP CONTAINS NO MEMBERS**Macro:** FLMAGRP**Explanation:** No authorization codes were specified on the AC parameter. An authorization code group must contain one or more authorization codes.**Project Manager Response:** Add one or more authorization codes to the AC parameter, or remove the FLMAGRP macro, and assemble the project definition again.

ERROR - SPECIFIED EXTERNAL LIBRARY IS PREVIOUSLY DEFINED**Macro:** FLMEXLIB**Explanation:** Duplicate EXLIBID values were specified for two or more FLMEXLIB macro statements in the project definition.**Project Manager Response:** Remove the duplicate library IDs and assemble the project definition again.

ERROR - SPECIFIED GROUP HAS BEEN PREVIOUSLY DEFINED**Macro:** FLMGROUP**Explanation:** The group name specified has already been defined using an FLMGROUP macro.**Project Manager Response:** Change one of the duplicate names, and assemble the project definition again.

ERROR - SPECIFIED LANGUAGE WAS PREVIOUSLY DEFINED**Macro:** FLMCMPLB, FLMSYSLB**Explanation:** The language name specified was used on a previous FLMCMPLB or FLMSYSLB macro. One unique language can be used per FLMCMPLB or FLMSYSLB concatenation. See *ISPF Software Configuration and Library Manager (SCLM) Referenc* for more information.**Project Manager Response:** Change the language name and assemble the project definition again.

ERROR - SPECIFIED MACRO ONLY VALID FOR BUILD TRANSLATORS**Macro:** FLMTCOND, FLMTOPTS**Explanation:** A macro that is restricted to BUILD translators was used with an FLMTRNSL that did not specify FUNCTION=BUILD.**Programmer Response:** Examine the language definitions in the project definition for usage of restricted macros with an FLMTRNSL macro that does not specify FUNCTION=BUILD. Edit the language definition for correct use of the restricted macros. Reassemble and link the project definitions that use the language definition.

ERROR - SPECIFIED TYPE AND LANGUAGE ALREADY DEFINED**Macro:** FLMLANGL, FLMTSEXT, FLMTYPE**Explanation:** A PWS Extension has already been defined for the given TYPE and LANGUAGE. Each TYPE and LANGUAGE combination can only occur once.**Project Manager Response:** Remove the redundant TSEXT parameter.

ERROR - SPECIFIED TYPE WAS PREVIOUSLY DEFINED**Macro:** FLMTYPE**Explanation:** The type name has already been specified on a previous FLMTYPE macro.**Project Manager Response:** Change the type name, and assemble the project definition again.

ERROR - TASKLIB IS ONLY VALID FOR BUILD TRANSLATORS**Macro:** FLMTRNSL**Explanation:** TASKLIB can only be specified for build translators.**Project Manager Response:** Specify FUNCTN=BUILD

Macro Messages

on the FLMTRNSL macro when using the TASKLIB keyword.

ERROR - TASKLIB VALUE > 8 CHARACTERS, IGNORED

Macro: FLMTRNSL

Explanation: The DDNAME specified for the TASKLIB keyword was more than 8 characters.

Project Manager Response: Change the DDNAME to one that has 8 characters or less.

ERROR - TSEXT NAME REQUIRED

Macro: FLMTSEXT

Explanation: The PWS Extension name is missing from the FLMTSEXT macro. It is a required parameter.

Project Manager Response: Add the correct PWS Extension name, or remove this instance of the FLMTSEXT macro.

ERROR - TYPE NAME MUST ALSO BE DEFINED IN FLMTYPE MACRO

Macro: FLMAEND, FLMATVER, FLMTYPE

Explanation: The value of the TYPE parameter on the FLMATVER macro is not a valid type defined in the project definition.

Project Manager Response: Change the value of the TYPE parameter to a valid type, or add the type with an FLMTYPE macro, and assemble the project definition again.

ERROR - UNABLE TO FIND FLMALTC: xxxxxxxx

Macro: FLMAEND, FLMALTC, FLMGROUP

Explanation: The alternate control name specified on the ALTC parameter of the FLMGROUP macro is not defined.

Project Manager Response: Define the alternate control name using FLMALTC, or correct the ALTC parameter in error, and assemble the project definition again.

ERROR - UNABLE TO FIND PROMOTE GROUP: xxxxxxxx

Macro: FLMAEND, FLMGROUP

Explanation: The group named xxxxxxxx was specified on the PROMOTE parameter of an FLMGROUP macro. However, that group name is not a valid group.

Project Manager Response: Change the group name on the PROMOTE parameter, or add the group using

an FLMGROUP macro, and assemble the project definition again.

ERROR - VALUE FOR "PDSDATA" MUST MATCH FOR ALL TRANSLATORS OF THE SAME TYPE WITHIN A LANGUAGE

Macro: FLMTRNSL

Explanation: Multiple translators of any function type (such as PARSE, BUILD and COPY) for the same language must all specify the same PDSDATA value.

Project Manager Response: Change the PDSDATA values for the translators, and assemble the project definition again.

ERROR - VERS IS REQUIRED WHEN xxxxxxxx SPECIFIED

Macro: FLMALTC, FLMCNTRL

Explanation: The VERS parameter must be specified when xxxxxxxx is VERS2 or VERPDS. VERS specifies a VSAM audit control data set name, which must be present when specifying a secondary VSAM audit control data set (VERS2), or version data PDS (VERPDS).

Project Manager Response: Add a VERS parameter and value, and assemble the project definition again.

ERROR - VERS NAME AND VERS2 NAME ARE THE SAME

Macro: FLMALTC, FLMCNTRL

Explanation: The name on the VERS2 parameter must be different from the name on the VERS parameter.

Project Manager Response: Change the name on the VERS2 parameter and assemble the project definition again.

ERROR - "VERS" REQUIRED IN FLMALTC FOR VERSION/AUDIT FLMALTC: xxxxxxxx

Macro: FLMAEND, FLMALTC, FLMATVER

Explanation: Audit and/or version control has been enabled using an FLMATVER macro, but no VSAM audit control data set has been specified on the FLMALTC macro associated with the group being audited/versioned. The FLMALTC alternate control definition in error is named xxxxxxxx.

Project Manager Response: Add a VERS parameter and data set name to the FLMALTC macro in error, or remove the FLMATVER macro, and assemble the project definition again.

ERROR - "VERS" REQUIRED IN FLMCNTRL FOR VERSION/AUDIT

Macro: FLMAEND, FLMATVER, FLMCNTRL

Explanation: Audit and/or version control has been enabled using a FLMATVER macro, but no VSAM audit control data set has been specified on the FLMCNTRL macro.

Project Manager Response: Add a VERS parameter and data set name to the FLMCNTRL macro, or remove the FLMATVER macro, and assemble the project definition again.

ERROR - XREF AND EXPXREF NAMES SAME IN FLMCNTRL, FLMALTC: aaaaaaaaa

Macro: FLMAEND

Explanation: The export cross-reference data set and the cross-reference data set have the same names in the FLMCNTRL macro and FLMALTC macro aaaaaaaaa. This is not allowed.

Project Manager Response: Change the name of the export cross-reference data set and regenerate the project definition.

ERROR - XREF IS REQUIRED WHEN EXPXREF SPECIFIED

Macro: FLMALTC, FLMCNTRL

Explanation: A VSAM cross reference data set must be specified on the XREF parameter in order to use the EXPXREF parameter.

Project Manager Response: Remove the EXPXREF parameter, or define an XREF data set, and assemble the project definition again.

ERROR - xxxxxxxx PARAMETER IS REQUIRED

Macro: FLMATVER

Explanation: The xxxxxxxx parameter must be specified with an acceptable value. Versioning must be enabled for specific groups and types. See *ISPF Software Configuration and Library Manager (SCLM) Referenc* for more information.

Project Manager Response: Add the missing parameter and a corresponding value and assemble the project definition again.

WARNING - DASDUNIT NAME > 8 CHARS, TRUNCATED

Macro: FLMCNTRL

Explanation: A value specified for the DASDUNIT parameter exceeded the maximum length of eight characters. The name specified was truncated to 8 characters.

Project Manager Response: If the truncated value is unacceptable, change it to the correct length, and reassemble the project definition.

WARNING - EXLIBID VALUE > 8 CHARS, TRUNCATED

Macro: FLMEXLIB, FLMGROUP, FLMTRNSL

Explanation: A value specified for the EXLIBID parameter exceeded the maximum length of 8 characters. The name specified was truncated to 8 characters.

Project Manager Response: If the truncated value is unacceptable, change it to the correct length, and assemble the project definition again.

WARNING - EXTENDED TYPE NAME > 8 CHARS, TRUNCATED

Macro: FLMTYPE

Explanation: The type name specified on the EXTEND keyword parameter is too long. Type names can only a maximum of 8 characters. The name specified was truncated to 8 characters.

Project Manager Response: If the truncated type name is unacceptable, change it to the correct length, and assemble the project definition again.

WARNING - FIELD "DISP" IS IGNORED FOR IOTYPES L, N, AND U

Macro: FLMALLOC

Explanation: A nonblank value was specified for the DISP parameter on an FLMALLOC macro with IOTYPE=L, N, or U. Because these IOTYPES do allocate a data set, disposition has no meaning. The value specified is ignored.

Project Manager Response: Change the IOTYPE on the macro to allocate a data set or remove the DISP parameter from the macro. Reassemble and link the project definition.

WARNING - FLMALTC Macro Name: "xxx(8)" NEVER REFERENCED BY AN FLMGROUP MACRO

Macro: FLMAEND, FLMALTC, FLMGROUP

Explanation: The alternate control named xxxxxxxx was not used as an ALTC value in any FLMGROUP macro. That alternate control will not be used.

Project Manager Response: Correct the FLMALTC macro, or the ALTC parameter on the FLMGROUP macro, and assemble the project definition again.

Macro Messages

WARNING - FLMxxxLB LIBRARIES FOR LANGUAGE: xxxxxxxx EXCEED MAXIMUM OF: 123. REMAINING LIBRARIES IGNORED.

Macro: FLMAEND, FLMCMPPLB, FLMSYSLB

Explanation: The number of libraries concatenated using FLMCMPPLB or FLMSYSLB for language xxxxxxxx is too high. Only the first 123 libraries will be concatenated.

Project Manager Response: If the result of ignoring some libraries is unacceptable, reduce the number of concatenated libraries, and assemble the project definition again.

WARNING - INVALID VALUE FOR FIELD "xxxxxxx", DEFAULTED

Macro: FLMALLOC, FLMATVER, FLMCNTRL, FLMLANGL, FLMTRNSL

Explanation: The value specified on the keyword parameter xxxxxxxx is incorrect. The default value was used.

Project Manager Response: Check the values for the macro keyword in *ISPF Software Configuration and Library Manager (SCLM) Referenc* Change the value to an acceptable one, and assemble the project definition again.

WARNING - INVALID VALUE FOR FIELD "CALLMETH"

Macro: FLMCNTRL, FLMTRNSL

Explanation: The specified value for the CALLMETH parameter is incorrect. Allowable values are ATTACH, LINK, TSOLNK, and ISPLNK.

Project Manager Response: Correct the value and assemble the project definition again.

WARNING - INVALID VALUE FOR FIELD "KEYREF", IGNORED

Macro: FLMALLOC

Explanation: The value specified on the keyword parameter KEYREF is incorrect. It must be a valid build map or architecture definition keyword. The keyword and the specified value were ignored.

Project Manager Response: Check the values in *ISPF Software Configuration and Library Manager (SCLM) Developer's Guide* Change the value to an acceptable one, and assemble the project definition again.

WARNING - IOTYPE INVALID FOR TRANSLATOR FUNCTION

Macro: FLMALLOC

Explanation: The value specified on the IOTYPE parameter is not valid for the FUNCTN parameter specified in the FLMTRNSL macro.

Project Manager Response: Change the IOTYPE specified to one that is valid for the translator function and reassemble the project definition.

WARNING - LANGUAGE NAME GREATER THAN 8 CHARS, TRUNCATED

Macro: FLMLANGL

Explanation: The user-specified pseudonym language name on the LANG keyword parameter is too long. Language names can be up to 8 characters. The name specified was truncated to 8 characters.

Project Manager Response: If the truncated language name is unacceptable, change it to the correct length, and assemble the project definition again.

WARNING - LANGUAGE: xxxxxxxx NOT DEFINED. FLMxxxLB LIBRARIES IGNORED.

Macro: FLMAEND, FLMLANGL, FLMCMPPLB, FLMSYSLB

Explanation: Language xxxxxxxx specified on a FLMCMPPLB or FLMSYSLB library concatenation is not defined by any FLMLANGL macro. The library concatenation associated with language xxxxxxxx was ignored.

Project Manager Response: Define the language using FLMLANGL, or correct the language on the FLMCMPPLB or FLMSYSLB macro, and assemble the project definition again.

WARNING - LIBID NOT SPECIFIED, DEFAULTED TO "SCLM"

Macro: FLMAEND, FLMCNTRL

Explanation: No value was specified for the LIBID parameter on the FLMCNTRL macro. A default value of *SCLM* was used. This message only appears if external libraries are also defined using the FLMEXLIB macro.

Project Manager Response: If the default value is unacceptable, specify a value for LIBID, and assemble the project definition again.

WARNING - LIBID VALUE > 8 CHARS, TRUNCATED**Macro:** FLMCNTRL**Explanation:** A value specified for the LIBID parameter on the FLMCNTRL macro exceeded the maximum length of eight characters. The name specified was truncated to 8 characters.**Project Manager Response:** If the truncated value is unacceptable, change it to the correct length, and assemble the project definition again.

WARNING - MAXVIO MUST BE LESS THAN 2147483648, DEFAULTED TO 5000**Macro:** FLMCNTRL**Explanation:** The value specified on the MAXVIO parameter is too high. The maximum value is 2 147 483 647. The default value of 5000 was used.**Project Manager Response:** If the default value is not acceptable, reduce the specified MAXVIO value, and assemble the project definition again.

WARNING - MULTIPLE BRANCHES DETECTED FOR NON-KEY GROUP: xxxxxxxx**Macro:** FLMAEND, FLMGROUP**Explanation:** Non-key group xxxxxxxx has multiple groups promoting into it. Any group with more than one lower group promoting into it should be key. For more information, see *ISPF Software Configuration and Library Manager (SCLM) Developer's Guide*.**Project Manager Response:** Change the group structure to remove the condition if it is unacceptable. Then assemble the project definition again.

WARNING - NO COMMAS ALLOWED IN AUTHCODE xxxxxxxx AUTHCODE IGNORED**Macro:** FLMAGRP, FLMGROUP**Explanation:** Authorization code xxxxxxxx contains commas. Commas are not allowed in authorization codes. The authorization code will be ignored.**Project Manager Response:** Remove the invalid authorization code and reassemble and relink the project definition.

WARNING - PARAMETER NOT SUPPORTED FOR EXTERNAL GROUP: xxxxxxxx**Macro:** FLMGROUP**Explanation:** The indicated parameter is not supported in conjunction with the EXLIBID parameter. The parameter is ignored.**Project Manager Response:** Remove either the

external library referenced by the EXLIBID parameter or the specified superfluous parameter from the FLMGROUP macro statement, and assemble the project definition again.

WARNING - SPECIFIED GROUP CONTAINS NO AUTHCODES**Macro:** FLMGROUP**Explanation:** No authorization codes or groups were specified on the AC parameter. The AC parameter can be omitted but doing so prevents members from being edited in the group. In addition, no editable members can be promoted into or out of the group.**Project Manager Response:** If omitting the authorization codes or groups is too restrictive, add some values to the AC parameter, and assemble the project definition again.

WARNING - TASKLIB IS IGNORED UNLESS CALLMETH IS ATTACH**Macro:** FLMTRNSL**Explanation:** TASKLIB is only valid when the CALLMETH is ATTACH. The TASKLIB keyword will be ignored when the CALLMETH is LINK or TSOLNK.**Project Manager Response:** Specify ATTACH for the CALLMETH keyword.

WARNING - TSEXT VALUE > 32 CHARACTERS, TRUNCATED**Macro:** FLMLANGL, FLMTSEXT, FLMTYPE**Explanation:** A value specified for the TSEXT parameter exceeds the maximum length of 32 characters and was truncated.**Project Manager Response:** If the truncated value is unacceptable, specify a PWS file extension of the correct length, and assemble the project definition again.

WARNING - VIOUNIT NAME > 8 CHARS, TRUNCATED**Macro:** FLMCNTRL**Explanation:** A value specified for the VIOUNIT parameter exceeded the maximum length of 8 characters. The name specified was truncated to 8 characters.**Project Manager Response:** If the truncated value is unacceptable, change it to the correct length, and assemble the project definition again.

Macro Messages

WARNING - xxxxxxxx NAME GREATER THAN 8 CHARACTERS, TRUNCATED

Macro: FLMALTC, FLMGROUP, FLMLANGL, FLMTSEXT, FLMTYPE

Explanation: The specified group, type, alternate control (ALTC) or version name xxxxxxxx is too long. Group, type, alternate control or version names can only be 1-8 characters. The name specified was truncated to 8 characters.

Project Manager Response: If the truncated name is unacceptable, change the name to the correct length, and assemble the project definition again.

Chapter 5. Library Management Facility (LMF) Messages

This chapter contains all relevant Library Management Facility error messages. The error messages are written to be as helpful and self-explanatory as possible; therefore, no message explanations are given.

ISRLA000	Activity log error - See system programmer - details in the LMF address space ISPLOG.	ISRLA104	SCLM project deactivated - The project is SCLM controlled, but has been successfully deactivated.
ISRLA001	Activity log allocation - Error data set could not be allocated.	ISRLA105	SCLM project activated - The project is SCLM controlled, but has been successfully activated.
ISRLA002	Activity log unavailable - Data set 'aaaaaaaa..bbbbbbbb..ACTLOG' could not be opened. It may be in use.	ISRLA110	Activated successfully - The hierarchy 'aaaaaaaa' is activated successfully.
ISRLA003	Activity log write error - Data set 'aaaaaaaa..bbbbbbbb..ACTLOG' had a write error.	ISRLA111	Activated successfully - All hierarchies in project 'aaaaaaaa' are activated successfully.
ISRLA004	Act. log close out error - Data set 'aaaaaaaa..bbbbbbbb..ACTLOG' had a write close out error.	ISRLA112	Deactivated successfully - The hierarchy 'aaaaaaaa' is deactivated successfully.
ISRLA005	Activity log free error - Data set 'aaaaaaaa..bbbbbbbb..ACTLOG' could not be freed.	ISRLA113	Deactivated successfully - All hierarchies in project 'aaaaaaaa' are deactivated successfully.
ISRLA006	Activity log read error - Data set 'aaaaaaaa..bbbbbbbb..ACTLOG' had a read error.	ISRLA114	Defined types - Structure for - aaaaaaaaa Date: bbbbbbbb Time: cccccccc
ISRLA007	Activity log write error - An error occurred writing 'aaaaaaaa..bbbbbbbb..ACTLOG' to a temporary file.	ISRLA115	Where: - 1, 2 indicates hierarchical position
ISRLA100	Deactivate ID not match - User ID 'aaaaaaaa' does not match the deactivate ID 'bbbbbbbb'.	ISRLA116	*** No defined type *** - B indicates bottom group
ISRLA101	Bad deactivate IDs - Deactivate IDs are not consistent. Deactivate and try again.	ISRLA117	The following groups were not activated.
ISRLA102	Already activated - The hierarchy 'aaaaaaaa' has already been activated.	ISRLA118	Top group Deactivate ID
ISRLA103	Already deactivated - The hierarchy 'aaaaaaaa' has already been deactivated.	ISRLA119	The following groups are active.
		ISRLA120	No unit description - Must specify the unit description for the outlist data set.
		ISRLA121	No block size - Must specify the block size for the outlist data set.

LMF Messages

ISRLA122	No logical record length - Must specify the logical record length for the outlist data set.
ISRLA123	No lines per page - Must specify the lines per page for the outlist data set.
ISRLA124	No primary/secondary - Must specify primary/secondary space quantity for outlist data set.
ISRLA125	No primary space - Must specify primary space quantity for partitioned outlist data set.
ISRLA200	Enter group name - A group name is required for this option.
ISRLA201	Type "aaaaaaaa" deleted - All entries for type "aaaaaaaa" have been deleted.
ISRLA202	Type not found - No entries for type "aaaaaaaa" exist in the member activity log.
ISRLA203	Delete failed - Entries in 'aaaaaaaa..bbbbbbbb..ACTLOG' were not all deleted.
ISRLA204	Activity log emptied - All entries in activity log 'aaaaaaaa..bbbbbbbb..ACTLOG' have been removed.
ISRLA205	aaaaaaaa types processed - aaaaaaaaa types were processed.
ISRLA206	No types logged - There are no entries in 'aaaaaaaa..bbbbbbbb..ACTLOG'.
ISRLA208	Log not allocated - 'aaaaaaaa..bbbbbbbb..ACTLOG' may be in use by another user.
ISRLA209	Invalid record length - 'aaaaaaaa..bbbbbbbb..ACTLOG' has an invalid record length for an activity log.
ISRLA210	Invalid record format - 'aaaaaaaa..bbbbbbbb..ACTLOG' does not have a fixed or fixed blocked record format.

ISRLA211	Log not sequential - 'aaaaaaaa..bbbbbbbb..ACTLOG' is not a sequential data set.
ISRLA213	ADMIN not allowed - You cannot specify a group name of ADMIN for a member activity log.
ISRLA214	Invalid selection code - Type an "s" in front of the type to be selected.
Explanation:	
ISRLA215	Invalid type name - You must enter a type name, an asterisk ("*") or leave the field blank.
ISRLA216	Group name required - Enter the group name of the activity log.
ISRLA217	Project name required - Enter the project name of the activity log.
ISRLA218	Type "aaaaaaaa" browsed - The logged activity for type "aaaaaaaa" was browsed.
ISRLA219	Activity log browsed - The activity in log 'aaaaaaaa..bbbbbbbb..ACTLOG' was browsed.
ISRLA220	Browse failed - An error occurred browsing 'aaaaaaaa..bbbbbbbb..ACTLOG'.
ISRLA221	Parameter required - The LOCATE command requires a valid type name as a parameter.
ISRLA222	'aaaaaaaa' not located - The type name 'aaaaaaaa' would be after the end of the displayed list.
ISRLA223	Invalid command - The only valid command on this panel is LOCATE.
ISRLA224	Invalid parameter - The locate command requires a valid type name as a parameter.
ISRLA225	Logging failed - The activity log is defined with an alias data set name.

ISRLC010	Member entry not created - Member entry 'aaaaaaaa' not created. The type does not exist.
ISRLC011	Member entry not created - Member entry 'aaaaaaaa' not created. The group does not exist.
ISRLC012	Member entry not created - Member entry 'aaaaaaaa' not created. The project does not exist.
ISRLC013	Entry not created - 'aaaaaaaa' was not created. It already exists.
ISRLC014	Promote failed - The 'to' data set was allocated as an alias. Aliases are not allowed.
ISRLC015	Attach failed - Attach failed in module aaaaaaaa.
ISRLC016	"aaaaaaaa" not started - The LMF started task "aaaaaaaa" was not found.
ISRLC017	Local lock failed - Local lock failed in the SVC.
ISRLC018	SVC GETMAIN failed - GETMAIN failed in the library management facility SVC.
ISRLC019	SVC FREEMAIN failed - FREEMAIN failed in the library management facility SVC.
ISRLC020	SRB GETMAIN failed - GETMAIN failed in the SRB.
ISRLC022	SRB purged - The SRB was purged.
ISRLC023	GETMAIN failed - GETMAIN failed for a dynamic TLD.
ISRLC024	Member in use - Member is edit locked by 'aaaaaaaa'.
ISRLC025	User not authorized - Member 'aaaaaaaa' could not be edit locked by user.

ISRLC026	Ddname not found in TIOT - Ddname not found in the TIOT.
ISRLC027	Library not deleted - Library controls were not deleted. Member controls exist for this library.
ISRLC028	Update failed - The group hierarchy is active. The update was not performed.
ISRLC029	Project in use - Project is currently being updated by 'aaaaaaaa'.
ISRLC030	"aaaaaaaa" not active - The LMF address space "aaaaaaaa" is not accepting any requests.
ISRLC031	LMF start up in progress - The LMF address space initialization is not complete.
ISRLC033	Promote failed - The group 'aaaaaaaa' is not active.
ISRLC034	Promote failed - From a non-controlled lib. can only promote into an entry level lib.
ISRLC035	Promote failed - Target group 'aaaaaaaa' could not be found.
ISRLC036	Promote failed - User is not current updater of member. current updater is 'aaaaaaaa'.
ISRLC037	Abend 'aaaaaaaa' occurred - 'aaaaaaaa' abend during the processing of a library management request.
ISRLC038	Promote failed - Entry level group 'aaaaaaaa' could not be found.
ISRLC039	Activity log not valid - Activity log for type 'aaaaaaaa' must be a sequential data set.
ISRLC040	Edit lock failed - The member is in a controlled library which is not active.

LMF Messages

ISRLC041	Edit lock failed - Requestor is not an authorized accessor.	ISRLC056	Group deleted - Controls for group 'aaaaaaaa' were deleted from the control file.
ISRLC042	Edit lock failed - The member "aaaaaaaa" has a status or owner of "bbbbbbbb".	ISRLC057	Project deleted - Controls for project 'aaaaaaaa' were deleted from the control file.
ISRLC043	Member entry not found - Member entry 'aaaaaaaa' could not be found in the control file.	ISRLC058	ENQUEUE failed - Member 'aaaaaaaa' is not available.
ISRLC044	Promote failed - The "to" and "from" libraries have incompatible record formats.	ISRLC059	Promote failed - The member was not edit locked.
ISRLC045	Unable to promote data - Data contains a user ttr, but is not a load module.	ISRLC060	Request failed - The project could not be locked or freed.
ISRLC046	Promote failed - The logical record lengths are incompatible.	ISRLC061	Promote failed - Member 'aaaaaaaa' is not edit locked by user.
ISRLC047	Promote failed - The "from" library is not allocated.	ISRLC062	Promote failed - Current user for desired member is 'aaaaaaaa'.
ISRLC048	SVC not installed - The library management facility SVC is not installed.	ISRLC063	Promote failed - Only predefined members can be promoted into this hierarchy.
ISRLC049	Promote failed - Promote free is invalid. Member does not exist.	ISRLC064	Promote failed - 'aaaaaaaa' is the only authorized promoter of undefined members.
ISRLC050	Edit lock failed - Edit lock failed due to an invalid condition on group 'aaaaaaaa'.	Explanation:	
ISRLC051	Promote failed - The member is not available for update.	ISRLC065	Promote failed - Promote failed due to invalid "from" data set organization.
ISRLC052	Promote failed - Authorized promoter for requested group is 'aaaaaaaa'.	ISRLC066	Promote failed - Promote after system failure must be identical to previous promote.
ISRLC053	Dist. table deleted - Distribution table 'aaaaaaaa' was deleted from the control file.	ISRLC067	Member entry not deleted - Member entry 'aaaaaaaa' is not a predefined member.
ISRLC054	User-set deleted - User-set 'aaaaaaaa' was deleted from the control file.	Explanation:	
ISRLC055	Type deleted - Controls for type 'aaaaaaaa' were deleted from the control file.	ISRLC068	Get close out failed - Get close out failed on the "from" library.
		ISRLC069	Read error occurred - A read error occurred on the "from" library.

ISRLC070	Member not found - The "from" library member was not found.
ISRLC071	Promote free failed - Member has not been edit locked or does not exist.
ISRLC072	Project has no groups - Project 'aaaaaaaa' has no promote hierarchies defined.
ISRLC073	Invalid hierarchy exists - Group 'aaaaaaaa' not in a valid hierarchy. Must be corrected first.
ISRLC074	Activity log not valid - Logical record length for member log 'aaaaaaaa' is invalid.
ISRLC075	Promote failed - Authorized promoter or user-set for predefined member is 'aaaaaaaa'.
ISRLC076	Multiple distrib tables - Hierarchy with top 'aaaaaaaa' has more than one dist. table defined.
ISRLC077	Types are not identical - Hierarchy with top group 'aaaaaaaa' does not have identical types.
ISRLC078	Distribution table error - Distribution table 'aaaaaaaa' has not been created.
ISRLC079	Group not found - Group found in distribution table 'aaaaaaaa' does not exist.
ISRLC080	Allocation failed - "to" library 'aaaaaaaa' could not be allocated.
ISRLC081	Distribution table error - There are no groups defined in distribution table 'aaaaaaaa'.
ISRLC082	Distribution table error - Group 'aaaaaaaa' references the wrong distribution table.
ISRLC083	Distribution table error - Group in dist. tab. 'aaaaaaaa' has inconsistent types with other groups.

ISRLC084	Invalid user id - Invalid user id for request in the SVC.
ISRLC085	Type queue build failed - Type queue build failed in module 'aaaaaaaa'.
ISRLC086	Type queue free failed - Type queue free failed in module 'aaaaaaaa'.
ISRLC087	Hierarchy already deact - Hierarchy is already deactivated. Deactivate ID is 'aaaaaaaa'.
ISRLC088	Hierarchy already deact - aaaaaaaaa hierarchy(s) already deactivated. They are not deactivated again.
ISRLC089	Bad deactivate IDs - Deactivate IDs,top 'aaaaaaaa',inconsistent. Deactivate and try again.
ISRLC090	Not a complete activate - aaaaaaaaa hierarchy(s) not activated - they don't belong to user.
ISRLC091	Groups already active - aaaaaaaaa hierarchy(s) are already active.
ISRLC092	Invalid control block - Invalid control block - request could not be processed.
ISRLC093	Invalid hierarchy exists - An invalid hierarchy exists, there are no valid hierarchies defined.
ISRLC094	Activation failed - Top group 'aaaaaaaa' deleted from hierarchy after ACTIVATE command.
Explanation:	
ISRLC095	Change not allowed - Another project administrator must remove your id.
ISRLC096	Promote failed - Cannot promote "planned overlay" load modules.
ISRLC097	To lib not controlled - "to" group 'aaaaaaaa' not a controlled library.

LMF Messages

ISRLC098	STOW failed - STOW failed in module 'aaaaaaaa'.	ISRLC113	Exit name required - Data set full exit was requested without specifying exit name.
ISRLC099	Member not found - Member 'aaaaaaaa' not found. control file/control lib inconsistent.	ISRLC114	Exit type required - Data set full exit was requested without specifying exit type.
ISRLC100	Promote failed - Requested version code not in distribution table 'aaaaaaaa'.	ISRLC115	Control file not valid - The control file is not bound to any started task.
ISRLC101	Library not deleted - Group 'aaaaaaaa' references the library as a target library.	ISRLC116	Control file not valid - The control file contains controls from a previous ISPF/PDF version.
ISRLC102	Top group not controlled - Top group 'aaaaaaaa' could not be found in the specified library.	ISRLC117	Exit name required - Activity log full exit was requested without specifying exit name.
ISRLC103	Type not controlled - Type entry 'aaaaaaaa' could not be found in the specified library.	ISRLC118	Record format not fixed - The activity log must have a fixed record format.
ISRLC104	Member not controlled - Member 'aaaaaaaa' could not be found in the specified library.	ISRLC119	Invalid control file - The old control file contains invalid members.
ISRLC105	Promotion successful - 'aaaaaaaa' was last member successfully processed.	ISRLC120	Delete failed - Member was not deleted because the controlled library is an alias.
ISRLC106	Promote failed - Record formats of the "from" and "to" groups are incompatible.	ISRLC121	Invalid record format - The LMF control file record format must be variable blocked. Dd ISRCFIL
ISRLC107	Activ. log not allocated - Activity log 'aaaaaaaa' could not be allocated. it may not be cataloged.	ISRLC122	Secondary extents exist - The control file must not have any secondary extents allocated.
ISRLC108	Promote failed - "To" data set 'aaaaaaaa' must be allocated as partitioned data set.	ISRLC123	Invalid command - Command is not valid. The only valid command is END.
ISRLC109	Distribution table error - Group 'aaaaaaaa' references no distribution table.	ISRLC124	Get closeout failed - Close out of control file failed in module 'aaaaaaaa'.
ISRLC111	Promote failed - "From" record length is greater than "to" block size for record format U.	ISRLC125	Not authorized - You are not authorized to change a log for project "aaaaaaaa".
ISRLC112	Exit type required - Activity log full exit was requested without specifying exit type.	ISRLC126	Invalid members found - The new control file must not contain any members.

ISRLC127	Invalid control file - The old control file is not a valid control file.	ISRLC141	Invalid member controls - Group 'aaaaaaaa' may have bad member controls. Activate cannot be done.
ISRLC128	No updates made - No entries were found which use activity log 'aaaaaaaa'.	ISRLC142	Invalid member controls - Use member utilities options 2 or 4 to correct the problem.
ISRLC129	Migration successful - Migration of old control file to new control file was successful.	ISRLC143	Entries in data set - This hierarchy not valid until problems in output data set are fixed.
ISRLC130	Data set not allocated - The output data set could not be allocated by user 'aaaaaaaa'.	ISRLC144	Controls cleared - All member controls for this hierarchy have been cleared.
ISRLC131	Data set LRECL too small - The output data set LRECL may result in truncation of records.	ISRLC145	Verify required - Verify or initialize is required before hierarchy can be activated.
ISRLC132	Member list failed - A member list could not be created for group 'aaaaaaaa'.	ISRLC146	Data set not allocated - The output data set could not be allocated by started task 'aaaaaaaa'.
ISRLC133	Data set not allocated - Group 'aaaaaaaa' could not be allocated.	ISRLC147	Data set not opened - Group 'aaaaaaaa' could not be opened.
ISRLC134	Controlled data set full - A controlled data set is out of space. See your library administrator.	ISRLC148	Member name required - A member name is required when a partitioned data set is specified.
ISRLC135	Control file full - The LMF control file is out of space. See your library administrator.	ISRLC149	Data set is not a PDS - LMF requires that group 'aaaaaaaa' be a partitioned data set.
ISRLC136	Activity log full - The activity log is out of space. See your library administrator.	ISRLC150	Delete not allowed - Delete not allowed on a member whose status is "Promote-in-process".
ISRLC137	Administrator log full - The administrator log is out of space. See your library administrator.	ISRLC151	Group not found - Use VERIFY CONTROLS option to determine the problem.
ISRLC138	Write failed - Write failed to output data set in module 'aaaaaaaa'.	ISRLC152	Allocate failed - Allocate failed in module "aaaaaaaa".
ISRLC139	Entries in data set - Entries were recorded in the output data set. Please review them.	ISRLC153	No members found - No physical members were found to initialize with member controls.
ISRLC140	Activity log not valid - The activity log must have a logical record length of 'aaaaaaaa'.		

LMF Messages

ISRLC154	Controls cleared - Member controls that existed for the hierarchy were cleared.
ISRLC155	No controls exist - No member controls exist to clear in the LMF hierarchy.
ISRLC156	All members not deleted - Not all physical members were deleted. VERIFY CONTROLS recommended.
ISRLC157	Data set full exit error - LMF services cannot be issued from the lmf address space.
ISRLC158	Lock not allowed - Lock not allowed on a member whose status is "Promote-in-process".
ISRLC159	Member "aaaaaaaa" in use - Member "aaaaaaaa" is in use. The physical member cannot be deleted.
ISRLC160	Member not locked - Project "aaaaaaaa" is an SCLM controlled project.
ISRLC161	SCLM warning - The project being updated is an SCLM controlled project.

ISRLD000A Messages ISRLD000 through ISRLD049 have been moved to "Chapter 2. PDF Messages" on page 195

Explanation: The following messages can be found in "Chapter 2. PDF Messages" on page 195.

- ISRLD000-009
- ISRLD010-019
- ISRLD020-029
- ISRLD030-039

ISRLE000A Messages ISRLE000 through ISRLE029 have been moved to "Chapter 2. PDF Messages" on page 195

Explanation: The following messages can be found in "Chapter 2. PDF Messages" on page 195.

- ISRLD000-009
- ISRLD010-019
- ISRLD020-029

ISRLF000 Control file error - See system programmer - details in the LMF address space islog.

ISRLF001	Internal program error - Module 'aaaaaaaa' received a return code bbbbbbbb from module 'ccccccc'.
ISRLF002	Control file LRECL error - An invalid record length detected in control file member 'aaaaaaaa'.
ISRLF003	Member not found - Member 'aaaaaaaa' could not be found in the control file.
ISRLF004	Member already exists - Member 'aaaaaaaa' not created. It already exists in the control file.
ISRLF005	ZNAMES member not found - The ZNAMES member could not be found in the control file.
ISRLF006	Project member not found - The ZPROJECT member could not be found in the control file.
ISRLF007	Type member not found - Type member 'aaaaaaaa' could not be found in the control file.

Explanation:

ISRLF008 Group member not found - Group member 'aaaaaaaa' could not be found in the control file.

ISRLF009 Member not found - MEMBER member 'aaaaaaaa' could not be found in the control file.

ISRLF010 Project not controlled - Project entry 'aaaaaaaa' could not be found in the control file.

ISRLF011 Group not controlled - Group entry 'aaaaaaaa' could not be found in the control file.

ISRLF012 Type not controlled - Type entry 'aaaaaaaa' could not be found in the control file.

ISRLF013 Top group not found - Top group 'aaaaaaaa' could not be found in the control file.

ISRLF014	Hierarchy group missing - Group 'aaaaaaaa' was not found within the promote hierarchy.
ISRLF015	User set does not exist - User set 'aaaaaaaa' could not be found in the control file.
ISRLF016	User set not created - User set 'aaaaaaaa' not created. The project does not exist.
ISRLF017	Dist. table not found - Distribution table 'aaaaaaaa' was not found in the control file.
ISRLF018	Dist. table not created - Distribution table 'aaaaaaaa' not created. The project does not exist.
ISRLF019	Group not defined - Group 'aaaaaaaa' does not exist in the promote hierarchy.
ISRLF020	Hierarchy is 'active' - Group 'aaaaaaaa' must be deactivated before any changes can be made.
ISRLF021	Target group invalid - Target group 'aaaaaaaa' could not be found in control file.
ISRLF022	Promote failed - The promote failed due to invalid access type 'aaaaaaaa'.
ISRLF023	Control file invalid - Group member name in project entry is blank.
ISRLF024	Library invalid - Type 'aaaaaaaa' has not been defined in target library.
ISRLF025	Ctl file did not open - The control file could not be opened.
ISRLF026	Ctl file not allocated - The control file was not preallocated to ddname ISRCFIL.
ISRLF027	Ctl file not shared - The control file was not allocated shared.

ISRLF028	Ctl file concatenated - The control file is concatenated.
ISRLF029	Ctl file not a PDS - The control file is not a partitioned data set.
ISRLF031	Invalid ctl file length - The control file must have a record length of aaaaaaaaa.
ISRLF032	Ctl file obtain failed - An obtain failed while allocating the control file.
ISRLF033	Type not deleted - Type 'aaaaaaaa' was not deleted. It was not found in the control file.
ISRLF034	Userset member not found - User set member 'aaaaaaaa' was not found in the control file.
ISRLF035	Dist. table member error - Distribution table member 'aaaaaaaa' was not found in the control file.
ISRLF036	Not authorized - The project administrator is 'aaaaaaaa'.
ISRLF037	Type queue failed - aaaaaaaaa.
ISRLF038	Control file invalid - The TYPE member name in the group entry is blank.
ISRLF039	Control file invalid - The MEMBER member name in the type entry is blank.
ISRLF040	Project already freed - Project 'aaaaaaaa' was not locked when the FREE request was issued.
ISRLF041	Promote failed - The hierarchy level indicator for group 'aaaaaaaa' is invalid.
ISRLF042	Promote failed - No valid groups in hierarchy queue for project 'aaaaaaaa'.
ISRLF043	Control file error - Invalid promote indicator for group 'aaaaaaaa'.

LMF Messages

ISRLI000	Internal program error - See system programmer - details in the LMF address space isplg.	ISRLI015	I/O error on BLDL - I/O error on BLDL in module 'aaaaaaaa'.
ISRLI001	Internal program error - Module 'aaaaaaaa' received a return code bbbbbbbb from module 'ccccccc'.	ISRLI016	Put close out failed - Put close out failed in module 'aaaaaaaa'.
ISRLI002	Invalid function code - Invalid function code. 'aaaaaaaa'.	ISRLI017	I/O error on STOW - A permanent I/O error occurred during a STOW in module 'aaaaaaaa'.
ISRLI003	Region size too small - Insufficient virtual storage from module 'aaaaaaaa'.	ISRLI018	Invalid DCB on STOW - DCB either closed or open for output on STOW in module 'aaaaaaaa'.
ISRLI004	Read failed - Read failed on member 'aaaaaaaa'.	ISRLI019	Reserve failed - Reserve failed in module 'aaaaaaaa'.
ISRLI005	Read close out failed - Read close out failed on member 'aaaaaaaa'.	ISRLI020	ENQUEUE failed - ENQUEUE failed in module 'aaaaaaaa'.
ISRLI006	Free main storage failed - Free main storage failed in module 'aaaaaaaa'.	ISRLI021	Release failed - Release failed in module 'aaaaaaaa'.
ISRLI007	Put failed - Put failed in module 'aaaaaaaa'.	ISRLI022	ENQUEUE/DEQUEUE failed - Invalid parameters passed to ISRLCEDQ. ENQUEUE or DEQUEUE failed
ISRLI008	Znames member exists - ISRLCOPY could not create the ZNAMES member. It already exists.	ISRLI023	Control file alloc fail - Invalid open parameter of 'aaaaaaaa' passed to ISRLCFAL..
ISRLI009	Close failed - Close failed in module 'aaaaaaaa'.	ISRLI024	No directory space - Promote failed for "to" library 'aaaaaaaa'.
ISRLI010	Open failed - Open failed in module 'aaaaaaaa'.	ISRLI025	Failure in SVC - ACEE control block not found for batch request.
ISRLI011	No directory space - Member not created or updated. No directory space for control file.	ISRLI026	Failure in SVC - ACEERACF = 0 - user ID is not defined to racf for batch request.
ISRLI012	Program error in ISPCDB - Module 'aaaaaaaa' received a return code of 36 from module ispcdb.	ISRLI027	New statistics invalid - Statistics cannot be updated for data sets with RECFM = U.
ISRLI013	Bad BLDL return code - A bad BLDL return code was returned for member 'aaaaaaaa'.	ISRLI028	New access ID invalid - Existing owner cannot be determined for data sets with RECFM = U.
ISRLI014	Obtain failed - Obtain failed for member 'aaaaaaaa'.		

ISRLI060	Internal program error - Invalid action 'aaaaaaaa' specified on promote.
ISRLI061	"From" lib not closed - Unable to close "from" library 'aaaaaaaa'.
ISRLI062	"From" library not freed - 'aaaaaaaa' could not be freed by program 'bbbbbbbb'.
ISRLI063	Free library error - 'aaaaaaaa' could not be freed by program 'bbbbbbbb'.
ISRLI064	"From" lib not opened - Unable to open "from" library 'aaaaaaaa'.
ISRLI065	User id - aaaaaaaa - ISRLI065 - 'bbbbbbbb' is the message number of the following message:
ISRLI066	Format message error - Failure calling ispcse with message number 'aaaaaaaa'.
ISRLK000	Member 'aaaaaaaa' was edit locked by 'bbbbbbbb'.
ISRLK001	The member was in group 'aaaaaaaa'. the controls are cleared.
ISRLK002	If member 'aaaaaaaa' is needed in group 'bbbbbbbb' it should be put there.
ISRLK003	Option 1 or 2 of member utilities can be used to delete controls if necessary.
ISRLK004	Controls for member 'aaaaaaaa' in group 'bbbbbbbb' are cleared.
ISRLK005	Controls for member 'aaaaaaaa' were found for group 'bbbbbbbb'.
ISRLK006	Controls for member 'aaaaaaaa' were also found for group 'bbbbbbbb'.
ISRLK007	These groups are in conflicting paths to the same top group.
ISRLK008	Member 'aaaaaaaa' must be moved or deleted from one or both of these groups.

ISRLK009	Member 'aaaaaaaa' was not found in group 'bbbbbbbb'.
ISRLK010	It should have been. member controls exist for it there.
ISRLK011	Member 'aaaaaaaa' was found in group 'bbbbbbbb'.
ISRLK012	It should not be found since no member controls exist for it there.
ISRLK013	Member 'aaaaaaaa' should be moved or deleted from 'bbbbbbbb'.
ISRLK014	Member 'aaaaaaaa' was also found in group 'bbbbbbbb'.
ISRLK015	If member controls are needed use option 2 of member utilities.
ISRLK016	Member 'aaaaaaaa' was locked in group 'bbbbbbbb' by user 'ccccccc'.
ISRLK017	Member 'aaaaaaaa' was locked in group 'bbbbbbbb' by user 'ccccccc'.
ISRLK018	***** (Member Utilities Message 'aaaaaaaa') *****
ISRLK019	If member controls are not needed delete or move the member from 'aaaaaaaa'.
ISRLK020	Verify or initialize should then be used to insure that the problem is fixed.
ISRLK021	No top group record exists for member 'aaaaaaaa'. one is needed.
ISRLK022	Use the initialize member utility with or without the preserve feature.
ISRLK023	Statistics for member 'aaaaaaaa' in 'bbbbbbbb' do not exist or are invalid.
ISRLK024	Statistics are needed for all LMF controlled members.

LMF Messages

ISRLK025	Use the PDF editor, pdf option 3.5, the LMMSTATS service or
ISRLK026	Verify should then be used to ensure that the problem is fixed.
ISRLK027	Member 'aaaaaaaa' is locked incorrectly in group 'bbbbbbbb'.
ISRLK028	It should be available or edit locked by an updater. It is neither.
ISRLK029	Member 'aaaaaaaa' is available incorrectly in group 'bbbbbbbb'.
ISRLK030	Member 'aaaaaaaa' should be locked against update.
ISRLK031	This is only an informational message. The problem is fixed.
ISRLK032	Duplicate member controls exist for member 'aaaaaaaa' in group 'bbbbbbbb'.
ISRLK033	Use the initialize members utility without the preserve controls feature.
ISRLK034	Member 'aaaaaaaa' is edit locked incorrectly in group 'bbbbbbbb'.
ISRLK035	Member 'aaaaaaaa' is available or edit locked in a group lower in hierarchy.
ISRLK036	Member 'aaaaaaaa' is predefined in group 'bbbbbbbb'.
ISRLK037	This is not valid since the physical member exists in group 'aaaaaaaa'.
ISRLK038	This is not valid since group 'aaaaaaaa' is not a top group.
ISRLK039	Predefined members are only valid in top groups.
ISRLK040	It should not be found since the member controls do not contain valid

ISRLK041	statistics for it.
ISRLL003	Invalid command - CAN or CANCEL are the only valid commands.
ISRLL004	Verify required - Controls created on a group that exists. Verify 8.1.3.4 is required.
ISRLL006	Enter required field - Enter required field at the cursor position.
ISRLL007	Promoter ID required - Promoter ID is required if a target group is specified.
ISRLL008	Promoter ID not allowed - Promoter ID must be blank when no target group is specified.
ISRLL009	Invalid option - Enter 1, 2 or 3. for information about the options press the Help key.
ISRLL011	Library not deleted - Controls for library 'aaaaaaaa..bbbbbbbb..ccccccc' not deleted.
ISRLL012	Library deleted - Controls for library 'aaaaaaaa..bbbbbbbb..ccccccc' deleted.
ISRLL013	Target group invalid - Target group cannot be changed. the hierarchy contains member entries.
ISRLL014	Controls saved - Controls for library 'aaaaaaaa..bbbbbbbb..ccccccc' were saved.
ISRLL015	Controls not saved - Controls for library 'aaaaaaaa..bbbbbbbb..ccccccc' were not saved.
ISRLL016	Member entries saved - Member entries for library 'aaaaaaaa..bbbbbbbb..ccccccc' were saved.
ISRLL017	Member entries not saved - Not all member entries for 'aaaaaaaa..bbbbbbbb..ccccccc' were saved.
ISRLL018	Controls created - Controls for library 'aaaaaaaa..bbbbbbbb..ccccccc' were created.

ISRLL019	Controls not modified - Controls for library 'aaaaaaaa..bbbbbbbb..ccccccc' not modified.
ISRLL050	Update in progress - Updates can be performed on only one screen.
ISRLL051	'aaaaaaaa' not valid - The group must be a "top" group.
ISRLL052	Invalid input - Enter blank, '*', or valid logon id or user set.
ISRLL053	Update successful - The data set full parameters have been successfully updated.
ISRLL055	Exit name invalid - Exit name must be up to 8 alphanumeric characters (1st must be alpha).
ISRLL056	Target group invalid - A "circular" hierarchy cannot be defined.
ISRLL057	Controls not modified - The data set full controls were not modified.
ISRLL071	Dist. table error - Target library must be an "entry" level library.
ISRLL072	Dist. table error - Library 'aaaaaaaa..bbbbbbbb..ccccccc' already references a dist. table.
ISRLL073	Dist. table error - Dist. table referenced at lower level library 'aaaaaaaa..bbbbbbbb..ccccccc'.
ISRLL074	Dist. table error - Controlled library hierarchy contains more than one "entry" level.
ISRLL075	Dist. table error - Library is not valid with specified target group.
ISRLL076	Dist. table error - More than one library is defined at this library level.
ISRLL077	Target group invalid - Entry level library 'aaaaaaaa..bbbbbbbb..ccccccc' references a dist. table.

ISRLL078	Target group invalid - Library 'aaaaaaaa..bbbbbbbb..ccccccc' in target hierarchy uses a dist. table.
ISRLL079	Dist. table error - Distribution table being added to a hierarchy with more than one entry level.
ISRLL090	No members modified - Member entries were not created or modified.
ISRLL091	Invalid member name - Member name specified is incorrect.
ISRLL092	Update not allowed - Hierarchy with top group 'aaaaaaaa' is active. update not allowed.
ISRLL093	Command not allowed - Only the 'end' command is valid from this panel.
ISRLL094	ADMIN not allowed - Libraries with a group name of ADMIN cannot be controlled.
ISRLL095	ADMIN not allowed - The group name of "admin" cannot be used for a member activity log.
ISRLL096	SCLM project updated - The project is SCLM controlled, but has been successfully updated.
ISRLL170	Update not allowed - Member 'aaaaaaaa' of type 'bbbbbbbb' is currently being updated by 'ccccccc'.
ISRLL171	Update not allowed - Member 'aaaaaaaa' of type 'bbbbbbbb' is currently being updated by 'ccccccc'.
ISRLL172	Update not allowed - Member 'aaaaaaaa' of type 'bbbbbbbb' must be promoted into the top group.
ISRLL173	Update not allowed - Member 'aaaaaaaa' of type 'bbbbbbbb' must be promoted into the top group.

LMF Messages

ISRLL190	'aaaaaaaa' not deleted - User set 'aaaaaaaa' was not deleted.
ISRLL191	'aaaaaaaa' saved - User set 'aaaaaaaa' was saved.
ISRLL192	'aaaaaaaa' saved - Distribution table 'aaaaaaaa' was saved.
ISRLL193	'aaaaaaaa' not deleted - Distribution table 'aaaaaaaa' was not deleted.
ISRLL194	No modifications made - User set 'aaaaaaaa' was not modified.
ISRLL195	No modifications made - Distribution table 'aaaaaaaa' was not modified.
ISRLL196	'aaaaaaaa' not saved - User set 'aaaaaaaa' was not saved due to CANCEL request.
ISRLL197	'aaaaaaaa' not saved - Distribution table 'aaaaaaaa' was not saved due to CANCEL request.
ISRLL198	Delete not allowed - The project administrator user set cannot be deleted.
ISRLL200	ID 'aaaaaaaa' not deleted - ID must be deleted by another proj. admin. Other changes processed.
ISRLL201	Create not allowed - Project 'aaaaaaaa' must be created before the distribution table.
ISRLL202	Log not allocated - Activity log 'aaaaaaaa..bbbbbbbb..ACTLOG' may be in use by another user.
ISRLL203	Invalid control file - Record for 'aaaaaaaa' not found in control file member bbbbbbbb
ISRLL210	Update not allowed - Group 'aaaaaaaa' must be deactivated before any changes can be made.
ISRLL211	Update not allowed - Group 'aaaaaaaa' does not exist in the promotion hierarchy.

ISRLL212	Update not allowed - Group 'aaaaaaaa' must be deactivated before any changes can be made.
ISRLL213	Update not allowed - Groups from the same hierarchy cannot be in the same dist. table.
ISRLL300	CLEAR request cancelled - Request to clear member controls was cancelled by end command.
ISRLL301	INIT request cancelled - Request to initialize member controls was cancelled by end command.
ISRLL302	CLEAR failed - Unable to clear member controls if a distribution table exists.
ISRLL303	Initialize failed - Unable to initialize member controls if a distribution table exists.
ISRLL304	LMF messages displayed - Multiple messages previously displayed.
ISRLL305	Controls initialized - Member controls successfully initialized.
ISRLL306	Controls cleared - Member controls cleared. a verify is required before further use.
ISRLL307	Controls verified - Member controls passed verification.
ISRLL308	Library not controlled - Use option 8.1.1 to set controls for the ISPF library.
ISRLL309	Update not allowed - Member controls cannot be updated for an SCLM controlled project.
ISRLLP100	Invalid project - Project must be 1-8 alphanumeric characters, the first alphabetic.
ISRLLP101	Invalid group - Group must be 1-8 alphanumeric characters, the first alphabetic.

ISRLP102	Invalid type - Type must be 1-8 alphanumeric characters, the first alphabetic.
ISRLQ001	FREEMAIN failure - System unable to process a FREEMAIN request.
ISRLQ004	Activity log open failed - Open failed on activity log 'aaaaaaaa'. see ISPF log for details.
ISRLQ005	Sort failed - External sort program returned an error code of 'aaaaaaaa'.
ISRLQ006	Listing printed - Listing printed for controlled library aaaaaaaa..bbbbbbbb..cccccccc.
ISRLQ007	Listing printed - Listing printed for activity log aaaaaaaa..ADMIN.ACTLOG.
ISRLQ008	Data set created - Data set created for control library aaaaaaaa..bbbbbbbb..cccccccc.
ISRLQ009	Data set updated - Data set updated for control library aaaaaaaa..bbbbbbbb..cccccccc.
ISRLQ012	Open outlist failed - Open failed on outlist file 'aaaaaaaa'.
ISRLQ015	Outlist close out failed - Unable to perform clean up on outlist file 'aaaaaaaa'.
ISRLQ016	Write failed - Write to outlist data set failed in module 'aaaaaaaa'.
ISRLQ017	Read failed - Read failed on activity log data set.
ISRLQ020	Listing print failed - Print to list file failed, see details in list file.
ISRLQ021	Listing has no members - Listing produced, member: 'aaaaaaaa' not found.
ISRLQ022	Listing has no members - Listing produced, no members were found for the library specified.

ISRLQ023	Page size too small - List data set lines per page must be at least 16.
ISRLQ024	Record length too small - aaaaaaaa record length must be at least 160.
ISRLQ025	Invalid parameter - Parameter passed from activity and status listings panel is invalid.
ISRLQ026	Read failed - Read from sort file failed in module aaaaaaaa.
ISRLQ027	No controlled members - No controlled members exist for the library specified.
ISRLQ028	Member name required - A member name must be provided when the data set is a PDS.
ISRLQ029	Data set is sequential - A member name is not permitted for a sequential data set.
ISRLQ030	Member not controlled - Controls for member "aaaaaaaa" not found in specified library.
ISRLQ031	Configuration error - Record length for control status is too short in configuration table.
ISRLQ033	Enter required field - Activity log group name is a required field.
ISRLQ034	Log group name error - Activity log group name must be a valid ISPF "group" name.
ISRLS000A	Messages ISRLS000 through ISRLS219 have been moved to "Chapter 2. PDF Messages" on page 195

Explanation: The following messages can be found in "Chapter 2. PDF Messages" on page 195.

- ISRLS000–009
- ISRLS010–019
- ISRLS020–029
- ISRLS030–039
- ISRLS040–049
- ISRLS050–059
- ISRLS060–069
- ISRLS070–079
- ISRLS080–089
- ISRLS090–099

LMF Messages

- ISRLS100–109
- ISRLS110–119
- ISRLS120–129
- ISRLS130–139
- ISRLS140–149
- ISRLS150–159
- ISRLS160–169
- ISRLS170–179
- ISRLS190–199
- ISRLS200–209
- ISRLS210–219

ISRLS260	Group not activated - LMHIER - group was found but not activated in hierarchy.
ISRLS261	Project not found - LMHIER - project was not found in hierarchy.
ISRLS262	Invalid parameter value - LMHIER - 'aaaaaaaa' is not a valid parameter value.
ISRLS263	Severe error occurred - LMHIER - a severe error occurred while processing request.
ISRLS264	Group not found - LMHIER - group was not found in hierarchy.
ISRLS265	VDEFINE error - LMHIER - a severe error occurred during VDEFINE.
ISRLS270	Invalid control type - LMREVIEW - control type must be LIBRARY or MEMBER.
ISRLS271	Data set or data ID req. - LMREVIEW - data set name or data-id is required for output data set.
ISRLS272	Incompatible parameters - LMREVIEW - data set name and data-id cannot both be used.
ISRLS273	Invalid data set name - LMREVIEW - data set name is not valid.
ISRLS274	Data-id does not exist - LMREVIEW - use LMINIT service to create a data-id.

ISRLS275	Data-id is not open - LMREVIEW - use LMOPEN service to open a data-id.
ISRLS276	Project name required - LMREVIEW - enter name of controlled project.
ISRLS277	Group name required - LMREVIEW - enter name of controlled group.
ISRLS278	Invalid group name - LMREVIEW - group name must be 1-8 alphanumeric characters, the first alphabetic.
ISRLS279	Type required - LMREVIEW - enter controlled type.
ISRLS280	Invalid type - LMREVIEW - type must be 1-8 alphanumeric characters, the first alphabetic.
ISRLS281	Member name required - LMREVIEW - member name is required if member controls requested.
ISRLS282	Invalid member name - LMREVIEW - member must be 1-8 alphanumeric characters, the first alphabetic.
ISRLS283	DATAMEMB required - LMREVIEW - output data member is required if data ID is partitioned.
ISRLS284	Datamemb invalid - LMREVIEW - data member must be 1-8 alphanumeric characters, the first alphabetic.
ISRLS285	Data-id is concatenation - LMREVIEW - data ID must be for a single library.
ISRLS286	Invalid project name - LMREVIEW - project must be 1-8 alphanumeric characters, the first alphabetic.
ISRLS287	Datamemb not allowed - LMREVIEW - output data set is sequential.
ISRLS288	Datamemb not allowed - LMREVIEW - data set has member name imbedded.

ISRLS289	Gen load failed - LMREVIEW - Gen load of ISRLALIN failed.
ISRLS290A	Messages ISRLS290 through ISRLS499 have been moved to "Chapter 2. PDF Messages" on page 195
Explanation: The following messages can be found in "Chapter 2. PDF Messages" on page 195.	
<ul style="list-style-type: none"> • ISRLS290–299 • ISRLS300–309 • ISRLS310–319 • ISRLS320–329 • ISRLS330–339 • ISRLS340–349 • ISRLS350–359 • ISRLS360–369 • ISRLS370–379 • ISRLS440–449 • ISRLS450–459 • ISRLS460–469 • ISRLS470–479 • ISRLS480–489 • ISRLS490–499 	
ISRLT000	Invalid primary command - 'aaaaaaaa' is not a valid command.
ISRLT001	Enter LOCATE parameter - Enter the argument to be located.
ISRLT002	Parameter not allowed - No parameter is allowed for the CANCEL command.
ISRLT003	Too many parameters - Too many parameters are defined for this command.
ISRLT004	Command not recognized - Valid line commands are: I (insert), D (delete), R (repeat).
ISRLT005	Command conflict - 'aaaaaaaa' is within range of the D command. Correct either one.
ISRLT006	'aaaaaaaa' not found - 'aaaaaaaa' not located.
ISRLT007	Delete not allowed - Member has a delete status of "I".

ISRLT008	Duplicate found - Duplicate table rows exists. Make changes before saving.
ISRLT009	Invalid parameter length - Parameter for LOCATE command cannot be more than 8 characters.
ISRLT010	'aaaaaaaa' found - 'aaaaaaaa' is located, and appears on the first line.
ISRLT011	Delete not allowed - A member with delete status of "I" is within range of a DELETE command.
ISRLT012	Line command invalid - The numeric portion of the line command must be greater than zero.
ISRLU000	No members in data set - The PDS specified contains no members.
ISRLU001	Data set aaaaaaaaa - To data set bbbbbbbb.
ISRLU002	Not entry level library - 'To ISPF library' must be an entry level controlled library.
ISRLU003	Library is deactivated - Control library must be activated before promotion can be done.
ISRLU004	Error on member list - Severe error creating member list.
ISRLU005	Free error - Severe error freeing input data set.
ISRLU006	Close error - Severe error closing input data set.
ISRLU007	Invalid name - Reenter a valid name at cursor location.
ISRLU008	Required field - Enter a valid name at cursor location.
ISRLU009	Not a controlled library - 'To ISPF library' must be a controlled library.

LMF Messages

ISRLU010	<i>aaaaaaaa</i>	ISRLU027	to <i>aaaaaaaa</i> .
ISRLU011	Data set not <i>aaaaaaaa</i> - Data set was not processed for promotion.	ISRLU028	Promotion error - Multiple messages previously displayed.
ISRLU012	Close error - Cannot close control files.	ISRLU029	'To' lib not cataloged - ' <i>aaaaaaaa</i> ' was not found in catalog.
ISRLU013	<i>aaaaaaaa</i> member <i>bbbbbbbb</i> - to data set <i>cccccccc</i> .	ISRLU030	Write variables failed - Write variables to shared pool for promote failed.
ISRLU014	<i>aaaaaaaa</i> members <i>bbbbbbbb</i> - to data set <i>cccccccc</i> .	ISRLU031	Promotion not allowed - Promotion user exit validation failed.
ISRLU015	FREEMAIN error - Cannot FREEMAIN control files storage.	ISRLU032	<i>aaaaaaaa</i> <i>bbbbbbbb</i> - <i>cccccccc</i> (<i>aaaaaaaa</i>) <i>bbbbbbbb</i> successfully
ISRLU016	No members <i>aaaaaaaa</i> - No members were processed for promotion.	ISRLU033	Severe error occurred - Module <i>aaaaaaaa</i> received a return code <i>bbbbbbbb</i> from module <i>cccccccc</i> .
ISRLU017	Severe error from service - Severe error defining ISPF dialog variables.	ISRLU034	Print failed - Print request failed. list data set may have more details.
ISRLU018	Severe error from service - Severe error deleting ISPF dialog variables.	ISRLU035	Open failed - I/O error occurred trying to open 'from' data set for input.
ISRLU019	Member <i>aaaaaaaa</i> <i>bbbbbbbb</i> - Member ' <i>aaaaaaaa</i> ' is now <i>bbbbbbbb</i> to data set ' <i>cccccccc</i> '.	ISRLU036	Delete failed - I/O error occurred trying to open 'from' data set for output.
ISRLU020	Invalid select code - Type 's' for select or 'b' for browse in front of the member desired.	ISRLU037	Delete failed - Permanent I/O error.
ISRLU022	Invalid newname - Newname field contains an invalid member name.	ISRLU038	Delete failed - Data control block is not open or is open for input.
ISRLU023	Member not found - Selected member is not available for promotion.	ISRLU039	Delete failed - Insufficient virtual storage is available to perform STOW function.
ISRLU024	BLDL error - Severe error performing BLDL on selected member.	ISRLU040	Open failed - Open failed for selected member.
ISRLU025	Cannot use 'top' library - 'From' library cannot be a 'top' or 'only' library.	ISRLU041	Region size too small - Insufficient virtual storage to perform BLDL.
ISRLU026	Data set <i>aaaaaaaa</i> - <i>bbbbbbbb</i> <i>aaaaaaaa</i> successfully	ISRLU042	Program error in ISPCDB - Module ISRLUPR22 or isrluprs received a return code of 36 from module ispcdb.

ISRLU043	Bad BLDL return code - A bad BLDL return code was returned from module ispcdb.
ISRLU044	Obtain failed - Obtain failed for BLDL on selected member.
ISRLU045	I/O error on BLDL - I/O error on BLDL for selected member.
ISRLU046	Promotion failed - Cannot promote from password protected data set.
ISRLU047	After exit failed - Member promoted. Exit after promotion failed.
ISRLU048	Seq. data set invalid - Use partitioned data set, if "from" member not given.
ISRLU050	Library required - Controlled ISPF library required. Sequential data set not allowed.
ISRLU051	ISRCFIL not allocated - Control file not allocated to ddname ISRCFIL
ISRLU052	Library not controlled - Unable to lock member. Library "aaaaaaaa" is not controlled.
ISRLU053	Member already locked - Member "aaaaaaaa" is locked by "bbbbbbbb".
ISRLU054	Controls not active - Controls must be activated before copy and lock performed.
ISRLU055	Severe error - see log - Lock failed for member "aaaaaaaa". Copy/lock completed for bbbbbbbb members.
ISRLU056	Copy and lock failed - Copy failed. Member is still locked with your id.
ISRLU057	ISPF library required - Controlled ISPF library required for lock function.
ISRLU058	Invalid "to" library - "To" library must not be controlled.

ISRLU059	Unable to lock member - Member "aaaaaaaa" exists at a lower level of the hierarchy.
ISRLU060	Unable to lock member - Member "aaaaaaaa" exists at a lower level. bbbbbbbb members copy/locked.
ISRLU061	Severe error - see log - Copy and lock failed for member "aaaaaaaa". See log for details.
ISRLU062	Member already locked - Member "aaaaaaaa" locked by "bbbbbbbb". Copy/lock completed for cccccccc members.
ISRLU063	Lock failed - Requestor is not authorized to access "aaaaaaaa".
ISRLU064	Lock failed - Requestor is not authorized to access "aaaaaaaa". bbbbbbbb members copy/locked.
ISRLU065	Lock failed - Promote is in process for member "aaaaaaaa".
ISRLU066	Lock failed - Promote is in process for member "aaaaaaaa". bbbbbbbb members copy/locked.
ISRLU100	Invalid option number - Enter one of the listed options.
ISRLU110	Dynamic allocation error - Unavailable resource with error code aaaaaaaa, press Help key for detail.
ISRLU111	Dynamic allocation error - Invalid parameter list with error code aaaaaaaa, press Help key for detail.
ISRLU112	Dynamic allocation error - Environmental error with error code aaaaaaaa, press Help key for detail.
ISRLU113	Dynamic allocation error - System routine error with error code aaaaaaaa, press Help key for detail.

LMF Messages

ISRLU114	No dynamic allocation - Installation validation routine deny dynamic allocation/unallocation.
ISRLU115	Catalog error - Already cataloged, VSAM protected, or other reason - <i>aaaaaaaa</i>
ISRLW001	ISRLW001: LMF started task ' <i>aaaaaaaa</i> ' initialized
ISRLW002	ISRLW002: LMF started task <i>aaaaaaaa</i> has been stopped by user " <i>bbbbbbbb</i> ".
ISRLW003	ISRLW003: LMF unable to establish ESTAE environment in started task <i>aaaaaaaa</i> .
ISRLW004	ISRLW004: LMF started task <i>aaaaaaaa</i> terminating - restart LMF
ISRLW006	ISRLW006: Control file version is not correct for LMF started task <i>aaaaaaaa</i> .
ISRLW007	ISRLW007: LMF started task name <i>aaaaaaaa</i> is not bound to the control file.
ISRLW008	ISRLW008: LMF task <i>aaaaaaaa</i> could not be started. Contact system programmer.
ISRLW009	ISRLW009: Please refer to the installation and customization guide.
ISRLW014	Invalid control file - The current control file has an invalid ZNAMES member.
ISRLW015	<i>aaaaaaaa</i> has run out of space
ISRLW016	For LMF started task <i>aaaaaaaa</i> ..
ISRLW017	<i>aaaaaaaa</i> has no directory blocks available.
ISRLW018	<i>aaaaaaaa</i> had a <i>bbbbbbbb</i> abend.
ISRLW019	The time that this event occurred was <i>aaaaaaaa</i> ..

Chapter 6. SuperC Messages

There are three levels of SuperC messages:

- *Informational* messages do not affect the return code and SuperC completes normally.
- *Warning* messages return a code of 4 to 7, processing is completed, but some user option/operation may not be completely performed.
- *Error* messages are accompanied with a return code of 8 or greater and the processing is prematurely terminated.

This section explains the SuperC message format and the messages you may receive.

Each of the messages issued by SuperC is of the form:

Message Format

ASMFnnns

where:

ASMF is the program identifier for SuperC

nnn represents a particular message number

s is the message severity level:

I Informational message

W Warning message

E Error message

ASMF001I EMPTY COMPARE SET, INVALID NAMES, NO COMMON NAMED EMPTY FILES/DATA SETS, OR ZERO COMPARE AFTER FILTERED.

Explanation: No data has been found to be compared.

System Action: The SuperC run continues.

Programmer Response: Check that the file/member name(s) have been entered correctly. Also, check that the parameters for any select, focus/exclude options are correct.

Refer:

Process Options in the SuperC Appendix of the User's Guide

Process Statements in the SuperC Appendix of the User's Guide

ASMF002I NO UPDATE FILE/DATA SET GENERATED FOR UPDCMS8 OR UPDMVS8 OPTIONS WHEN NO INPUT DIFFERENCES ARE FOUND.

Explanation: No differences in the input have been found. The update process option specified does not create an output update file in this situation.

System Action: The SuperC run continues.

Programmer Response: None.

ASMF003I THE COMPARISON OPERATION WAS EXECUTED UNDER STORAGE CONSTRAINTS THAT MAY AFFECT RESULTS/THROUGHPUT.

Explanation: Insufficient storage available for normal processing.

System Action: The SuperC run continues.

Programmer Response: Check storage allocation.

ASMF004I LISTING LINES MAY BE TRUNCATED DUE TO LIMITING OUTPUT LINE WIDTH.

Explanation: The length of the data being printed is less than the length of one of the records. This would be normal for a NARROW listing of 80 character records.

System Action: The SuperC run continues.

Programmer Response: The maximum listing length is 80 characters. If the data has records greater than 80, the part after the 80th character will not be displayed. If the length of the data is between 56 and 80 characters, the WIDE option will give a side-by-side listing of 80 characters from each file.

Refer:

Process Options in the SuperC Appendix of the User's Guide

ASMF005I NO DATA SEARCHED INVALID NAME(S), EMPTY MEMBERS PROCESSED OR ZERO SEARCH SET AFTER INPUT FILTERING.

Explanation: No data has been found to be searched.

System Action: The SuperC run continues.

Programmer Response: Check that the file/member name(s) have been entered correctly. Also, check that the parameters for any SELECT, FOCUS/EXCLUDE process options are correct.

Refer:

Process Options in the SuperC Appendix of the User's Guide

ASMF006I UPDATE PROCESSING DETECTED SEQUENCE NUMBERING ERRORS.

Explanation: The sequence numbers on one or both input files have found to be incorrect.

System Action: The SuperC run continues.

Programmer Response: Check sequence numbering on input.

ASMF007I MOVED LINE FLAGGING ONLY VALID FOR FIRST 32K LINES PORTION OF COMPARE OPERATION PER DATA SET (OR FILE).

Explanation: Process option FMVLNS (Flag Moved Lines) restricted to a maximum of 32K "blocks" of moved lines.

System Action: The SuperC run continues.

Programmer Response: None.

ASMF009W GWCBL OPTION AND Y2DTONLY MUTUALLY EXCLUSIVE. GWCBL IS IGNORED.

Explanation: GWCBL and Y2DTONLY process options cannot be used together.

System Action: The SuperC run continues (without GWCBL process option).

Programmer Response: None.

ASMF010W *process-option* PROCESS OPTION PARAMETER IS NOT A VALID PROCESS OPTION. IT IS IGNORED.

Explanation: *process-option* is not a valid process option keyword and has been ignored.

System Action: The SuperC run continues.

Programmer Response: Check that the process option(s) have been entered correctly.

Refer:

Process Options in the SuperC Appendix of the User's Guide

ASMF011W *start-value* SPECIFIED START VALUE GREATER THAN STOP VALUE. STOP VALUE CHANGED TO MAXIMUM VALUE.

Explanation: When nominating a range, the start value for the range has been specified with value greater than the stop value for the range. SuperC has attempted to accommodate the range by extending the stop value to the maximum value for the line or file concerned.

System Action: The SuperC run continues.

Programmer Response: Check start and stop values for range(s).

ASMF012W SRCHFOR STATEMENT(S) MISSING FOR SEARCH-FOR COMPARE TYPE REQUEST. ZERO LINES WILL BE INSPECTED.

Explanation: SuperC expected 1 or more SRCHFOR process statements to be present (specifying the "string(s)" to be searched for) but none were found. No records searched.

System Action: The SuperC run continues.

Programmer Response: Check that "search string" is being supplied to SuperC correctly.

Refer to the SuperC Appendix of the User's Guide.

ASMF013W CERTAIN "DO NOT PROCESS" OPTIONS ARE REJECTED DUE TO LINE LENGTHS > 256. OPTIONS RESERVED FOR PROGRAM SOURCE DATA.

Explanation: "Do not process" options are not allowed if line > 256 characters. These options are primarily for source text. The DPLINE process statement is allowed in these cases.

System Action: The SuperC run continues.

Programmer Response: Either use the DPLINE statement or modify the data before comparing.

ASMF014W UPDATE OPTION CONFLICTS WITH "DO NOT PROCESS" OPTION SELECTION. "DO NOT PROCESS" OPTIONS IGNORED.

Explanation: The update process option specified is incompatible with the "Do not process" (DP...) process option(s) specified.

System Action: The SuperC run continues.

Programmer Response: Check process options used.

Refer:

Process Options in the SuperC Appendix of the User's Guide

ASMF015W UPDMVS8 AND UPDCMS8 PROCESS OPTIONS ARE ONLY ALLOWED WITH FIXED 80 RECORDS.

System Action: The SuperC run continues. No update file is created.

Programmer Response: Check that the appropriate update process option is being used for the input file.

Refer:

Process Options in the SuperC Appendix of the User's Guide

ASMF016W MOVE LINE DETECTION RESTRICTED TO LINES <= 256 LRECL. OPTION IS IGNORED.

Explanation: Process option FMVLNS is restricted to lines <= 256 characters.

System Action: The SuperC run continues.

Programmer Response: None.

ASMF017W *file-name* - SELECT MEMBER WAS NOT FOUND.

Explanation: The member or file in the SELECT process statement could not be found.

System Action: The SuperC run continues.

Programmer Response: Check that the member/file name in the SELECT process statement is correct. Also, check that the "group" from which the member/file is to be selected has been specified correctly.

Refer:

Process Statements in the SuperC Appendix of the User's Guide

ASMF018W *file-name1:file-name2* SELECT MEMBER-PAIR WAS NOT FOUND.

Explanation: One or both of the members or files in the SELECT process statement could not be found.

System Action: The SuperC run continues.

Programmer Response: Check that both member/file names have been specified correctly.

Refer:

Process Statements in the SuperC Appendix of the User's Guide

ASMF019W YEAR 2000 AGING PARAMETER IS INVALID

Explanation: Aging parameter in NY2AGE/OY2AGE is not numeric. It should be a value between 1 and 999.

System Action: The SuperC run continues.

Programmer Response: Change NY2AGE/OY2AGE aging parameter to a valid value.

ASMF020W Y2DTONLY OPTION IGNORED AS THERE ARE NO VALID DATE DEFINITIONS.

Explanation: A Year 2000 Compare Dates Only (Y2DTONLY) process option has been specified but no dates have been defined by Year 2000 Date Definition (NY2C, NY2Z, NY2D, NY2P, OY2C, OY2Z, OY2D, OY2P) process statements.

System Action: The SuperCrun continues.

Programmer Response: Use appropriate Year 2000 Date Definition process statements to define the date(s) to be compared.

Refer:

Process Options in the SuperC Appendix of the User's Guide

ASMF022W *compare-type* COMPARE TYPE AND THIS PROCESS STATEMENT ARE INCOMPATIBLE. STATEMENT IGNORED.

Explanation: The compare type specified (FILE, LINE, WORD, or BYTE) is not valid for the process statement that has been specified.

System Action: The SuperC run continues.

Programmer Response: Change compare type to one that is valid for the process statement involved.

Refer:

Process Statements in the SuperC Appendix of the User's Guide

ASMF023W UNRECOGNIZED OR INVALID PROCESS STATEMENT KEYWORD.

Explanation: Keyword not valid for the process statement specified

System Action: The SuperC run continues.

Programmer Response: Check if the process statement involved requires a keyword. If so, ensure a valid keyword is used.

Refer:

Process Statements in the SuperC Appendix of the User's Guide

ASMF024W EXTRA DATA DETECTED AFTER NORMAL STATEMENT END. STATEMENT ACCEPTED WITH WARNING NOTIFICATION.

Explanation: Extraneous data or incorrect syntax.

System Action: The SuperC run continues.

Programmer Response: Check format of statement.

Refer:

Process Options in the SuperC Appendix of the User's Guide
Process Statements in the SuperC Appendix of the User's Guide

ASMF025W INVALID PROCESS STATEMENT DATA-VALUE/OPERAND, EXTRA DATA OR EXCEEDS COLUMN 72. STMT/OPERAND IGNORED.

Explanation: Incorrect syntax for process statement.

System Action: The SuperC run continues.

Programmer Response: Check required syntax for process statement.

Refer:

Process Statements in the SuperC Appendix of the User's Guide

ASMF026W THE CMPBOFS STATEMENT AND UPDCNTL CONFLICT. STATEMENT IGNORED.

Explanation: Cannot use a CMPBOFS process statement with UPDCNTL process option.

System Action: The SuperC run continues. CMPBOFS process statement ignored.

Programmer Response: Change process option(s) or process statement(s) as necessary.

ASMF028W *statement-type* STATEMENT CONFLICTS WITH SPECIFIED UPDATE OPTIONS. STATEMENT IGNORED.

Explanation: The type of statement specified is not compatible with one or more of the update process options specified.

System Action: The SuperC run continues.

Programmer Response:

Refer:

Process Options in the SuperC Appendix of the User's Guide
Process Statements in the SuperC Appendix of the User's Guide

ASMF029W A SELECT PROCESS STATEMENT IS INVALID WITH SEQUENTIAL FILES/DATA SETS. STATEMENT IGNORED.

Explanation: SELECT process statements can only be used to select members/files from a "group".

System Action: The SuperC run continues.

Programmer Response:

Refer:

Process Statements in the SuperC Appendix of the User's Guide

ASMF030W THE SELECT STATEMENT HAS AN INVALID MEMBER NAME OR IMPROPER OPERAND FORMAT. STMT/MEMBER IGNORED.

Explanation: Incorrect content or syntax.

System Action: The SuperC run continues.

Programmer Response: Check that the member/file name(s) have been entered correctly in the SELECT process statement.

Refer:

Process Statements in the SuperC Appendix of the User's Guide

ASMF031W AN INVALID START COLUMN VALUE WAS SPECIFIED.

Explanation: Missing, non-numeric, or otherwise invalid "start column" parameter specified.

System Action: The SuperC run continues.

Programmer Response: Check that details have been entered correctly and in accordance with the required syntax.

Refer:

Process Options in the SuperC Appendix of the User's Guide
Process Statements in the SuperC Appendix of the User's Guide

ASMF032W COLUMN VALUES MUST BE IN ASCENDING SEQUENCE. STATEMENT IGNORED.

Explanation: Column values not in ascending sequence or, possibly, statements out of sequence.

System Action: The SuperC run continues.

Programmer Response: Check that SuperC receives column numbers/ranges in ascending sequence such that a record can be scanned sequentially from "left to right".

ASMF033W CMPCOLM RANGE STARTS WITH A VALUE EXCEEDING THE MAXIMUM PROCESSING LENGTH. STATEMENT TERMINATED.

Explanation: The "start-column" specified in the CMPCOLM process statement is greater than the logical record length of the file.

System Action: The SuperC run continues.

Programmer Response: Correct the column/range specified in the CMPCOLM process statement.

ASMF034W CMPCOLM STMT(S) HAS TOO MANY RANGES. ONLY FIRST 15 RANGES WILL BE USED.

Explanation: More than the permitted maximum of 15 ranges/individual columns specified for the CMPCOLM process statement. Extraneous information ignored.

System Action: The SuperC run continues.

Programmer Response: Limit ranges/individual columns to a maximum of 15 for each run of SuperC. Additional ranges/individual columns can be specified in a separate run.

ASMF035W INVALID CHANGE TEXT COMBINATION OF NEW TEXT > OLD TEXT AND LINE LENGTHS > 256 ATTRIBUTE.

Explanation: The length of the search text in a NCHGT or OCHGT process statement can not be greater than the length of the change text when a record is greater than 256 characters.

System Action: The SuperC run continues.

Programmer Response: Correct process statement.

ASMF036W SELECT STATEMENTS VALID ONLY WITH /PDS/MACLIBS/TXTLIBS OR "*" FILE NAMES. STATEMENT IGNORED.

Explanation: SELECT process statements can only be used to select members/files from a "group".

System Action: The SuperC run continues.

Programmer Response:

Refer:

Process Statements in the SuperC Appendix of the User's Guide

ASMF037W DPLINEC MUST BE PRECEDED BY A VALID DPLINE/D PLINEC STATEMENT. STATEMENT REJECTED.

Explanation: The DPLINEC process statement is a continuation of the preceding DPLINE (or DPLINEC) statement and therefore must always be preceded by one of those statements.

System Action: The SuperC run continues.

Programmer Response: Ensure the first "Do not process" statement is a DPLINE followed, if necessary, by a DPLINEC statement containing "continuation" information.

Refer:

Process Statements in the SuperC Appendix of the User's Guide

ASMF038W SRCHFORC MUST BE PRECEDED BY A VALID SRCHFOR /SRCHFORC STATEMENT. STATEMENT REJECTED.

Explanation: The SRCHFORC process statement is a continuation of the preceding SRCHFOR (or SRCHFORC) statement and therefore must always be preceded by one of those statements.

System Action: The SuperC run continues.

Programmer Response: Ensure the first "search" statement is a SRCHFOR followed, if necessary, by a SRCHFORC statement containing "continuation" information.

Refer:

Process Statements in the SuperC Appendix of the User's Guide

ASMF039W ONLY ONE GROUP OF FILES OR MEMBERS MAY BE PROCESSED USING SELECTF STATEMENTS. STATEMENT REJECTED.

Explanation: SelectF does not allow multiple wildcard selection (except when used for *filemode*).

System Action: The SuperC run continues.

Programmer Response: Correct process statement.

Refer:

Process Statements in the SuperC Appendix of the User's Guide

ASMF040W SOME LINES OVERFLOW WITH CHANGE TEXT SUBSTITUTION. RESULTS MAY BE AFFECTED.

Explanation: Change text (NCHGT/OCHGT process statement) has a different length than search text. The result could run past the end of the record.

System Action: The SuperC run continues.

Programmer Response:

Refer:

Process Statements in the SuperC Appendix of the User's Guide

ASMF041W UPDLDEL OPTION INVALID DUE TO INCONSISTENT LRECL OR RECFM ATTRIBUTES.

Explanation: If input is fixed, then both files must be the same record length. The UPDLDEL option is ignored.

System Action: The SuperC run continues (without UPDLDEL process option).

Programmer Response:

Refer:

Process Options in the SuperC Appendix of the User's Guide

ASMF042W NCHGT AND OCHGT MIXED DBCS PATTERNS MUST BE THE SAME LENGTH. STATEMENT REJECTED.

Explanation: The lengths of the search text and change text must be equal length in DBCS.

System Action: The SuperC run continues.

Programmer Response: Correct NCHGT or OCHGT process statement.

ASMF043W CMPCOLM NOT VALID FOR MIXED DATA AND SRCHCMP OR WORDCMP OPERATIONS. STATEMENT REJECTED.

Explanation: CMPCOLM process statement cannot be used with search or WORD compare type when the input contains a mixture of DBCS and non-DBCS data.

System Action: The SuperC run continues.

Programmer Response: Correct process statement or change to a line compare.

ASMF044W MIXING CMPLINE, CMPSECT, AND CMPBOFS STMTS IS NOT ALLOWED. STATEMENT REJECTED.

Explanation: Invalid combination of process statements.

System Action: The SuperC run continues.

Programmer Response: Use only one of these type of process statements at a time.

ASMF045W *statement-type* STATEMENT(S) ONLY ALLOWED WITH SINGLE MEMBERS OR SEQUENTIAL FILES/DATA SETS. STATEMENT REJECTED.

Explanation: An NTITLE, OTITLE or CMPSECT process statement has been used for a "group" of files or members. These statements are only valid for single members or files.

System Action: The SuperC run continues.

Programmer Response: Specify a single member/file.

ASMF046W VSE NEWDD/OLDDD PARAMETER IS INVALID.

Explanation: One of the NEWDD/OLDDD parameters is invalid.

System Action: The SuperC run continues.

Programmer Response: Check format of NEWDD/OLDDD statement.

Refer:

Process Statements in the SuperC Appendix of the User's Guide

ASMF047W VSE PARAMETER NAME LONGER THAN 8 CHARACTERS.

Explanation: One of the parameters on a NEWDD/OLDDD statement is too long.

System Action: The SuperC run continues.

Programmer Response: Correct NEWDD or OLDDD process statement.

Refer:

Process Statements in the SuperC Appendix of the User's Guide

ASMF048W VSE RECFORM VALUE MORE THAN 2 CHARACTERS.

Explanation: RECFORM in a NEWDD or OLDDD process statement can only be FU, FB, VU or VB.

System Action: The SuperC run continues.

Programmer Response: Correct NEWDD or OLDDD process statement.

Refer:

Process Statements in the SuperC Appendix of the User's Guide

ASMF049W VSE: MIXED MATCHING OF LIBRARIAN FILES AND SAM FILES NOT ALLOWED. NEWDD/OLDDD SET TO DEFAULT.

Explanation: Input files must be the same type. The statement which defined the Librarian is ignored and default attributes are assigned to the file concerned. Default file attributes used: fixed, unblocked, record and blocksize of 80.

System Action: The SuperC run continues.

Programmer Response:

Refer:

Process Statements in the SuperC Appendix of the User's Guide

ASMF050W YEAR 2000 AGING ONLY ALLOWED ON ONE FILE. WILL ASSUME ONLY OLDDD IS TO BE AGED.

Explanation: NY2AGE and OY2AGE process statements are mutually exclusive. NY2AGE statement ignored.

System Action: The SuperC run continues.

Programmer Response: Check which file you want to "age" and use either the NY2AGE or OY2AGE accordingly.

Refer:

Process Statements in the SuperC Appendix of the User's Guide

ASMF051W CONFLICTING FOCUS/EXCLUDE STATEMENTS DEFINED.

Explanation: NEXCLUDE/OEXCLUDE process statements are mutually exclusive to NFOCUS/OFOCUS respectively if using the same operand keyword (ROWS or COLS).

System Action: The SuperC run continues.

Programmer Response: Check that the NEXCLUDE/OEXCLUDE and NFOCUS/OFOCUS process statements will "exclude" and "focus" on the data you want without conflicting with each other.

Refer:

Process Statements in the SuperC Appendix of the User's Guide

ASMF052W WRONG DATE FORMAT IN NEW FILE

Explanation: Date definition format in NY2C/NY2Z/NY2D/NY2P statement is invalid. Date is ignored.

System Action: The SuperC run continues.

Programmer Response: Correct process statement.

Refer:

Process Statements in the SuperC Appendix of the User's Guide

ASMF053W WRONG DATE FORMAT IN OLD FILE

Explanation: Date definition format in OY2C/OY2Z/OY2D/OY2P statement is invalid. Date is ignored.

System Action: The SuperC run continues.

Programmer Response: Correct process statement.

Refer:

Process Statements in the SuperC Appendix of the User's Guide

ASMF054E "NEW" FILE/DATA SET NAME/MEMBER IS INVALID OR AN ERROR WAS ENCOUNTERED DURING OPEN. OPERATION TERMINATED.

Explanation: "New" input file could not be found or a problem was encountered during the open process.

System Action: The SuperC run terminates.

Programmer Response: Check that the "new" file name has been specified correctly

ASMF055E "OLD" FILE/DATA SET NAME/MEMBER IS INVALID OR AN ERROR WAS ENCOUNTERED DURING OPEN. OPERATION TERMINATED.

Explanation: "Old" input file could not be found or a problem was encountered during the open process.

System Action: The SuperC run terminates.

Programmer Response: Check that the "old" file name has been specified correctly

ASMF056E "SRH" FILE/DATA SET NAME/MEMBER IS INVALID OR AN ERROR WAS ENCOUNTERED DURING OPEN. OPERATION TERMINATED.

Explanation: New file could not be opened

System Action: The SuperC run terminates.

Programmer Response: Check that the dataset/file has been assigned correctly.

ASMF057E THE INPUT FILES/DATA SETS COULD NOT BE PROCESSED. BOTH MUST BE SEQUENTIAL OR A WHOLE PDS/MACLIB.

Explanation: Cannot compare a PDS/MACLIB/TXTLIB/Librarian with a sequential file/dataset.

System Action: The SuperC run terminates.

Programmer Response: Ensure input files are comparable.

ASMF058E MEMORY AVAILABLE WAS INSUFFICIENT. OPERATION TERMINATED.

Explanation: There was insufficient memory available for SuperC to run.

System Action: The SuperC run terminates.

Programmer Response: Increase amount of memory available.

ASMF059E A SYNAD ERROR INTERCEPT ON THE NEW-FILE/DATA SET IS AN I/O ERROR, CONCATENATION ORDERING OR ATTRIBUTE CONFLICT.

Explanation: New file/dataset I/O error.

System Action: The SuperC run terminates.

Programmer Response: Refer to your systems programmer.

ASMF060E A SYNAD ERROR INTERCEPT ON THE OLD-FILE/DATA SET IS AN I/O ERROR, CONCATENATION ORDERING OR ATTRIBUTE CONFLICT.

Explanation: Old file/dataset I/O error.

System Action: The SuperC run terminates.

Programmer Response: Refer to your systems programmer.

ASMF061E A SYNAD ERROR INTERCEPT ON THE UPD-FILE/DATA SET WAS DETECTED. THE OUTPUT MAY BE INCOMPLETE.

Explanation: Update file/dataset I/O error.

System Action: The SuperC run terminates.

Programmer Response: Refer to your systems programmer.

ASMF062E UPDATE FILE/DATA SET, DELDD, MISSING OR INCOMPATIBLE ATTRIBUTES/LRECL FOR PDS/MACLIB. UPDATE OPTIONS CANCELLED.

Explanation: Update/delta file requested but there is no assignment for it.

System Action: The SuperC run terminates.

Programmer Response: Refer to your systems programmer.

ASMF063E *member-name* - SYNAD ERROR INTERCEPT OCCURRED PROCESSING NAMED MEMBER.

Explanation: I/O error on processing member.

System Action: The SuperC run terminates.

Programmer Response: Refer to your systems programmer.

ASMF064E *data-set-name* COULD NOT BE OPENED

Explanation: Problem encountered when trying to open data set.

System Action: The SuperC run terminates.

Programmer Response: Correct either the *data-set-name* process statement or the *dataset-name* JCL statement.

ASMF065E LABEL INFORMATION NOT AVAILABLE FOR *data-set-name*.

Explanation: Label details for data set missing.

System Action: The SuperC run terminates.

Programmer Response: Correct either the *data-set-name* process statement or the *data-set-name* JCL statement.

ASMF066E *data-set-name* IS A NATIVE VSAM FILE. NATIVE VSAM IS NOT SUPPORTED.

Explanation: VSAM catalog indicates that this file is not a VSAM-managed SAM file.

System Action: The SuperC run terminates.

Programmer Response: Refer to your systems programmer.

ASMF067E *data-set-name* SHOWCAT FAILURE.

Explanation: Error in accessing VSAM catalogue.

System Action: The SuperC run terminates.

Programmer Response: Make sure the *data-set-name* is assigned correctly.

ASMF068E *data-set-name* DEVICE TYPE NOT SUPPORTED.

Explanation: *data-set-name* is supported for disk and tape only.

System Action: The SuperC run terminates.

Programmer Response: Correct the *data-set-name* to ensure it is assigned to disk or tape.

ASMF069W LIBRARY MEMBER IN *data-set-name* NOT FOUND.

Explanation: Member could not be found in library.

System Action: The SuperC run continues (without this member).

Programmer Response: Inspect output listing for further details.

ASMF070W REQUEST FOR WIDE OPTION NOT SUPPORTED BY SYSLST. NARROW OPTION WILL BE SUBSTITUTED.

Explanation: The WIDE process option requires a printing device capable of printing lines up to 202 characters long. The 55-character side-by-side NARROW option has been used instead.

System Action: The SuperC run continues.

Programmer Response: Refer to your systems programmer.

ASMF071W SIDE BY SIDE LISTINGS NOT ALLOWED WHEN USING COLHEAD PROCESS STATEMENT.

Explanation: The NARROW process option cannot be used with the COLHEAD process statement.

System Action: The COLHEAD statements are accepted and the NARROW (side-by-side) process option is ignored. The SuperC run continues.

Programmer Response: Check that you are using the correct process options and statements.

Refer:

Process Options in the SuperC Appendix of the User's Guide
Process Statements in the SuperC Appendix of the User's Guide

ASMF072W UPDATE PROCESS OPTIONS INCOMPATIBLE WITH Y2DTONLY PROCESS OPTION.

Explanation: Update process options cannot be used with the "Year 2000 Compare Dates Only" process option.

System Action: The UPD... process option is ignored. The SuperC run continues.

Programmer Response: Check that you are using the correct process options and statements.

Refer:

Process Options in the SuperC Appendix of the User's Guide
Process Statements in the SuperC Appendix of the User's Guide

ASMF073W Y2PAST PROCESS STATEMENT SPECIFIED WITHOUT ANY DATE DEFINITION PROCESS STATEMENTS.

Explanation: A Y2PAST process statement has been used but there are no accompanying Year 2000 Date Definition process statements.

System Action: The Y2PAST process option is ignored. The SuperC run continues.

Programmer Response: Check that you are using the Year 2000 process statements correctly. Either the Y2PAST process statement should be removed—or one or more date definition process statements should be included.

Refer:

Process Statements in the SuperC Appendix of the User's Guide

ASMF074W FOCUS/EXCLUDE PROCESS STATEMENTS ARE IGNORED WHEN USING THE Y2DTONLY PROCESS OPTION.

Explanation: NFOCUS, OFOCUS, NEXCLUDE, and OEXCLUDE process statements have no effect when the Y2DTONLY process option is used.

System Action: The FOCUS/EXCLUDE process statements are ignored. The SuperC run continues.

Programmer Response: Check that you are using the correct process options and statements.

Refer:

Process Options in the SuperC Appendix of the User's Guide
Process Statements in the SuperC Appendix of the User's Guide

**ASMF075I DATE DEFINITION PROCESS
STATEMENTS ARE IGNORED WHEN
USING THE COLHEAD PROCESS
STATEMENT.**

Explanation: Year 2000 Date Definition process statements cannot be used with the COLHEAD process statement. (The Year 2000 process statements generate their own *information line* for which column headings are not appropriate.)

System Action: The Year 2000 Date Definition process statements are ignored. The SuperC run continues.

Programmer Response: Check that you are using the correct process statements.

Refer:

Process Statements in the SuperC Appendix of the User's Guide

**ASMF076I FOCUS/EXCLUDE OF ROWS USED
FOR ONLY ONE FILE. ALL ROWS
PROCESSED IN THE OTHER FILE.**

Explanation: A "focus" (NFOCUS or OFOCUS) or an "exclude" (NEXCLUDE or OEXCLUDE) process statement has been specified for one file but not for the other file.

System Action: All rows (records) of the file for which no "focus" or "exclude" statement exists are included in the comparison process.

Programmer Response: Check that you are using the "focus" or "exclude" process statements correctly.

Refer:

Process Statements in the SuperC Appendix of the User's Guide

**ASMF077E WRONG LENGTH RECORD IN
defined-input-file. RUN ABORTED.**

Explanation: The input tape file defined by the process statement *defined-input-file* (NEWDD or OLDDD) contains a record of the wrong length.

System Action: The SuperC run terminates.

Programmer Response: Check that the record format, block size, and maximum record size have been specified correctly on the NEWDD/OLDDD process statement.

Refer:

Process Statements in the SuperC Appendix of the User's Guide

Chapter 7. TCP/IP Error Codes

This chapter contains all relevant TCP/IP error messages. The error messages are written to be as helpful and self-explanatory as possible; therefore, no message explanations are given.

1	EDOM - Math domain error.	20	EINTR - Interrupted by signal.
2	ERANGE - Math range error.	21	EDUPKEY - Attempt to add record with duplicate key.
3	ENOMEM - Out of memory.	22	ECORRUPT - File contents corrupt or incorrect.
4	EBADF - File not open or not suitable.	23	EACCES - Permission denied.
EBADF	ENOTOPEN - File not open.	24	EWouldBLOCK - I/O would have blocked.
5	ENFOUND - File not found.	25	EINPROGRESS - Connection has begun.
6	EFATTR - File attribute conflict.	26	EALREADY - Earlier connection has not completed.
7	EUNSUPP - Unsupported I/O operation.	27	ENOTSOCK - File descriptor is not a socket.
8	ENOSPC - No space in file.	28	EDESTADDRREQ - Destination address required.
9	EDEVICE - Physical device error.	29	EMSGSIZE - Message too large for datagram.
10	EPREV - Previous error not cleared.	30	EPROTOTYPE - Protocol inconsistent with socket type.
11	ECONV - Data conversion error.	31	ENOPROTOOPT - Invalid socket option.
12	ELIMIT - Internal limit exceeded.	32	EPROTONOSUPPORT - Protocol type not supported.
13	EARG - Undefined argument value.	33	ESOCKTNOSUPPORT - Socket type not supported.
14	ESYS - System interface failure.	34	EOPNOTSUPP - Call does not support socket type.
15	EFFORM - File data format error.		
16	EUSAGE - Incorrect function usage.		
17	ELIBERR - Runtime system internal error.		
18	EFORBID - Request precluded by runtime options.		
19	EINUSE - File in use.		

TCP/IP Error Codes

35	EPFNOSUPPORT - Invalid/unsupported protocol family
36	EAFNOSUPPORT - Addressing family not supported/inconsistent
37	EADDRINUSE - Address in use.
38	EADDRNOTAVAIL - Address not available on local host
39	ENETDOWN - Networking software incommunicado.
40	ENETUNREACH - Host cannot reach network.
41	ENETRESET - Remote host dropped network communications.
42	ECONNABORTED - Local software aborted connection.
43	ECONNRESET - Connection reset by peer.
44	ENOBUFS - Buffers not available.
45	EISCONN - Socket already connected.
46	ENOTCONN - Socket not connected.
47	ESHUTDOWN - Session is already shut down.
48	ETIMEDOUT - Attempt to make connection timed out.
49	ECONNREFUSED - Connection attempt refused.
50	EHOSTDOWN - Destination host is down.
51	EHOSTUNREACH - Destination host is unreachable.

52	EPIPE - Broken socket connection.
53	EEXIST - File exists.
54	EFBIG - File too large.
55	EISDIR - Is a directory.
56	ENAMETOOLONG - File name is too long.
57	ENOTDIR - Not a directory.
58	ENOTEMPTY - Directory not empty.
59	EPERM - Operation not permitted.
60	EROFS - Read only file system.
61	EXDEV - Improper link.
62	ELOOP - Too many symbolic links for pathname.
63	EAGAIN - Resource temporarily unavailable.
64	ECHILD - No child process exists.
65	EDEADLK - Deadlock avoided.
66	EFAULT - Memory fault accessing argument.
67	EMLINK - Too many links.
68	ENFILE - Too many files open in system.
69	ENODEV - No such device exists.
70	ENOEXEC - Exec format error.
71	ENOLCK - No locks available.

72	ENOSYS - Function not implemented.
73	ENOTTY - Inappropriate I/O control.
74	ENXIO - No such device or address exists.
75	ESRCH - No such process or thread exists.
76	E2BIG - Parameter list too long.
77	EILSEQ - Invalid byte sequence.
78	EMVSNOTUP - OpenMVS kernal not active.
79	EMVSDYNALC - Dynamic allocation error.
80	EMVSCVAF - CVAf error.
81	EMVSCATLG - Catalog obtain error.
82	EMVSINITIAL - Process initialization error.
83	EMVSPFSFILE - Permanent HFS file error.
84	EMVSPFSPERM - HFS system error.
85	EMVSSAFEXTRERR - SAF extract error.
86	EMVSSAF2ERR - SAF error.
87	EMVSEXPIRE - Expired password.
88	EMVSPASSWORD - Incorrect password.
89	EIBMSOCKOUTOFRANGE - Client socket number out of range.
90	EIBMSOCKINUSE - Client socket in use.

91	EOFFLOADBOXERROR - Offload box error.
92	EOFFLOADBOXRESTART - Offload box restarted.
93	EOFFLOADBOXDOWN - Offload box down.
94	EIBMCONFLICT - Conflicting socket call outstanding.
95	EIBMCANCELLED - Request cancelled.
96	ENOTBLK - Block device required.
97	ETXTBSY - Text file busy.
98	ETOOMANYREFS - Too many references, cannot splice.
99	EPROCLIM - Quotas: too many processes.
100	EUSERS - Quotas: too many users.
101	EDQUOT - Quotas: disk quota exceeded.
102	ESTALE - NFS: stale file handle.
103	EREMOTE - NFS: too many levels of remote.
104	ENOSTR - Streams: device not a stream.
105	ETIME - Streams: timer expired.
106	ENOSR - Streams: out of stream resources.
107	ENOMSG - Streams: no message of desired type.
108	EBADMSG - Streams: unreadable message.

TCP/IP Error Codes

109	EIDRM - SysV IPC: identifier removed.
110	ENONET - RFS: machine not on network.
111	ERREMOTE - RFS: object is remote.
112	ENOLINK - RFS: link has been severed.
113	EADV - RFS: advertise error.
114	ESRMNT - RFS: srmount error.
115	ECOMM - RFS: send communication error.
116	EPROTO - RFS: protocol error.
117	EMULTIHOP - RFS: multihop attempted.
118	EDOTDOT - RFS: cross mount point.
119	EREMCHG - RFS: remote address changed.

Chapter 8. Return Codes from Terminating Dialogs

This chapter contains return codes from terminating dialogs. For more information, refer to *ISPF Dialog Developer's Guide and Reference*.

Return Codes from Terminating Dialogs

The return code from ISPSTART for a successful dialog completion is either 0 or a value returned by the executing dialog in shared-pool system variable ZISPFRC. ZISPFRC is a shared pool input variable of length 8. The dialog can set ZISPFRC to any value in the range of 0 to 16777215, except the values reserved for ISPF use (900 through 999). This value must be left-justified and padded with blanks.

At termination, ISPF copies the value from ZISPFRC and passes it to the invoking application (or Terminal Monitor Program) in register 15. If the value in ZISPFRC is not within the valid range or is otherwise not valid, such as a value that is not numeric, ISPF issues an appropriate line message and passes a return code of 908. If the dialog has not set ZISPFRC to a value, ISPF returns a value of 0.

Notes:

1. CLIST procedures that invoke ISPSTART can check the CLIST variable LASTCC for the ISPF return code. In REXX, check the variable *rc* after an ISPF function.
2. Even though ISPF restricts the return code value to the range 0 to 16777215, other products or subsystems, such as JES when processing JCL condition codes, can be more restrictive on return code values. See documentation for the affected product for more information.
3. ZISPFRC should not be confused with the normal dialog return code set by the function; it has no effect on ISPF log/list termination processing.

ZISPFRC is intended to be used by applications that invoke a dialog dedicated to a single task or function. However, it is valid to set ZISPFRC from a selection panel invoked by the ISPSTART command.

ISPF checks for the existence of ZISPFRC only at ISPF termination. If ZISPFRC is set by any dialog other than the one invoked by the ISPSTART command, ISPF ignores the value.

Return Codes from Termination Dialogs

Error codes that ISPF can return in register 15 to an application are:

- | | |
|-----|---|
| 908 | ZISPFRC value not valid |
| 920 | ISPSTART command syntax not valid |
| 985 | An attempt was made to start a GUI in batch mode, but no workstation connection was made. |
| 987 | An attempt was made to start GUI with GUISCRW or GUISCRD and the GUI initialization failed. |
| 988 | An error occurred initializing IKJSATTN |
| 989 | The ISPF C/S component window was closed while still running ISPF in GUI mode |

990 An error occurred running in batch mode. If ZISPFRC has not been set previously, and ISPF encounters a severe error that terminates the product, then 990 is set.

997 Uncorrectable TPUT error

998 ISPF initialization error. A 998 error code can result from:

- Required ISPF data element library not preallocated
- Error opening ISPF data element library
- ISPF data element library has invalid data set characteristics
- Error loading literals module
- Recursive ISPF call

ISPF issues a line message that indicates which of these errors caused the 998 return code.

999 ISPF environment not valid. A 999 error code can result from:

- TSO/MVS environment not valid
- Unsupported screen size

ISPF issues a line message that indicates which of these errors caused the 999 return code.

Chapter 9. Diagnostic Tools and Information

This chapter contains debugging tools, diagnostic information, and common problems that can occur while using ISPF.

ISPF Debug Tools

The following tools ship with ISPF as samples.

ISRABEND

A CLIST that provides a step-by-step explanation of how to diagnose an abend interactively. It uses TSO TEST to gather the information that the IBM support organization normally requires.

ISRCSECT

A REXX exec used in conjunction with ISRTCB exec. It takes the entry point of a load module and begins searching for a specific CSECT. If it finds one, the exec displays the CSECT's eye-catcher.

ISRFIND

A REXX exec that issues a LISTA STATUS and searches for a specified member or load module. Also, the exec optionally calls AMBLIST to check the MODIFIED, FIXED, and PAGEABLE LPAs and checks LPALIST and LNKLIST (pointed to by system control blocks) for the specified load module. If invoked under ISPF, the information is displayed via an ISPF table display (panel ISRFINDP) and allows the user to BROWSE or EDIT the specified member.

ISRPOINT

A REXX exec used in conjunction with the ISRTCB exec. This exec uses the entry point address obtained from ISRTCB and lists the CSECT eye-catchers associated with that load module.

ISRTCB

A REXX exec that emulates the TSO TEST command LISTMAP. It lists the TCBs and the load modules (with their entry points) associated with each TCB, without using TSO TEST.

ISRTEST

A CLIST that uses TSO TEST to load the job pack area (JPA) and set breakpoints on entry to a specific ISPF CSECT. This allows for the verification of the compile date associated with the CSECT with the most recent maintenance level for that version or release. Additionally, you can modify this sample to set specific breakpoints within the CSECT to identify the failing instruction.

Diagnostic Information

This section is intended to help you gather information in order to diagnose ISPF problems.

Using the ENVIRON System Command

ISPF provides the ENVIRON command to assist you in gathering data that can be helpful in diagnosing problems, thus reducing service time. The ISPF session does not have to be running in any ISPF TEST/TRACE mode when you use the ENVIRON command.

The ENVIRON command can help you:

- Produce system abend dumps when not running in ISPF TEST mode (ENBLDUMP parameter)
- Trace the TPUT, TGET, and PUTLINE buffers and obtain dump information for TPUT and TGET errors (TERMTRAC parameter)
- Gather terminal status information (TERMSTAT parameter)

You can display a panel (Figure 1) for selecting command options by entering the ENVIRON command with no parameters, or display the panel through the use of the Environ settings... choice from the Environ pull-down on the ISPF Settings panel. This panel includes the current values of the ENVIRON command parameters (ENBLDUMP and TERMTRAC) and the ddname, if any, allocated for a dump data set. The values can be changed by entering new values directly on the panel.

```

Log/List  Function keys  Colors  Environ  Temporary  Help
-
ISPENVA Settings
+
S  Enter "/" to select option
   _ Enable a dump for a subtask abend when not in ISPF TEST mode

Terminal Tracing (TERMTRAC)
  Enable . . . _  1. Enable terminal tracing (ON)
                  2. Enable terminal tracing when a terminal error
                  is encountered (ERROR)
                  3. Disable terminal tracing (OFF)
  DDNAME . . . ISPSNAP (DDNAME for TERMTRAC ON, ERROR, or DUMP.)

T  Terminal Status (TERMSTAT)
   Enable . . . _  1. Yes, invoke TERMSTAT immediately
                  2. Query terminal information
                  3. No

Command ==>
F1=Help      F2=Split      F3=Exit      F7=Backward  F8=Forward
F9=Swap      F12=Cancel

C
F1=Help      F2=Split      F3=Exit      F7=Backward  F8=Forward  F9=Swap
F10=Actions  F12=Cancel

```

Figure 1. ENVIRON Settings Panel (ISPENVA)

You can issue the ENVIRON command at any time during an ISPF session.

ENVIRON Command Syntax and Parameter Descriptions

The general syntax for the ENVIRON command is:

```
ENVIRON [ENBLDUMP [ON|OFF]]
          [TERMTRAC [ON|ERROR|DUMP|OFF]]
          [TERMSTAT [QUERY]]
```

The parameter descriptions for the ENVIRON command are as follows:

ENBLDUMP

Specifying the ENBLDUMP parameter enables ISPF to produce an abend dump if a subtask abnormally terminates when ISPF is not running in TEST mode (as required prior to ISPF Version 2.3, and documented in *ISPF Dialog Developer's Guide and Reference*). The ENBLDUMP parameter does not apply to attached commands. Prior to the time that a dump is taken you must allocate either the SYSUDUMP, SYSMDUMP, or SYSABEND ddname. For more information about these data sets, refer to *MVS Diagnostic Techniques*

The default value for the ENBLDUMP parameter is ON. ENVIRON ENBLDUMP ON specifies to ISPF that a dump for the abending subtask is to be generated.

Issuing ENVIRON ENBLDUMP OFF cancels the effect of the ON status.

The ENBLDUMP parameter value is preserved across ISPF sessions in the ISPSPROF profile.

With ENBLDUMP active, even when ISPF is not running in TEST mode, abnormal termination of a subtask results in a dump being taken and control being returned to TSO. ISPF execution is not resumed.

When running in ISPF TEST mode, issuing ENVIRON ENBLDUMP has no effect on dump processing.

TERMTRAC

Specifying the TERMTRAC parameter allows you to trace all terminal input and output data (TPUT, TGET, PUTLINE) during an ISPF session. The TERMTRAC parameter also allows you to turn on in-core tracing and cause ISPF to produce a SNAP dump if the TPUT or TGET service results in an error. ISPF does not have to be running in TSO TEST mode.

Note: The ENVIRON TERMTRAC buffer does not include:

- The TPUT/TGET instructions issued to query the terminal:
 - At ISPF initialization
 - By the ENVIRON TERMSTAT command
- The TPUT instruction issued to clear the screen at ISPF termination
- Under certain severe ISPF error conditions, the TPUT instruction issued to display a severe error line message

Before issuing the ENVIRON TERMTRAC DUMP command you must have first issued the ENVIRON TERMTRAC ON or ENVIRON TERMTRAC ERROR command.

Prior to using the TERMTRAC option, you must define to ISPF the ddname for the data set to be used for the SNAP macro, which ISPF invokes to provide data stream dumps. The ddname can be defined by specifying it on the panel displayed as a result of either issuing the ENVIRON command with no parameters, or selecting the Environ settings... choice from the Environ pull-down on the ISPF Settings panel. You must follow the data set

Diagnostic Information

characteristics guidelines defined by MVS for the SNAP macro. See *MVS/XA Supervisor Services and Macro Instructions* for DCB information that can be specified for the SNAP ddname.

The terminal data stream buffer used for ENVIRON TERMTRAC data collection is not reset to zeroes.

Subparameters define terminal data tracing as follows:

- **ENVIRON TERMTRAC ON**

Activates TPUT, TGET, and PUTLINE buffer tracing of the terminal data stream. All data is retained in a 24K buffer provided by ISPF. No buffer entry is fragmented. If an entry will not fit into the remaining buffer space, ISPF issues a SNAP to capture the buffer data. The next trace entry is stored at the top of the buffer, regardless of the status of the SNAP execution.

Messages are displayed to the user only for errors during SNAP execution. No messages are displayed during dumps taken as a result of the data buffer filling.

Because ENVIRON TERMTRAC ON causes a SNAP dump to be taken each time the buffer fills, the ddname that you allocate for the SNAP macro should have a disposition of MOD. This assures that no trace data is lost.

The layout of the terminal data buffer for all SNAP dumps is:

- 1 TPUT/TGET/PUTLINE BUFFER TRACE
 - 2 Header of 8 bytes initialized to TERMTRAC
 - 2 4-byte pointer to where the next entry is to be placed
 - 2 Reserved (20 bytes, for 32-byte boundary alignment)
 - 2 TPUT/TGET/PUTLINE DATA (*)
 - 3 8-byte TPUT/TGET/PUTLINE identifier
 - 3 4-byte pointer to previous entry
 - 3 Information specific to the terminal type identifier.

The TPUT/TGET identifiers and specific information for each is as follows. Each buffer entry is aligned on a 32-byte boundary.

TGET 'TGET' –prior to issuing TGET SVC. 4-byte pointer to previous entry. General purpose registers 0, 1, and 15:

R0 = input data area size
R1 = input data area pointer
R15 = TGET option byte

TGETR

'TGETR' –return from TGET SVC. 4-byte pointer to previous entry. General purpose registers 1 and 15:

R1 = input data length
R15 = TGET return code

Four-byte length of data stream. Data stream.

TPUT 'TPUT' –prior to issuing edit TPUT macro. 4-byte pointer to previous entry. General purpose registers 0, 1, and 15:

R0 = output data area
R1 = output data area pointer
R15 = TPUT option byte

4-byte length of data stream. Data stream.

TPUTR

'TPUTR ' –return from edit TPUT macro. 4-byte pointer to previous entry. General purpose register 15:

R15 = TPUT return code

TPUTNE

'TPUTNE ' –prior to issuing the noedit TPUT macro. 4-byte pointer to previous entry. General purpose registers 0, 1, and 15:

R1 = address of plist

R15 = TPUT option byte

16-byte noedit plist:

Reserved (2 bytes)

2-byte length of data stream

Code (1 byte)

3-byte addr of data stream

Reserved (8 bytes)

Data stream.

TPUTNER

'TPUTNER ' –return from noedit TPUT macro. 4-byte pointer to previous entry. General purpose register 15:

R15 = TPUT return code

PUTLINE

'PUTLINE ' –prior to issuing the PUTLINE macro. 4-byte pointer to previous entry 12-byte PUTLINE parameter block:

Control flags (2 bytes)

2-byte TPUT options field

4-byte address of message

4-byte address of format-only line

125-byte message description:

2-byte message length

2-byte message offset

121-byte message

Actions that occur as a result of issuing the ENVIRON TERMTRAC command when ENVIRON TERMTRAC ON is already in effect are listed by command subparameter below:

ON ENVIRON TERMTRAC ON continues to function normally.

OFF Tracing is turned off and ISPF issues a SNAP macro. If ENVIRON TERMTRAC tracing is requested again, the next entry is written at the top of the buffer, regardless of whether the prior SNAP was successful.

ERROR

Changes the setting of the command to ENVIRON TERMTRAC ERROR. Tracing continues, with the next buffer entry being written after the last entry written by the ENVIRON TERMTRAC ON setting.

DUMP

The ENVIRON TERMTRAC ON condition continues. In addition, ISPF issues a SNAP macro and, if the SNAP is successful, the next trace entry is written at the top of the buffer. If the SNAP fails, the next entry is written after the last entry prior to the SNAP.

Diagnostic Information

- *ENVIRON TERMTRAC ERROR*

Initiates tracing of the TPUT, TGET, and PUTLINE buffers. In addition, it causes ISPF to initiate an MVS SNAP dump if a TPUT or TGET error occurs. The dump includes the storage trace buffer, the current TCB, all system control program information, and all problem program information. The MVS SNAP macro definition provides more specific information about the areas dumped when all system control program and problem program information is requested.

ISPF issues the SNAP macro on the first occurrence of a TPUT failure. ISPF makes three consecutive attempts to correct a TPUT error.

Before using this option, you must have defined the ddname for the SNAP macro as described earlier in this topic under TERMTRAC.

Actions that occur as a result of issuing the ENVIRON TERMTRAC command when ENVIRON TERMTRAC ERROR is already in effect are listed by command subparameter below:

ON Changes the setting of the command to ENVIRON TERMTRAC ON. Tracing continues, with the next buffer entry being written after the last entry written by the ENVIRON TERMTRAC ON setting.

ERROR

ENVIRON TERMTRAC ERROR continues to function normally, with the next trace entry written after the last ERROR trace entry.

OFF The setting for ENVIRON TERMTRAC is set to OFF. If ENVIRON TERMTRAC tracing is requested again, the next entry is written at the top of the buffer, regardless of whether the prior SNAP was successful.

DUMP

The ENVIRON TERMTRAC ERROR condition continues. In addition, ISPF issues a SNAP macro and, if the SNAP is successful, the next trace entry is written at the top of the buffer. If the SNAP fails, the next entry is written after the last entry prior to the SNAP.

- *ENVIRON TERMTRAC DUMP*

Causes ISPF to immediately issue a SNAP macro, but only if ENVIRON TERMTRAC ON or ENVIRON TERMTRAC ERROR is active. The resulting dump includes the storage trace buffer, the current TCB, all system control program information, and all problem program information. The MVS SNAP macro definition provides more specific information about the areas dumped when all system control program and problem program information is requested.

Notes:

1. This command execution does not turn off terminal data stream tracing if it is active at the time.
2. The next entry is written to the top of the terminal data buffer if the SNAP was successful; otherwise, tracing continues immediately after the last trace buffer entry.

- *ENVIRON TERMTRAC OFF*

Resets active ENVIRON TERMTRAC ON and ENVIRON TERMTRAC ERROR commands. If ENVIRON TERMTRAC is active, ISPF issues a SNAP macro.

The TERMTRAC parameter value is preserved across ISPF sessions in the ISPSPROF profile. The ddname specified for TERMTRAC on the ENVIRON option panel is also saved across sessions.

TERMSTAT

Specifying the TERMSTAT option of the ENVIRON command allows you to collect information about the characteristics of the terminal you are using and the line to which it is attached. The information is returned to your terminal by using line mode, and is written to the ISPF log data set.

The description below of the information returned from an ENVIRON TERMSTAT request is divided into three parts:

- A list of terminal characteristics as defined in ISPF variables. In other words, this list defines what ISPF thinks your terminal characteristics are.
- A list of terminal characteristics as defined within TSO.
- A list of structured fields that apply only to terminals with extended data stream (EDS) capability.

If you issue ENVIRON TERMSTAT (without the QUERY parameter) ISPF unconditionally returns information from lists A and B (below). In addition, if your terminal is connected to a port that supports extended data streams, ISPF returns information from list C (below).

If your terminal is one that supports extended data streams, such as an IBM 3279, but is connected to a non-EDS port, you can issue ENVIRON TERMSTAT QUERY to force ISPF to return information from list C. Be aware that if you issue ENVIRON TERMSTAT QUERY, and your terminal is not a type that supports extended data streams, such as the IBM 3277, you will receive an ORDER STREAM CHECK error.

Information returned as a result of issuing the ENVIRON TERMSTAT command is as follows:

List A – Terminal Characteristics as Defined Within ISPF

14-bit terminal addressing mode (ON or OFF)
16-bit terminal addressing mode (ON or OFF)
Color mode (ON or OFF)
Highlighting mode (ON or OFF)
DBCS mode (ON or OFF)
Primary screen size (length, width, total bytes)
Alternate screen size (length, width, total bytes)
Partition screen size (length, width, total bytes)
ISPF terminal buffer data (TSB ptr., TSB size,
TPP addr.)

List B – Terminal Characteristics as Defined Within TSO

Return code from GTTERM
Primary screen information (rows, columns)
Alternate screen information (rows, columns)
Screen attribute value
Character set (ASCII or EBCDIC)
Extended data streams or non-EDS support
Return code from GTSIZE
GTSIZE information (rows, columns)
Access method being used (VTAM* or TCAM)

List C – Terminals Supporting EDS (structured fields)

Diagnostic Information

Usable areas
Partitions
Character sets
Color
Highlighting
Reply modes
PC 3270
Implicit partition
Input control
Field rule

- *ENVIRON TERMSTAT QUERY*

The QUERY parameter allows you to request terminal data related to extended data stream capability, even though your terminal is connected to a port that does not support extended data streams.

Abend Panels Provide Diagnostic Information

When ISPF processing ends abnormally, diagnostic panels are available for displaying:

- Task abend code
- Reason code
- Module name
- Entry point address
- Program-Status Word (PSW)
- Register content at the time of the abend

This information is used in logged abend messages. A tutorial panel displays a list of the common abend codes.

On abnormal ISPF termination, the Error Recovery panel shown in Figure 2 indicates the abend code and reason code.

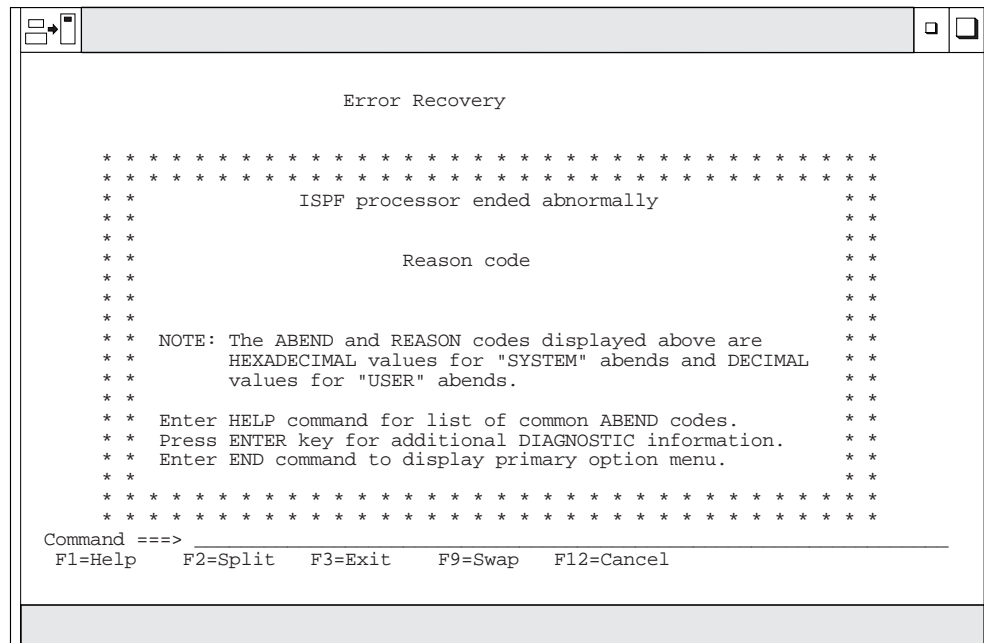


Figure 2. Error Recovery Panel (ISPPRS1)

If you are not running in an MVS/XA environment, the reason code will be blank. If you are running in an MVS/XA environment and the SDWA (System Diagnostic

Diagnostic Information

Work Area) Reason Code is not supplied, that is, the SDWA reason code flag bit is OFF, the Reason Code panel field will be blank. If the abend code documentation indicates that the reason code is in a particular register, see the contents of that register, which can be displayed on the Additional Diagnostic Information panel as shown in Figure 4 on page 580.

If you enter HELP, the panel shown in Figure 3 displays a list of the common abend codes.

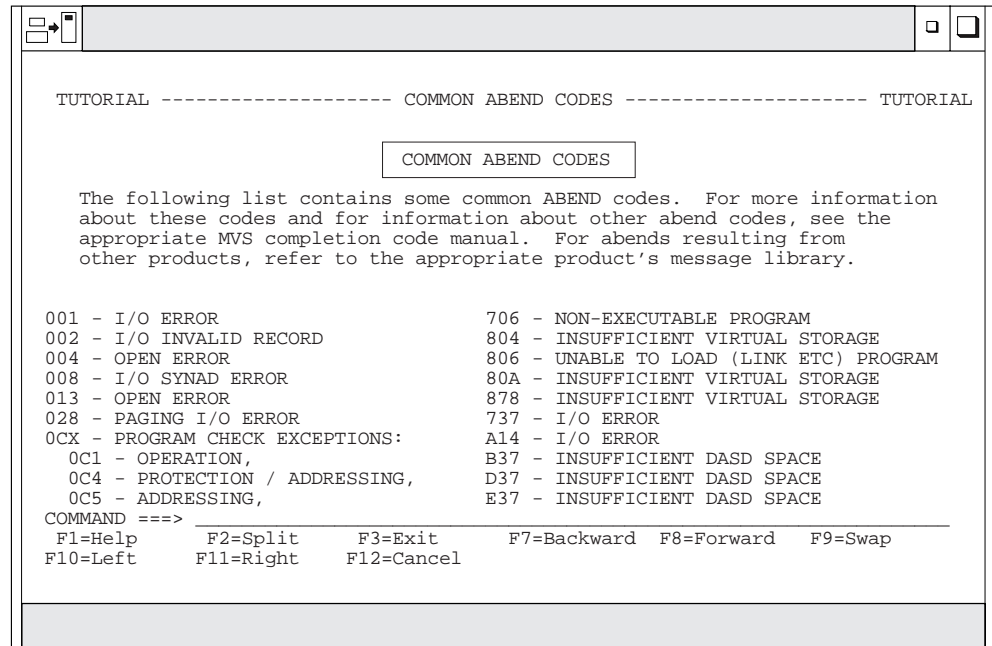


Figure 3. Common Abend Codes (ISP93010)

To return to the Error Recovery panel, enter end from the Common ABEND panel.

If you press Enter from the Error Recovery panel, the panel shown in Figure 4 on page 580 is displayed:

Diagnostic Information

```
Additional Diagnostic Information

System Abend code = 806
Reason code =

ISPF Release Level  4.1

Module name         *Not specified*
Entry point address 00000000

PSW                 FF850008 4000DB8E

Register content:

R0 00806000 R1 80806000 R2 000526E0 R3 0009DDA0
R4 00000058 R5 008FD568 R6 008C7850 R7 000526E0
R8 0009DD30 R9 008C7850 R10 81005342 R11 00000C00
R12 00000000 R13 008C7850 R14 810056C6 R15 0000001C

Enter HELP command for list of common ABEND Codes.
Enter END command to display primary option menu.
Command ==>>
F1=Help  F2=Split  F3=Exit  F9=Swap  F12=Cancel
```

Figure 4. Additional Diagnostic Information (ISPPRS2)

Entry point, PSW, and register values are in hexadecimal. Abend code and reason code are in hexadecimal for system abends and in decimal for user abends. Meanings for the entries on the Additional Diagnostic Information panel are:

Abend code

Abend completion code, identified on the panel as “user” or “system”.

Reason code

Component reason code or return code associated with the abend.

ISPF Release Level

ISPF version/release/modification level.

Module Name

Name of abending program or *NOT SPECIFIED* if no name is available.

Entry Point Address

Entry point address of abending program.

PSW Program-Status Word at time of error.

Register content

General Purpose register content at time of error.

If the Recovery Termination Manager (RTM) could not get storage for the System Diagnostic Work Area (SDWA) or an error occurred within the error routine, all fields on this panel will contain 0's, with the exception of the abend code and ISPF release level. Those fields will contain the correct data.

You can enter the HELP command from this panel as well to display the list of common abend codes. Information associated with an abend is available from the ISPF log file.

Pressing the END function key returns you to the primary option menu.

ISPF Statistics Entry in a PDS Directory

The following is the format of the information that ISPF writes to the PDS directory to maintain statistics for a member. If you suspect the statistics data has been corrupted, you can compare the existing entry against these formats to help in problem determination.

Byte Description and Format

1	Version number, in hexadecimal format. Value is between X'01' and X'99'.
2	Modification level, in hexadecimal format. Value is between X'00' and X'99'.
3	Flags: <div> Bit 1 SCLM indicator. SCLM uses this to determine whether the member and any related SCLM information are still in sync. <ul style="list-style-type: none"> • ON means the member was last edited by SCLM, the PDF Software Configuration and Library Manager. • OFF means the member was somehow processed outside SCLM. </div> <div> Bit 2–8 Reserved for future ISPF use. </div>
4	The seconds portion of the time last modified, in packed decimal format.
5–8	Creation date: <div> Byte 5 Century indicator. X'00' = 1900. X'01' = 2000. </div> <div> Byte 6–8 Julian date, in packed decimal format </div>
9–12	Date last modified: <div> Byte 9 Century indicator. X'00' = 1900. X'01' = 2000. </div> <div> Byte 10–12 Julian date, in packed decimal format </div>
13–14	Time last modified, in packed format: <div> Byte 13 Hours, in packed decimal format </div> <div> Byte 14 Minutes, in packed decimal format </div>
15–16	Current number of lines, in hexadecimal format
17–18	Initial number of lines, in hexadecimal format
19–20	Number of modified lines, in hexadecimal format
21–27	Userid, in character format
28–30	Reserved for future ISPF use

Common Problems Using ISPF

This section contains some common error messages that may be encountered while using ISPF. Error resolutions and explanations are also included.

Messages

- IKJ56500I COMMAND NOT FOUND

If a command processor exists only in LPA, there must be an entry in the ISPTCM for the command processor. Please refer to *ISPF Planning and Customizing* for more details on customizing the ISPF TSO command table.

- IKJ56861I FILE ddname NOT FREED, DATA SET IS OPEN

If the LIBRARY parameter is used with a table service, the user is not able to free the ddname for the table library pointed to by the LIBRARY parameter. ISPF keeps this library open until a new ddname is used in the LIBRARY parameter with another table service. ISPF functions in this manner for performance reasons.

Issuing a table service with a LIBRARY parameter containing a ddname that does not exist causes the previous library to be closed and therefore allows the user to free the previous ddname. Use of CONTROL ERRORS RETURN may be used to guard against a severe error as a result of a ddname not existing.

For example:

```
ALLOC FILE(DD1) DATASET('USERID.YOUR.TABLES') SHR
ISPEXEC TBOPEN MYLIB LIBRARY(DD1)
.
.
/*ISPF services against your table*/
.
ISPEXEC TBCLOSE MYLIB LIBRARY(DD1)
ISPEXEC CONTROL ERRORS RETURN
ISPEXEC TBOPEN JUNK LIBRARY(DDJUNK)
                                /*non-existent table in a */
                                /*non-existent library      */
ISPEXEC CONTROL ERRORS CANCEL
FREE F(DD1)
```

- ISPP150

Panel 'name' error--At least one of the CLEAR names listed is not a panel field name. or ISPP121

Panel 'name' error--Panel definition too large, greater than screen size.

when entering KEYLIST, when requesting field-level help in ISPF panels, or when displaying panels created using DTL.

These messages are often caused by having a GML library in the ISPLIB concatenation or by having GML source code in the panel library. Check your ISPLIB concatenation to make sure that the ISPF-supplied GML library is not concatenated first. The ISPF-supplied GML library should not be in any of the ISPF library concatenations. Make sure that the libraries in your ISPLIB concatenation do not contain GML source code.

- ISPT036 'Table in use--'table service' issued for table 'table name' that is in use, ENQUEUE failed.

This message frequently occurs when batch jobs that use ISPF services run concurrently. This occurs because most batch jobs allocate a new profile each time they run. ISPF issues a TBOPEN against ISPPROF DD card for member ISPSPROF. The TBOPEN fails since ISPPROF does not contain this member. ISPF then issues a TBOPEN against ISPTLIB to copy the default ISPSPROF from ISPTLIB to ISPPROF.

If the first data set in the ISPTLIB concatenation sequence is the same for two batch jobs running concurrently, message ISPT036 is issued. To make sure that this condition does not occur, the first data set in the ISPTLIB concatenation should be unique. This can be accomplished by putting the ISPPROF data set first in the ISPTLIB concatenation.

For the same reasons, this problem can also occur when two users logon to ISPF for the first time if they have the same data set concatenated first in the ISPTLIB concatenation.

- ISPT016, ISPT017, and other I/O Errors

ISPF has various messages that reference I/O errors on either GET or PUT (READ and WRITE macros) such as message ISPT017. These errors are typically caused by concatenation problems on one of the ISPF libraries.

Allocating data sets that do not have consistent DCB parameters in ISPF library concatenations often causes these messages. Also, ISPTABL, ISPFIL, and ISPPROF are used for output and therefore must have only a single data set allocated to their ddnames.

- For I/O errors during panel services, check your ISPLIB concatenation for inconsistent DCBs.
- For I/O errors during file tailoring services, check your ISPSLIB concatenation for inconsistent DCBs and make sure that only one data set is allocated to ddname ISPFIL.
- For I/O errors during table services, check your ISPTLIB concatenation for inconsistent DCBs and make sure that only one data set is allocated to ddname ISPTABL.

I/O error messages cannot be issued when there is a problem with the ISPLIB concatenation since messages cannot be located due to the I/O error. Message CMG999 occurs when there is an I/O error due to an ISPLIB concatenation problem.

- CMG999

CMG999 is issued with an appropriate description of the error condition for any problem with accessing a message. Refer to *ISPF Dialog Developer's Guide and Reference* for further information on how to define a message.

Unexpected Output

- ISPF services do not pick up updated copies of messages or panels.

When not in TEST mode, the most recently accessed panel and message definitions are retained in virtual storage for performance reasons. If you have modified a panel or message file, using TEST mode ensures that the latest copy of each message or panel is accessed. Refer to *ISPF Services Guide* for more information on executing ISPF in TEST mode.

- ISPF commands such as WINDOW, COLOR, CUAATTR, EXIT, CANCEL, ACTIONS, KEYSHELP, KEYLIST, EXHELP, FKA, and ISPD TLC are not recognized as valid commands, or function keys defined as these commands do not function properly.

The user issuing these commands or pressing the function keys defined as these commands has a private copy of ISPCMD in the ISPTLIB concatenation. The user's private copy of ISPCMD is missing some or all of the new commands supplied in the new command table, ISPCMD, shipped with ISPF.

Users experiencing this problem should either replace their private copy of ISPCMD with the ISPF supplied copy, or update their private ISPCMD with the missing commands.

Abend Codes and Information

ISPF controller and processor task abends are controlled by STAE and STAI exit routines and by ISPF execution modes set using the ISPSTART TEST parameters.

Diagnostic Information

Under normal conditions (that is, when processor and controller dumps have not been requested by specifying the ISPSTART TEST command):

- When a processor task abends:
 - No dump is taken.
 - The controller reattaches the processor main drive (ISPPMD).
 - The primary option menu is redisplayed for that logical screen.
- When the controller task abends:
 - ISPF terminates with *** ISPF MAIN TASK ABEND *** message.
 - Control returns to TSO.
 - Pressing Enter causes a dump to be taken if a dump data set has been allocated.

The controller and processor tasks issue the ABEND system service and allow dumps under certain situations. The ISPF modules that issue ABENDs and their associated codes and reasons are listed below:

ABEND0C1 in various common ISPF subroutines

In several ISPF modules, an invalid operation code of (X'00') is executed to force an abend at the point that an unexpected condition occurs. Contact IBM support if this condition occurs within an ISPF module.

ABEND0C4 in ISPDVCGT, ISPDVCPT, or ISPDVCFD

These abends are often caused by mismatched VDEFINE and VDELETE services in a user's program. The VDEFINE service gives ISPF addressability to user storage. This storage is used by variable services any time the variable that has been established by the VDEFINE service is referenced. If this storage is released back to the system, an ABEND0C4 may occur depending on whether the storage is still accessible. Following are two common scenarios that often show these abends:

- A program establishes a variable in a called subroutine using the VDEFINE service and subsequently uses an ISPF service that references this variable in another routine. If the called subroutine was dynamically loaded and therefore released its storage, an ABEND0C4 could occur when the subroutine references a VDEFINED variable.
- A program establishes a variable in a called subroutine using the VDEFINE service and then calls another program without using the SELECT service. Then the called program VDEFINES a variable with the same name, but does not VDELETE it on exit. If the calling program references that variable after the called program returns control to it, an ABEND0C4 can occur. Since a VDELETE has not been done, ISPF services still reference the variable VDEFINED by the called program.

If the program intent is to use the same variable in the main and called routines, the variable should be VDEFINED only in the main routine. If the program intent to isolate a variable to be used only in the routine in which it is VDEFINED, then the program should also VDELETE the variable before it ends. To diagnose whether the user application has this problem, a function trace on VDEFINE, VDELETE, and the SELECT services (Option 7.7.1) is very helpful.

Abend codes 111 or 222

To produce these abends, the user must be in test mode and request processor dumps by entering one of the following commands on the ISPF command line. With exception of the user completion code, both commands function in the same manner.

ABEND

Terminates ISPF with user completion code 111.

CRASH

Terminates ISPF with user completion code 222.

Abend code 988

Invalid TSO environment. Refer to *ISPF Planning and Customizing* for the proper TSO version.

Abend code 997 (or X'3E5')

A TPUT returned a return code other than 0 or 8. A message is displayed and an attempt is made to redisplay the full screen. If the redisplay fails twice, this abend is issued.

Abend code 998 (or X'3E6')

An ISPF severe error that occurs while not in CONTROL ERRORS RETURN mode and before ISPF is fully initialized. ISPF is considered to be fully initialized when the Enter key on the primary option menu has been processed without a severe error occurring.

Abend code 999 (or X'3E7')

This abend is issued for the following reasons:

- No function pool is established for a command processor.
For example, a command processor that uses ISPF services is invoked using option 6 or SELECT CMD, but the command processor does not have a function pool. The user needs to have an entry for the command processor in the ISPTCM with the X'40' flag set on. The X'40' flag indicates that the command requires a function pool. Refer to *ISPF Planning and Customizing* for more information on customizing the ISPTCM.
- An error occurs while another error is already being processed.
ISPF issues the abend code 999 in this case to protect against an infinite loop.
- An error occurred during ISPF initialization.
For example:
 - An I/O error occurred due to ISPF library allocations such as ISPSLIB, ISPPLIB, ISPMLIB, and so forth, containing inconsistent or incorrect DCB attributes.
 - An ISPF library allocation does not contain the required ISPF libraries in its concatenation. For example, the ISPMLIB contains user product libraries but not ISPF libraries.

Terminal I/O Error Codes

Below is a list of terminal I/O error codes that you may see while using ISPF.

- ISPF screen output error code
 - 41** TPUT return code not equal to 0 or 8
- ISPF screen input error code
 - 21** TGET return code other than 0, 4, or 8.
 - 22** Input stream size greater than input buffer size or 0.
 - 23** Unknown attention identifier (AID).
 - 24** Invalid input AID.

Diagnostic Information

- 25 Input stream size invalid for input AID.
- 26 Input cursor location not within physical screen.
- 28 First byte of input buffer field not an SBA (invalid input data).
- 31 Byte preceding the physical screen field is past the end of the physical screen (input data from invalid screen position).
- 32 Byte preceding the physical screen field is not an input attribute (input data from invalid screen position).
- 33 Physical screen field not defined on panel (input data from invalid screen position).
- 51 Physical screen field attribute not found in logical screen.
- 52 Byte preceding logical screen field is not an input attribute.
- 55 Physical screen size is greater than corresponding logical screen size.

Notes:

1. The physical screen size is determined by ISPF during initialization.
2. The input buffer size is a variable based on the physical screen size.
3. The logical screen is the same size as the physical screen, and is the size that the processor task uses for screen I/O. When the 3290 is running in 62 X 160 partition mode, the SPLITV command makes the logical screen width equal to 80. When a 3278 mod 5 is running in standard mode, the logical screen size is 24 X 80.
4. Only part of the logical screen appears on the physical screen when ISPF is running in split-screen mode. When the 3290 is running in 62 X 160 partition mode, the entire logical screen may be visible, depending on the position of the horizontal split line.
5. An input buffer field extends from an SBA to either the next SBA or the end of the input buffer.
6. A physical screen field extends from the location indicated in the input buffer SBA to the location of the next attribute byte in the physical screen.

Register Linkage Conventions

ISPF uses standard linkage conventions:

- **SELECT PGM(program-name)**

REGISTER

CONTENTS

- 1 Points to the address of the parameter data (from the PARM keyword) field (half-word length) followed by the data
- 2 - 12 Not used
- 13 72-byte save area
- 14 Return address
- 15 Entry address / Return code on exit

- **ISPF EXITS / Call to ISPLINK**

REGISTER

CONTENTS

- 1 On entry, points to a parameter list; each address in the list in turn

points to a parameter. On return to the caller of ISPLINK, the user's parameter list starts at the second parameter. ISPF has inserted a parameter in front of the user's parameters for ISPF use.

2 - 12 Not used

13 72-byte save area

14 Return address

15 Entry address / Return code on exit

- **SELECT CMD(cmdname)** where *cmdname* is a program that will be attached as a command processor by ISPF:

REGISTER

CONTENTS

1 Points to a CPPL (Command Processor Parameter List) which is a list of four addresses that point respectively to: Command buffer, UPT, PSCB, ECT. See the TSO programming services manual for descriptions of these parameters.

2 - 12 Not used

13 72-byte save area

14 Not applicable

15 Return code on exit

Usually when an abend occurs within ISPF code, register 12 points to the entry point of the abending CSECT.

Obtaining Message IDs

In order to obtain the message ID associated with an error message in ISPF, you need to be in ISPF TEST mode.

ISPF is in TEST mode if:

- ISPF is invoked with the TEST, TESTX, TRACE, or TRACEX parameter specified on the ISPSTART, PDF, or ISPF command, or
- Restore TEST/TRACE option is not selected in option 0 and you go into option 7, Dialog Test, at some point in your current ISPF session.

If you are not in TEST mode, split the screen, enter option 7, Dialog Test, and swap back to the screen containing the error.

You can use either of the following methods to get the message ID:

- Enter print on the panel displaying the error message. The message ID, along with the displayed message text and screen output, appears in the LIST data set. The LIST data set can be printed using the LIST command.
- With the short message displayed:
 1. Press the function key assigned to Help (default is F1) or type help on the command line. This displays the long message text for the error.
 2. Press the function key assigned to Help or type help on the command line once more to display the Tutorial panel associated with the error. The bottom lines of the Tutorial panel contain fields that list the current panel name, the previous panel name, and the message ID. The value following LAST MSG= is the message ID associated with the error.

Installation, Maintenance, and Migration Diagnostics

The information following is representative of common situations a user may encounter during installation, maintenance, and migration.

Common Installation and Maintenance Problems

Problem:

Unpredictable results such as ABEND0C4s, ABEND0C1s, and so forth, upon invocation of ISPF.

Cause: This problem can occur when internal LINKs and LOADs are used in conjunction with the ISPF ISPLLIB DCB.

Solution:

When using STEPLIB to test new maintenance, releases, or versions of products and an ISPLLIB is allocated, data sets allocated to STEPLIB should also be allocated to ISPLLIB.

Problem:

New levels of code residing in STEPLIB do not appear to be executed. This includes changes to customer applications, new levels of code, and changes made by PTFs, for example.

Cause: This problem can occur when internal LINKs and LOADs are used in conjunction with the ISPF ISPLLIB DCB.

Solution:

When using STEPLIB to test new maintenance, releases, or versions of products and an ISPLLIB is allocated, data sets allocated to STEPLIB should also be allocated to ISPLLIB.

Problem:

Abends occur when invoking or exiting HELP, KEYS, or ISPPREP.

Cause: An older level of ISPF exists in LPA or LINKLIB; an ISPLLIB or STEPLIB is used to allocate libraries for the new release of ISPF; and a LIBDEF for ISPLLIB that does not include the new level of ISPF libraries has been issued.

Not all of ISPF is loaded at initialization, for example, ISPTUTOR is linked when HELP is requested. The LIBDEF of ISPLLIB results in the older level of any modules that are not loaded on ISPF entry to be picked up from LPA or LINKLIB due to internal search orders. For further information, refer to the LIBDEF command in *ISPF Services Guide*.

Solution:

Include the new level of ISPF in any LIBDEFs issued for ISPLLIB.

Problem:

ABEND806 for ISPLINK or ABEND0C1 in user application.

Cause: During installation, the SMP/E install logic for ISPF deletes the existing ISPLINK load module.

Solution:

Relink-edit ISPLINK to user application.

Migration from Version 2 and Version 3 to Version 4.1

Problem:

ABEND806 received for program ISRYXDR.

Cause: The Dialog Test Facility is now part of ISPF and is invoked by PGM(ISPYXDR). The Dialog Test Facility was part of ISPF/PDF and was previously invoked using PGM(ISRYXDR) from the ISR@PRIM panel.

Solution:

Use the ISP@PRIM or ISR@PRIM panel supplied with this release of ISPF or modify your own customized ISP@PRIM or ISR@PRIM panels. Change the dialog test selection to invoke ISPYXDR rather than ISRYXDR as shown below:

```
'PGM(ISPYXDR) PARM(ISR) NOCHECK' /* ISR@PRIM */
or
'PGM(ISPYXDR) PARM(ISP) NOCHECK' /* ISP@PRIM */
```

Problem:

Abends in load modules IGC0009C and IGC0009D.

Cause: Failure to install ISPF in the same zone as TSO/E will result in the supplied ISPF SVC 93 and SVC 94 exits (ISPSC93, ISPSC94), creating SVC 93 and SVC 94 load modules without the proper link edit information.

Failure to use the correct version of either IGC0009C or IGC0009D or both.

Solution:

TSO/E, ISPF, and ISPF/PDF must all be installed in the same zone. Verify that the correct versions are copied from a test system to the production system.

Problem:

ISPP150 PANEL 'name' ERROR NO ")END" FOUND BEFORE REACHING
END OF FILE

or

SPP121 PANEL 'name' ERROR PANEL DEFINITION TOO LARGE,
GREATER THAN SCREEN SIZE when entering KEYLIST, requesting field
level help in ISPF panels, or when displaying panels created using DTL.

Cause: These messages are often caused by having a GML library in the ISPLIB concatenation, or by having GML source code in the panel library.

Solution:

Check your ISPLIB concatenation to make sure that the ISPF-supplied GML library is not concatenated first. The ISPF-supplied GML library should not be in any of the ISPF library concatenations. Make sure that the libraries in your ISPLIB concatenation do not contain GML source code.

Problem:

ISPF Version 3 specific commands such as WINDOW, COLOR, CUAATTR, EXIT, CANCEL, ACTIONS, KEYSHELP, KEYLIST, EXHELP, FKA, and ISPD TLC are not recognized as valid commands or function keys defined as these commands do not function properly.

Diagnostic Information

Cause: Users issuing these commands or pressing the function keys defined as these commands have a private copy of ISPCMD5 in their ISPTLIB concatenation. Users' private copy is missing some or all of these supplied commands, or they may be using a command table from a previous version or release of ISPF.

Solution:

Users experiencing this problem should either replace their private copy of ISPCMD5 with the ISPF 4.1 supplied copy, or update their private ISPCMD5 with the missing commands.

Problem:

Receiving error messages such as: 'PROFILE TABLE NOT FOUND, UNABLE TO ACCESS ISRPROF TABLE FOR VAR 'ZERRMSG'' or ABEND3E7 or ABENDU999.

Cause: The profile data set may run out of directory space as Version 3 adds more members to the profile, or the logon allocation of ISPTLIB may be pointing to an old Version 2 or Version 3 table library. Another common cause of this symptom is that an application that link-edits the ISPF load module ISPTASK into it has not been relink-edited after installing a new version of ISPTASK.

Solution:

Add more directory blocks to the profile data set and ensure that the Version 4.1 table library containing ISPKEYS is in the ISPTLIB concatenation. Verify that the application that link-edits ISPTASK is relink-edited after a new release of ISPF is installed or after maintenance that updates ISPTASK is installed.

Problem:

Attempting to start an ISPF session with a workstation connection using ISPF Client/Server gets error messages such as: CSV003I REQUESTED MODULE LSCSIO NOT FOUND. +LSCX012 UNABLE TO LOAD RUNTIME I/O ROUTINES, EXECUTION CANNOT CONTINUE.

Cause: Library SISPSASC is not in the normal MVS load module search order. This library is NOT searched using the ISPLLIB allocation. It must be in STEPLIB or LNKLIST.

Solution:

Put the SISPSASC library in STEPLIB or LNKLIST. For more information about SISPSASC, refer to the *ISPF Planning and Customizing* manual.

Readers' Comments — We'd Like to Hear from You

Interactive System Productivity Facility (ISPF)
Messages and Codes
OS/390 Version 2 Release 8.0

Publication No. GC28-1326-03

Overall, how satisfied are you with the information in this book?

	Very Satisfied	Satisfied	Neutral	Dissatisfied	Very Dissatisfied
Overall satisfaction	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

How satisfied are you that the information in this book is:

	Very Satisfied	Satisfied	Neutral	Dissatisfied	Very Dissatisfied
Accurate	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Complete	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Easy to find	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Easy to understand	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Well organized	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Applicable to your tasks	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Please tell us how we can improve this book:

Thank you for your responses. May we contact you? ☐ Yes ☐ No

When you send comments to IBM, you grant IBM a nonexclusive right to use or distribute your comments in any way it believes appropriate without incurring any obligation to you.

Name

Address

Company or Organization

Phone No.



Cut or Fold
Along Line

Fold and Tape

Please do not staple

Fold and Tape




NO POSTAGE
NECESSARY
IF MAILED IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST-CLASS MAIL PERMIT NO. 40 ARMONK, NEW YORK

POSTAGE WILL BE PAID BY ADDRESSEE

IBM Corporation
Information Development
Department CGMD / Bldg 062
P.O. Box 12195
Research Triangle Park, NC
27709-2195



Fold and Tape

Please do not staple

Fold and Tape

Cut or Fold
Along Line



File Number: S370/4300-39
Program Number: 5645-001



Printed in the United States of America
on recycled paper containing 10%
recovered post-consumer fiber.

GC28-1326-03

