


Introduction 1

Working Environment

RStudio is divided into 4 main panes:

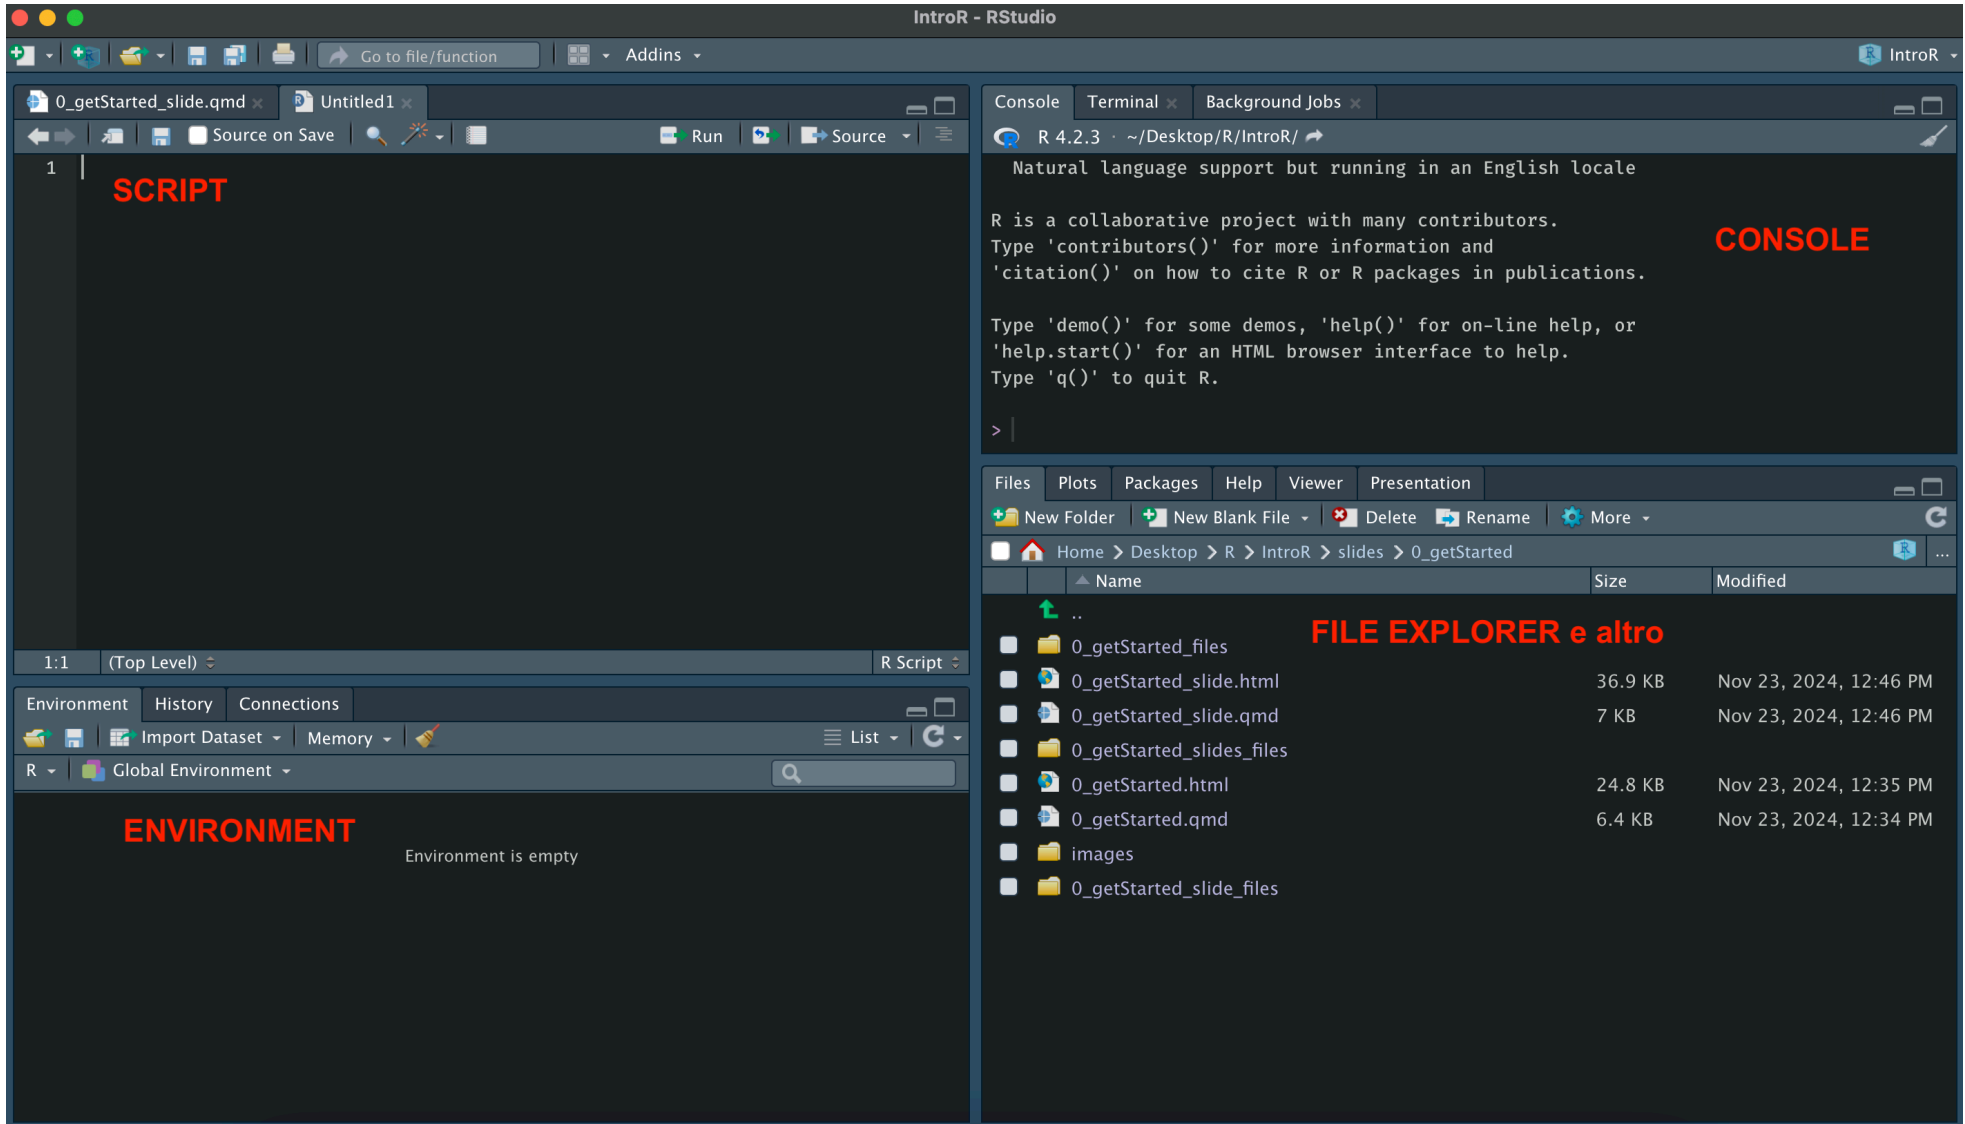

Script. The text file where you write and save your code. You can run one line at a time ([Ctrl + Enter](#) / [Cmd + Enter](#)) or the whole script by clicking [Source](#). Comments are added with <#>.

Console. This is where R runs the code and shows the results. You can type commands directly in the console for quick tests, but they are not saved.

Environment / Temporary desk. Shows all the **objects** created during the current session.

Miscellaneous. A multi-purpose pane with several tabs, including the file explorer

Console

Commands in the console are executed but **not saved**.

To run the command → Enter

The output is immediate and appears in the console.

Script


You can save scripts with all your commands.

To run the command → Ctrl + Enter (Cmd + Enter on Mac)

The output is returned in the console.


How to work in R

Let's create a script:

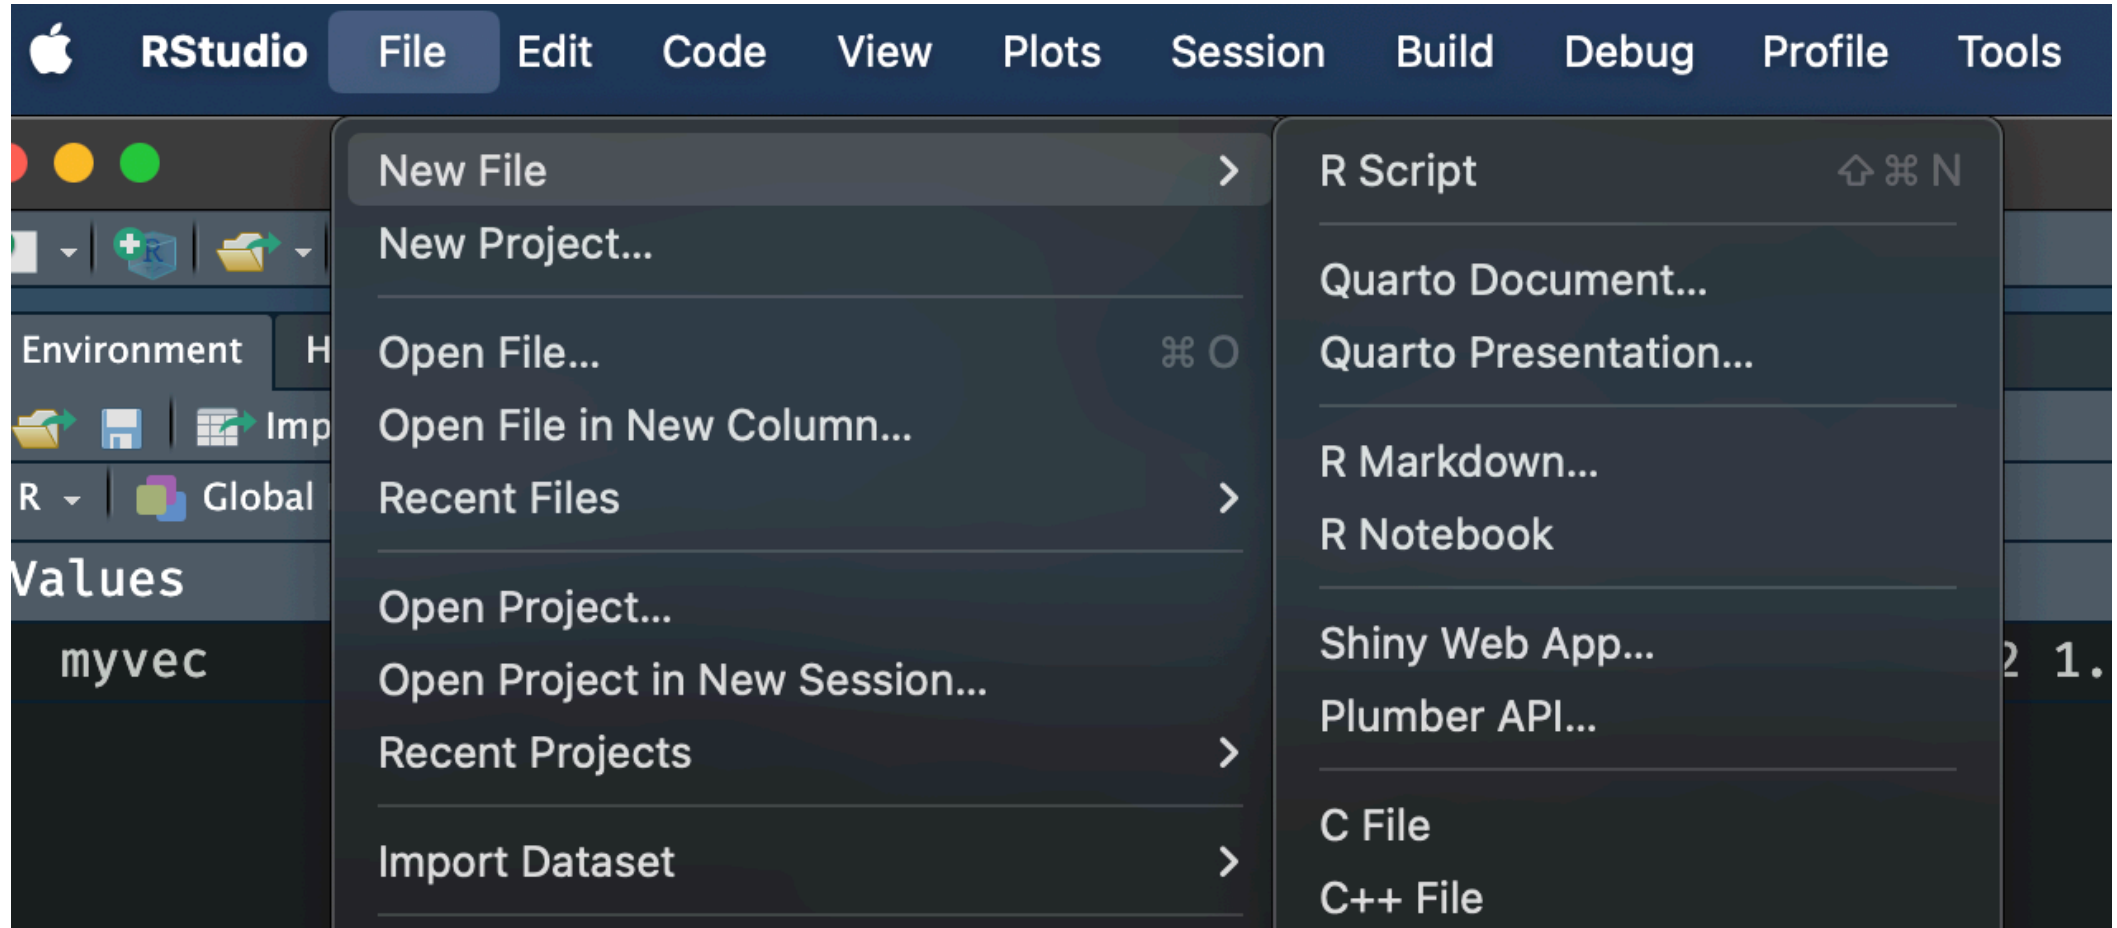

How to work in R

Let's save it:

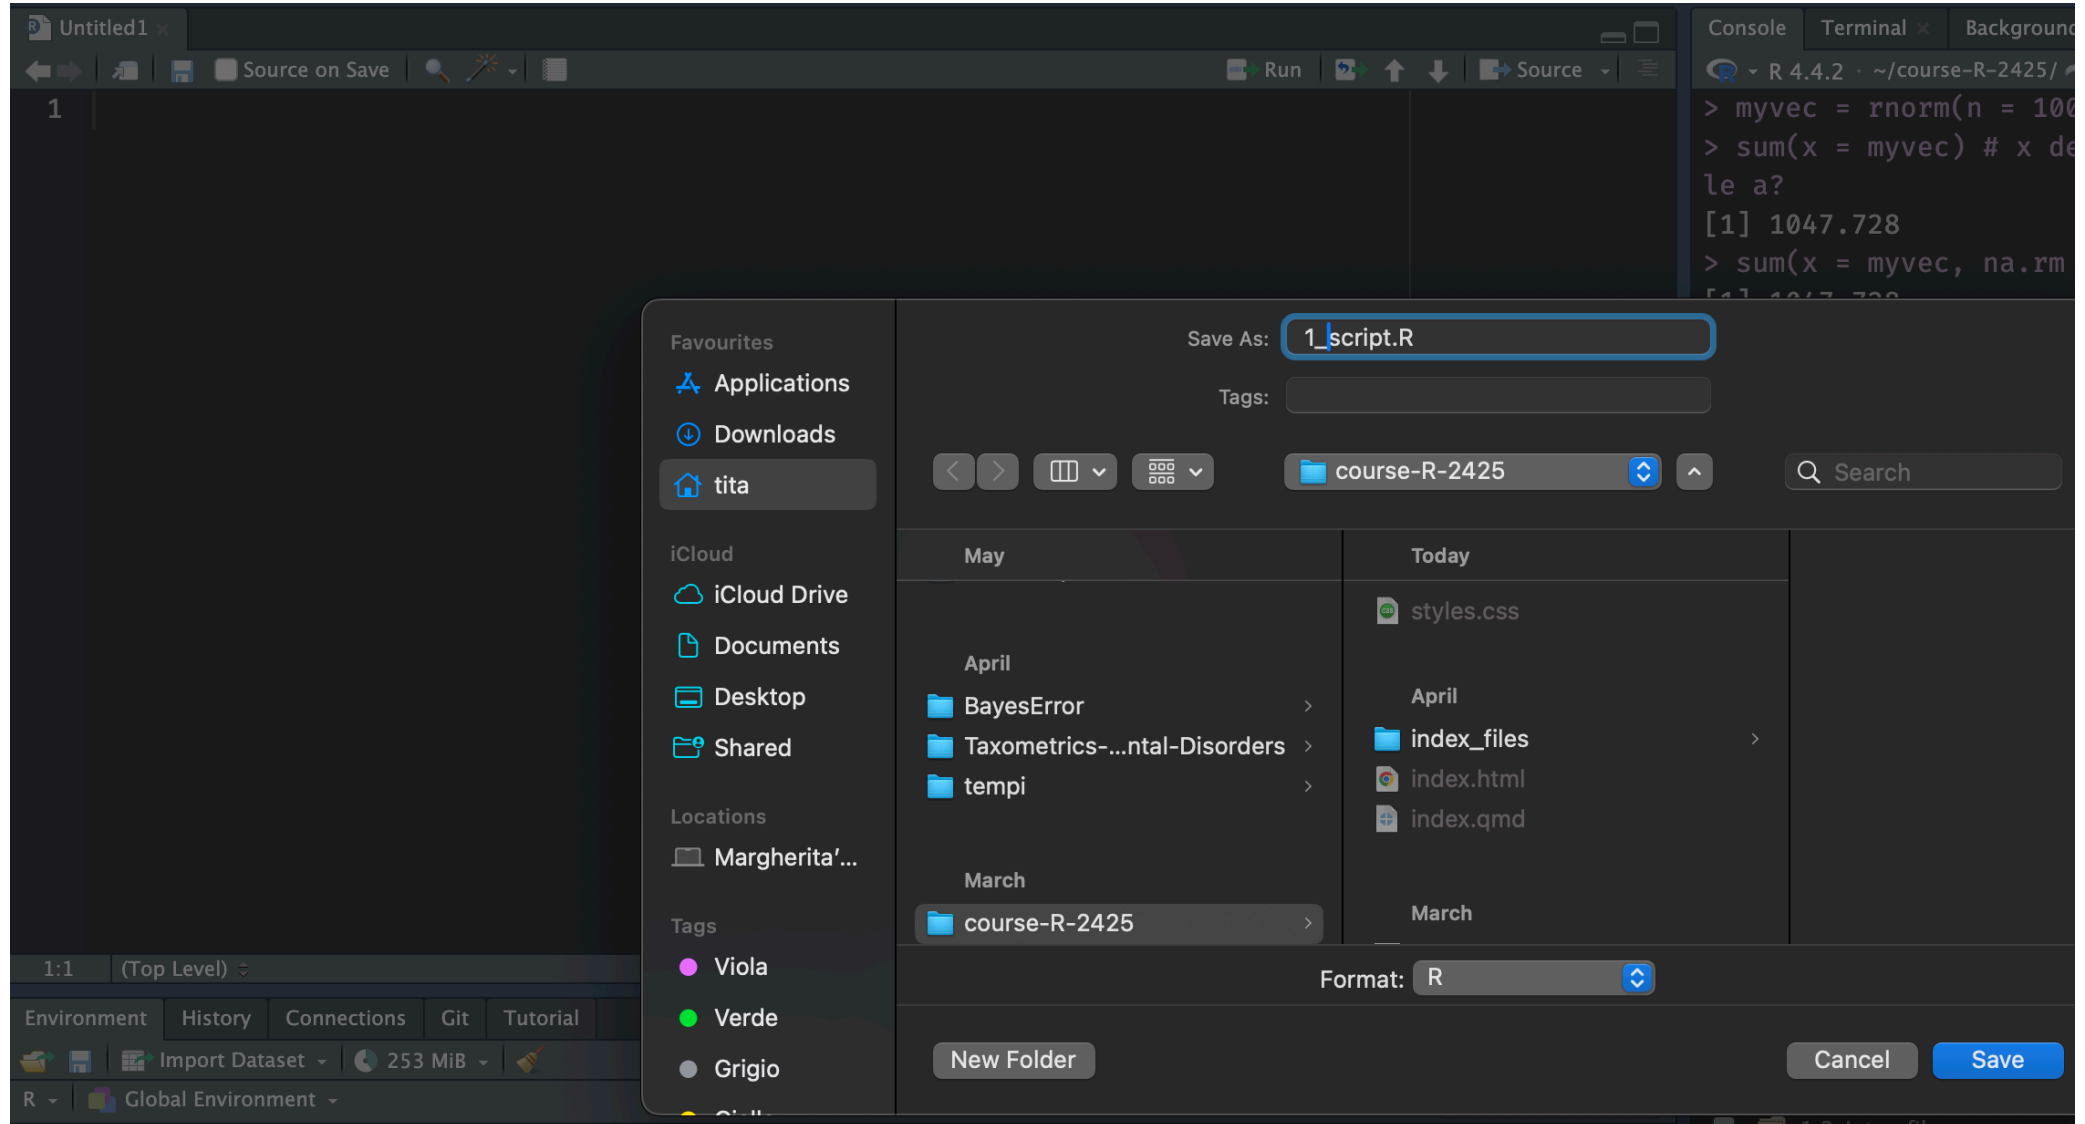

Working Directory

The location (folder) on your PC where R is working and where R expects to find your files, unless specified otherwise.

```
1 getwd()
```

```
[1] "/Users/tita/course-R-2425/materials/1_intro"
```

Absolute Path

PC

```
| - Users
  |
  | - tita
    |
    | - course-R-2425
      |
      | - materials
        |
        | - 1_intro
```

I am working inside the 1_intro folder.

Relative Path (to the working directory)

1. Change the working directory with the `setwd` command:

```
1 setwd('/Users/tita/Desktop')
```

2. Download the file `prova.csv` and put it in the folder.

3. Since we are working inside the folder, if we want to load a file located in this folder we can simply write the file name in quotes and use, for example, the `read.csv` function:

```
1 data = read.csv("prova.csv")
2
3 head(data, n = 4) # show the first rows of the dataset
```

	X	id	age
1	1	1	30.74643
2	2	2	34.06618
3	3	3	28.73101
4	4	4	28.48286

If instead we want to load a file located somewhere else, we need to refer to it through its absolute path:

```
1 data = read.csv("/Users/tita/course-R-2425/materials/1_intro/prova.csv")
2 head(data, n = 4) # show the first rows of the dataset
```

	X	id	age
1	1	1	30.74643
2	2	2	34.06618
3	3	3	28.73101
4	4	4	28.48286

Or, first change the working directory with the `setwd` command and then load the file.

The best solution?

Create an R project!

- they set the working directory automatically
- they let you use ***relative paths*** instead of ***absolute paths***
- they give quick access to a given project

Let's create one!