

Conditional programming

Programming in R


We will look at the main programming constructs and how they are applied in R. Many of the concepts presented are general, so they also apply to other programming languages. Here we will cover the most basic aspects; for more advanced applications we suggest the book: [Advanced R](#)

Topics

- Programming constructs
- Conditional programming
- Iterative programming

Functions

Just like mathematical functions, a function in programming abstracts a series of operations (in our case a portion of code): given some **inputs**, it performs a series of operations and returns some **outputs**.

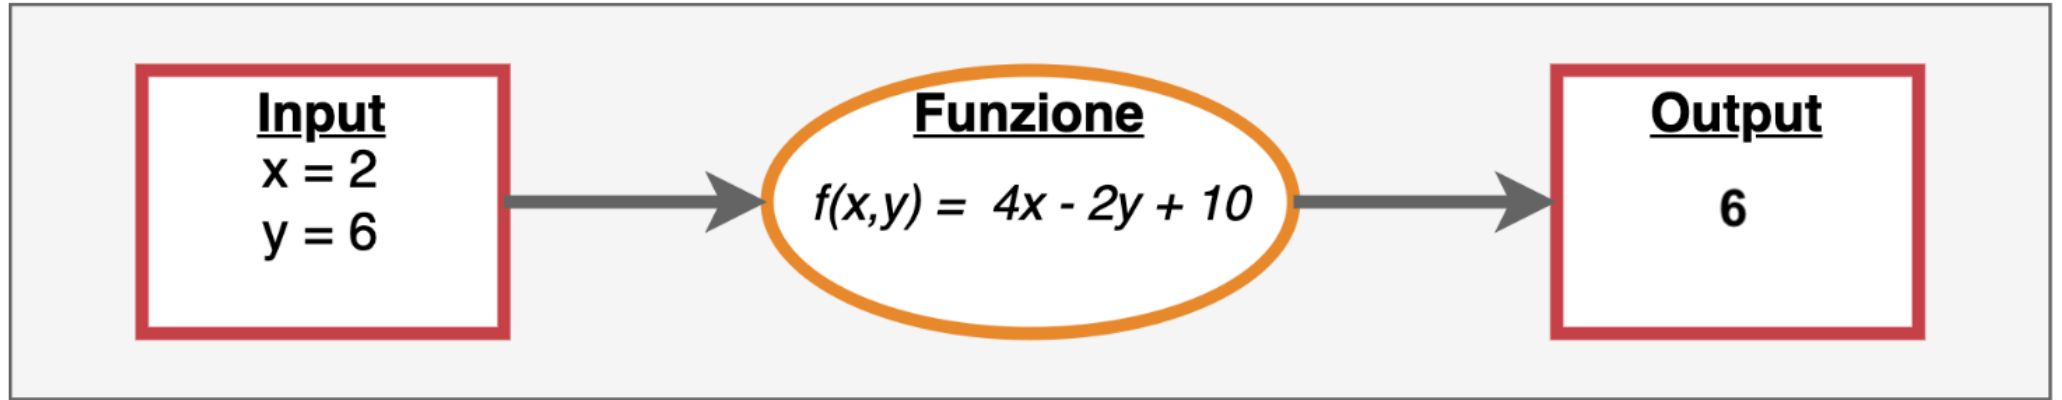

Functions - Creation

The command used to create a function in R is `function()`, followed by a pair of curly braces `{ }` inside which we write the **body** of the function:

```
1 myfun_sum = function(x,y){ # arguments
2
3   x + y # body
4
5   }
6
7 myfun_sum(2,3)
```

```
[1] 5
```

The function I created takes x and y as **input**, **adds** them, and returns the result as **output**.

Functions - Creation

We can perform many different operations inside a single function. It is better to use the **return()** command to explicitly define the output we want, for example...

```
1 myfun = function(x,y, name){  
2  
3   # body  
4   z = x + y # add x and y  
5   id = paste(z, name, sep = "_") # create a code  
6  
7   # output  
8   return(id)  
9 }  
10  
11 myfun(2,3, "carlo")
```

```
[1] "5_carlo"
```

Functions - Creation

Let's take a repetitive operation often performed in data analysis: **standardizing** a variable (transforming it into z scores), i.e. **subtracting** its **mean** μ_x from a **vector x** of observations and then **dividing** by the **standard deviation** σ_x :

$$x_z = \frac{x - \mu_x}{\sigma_x}$$

Functions - Creation

To create this function we need to define:

- **arguments:** variables to be defined (if not already defined)
- **body:** the operations the function must perform using the arguments
- **output:** what the function must return as a result

Functions - Creation

Arguments

The **arguments** are the **variable** parts of the function that are defined and then needed to run the function itself. In our function the only argument is the **input vector**. Just like **mean** and **sd**, we can add a second argument indicating whether to remove NAs:

```
1 z_score = function(x, na.rm = FALSE){ # arguments
2   # body
3   # output
4 }
```

Functions - Creation

Body

The **body** of the function contains the **operations** to perform using the input arguments. In our case we need to subtract the mean and divide by the standard deviation.

```
1 z_score = function(x, na.rm = FALSE){ # arguments
2
3   (x - mean(x, na.rm = na.rm)) / sd(x, na.rm = na.rm)
4   # output
5 }
```

Functions - Creation

Output

The output is the result the function returns after performing all the operations. In our case we want the function to return the vector transformed into z scores. As we saw before, we can use the `return()` function, which explicitly tells the function what to return:

```
1 z_score = function(x, na.rm = FALSE){ # arguments
2
3   xcen = (x - mean(x, na.rm = na.rm)) / sd(x, na.rm = na.rm)
4
5   return(xcen)
6
7 }
```

Functions - Creation

We have now created this function, which becomes an object in our ***environment***, and we can use it

```
1 # create a vector x
2 vect = runif(n = 100, min = 1, max = 10)
3
4 mean(vect) # mean
```

```
[1] 5.811049
```

```
1 sd(vect) # standard deviation
```

```
[1] 2.672842
```

```
1 # standardize
2 vec0 = z_score(vect) # by default na.rm is set to FALSE
3
4 round(mean(vec0),2) # mean 0
```

```
[1] 0
```

```
1 sd(vec0) # standard deviation 1
```

```
[1] 1
```

Functions - tips

- Curly braces `{}` can be omitted if the code is all on the same line
- `return()` can be omitted if the last line is the desired output

```
1 z_score1 = function(x){  
2   xcen = (x - mean(x))/sd(x)  
3   return(xcen)  
4 }  
5 z_score1(vect[1:5])
```

```
[1] 1.0144404 0.3912346 0.6830791  
-0.7529994 -1.3357548
```

```
1 z_score2 = function(x) (x - mean(x)) / sd(x)  
2 z_score2(vect[1:5])
```


```
[1] 1.0144404 0.3912346 0.6830791 -0.7529994 -1.3357548
```

Conditional programming - **if**

In programming we usually need not only to perform a series of operations BUT to perform operations depending on some conditions.

Conditional programming - **if**

The concept of **if** *condition* **then** do *operation* is translated in programming through what are called **if** statements

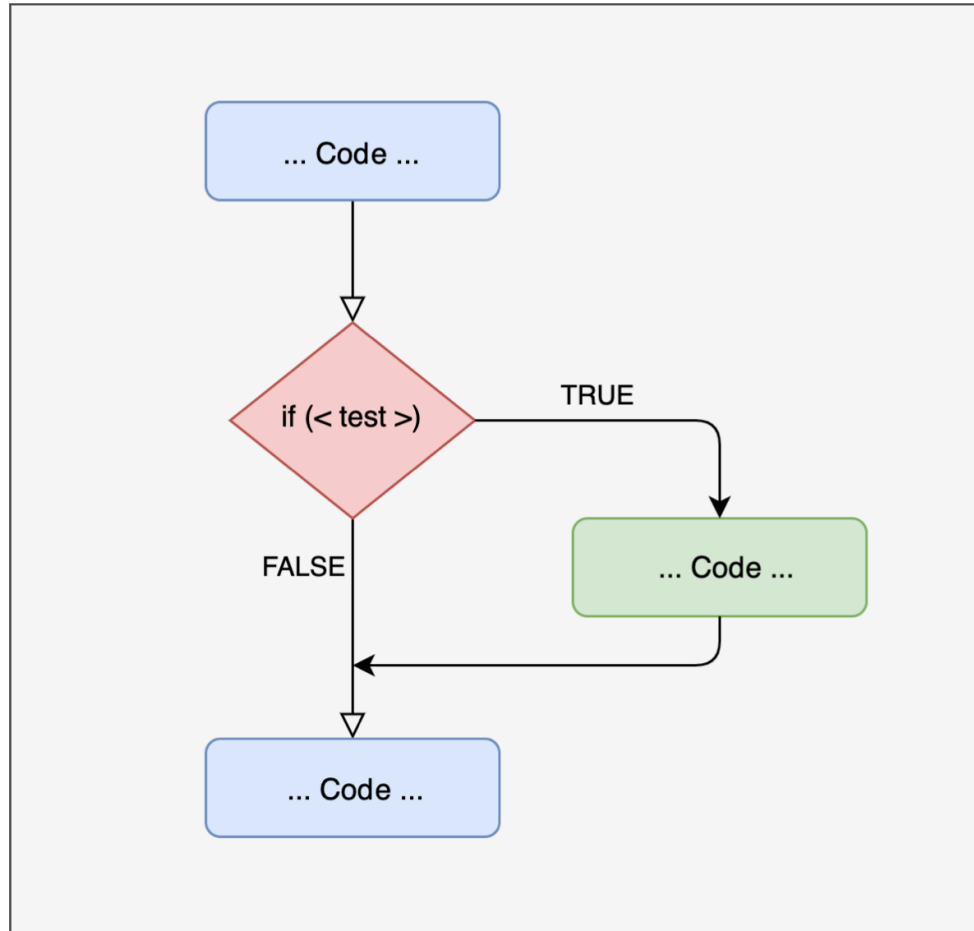

if statement

Let's see an example

```
1 myfun_if = function(x){ # argument
2
3   if (x > 0){
4     cat("The value is greater than 0\n")
5   }
6   cat("End of function")
7 }
8
9 myfun_if(10)
```

The value is greater than 0
End of function

```
1 myfun_if(-10)
```

End of function

if statement - STOP

There is a family of functions with the `is.` prefix that returns **TRUE** when the object type matches the requested one and **FALSE** otherwise.

```
1 myfun_stop = function(x){ # argument
2
3   if (!is.numeric(x)) { # useful when we want to prevent the function from running
4     stop("the vector must be numeric")
5   }
6   mean(x, na.rm = TRUE)
7 }
8
9 x = 1:10 # numeric vector
10 y = letters[1:10] # character vector
11
12 myfun_stop(x)
```

```
[1] 5.5
```

```
1 myfun_stop(y)
```


```
Error in `myfun_stop()`:
! the vector must be numeric
```

if...else

Using a single **if** may not be enough in some situations. Above all because we can see the **if** as a **temporary detour** from the main script that is taken only if a condition is true; otherwise the script goes on.

if...else

If we want a more “symmetric” structure, we can perform some operations if the condition is true (**if**) and others for all the other scenarios (**else**).

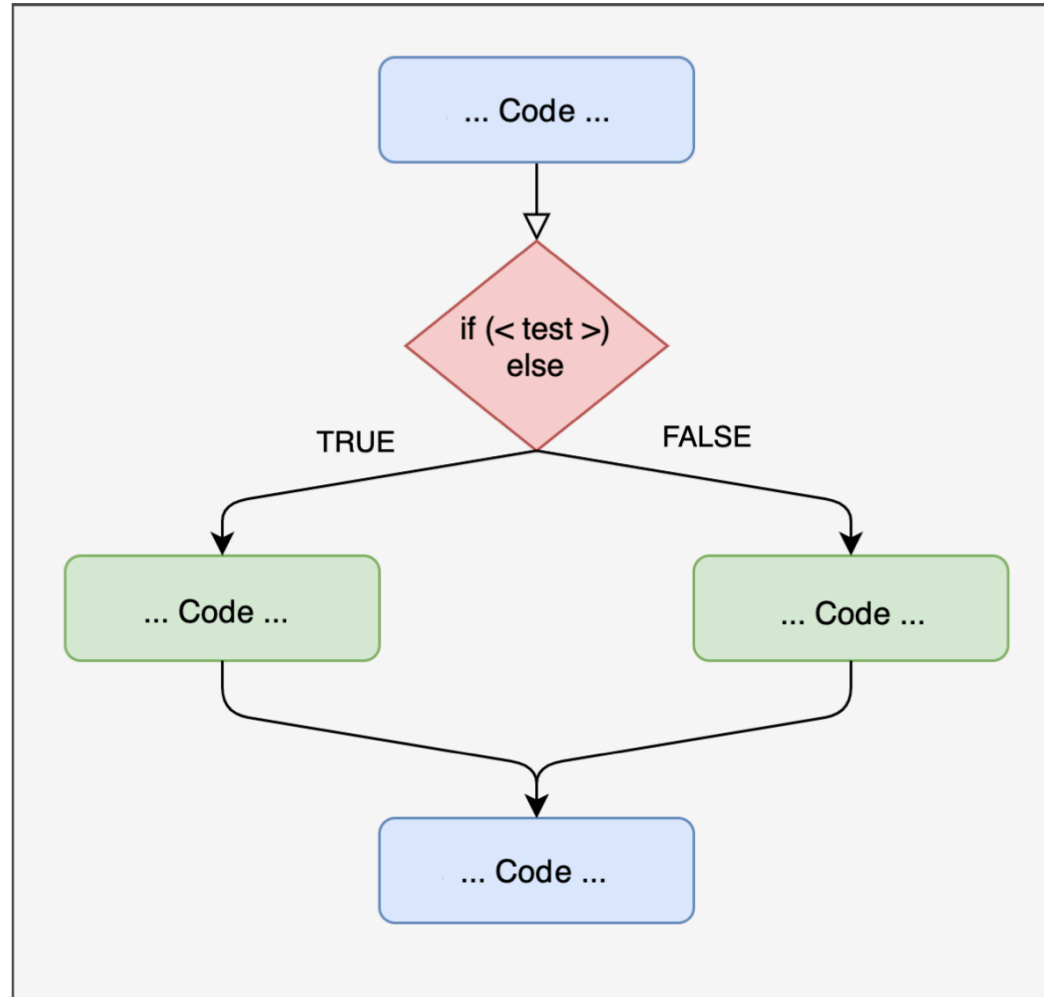

if...else

Let's see an example

```
1 myfun_ifelse = function(x){ # argument
2
3   if (x > 0){
4     cat("The value is greater than 0\n")
5   }
6   else{
7     cat("The value is less than 0\n")
8   }
9   cat("End of function")
10 }
11
12 myfun_ifelse(10)
```

The value is greater than 0
End of function

```
1 myfun_ifelse(-10)
```

The value is less than 0
End of function

if...else - nested

```
1 myfun_ifelse = function(x){ # argument
2   if (x > 2){
3     cat("The value is greater than 2\n")
4   }
5   else if (x <= 2 & x >= 0){
6     cat("The value is between 0 and 2\n")
7   }
8   else{
9     cat("The value is less than 0\n")
10  }
11 }
12
13 myfun_ifelse(2.3)
```

The value is greater than 2

```
1 myfun_ifelse(-1)
```

The value is less than 0

```
1 myfun_ifelse(1.4)
```

The value is between 0 and 2

Conditional programming

To understand which conditional structure to use, it is important to understand the problem we need to solve well. Let's take an example: imagine we have 2 types of data in R, strings and numbers. In this case it is enough to have an **if statement** that checks whether the element is a string/number and performs a given operation.

Conditional programming

Let's write a function that returns the mean when the vector is numeric, and the frequency table otherwise.

```
1 my_summary = function(x){  
2  
3   if(is.numeric(x)){  
4     return(mean(x))  
5  
6   }else{  
7     return(table(x))  
8   }  
9 }
```

Conditional programming

Let's test the function

```
1 x = 1:7
2 my_summary(x)
```

[1] 4

```
1 x = c(rep(c("A","B"), 3), "C")
2 my_summary(x)
```

x

A B C

3 3 1

Conditional programming

One limitation of `if statements` is that they only work on a **single value** (i.e. they are not vectorized). So, while the `my_summary` function works because it evaluates whether the whole vector is numeric (`is.numeric()`)...

Conditional programming

If we wanted to use the `myfun_if` function ...

```
1 cat(deparse(myfun_if), sep = "\n")
```

```
function (x)
{
  if (x > 0) {
    cat("The value is greater than 0\n")
  }
  cat("End of function")
}
```

it would not work...

```
1 x = 1:7
2
3 myfun_if(x)
```

```
Error in `if (x > 0) ...`:
! the condition has length > 1
```

Conditional programming

The vectorized version is obtained with the `ifelse()` function, whose arguments are the condition to test, the output if the condition is **TRUE**, and the output if it is **FALSE**

```
1 x
```

```
[1] 1 2 3 4 5 6 7
```

```
1 ifelse(x < 5, "x is less than 5", "x is greater than 5")
```

```
[1] "x is less than 5" "x is less than 5" "x is less than 5"
```

```
[4] "x is less than 5" "x is greater than 5" "x is greater than 5"
```

```
[7] "x is greater than 5"
```

Conditional programming

When we need to test several alternatives we can create nested `ifelse()`. Imagine we have an **age** vector and want to create another vector where age is divided into **3 groups**: child, adult, elderly:

```
1 age = round(runif(10, 3, 80)) # sample from a uniform distribution from 3 to 80
2 age
```

```
[1] 31 23 43 22  5 61 35 59 22 30
```

```
1 age_ifelse = ifelse(age < 18,
2                       yes = "child",
3                       no = ifelse( age >= 18 & age < 60, "adult", "elderly"))
4 age_ifelse
```

```
[1] "adult" "adult" "adult" "adult" "child" "elderly" "adult"
```

```
[8] "adult" "adult" "adult"
```

`dplyr::case_when`

When there are many conditions to test (roughly > 3), writing many nested `ifelse()` can be tedious. We can then use the `dplyr::case_when()` function from the *dplyr* package, which is a generalization of `ifelse()`:

```
1 age_case_when = dplyr::case_when(age < 18 ~ "child",  
2                                age >= 18 & age < 60 ~ "adult",  
3                                TRUE ~ "elderly")  
4 # TRUE identifies "everything else"
```

the results are identical...

```
1 all.equal(age_case_when, age_ifelse)
```

```
[1] TRUE
```

dplyr::case_when

Recoding the values of a variable, for example reversing the items of a questionnaire, is easily done with `dplyr::case_when()`:

```
1 item = sample(1:5, size = 20, replace = TRUE) # simulate 20 responses to an item
2 item
```

```
[1] 5 3 2 3 2 3 1 1 1 1 2 5 4 4 3 3 2 2 4 4
```

```
1 library(dplyr) # load the package so we don't always have to write its name
2
3 item_rec = case_when( # recode with 1 = 5, 2 = 4, 3 = 3, 4 = 2, 5 = 1
4   item == 1 ~ 5,
5   item == 2 ~ 4,
6   item == 3 ~ 3,
7   item == 4 ~ 2,
8   item == 5 ~ 1 )
9 item_rec
```

```
[1] 1 3 4 3 4 3 5 5 5 5 4 1 2 2 3 3 4 4 2 2
```

dplyr::case_when

These functions can also be applied to the variables in a dataframe:

```
1 # create a dataframe with id and age variables
2 mydf = data.frame(id = factor(1:30), age = sample(14:50, 30))
3 # save it for later
4 readr::write_csv(mydf, file = "data/mydf.csv")
5 # create a third variable with "adolescent", "young", "adult"
6 mydf$age_cat = factor(case_when(mydf$age > 30 ~ "adult",
7                                 mydf$age <= 30 & mydf$age >= 20 ~ "young",
8                                 mydf$age < 20 ~ "adolescent",
9                                 TRUE ~ "error" # check for coding errors
10                                ))
11 str(mydf)
```

```
'data.frame':  30 obs. of  3 variables:
```

```
$ id      : Factor w/ 30 levels "1","2","3","4",...: 1 2 3 4 5 6 7 8 9 10 ...
```

```
$ age     : int  47 50 23 39 28 15 17 38 19 42 ...
```

```
$ age_cat: Factor w/ 3 levels "adolescent","adult",...: 2 2 3 2 3 1 1 2 1 2 ...
```

Importing a function

We have already seen that the `library()` command loads a package, making the functions it contains available. Without needing to create a package, we can still organize our own functions effectively.

Importing a function

We have two options

- write the functions in the same script where they are used
- write a separate script and import all the functions it contains

Importing a function

Here too it is a matter of style and convenience; in general:

- if we have many functions, it is better to write them in one or more separate files and then import them at the beginning of the main script
- if we have few functions, we can keep them in the main script, perhaps in a dedicated section at the beginning

Importing a function

In the second case it is enough to write the function, and it will be saved as an object in the main environment. For the first scenario, we can use the

`source("utl/script.R")` function:

```
1 rm(list = ls()) # clear the environment
2
3 # load the functions
4 source("utl/myfun.R")
5 # now my functions are available and I can use them
6 ls()
```

```
[1] "my_summary" "mydf_fun" "myfun_ifelse" "myfun_stop" "z_score"
```

Importing and using a function

Now my functions are available as objects in my environment and I can use them:

```
1 # load the dataframe saved earlier
2 mydf_1 = data.frame(readr::read_csv("data/mydf.csv"))
3 str(mydf_1) # check
```

```
'data.frame':  30 obs. of  2 variables:
 $ id : num  1 2 3 4 5 6 7 8 9 10 ...
 $ age: num  47 50 23 39 28 15 17 38 19 42 ...
```

```
1 # apply the mydf_fun function
2 mydf_2 = mydf_fun(mydf_1)
3 head(mydf_2)
```

	id	age	age_cat	age_z
1	1	47	adult	1.3942438
2	2	50	adult	1.6652631
3	3	23	young	-0.7739107
4	4	39	adult	0.6715256
5	5	28	young	-0.3222119
6	6	15	adolescent	-1.4966289

```
1 readr::write_csv(mydf_2, file = "data/mydf_2.csv") # save it for later
```

Now let's practice!

Open this link and keep it open:

<https://etherpad.wikimedia.org/p/arca-corsoR>