

Quantum Systems

(Lecture 4: Quantum gates and the circuit model)

Luís Soares Barbosa



Universidade do Minho



Universidade do Minho

The circuit model

Classical reversible circuits (which can simulate any non-reversible one with modest overhead) generalise to **quantum circuits** where


- logical **qubits** are carried along **wires**,
- quantum **gates**, corresponding to unitary transformations, act on them,
- and **measurements** of a quantum state $|\phi\rangle = \sum_i \alpha_i |i\rangle$ result in a state $|i\rangle$, with probability given by the norm squared of its amplitude, $\|\alpha_i\|^2$, together with a classical label i indicating which outcome was obtained.

The circuit model

Quantum gates

A **gate** is a transformation that acts on only a small number of qubits
 Differently from the classical case, they do not necessarily correspond to physical objects

Notation




The circuit model

Circuits in Qiskit

```
from qiskit import QuantumCircuit


qc = QuantumCircuit(2, 2)
qc.h(0)
qc.cx(0, 1)
qc.measure([0, 1], [0, 1])
qc.draw()
```



1-Gates

The action of a 1-gate U on a quantum state $|\phi\rangle$ can be thought of as a rotation of the Bloch vector for $|\phi\rangle$ to the Bloch vector for $U|\phi\rangle$, eg.

Example: X



is a rotation about the x axis.

1-Gates

The $X = \begin{bmatrix} 0 & 1 \\ 1 & 0 \end{bmatrix}$ gate




$$X|0\rangle = \begin{bmatrix} 0 & 1 \\ 1 & 0 \end{bmatrix} \begin{bmatrix} 1 \\ 0 \end{bmatrix} = \begin{bmatrix} 0 \\ 1 \end{bmatrix} = |1\rangle$$

1-Gates

The Hadamard gate creates superpositions

$$H = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix}$$

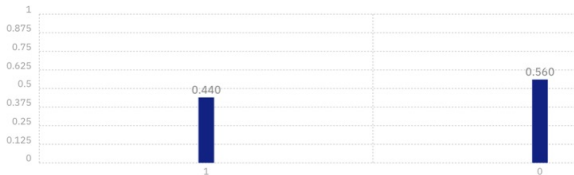

$$H|0\rangle = |+\rangle = \overbrace{\frac{1}{\sqrt{2}}(|0\rangle + |1\rangle)}^{\text{superposition}}$$

$$H|1\rangle = |-\rangle = \frac{1}{\sqrt{2}}(|0\rangle - |1\rangle)$$

1-Gates

The phase shift gate

$$R_\Phi = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 0 \\ 0 & e^{i\Phi} \end{bmatrix}$$

$$R_\phi |0\rangle = |0\rangle$$

$$R_\phi |1\rangle = e^{i\phi} |1\rangle$$

The T (or $\frac{\pi}{8}$) gate

$$T = R_{\frac{\pi}{4}} = \begin{bmatrix} 1 & 0 \\ 0 & e^{i\frac{\pi}{4}} \end{bmatrix}$$

which, up to a global phase factor $e^{i\frac{\pi}{8}}$, is equivalent to

$$\begin{bmatrix} e^{-i\frac{\pi}{8}} & 0 \\ 0 & e^{i\frac{\pi}{8}} \end{bmatrix}$$

1-Gates

Pauli gates

$$I = |0\rangle\langle 0| + |1\rangle\langle 1| = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix}$$

$$X = |1\rangle\langle 0| + |0\rangle\langle 1| = \begin{bmatrix} 0 & 1 \\ 1 & 0 \end{bmatrix}$$

$$Z = |0\rangle\langle 0| - |1\rangle\langle 1| = \begin{bmatrix} 1 & 0 \\ 0 & -1 \end{bmatrix} = R_\pi$$

$$Y = i(-|1\rangle\langle 0| + |0\rangle\langle 1|) = \begin{bmatrix} 0 & -i \\ i & 0 \end{bmatrix}$$

1-Gates

Rotation gates

Correspond to rotations about the three axes of the Bloch sphere, and are computed as Pauli gates squared.

$$R_e(\theta) \hat{=} e^{\frac{-i\theta E}{2}} = \cos\left(\frac{\theta}{2}\right)I - i\sin\frac{\theta}{2}E$$

where $e \hat{=} x, y, z$ and $E \hat{=} X, Y, Z$.

because, for any real number r and matrix R st $R^2 = I$, which is the case for X , Y , and Z ,

$$e^{irR} = \cos(r)I + i\sin(r)R$$

1-Gates

Rotation gates as matrices in the computational basis

$$R_x(\theta) = \begin{bmatrix} \cos\left(\frac{\theta}{2}\right) & -i \sin\left(\frac{\theta}{2}\right) \\ -i \sin\left(\frac{\theta}{2}\right) & \cos\left(\frac{\theta}{2}\right) \end{bmatrix}$$

$$R_y(\theta) = \begin{bmatrix} \cos\left(\frac{\theta}{2}\right) & -\sin\left(\frac{\theta}{2}\right) \\ \sin\left(\frac{\theta}{2}\right) & \cos\left(\frac{\theta}{2}\right) \end{bmatrix}$$

$$R_z(\theta) = \begin{bmatrix} e^{-i\frac{\theta}{2}} & 0 \\ 0 & e^{i\frac{\theta}{2}} \end{bmatrix}$$

1-Gates

Compute $R_z(\theta)|\psi\rangle$ for $|\psi\rangle = \cos\left(\frac{\sigma}{2}\right)|0\rangle + e^{i\gamma}\sin\left(\frac{\sigma}{2}\right)|1\rangle$

$$\begin{aligned}\begin{bmatrix} e^{-i\frac{\theta}{2}} & 0 \\ 0 & e^{i\frac{\theta}{2}} \end{bmatrix} \begin{bmatrix} \cos\left(\frac{\sigma}{2}\right) \\ e^{i\gamma}\sin\left(\frac{\sigma}{2}\right) \end{bmatrix} &= \begin{bmatrix} e^{-i\frac{\theta}{2}} \cos\left(\frac{\sigma}{2}\right) \\ e^{i\frac{\theta}{2}} e^{i\gamma} \sin\left(\frac{\sigma}{2}\right) \end{bmatrix} \\ &= e^{-i\frac{\theta}{2}} \begin{bmatrix} \cos\left(\frac{\sigma}{2}\right) \\ e^{i\theta} e^{i\gamma} \sin\left(\frac{\sigma}{2}\right) \end{bmatrix} \\ &= e^{-i\frac{\theta}{2}} \left(\cos\left(\frac{\sigma}{2}\right)|0\rangle + e^{i(\gamma+\theta)} \sin\left(\frac{\sigma}{2}\right)|1\rangle \right)\end{aligned}$$

As global phase is insignificant, the angle mapping $\gamma \mapsto \gamma + \theta$ is a rotation of θ around the z-axis of the Bloch sphere.

1-Gates

Theorem

Let U be a 1-gate, and v, w any two non-parallel axes of the Bloch sphere. Then there exist real numbers $\alpha, \beta, \gamma, \delta$ st

$$U = e^{i\alpha} R_v(\beta) R_w(\gamma) R_v(\delta)$$

which means that any 1-gate can be expressed as a sequence of **two rotations about an axis** and **one rotation about another non parallel axis**, multiplied by a suitable **phase factor**.

proof hint: Recall U is unitary and unfold the definition of rotation gate.

2-gates: *CNOT*

Acts on the standard basis for a 2-qubit system, flipping the second bit if the first bit is 1 and leaving it unchanged otherwise.

$$\begin{aligned}
 CNOT &= |0\rangle\langle 0| \otimes I + |1\rangle\langle 1| \otimes X \\
 &= |0\rangle\langle 0| \otimes (|0\rangle\langle 0| + |1\rangle\langle 1|) + |1\rangle\langle 1| \otimes (|1\rangle\langle 0| + |0\rangle\langle 1|) \\
 &= |00\rangle\langle 00| + |01\rangle\langle 01| + |11\rangle\langle 10| + |10\rangle\langle 11| \\
 &= \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & 0 \end{bmatrix}
 \end{aligned}$$

CNOT is unitary and is its own inverse, and **cannot be decomposed into a tensor product of two 1-qubit transformations**

2-gates: *CNOT*

The importance of *CNOT* is its ability to **change the entanglement** between two qubits, e.g.




$$\begin{aligned} \text{CNOT} \left(\frac{1}{\sqrt{2}}(|0\rangle + |1\rangle) \otimes |0\rangle \right) &= \text{CNOT} \left(\frac{1}{\sqrt{2}}(|00\rangle + |10\rangle) \right) \\ &= \frac{1}{\sqrt{2}}(|00\rangle + |11\rangle) \end{aligned}$$

Being its own inverse, also takes an entangled state to an unentangled one.

Note that **entanglement** is not a local property in the sense that transformations that act separately on two or more subsystems cannot affect the entanglement between those subsystems:

$$(U \otimes V)|\nu\rangle \text{ is entangled iff } |\nu\rangle \text{ is}$$

2-gates: *CNOT*

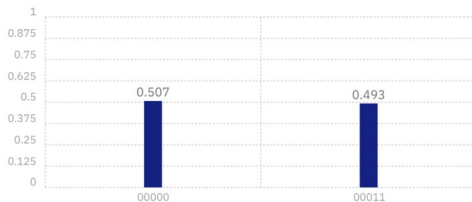


2-gates: *CNOT*

The notions of control/target bit in *CNOT* are **arbitrary**: they depend on what basis is considered. The standard behaviour is obtained in the computational basis. However, roles are interchanged in the Hadamard basis in which the effect of *CNOT* is

$$|++\rangle \mapsto |++\rangle \quad |+-\rangle \mapsto |--\rangle \quad |-+\rangle \mapsto |-+\rangle \quad |--\rangle \mapsto |+-\rangle$$

Exercise



The proof


$$\begin{aligned}
 LHS &= \frac{1}{2} \begin{bmatrix} H & H \\ H & -H \end{bmatrix} \overbrace{\begin{bmatrix} I & 0 \\ 0 & X \end{bmatrix}}^{CNOT} \begin{bmatrix} H & H \\ H & -H \end{bmatrix} \\
 &= \frac{1}{2} \begin{bmatrix} H & HX \\ H & -HX \end{bmatrix} \begin{bmatrix} H & H \\ H & -H \end{bmatrix} \\
 &= \frac{1}{2} \begin{bmatrix} I + HXH & I - HXH \\ I - HXH & I + HXH \end{bmatrix} = \frac{1}{2} \begin{bmatrix} I + Z & I - Z \\ I - Z & I + Z \end{bmatrix} \\
 &= \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & 0 \\ 0 & 1 & 0 & 0 \end{bmatrix} \\
 &= I \otimes |0\rangle\langle 0| + X \otimes |1\rangle\langle 1| = RHS
 \end{aligned}$$

noting that

$$H \otimes H = (I \otimes H)(H \otimes I) = \frac{1}{\sqrt{2}} \begin{bmatrix} H & 0 \\ 0 & H \end{bmatrix} \begin{bmatrix} I & I \\ I & -I \end{bmatrix} = \frac{1}{\sqrt{2}} \begin{bmatrix} H & H \\ H & -H \end{bmatrix}$$

Exercise

Discuss



Controlled Q-gates



$$C_Q|0\rangle|\varphi\rangle = |0\rangle|\varphi\rangle$$

$$C_Q|1\rangle|\varphi\rangle = |1\rangle Q|\varphi\rangle$$

$$C_Q = |0\rangle\langle 0| \otimes I + |1\rangle\langle 1| \otimes Q$$

corresponding to the following matrix in the standard basis:

$$C_Q = \begin{bmatrix} 1 & 0 \\ 0 & Q \end{bmatrix}$$

CCNOT or Toffoli gate

A 3-bit gate corresponding to **controlled *CNOT***. If the first two bits are in the state $|1\rangle$ applies X the third bit, else it does nothing:

$$|q_1 q_2 q_3\rangle \mapsto |q_1 q_2, q_3 \oplus (q_1 \wedge q_2)\rangle$$

In matrix form,

$$\begin{bmatrix} 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 \end{bmatrix}$$

Is there a universal set of quantum gates?

Definitions

- $$Er(U, V) = \max_{|\phi\rangle} \|(U - V)|\phi\rangle\|$$

- ◀ ◻ ▶ ◀ ◻ ▶ ◀ ≡ ▶ ◀ ≡ ▶ ≡

Universal set of gates?

Some examples

- The set $\{H, T\}$ is universal for 1-gates.
- The set $\{H, T, CNOT\}$ is a universal set of gates.

How efficient is an approximation?

To approximate an unitary transformation encoding some specific computation, one would expect to use a number of gates from the universal set which is **polynomial** in the number of qubits and the inverse of the quality factor ϵ .

Main result: theorem of **Solovay-Kitaev**

Teleportation

Aim: to transmit, using **two classical bits**, the state of **a single qubit**.


Surprisingly,

- shows that two classical bits suffice to communicate a qubit state, which has an **infinite number of configurations**
- provides a mechanism for the transmission of an unknown quantum state, **in spite of the no-cloning theorem**

Note that the **original state cannot be preserved** (precisely because of the no-cloning result), which motivates the name of the protocol ...

Teleportation

Implementation:

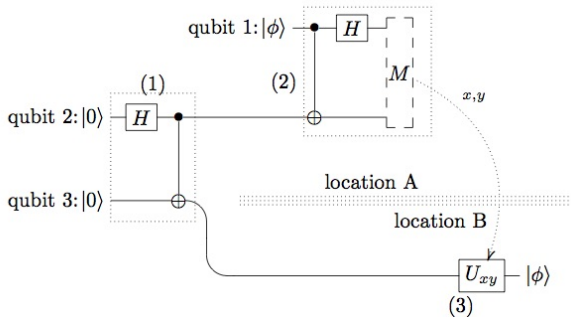

The EPR pair

is the real **resource**

named after Einstein, Podolsky, and Rosen, from the *hidden-variable* controversy

Teleportation

Alice

... has a qubit whose state $|\phi\rangle = \alpha|0\rangle + \beta|1\rangle$ she does not know, but wants to send to Bob through classical channels.

The starting point is the 3-qubit state **after** stage (1) whose first 2 qubits are controlled by Alice and the last by Bob:

$$\begin{aligned}
 |\phi\rangle \otimes |r\rangle &= \frac{1}{\sqrt{2}}(\alpha|0\rangle \otimes \overbrace{(|00\rangle + |11\rangle)}^{\text{entangled}} + \beta|1\rangle \otimes \overbrace{(|00\rangle + |11\rangle)}^{\text{entangled}}) \\
 &= \frac{1}{\sqrt{2}}(\alpha|000\rangle + \alpha|011\rangle + \beta|100\rangle + \beta|111\rangle)
 \end{aligned}$$

Teleportation

Alice

... then she applies $CNOT \otimes I$ and $H \otimes I \otimes I$ to obtain

$$\begin{aligned}
 & (H \otimes I \otimes I)(CNOT \otimes I)(|\phi\rangle \otimes |r\rangle) \\
 &= (H \otimes I \otimes I) \frac{1}{\sqrt{2}} (\alpha|000\rangle + \alpha|011\rangle + \beta|110\rangle + \beta|101\rangle) \\
 &= \frac{1}{2} (\alpha(|000\rangle + |011\rangle + |100\rangle + |111\rangle) + \beta(|010\rangle + |001\rangle - |110\rangle - |101\rangle)) \\
 &= \frac{1}{2} (|00\rangle \otimes (\alpha|0\rangle + \beta|1\rangle) + |01\rangle \otimes (\alpha|1\rangle + \beta|0\rangle) + \\
 &\quad + |10\rangle \otimes (\alpha|0\rangle - \beta|1\rangle) + |11\rangle \otimes (\alpha|1\rangle - \beta|0\rangle))
 \end{aligned}$$

Teleportation

Alice

Alice **measures** the first two qubits and obtains one of the four standard basis states, $|00\rangle$, $|01\rangle$, $|10\rangle$, $|11\rangle$, with equal probability.

Depending on the result of her measurement, the state of Bob's qubit is **projected** to

$$\alpha|0\rangle + \beta|1\rangle, \alpha|1\rangle + \beta|0\rangle, \alpha|0\rangle - \beta|1\rangle, \alpha|1\rangle - \beta|0\rangle$$

Then, Alice **sends** the result of her measurement as two classical bits to Bob.

After these transformations, **crucial information** about the original state $|\phi\rangle$ is contained in Bob's qubit, Alice's being **destroyed** ...

Teleportation

Bob

When Bob receives the two bits from Alice, he knows how the state of his half of the entangled pair compares to the original state of Alice's qubit.

Bob can **reconstruct** the original state of Alice's qubit, $|\phi\rangle$, by applying the appropriate decoding transformation to his qubit, originally part of the entangled pair.

Bits received	Bob's state	Transformation to decode
00	$\alpha 0\rangle + \beta 1\rangle$	<i>I</i>
01	$\alpha 1\rangle + \beta 0\rangle$	<i>X</i>
10	$\alpha 0\rangle - \beta 1\rangle$	<i>Z</i>
11	$\alpha 1\rangle - \beta 1\rangle$	<i>Y</i>

After **decoding**, Bob's qubit will be in the state $|\phi\rangle$

Dense coding

Alice

wishes to transmit the state of two classical bits **encoding** one of the numbers 0 through 3. Depending on this number, Alice performs one of the Pauli transformations on her qubit of the entangled pair $|r\rangle$, and then sends her qubit to Bob.

	Transformation	New state
0	$(I \times I) r\rangle$	$\frac{1}{\sqrt{2}}(00\rangle + 11\rangle)$
1	$(X \times I) r\rangle$	$\frac{1}{\sqrt{2}}(10\rangle + 01\rangle)$
2	$(Z \times I) r\rangle$	$\frac{1}{\sqrt{2}}(00\rangle - 11\rangle)$
3	$(Y \times I) r\rangle$	$\frac{1}{\sqrt{2}}(- 10\rangle + 01\rangle)$

Dense coding

Bob

decodes the information applying a *CNOT* gate to the two qubits of the entangled pair and then *H* to the first qubit:

$$CNOT \longrightarrow \begin{bmatrix} \frac{1}{\sqrt{2}}(|00\rangle + |10\rangle) \\ \frac{1}{\sqrt{2}}(|11\rangle + |01\rangle) \\ \frac{1}{\sqrt{2}}(|00\rangle - |10\rangle) \\ \frac{1}{\sqrt{2}}(-|11\rangle + |01\rangle) \end{bmatrix} = \begin{bmatrix} \frac{1}{\sqrt{2}}(|0\rangle + |1\rangle) \otimes |0\rangle \\ \frac{1}{\sqrt{2}}(|1\rangle + |0\rangle) \otimes |1\rangle \\ \frac{1}{\sqrt{2}}(|0\rangle - |1\rangle) \otimes |0\rangle \\ \frac{1}{\sqrt{2}}(-|1\rangle + |0\rangle) \otimes |1\rangle \end{bmatrix}$$
$$H \otimes I \longrightarrow \begin{bmatrix} |00\rangle \\ |01\rangle \\ |10\rangle \\ |11\rangle \end{bmatrix}$$

Bob then measures the two qubits in the standard basis to obtain the 2-bit binary encoding of the number Alice wished to send