


`/Users/archanar/Kinematic
_factor/adat_devel_install
/include/xml_array.h`

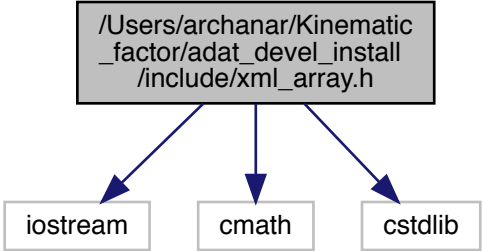

```
graph TD; A["/Users/archanar/Kinematic  
_factor/adat_devel_install  
/include/xml_array.h"] --> B[iostream]; A --> C[cmath]; A --> D[cstdlib];
```

The diagram illustrates the dependencies of a header file. A central box at the top contains the file path `/Users/archanar/Kinematic_factor/adat_devel_install/include/xml_array.h`. Three blue arrows point downwards from this box to three separate boxes below it. The left box contains `iostream`, the middle box contains `cmath`, and the right box contains `cstdlib`.

`iostream`

`cmath`

`cstdlib`