


/Users/archanar/Kinematic
_factor/adat_devel/other
_libs/filedb/filehash/replaceStrings.c

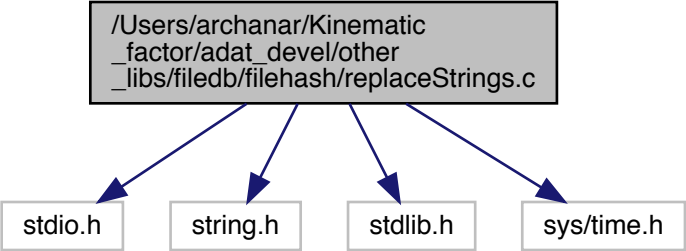

```
graph TD; A["/Users/archanar/Kinematic  
_factor/adat_devel/other  
_libs/filedb/filehash/replaceStrings.c"] --> B["stdio.h"]; A --> C["string.h"]; A --> D["stdlib.h"]; A --> E["sys/time.h"];
```

The diagram illustrates the dependencies of a C source file. A central box at the top contains the file path: /Users/archanar/Kinematic_factor/adat_devel/other_libs/filedb/filehash/replaceStrings.c. Four blue arrows point downwards from this box to four separate boxes below it, each representing a header file dependency: stdio.h, string.h, stdlib.h, and sys/time.h.

stdio.h

string.h

stdlib.h

sys/time.h