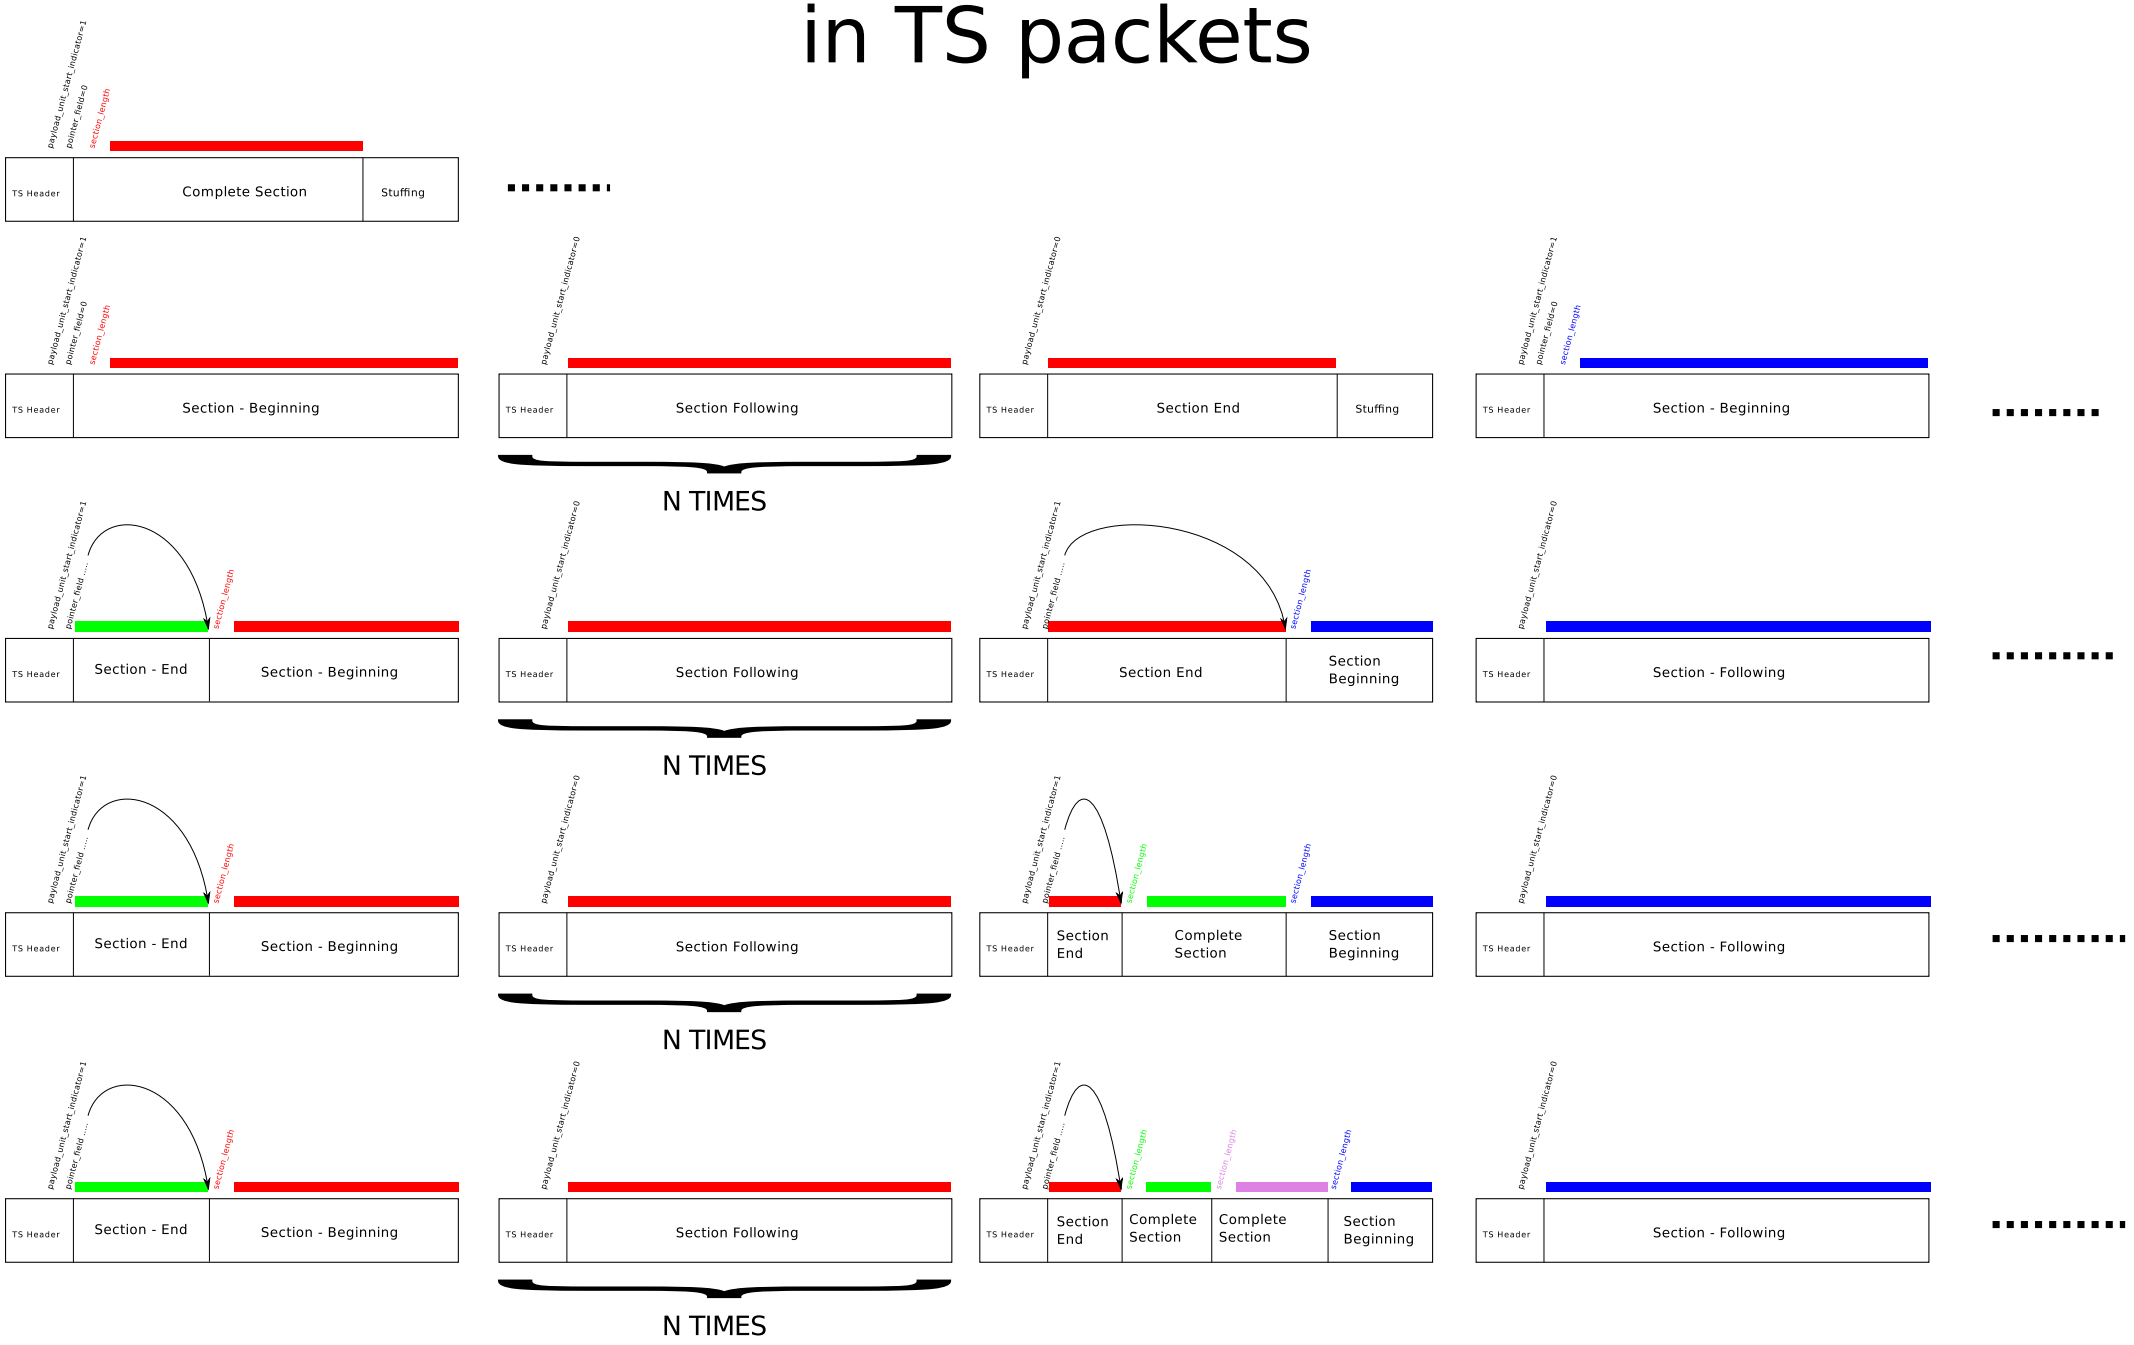Different cases for reparting sections in TS packets