

Short Analysis Pipeline

BIOLM0051

Archie Benn

Scenario

A suitcase containing several packages of unidentified frozen meat has been intercepted at Heathrow Airport by UK Border Force officers during routine inspections. The shipment had no import documentation, raising concerns that the meat may originate from protected or endangered species.

Given the serious implications for public health, food safety, and wildlife conservation, the case has been referred to the Animal and Plant Health Agency (APHA). As a bioinformatician assisting with the inquiry, you have been tasked with determining the species of origin for each meat sample. DNA barcoding has already been performed in the laboratory, and you have now received the resulting FASTAQ sequence files for analysis.

Abstract

Introduction

Methods

While the FASTQ files provided in this report are small and the use of HPC resources in this case is not necessary, this workflow is designed to scale easily to similar analyses with much larger datasets. All steps here are able to run on an HPC cluster without modification, demonstrating reproducibility, automation, and capacity for high-throughput analyses.

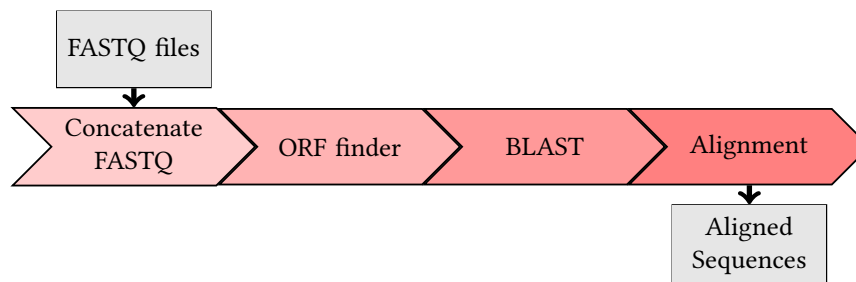


Figure 1: Workflow of Snakemake analysis pipeline.

Some python code:

```
from Bio import SeqIO
for record in SeqIO.parse("sequence.fasta", "fasta"):
    print(record.id, record.seq.translate())
```

Some Bash script:

```
#!/bin/bash
#SBATCH --job-name=blast_job
#SBATCH --partition=teach_cpu
#SBATCH --time=01:00:00
#SBATCH --mem=2000M

blastn -db nt -query sequence.fa -out results.out -remote
```

Results

In this study, we analysed the gene expression levels across multiple samples using RNA-seq data. The expression values x_i for gene i were normalised using the log-transformation:

$$y_i = \log_2(x_i + 1)$$

to stabilise variance. Data processing was performed using Python scripts:

```
import pandas as pd
data = pd.read_csv("expression.csv")
normalized = data.apply(lambda x: np.log2(x+1))
```

Alignment results using Clustal Omega on some test data:

Discussion

Yadadadada [1] and then also [2] and maybe even from this guy [3, 2]

References

- [1] WJ Kent. Blat—the blast-like alignment tool. *Genome research*, 12(4):656–664, 2002.
- [2] MJ Wolin, TL Miller, and CS Stewart. Microbe-microbe interactions. In *The rumen microbial ecosystem*, pages 467–491. Springer, 1997.
- [3] B Baker, P Zambryski, B Staskawicz, and SP Dinesh-Kumar. Signaling in plant-microbe interactions. *Science*, 276(5313):726–733, 1997.

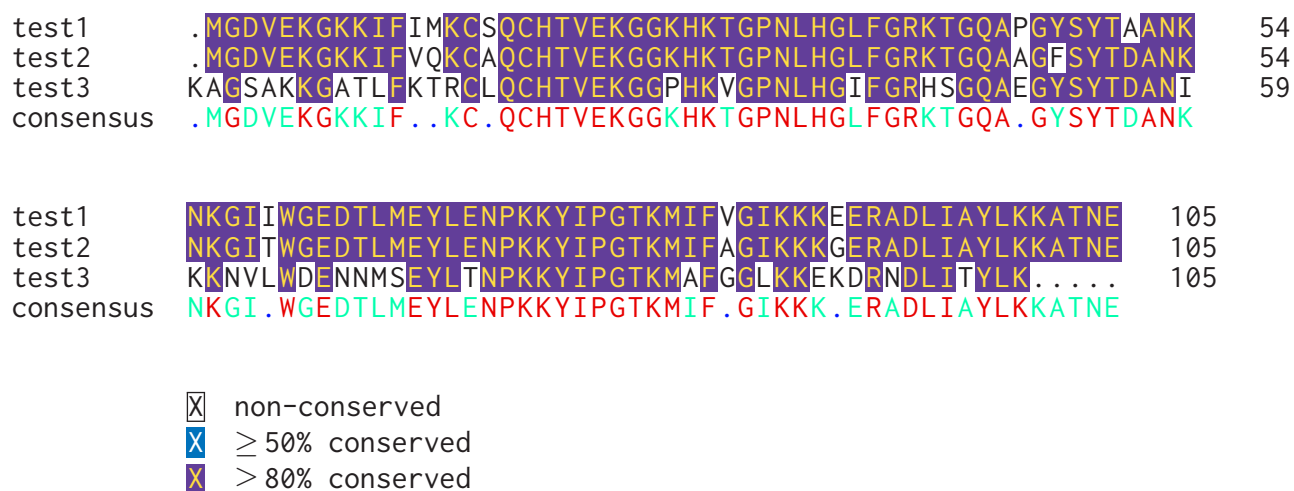


Figure 2: Alignment using Clustal Omega and Identity mode in texshade

Acknowledgments

This work was carried out using the computational facilities of the Advanced Computing Research Centre, University of Bristol - <http://www.bristol.ac.uk/acrc/>

Supplementary Data

Supplementary data can be found within the GitHub repository for this project: https://github.com/archiebenn/BIOLM0051_analysis.git