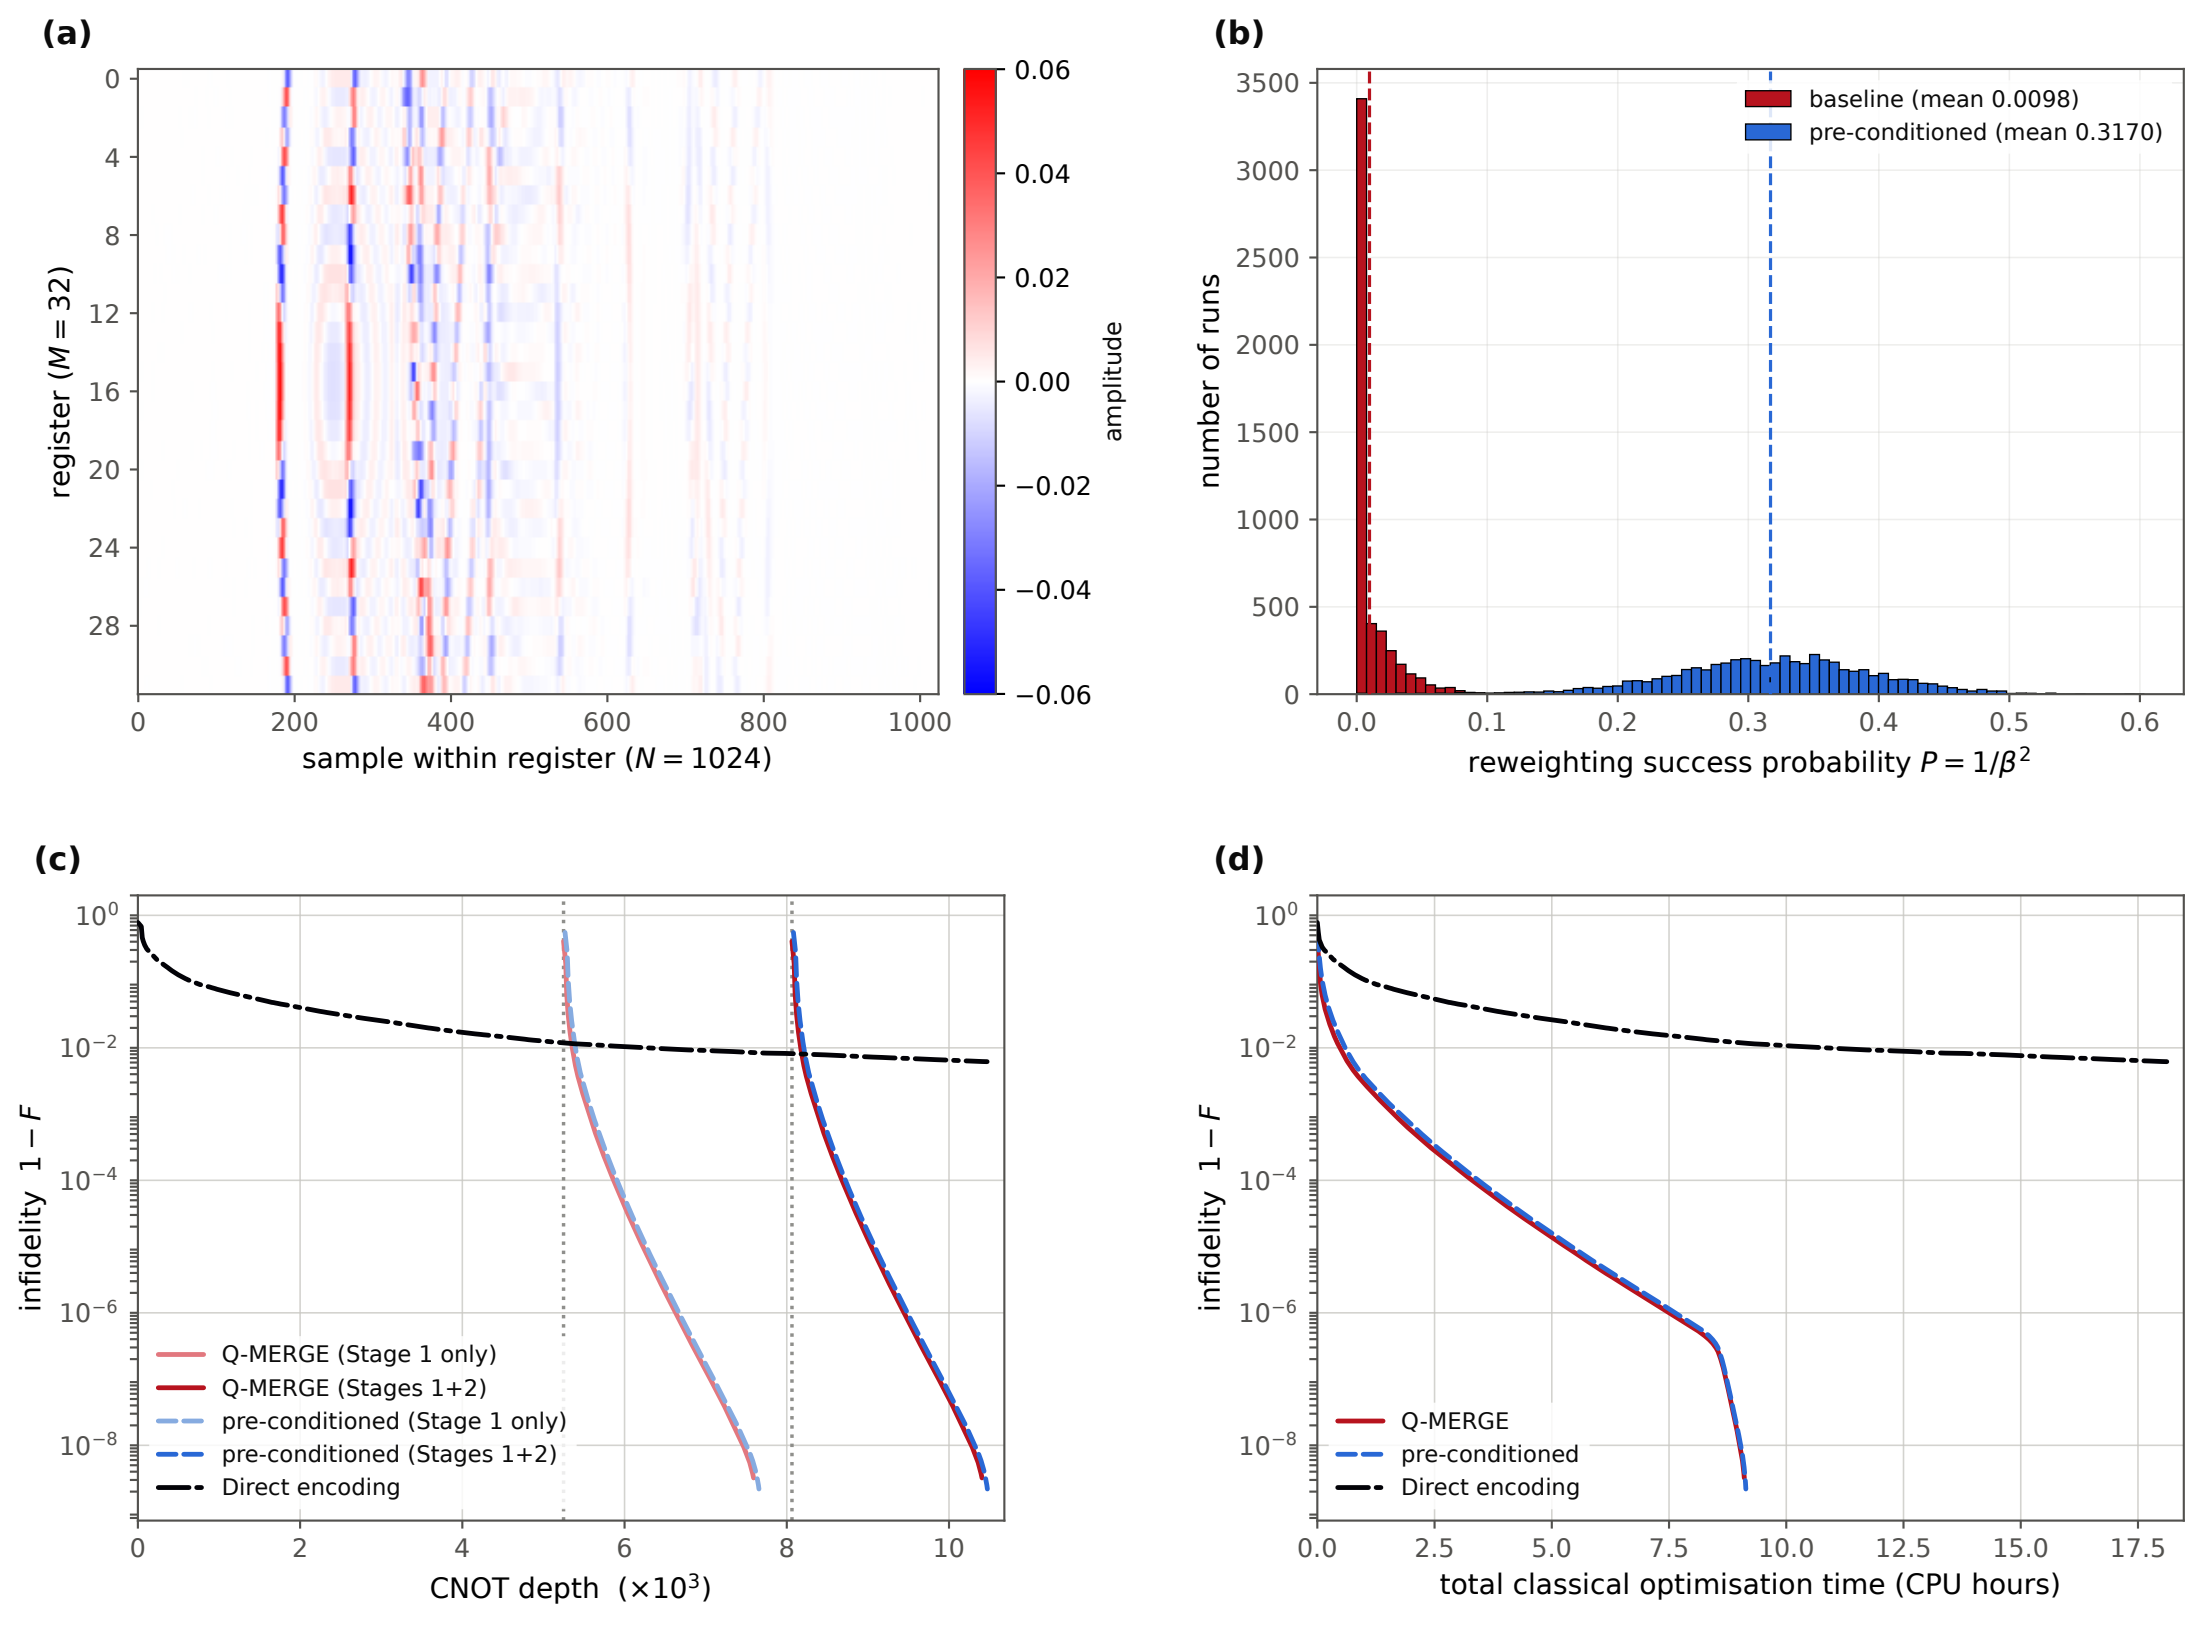
(a)
register ($M = 32$)
sample within register ($N = 1024$)
amplitude
(b)
number of runs
reweighting success probability $P = 1/\beta^2$
baseline (mean 0.0098)
pre-conditioned (mean 0.3170)
(c)
infidelity $1 - F$
CNOT depth ($\times 10^3$)
Q-MERGE (Stage 1 only)
Q-MERGE (Stages 1+2)
pre-conditioned (Stage 1 only)
pre-conditioned (Stages 1+2)
Direct encoding
(d)
infidelity $1 - F$
total classical optimisation time (CPU hours)
Q-MERGE
pre-conditioned
Direct encoding