Forward: source → output

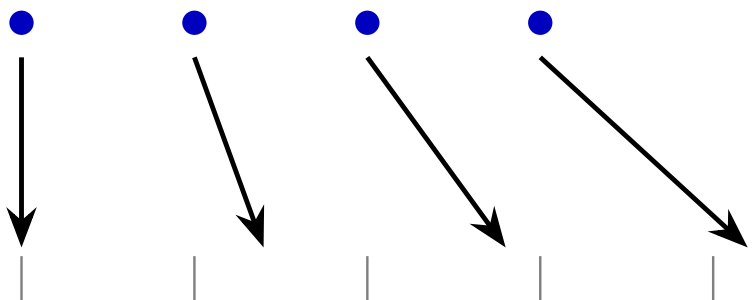

Rounded placement can skip output pixels.

Inverse: output → source

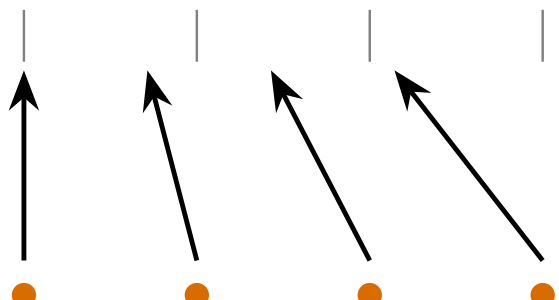

Every output pixel asks for a sample.