

Face Recognition Using Singular Value Decomposition of Facial Colour Image Database

Satonkar Suhas S.¹, Kurhe Ajay B.², Dr. Khanale Prakash B.³

¹Arts, Commerce and Science College, Gangakhed, District Parbhani, Maharashtra State, India

²Shri Guru Buddhiswami College, Purna, Maharashtra State, India

³Dnyanopasak College, Parbhani,, Maharashtra State, India

Abstract: Face recognition system should be able to automatically detect a face in images. This involves extraction of its features and then recognizes it, regardless of lighting, ageing, occlusion, expression, illumination and pose. The Singular Value Decomposition and Principal Component Analysis are very useful techniques in data analysis and visualization. Singular Value Decomposition approach used in image compression and face recognition. In this paper we have attempted a comparative study of Singular Value Decomposition. The first experiment is used standard face95 and face96 Database. The performance of SVD is 100%. The second experiment is used standard grimaces database. Two different classes are tested using SVD and its performance is 100%. The experiment is also tested for locally created poor image quality database and pose variation database and its recognition performance is 100%.

Keywords: Face Recognition, Singular Value Decomposition, Pattern Recognition, Image Processing, Colour Image, Biometric

1. Introduction

Automatic recognition of faces is considered as one of the fundamental problems in computer vision and pattern recognition. Face Recognition is widely used in biometric systems. Face Recognition by human being is very easy but it is very difficult to computer. The difficulties in face recognition are different poses, expressions, illuminations, orientations and presence of glasses. Face recognition is also useful in human computer interaction, virtual reality, database retrieval, multimedia, computer entertainment, information security e.g. operating system, medical records, online banking., biometric e.g. personal identification - passports, driver licenses , automated identity verification – border controls , law enforcement e.g. video surveillances , investigation , personal security – driver monitoring system, home video surveillance system. Great progress has been made in the area of machine recognition and many methods have been implemented [1-4]. This paper [5], provides an up-to-date critical survey of still- and video-based face recognition research. In this paper [6], focuses on the algebraic features are stable and valid features in object recognition such as face recognition. He proposed singular value decomposition (SVD) based method which uses the singular values as the feature extractor and had obtained an acceptable recognition rate. This paper [7], presents an algorithm for face recognition by performing singular valued decomposition on the extracted feature of images and then training were done using back propagation neural network where the ORL database of faces were used. In this paper [8], we proposed a novel method for face recognition. This method combines the advantages of the recent LDA enhancements namely relevance weighted LDA and singular value decomposition and also reduces dimensions of input data matrix using 2DLDA concept. In this paper [9], focuses on the principal component analysis (PCA) is implemented with Singular value decomposition for feature extraction to

determine principal emotions. In this paper [10], recognition is performed on a uniform eigen-space of Singular Value Decomposition of the enhanced image set. In this paper [11], we first study the role of SVD and FFT in both filed. Then the decomposition information from SVD and FFT are compared. In this paper [12], we studied singular value decomposition based JPEG image compression technique.

2. Singular Value Decomposition

The Singular value decomposition is an outcome of linear algebra. It plays an interesting, fundamental role in many different applications that is, face recognition, image compression, watermarking, object detection, scientific computing, signal processing, texture classification etc. The special feature of SVD is that it can be performed on any real matrix. The singular value decomposition of a rectangular matrix A is a decomposition of the form

$$A = USV^T \quad (1)$$

Where A is an m x n matrix, U = m x m and V = n x n. U and V are orthogonal Matrices. **A square matrix A with real entries and satisfying the condition $A^{-1} = A^t$ is called an orthogonal matrix.** S is an m x n diagonal matrix with singular values on the diagonal.

$$\begin{aligned} AA^T &= USV^T (USV^T)^T \\ &= USV^T V S U^T \\ &= US^2 U^T \\ &\text{also} \end{aligned}$$

$$\begin{aligned} A^T A &= (USV^T)^T USV^T \\ &= VSU^T USV^T \\ &= VS^2 V^T \end{aligned}$$

Thus U and V are calculated as the eigen vectors of AA^T and $A^T A$ respectively. The square root of the eigen values are the

singular values along the diagonal of the matrix S. If the matrix A is real, then the singular values are always real numbers, and U and V are also real.

2.1 Properties of SVD

1. The singular values $\sigma_1, \sigma_2, \dots, \sigma_n$ are unique, however the matrix U and V are not unique.
2. $AA^T = USV^T (USV^T)^T = USV^T VSU^T = US^2U^T$ hence V diagonalises $A^T A$. It follows that the matrix V can be computed through the eigen vector of $A^T A$
3. The matrix U can be computed through the eigen vector of AA^T
4. The rank of the matrix A is equal to the number of its non-zero singular values.

3. The steps in finding Singular Value Decomposition [13] as follows:

1. Get a dataset in S with N images.
2. Calculate the mean of S and store into imgm

$$\text{imgm} = \frac{1}{N} \sum_{i=1}^N S_i \quad (1)$$

3. Subtract imgm from the original faces S_i gives

$$A = S_i - \text{imgm} \text{ Where } i = 1, 2, 3, 4, \dots, N$$

4. Calculate the Singular Value Decomposition of A as shown in (1), obtain U, S and V. that is U is m x m right side matrix of singular value decomposition of matrix A m x n, S is an m x n diagonal matrix with singular values on the diagonal and V is n x n left side matrix of singular value decomposition of matrix A m x n.
5. Choose Singular Value range that is SV
6. Usv is m x SV matrix that are form from U.
7. Multiply A with transpose of Usv and assign to X,

$$X = Usv^T * A$$

8. Get the query image
 9. Subtract query image from imgm and assign to qimgm.
 10. Multiply qimgm with transpose of Usv and assign to
- $$x = Usv^T * \text{qimgm}$$
11. Subtract x from X
- $$(D = X - x * \text{ones}(1, N))$$
12. Multiply D with transpose of D, Select diagonal of multiplied matrix and calculate square root of diagonal.
 13. Select minimum of square root and compare with threshold value, if selected minimum value is less than threshold then query image is face otherwise query image is an unknown face image. In the above algorithm variables imgm, qimgm used to stored image mean and query image mean.

4. Image Database

The experiments were done using Singular Value Decomposition of facial color image database. The images were obtained from Libor Spacek Collection of facial images [16]. This database includes 7900 colored images of faces of

395 individuals. Each individual has 20 image samples in the database. The database consists of male and female images of various racial origins. The images are mainly of first year undergraduate students, so the majority of individuals are between 18-20 years old but some under individuals are also present. Some of the individuals have glasses and some of the male individuals have beards. The image format is 24-bit color jpeg in other words 200 x 180 array of pixels and each pixel is represented by 24 bits of RGB color values. The images were recorded with an S-VHS camcorder camera and the lighting is artificial, mixture of tungsten and fluorescent overhead.

4.1 Experiment I

Experiment were conducted standard face95 and face96 database. The face95 database contains number of individuals 72. The background consists of a red curtain. Background variation is caused by shadows as subject moves forward. Large head scale and some expression variation. The face96 database contains number of individuals 152. The background is complex (glossy poster). Large headscale and some expression variation. The position of face in image is some translation. All images have same size and the extension of these images jpeg. The 20 and 9 face images in the database were tested using singular value decomposition. The threshold values of all database is changed.

The figure 1 shows the sample images of face95 database. The figure 2 shows the graph of singular values of face95 database and figure 3 gives the query and output image. The figure 4 shows the sample images of face96 database. The figure 5 shows the graph of singular values of face96 database and figure 6 gives the query and output image. The Success rate of recognition using Singular Value Decomposition is 100%. The Table 1 shows the Singular Value Decomposition performance.

5. Result

Sample Image of face95 Database



Figure 1: Sample Images of face95 database

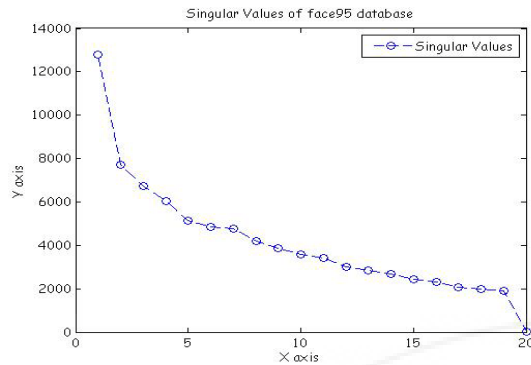


Figure 2: Singular Values of face95 database graph

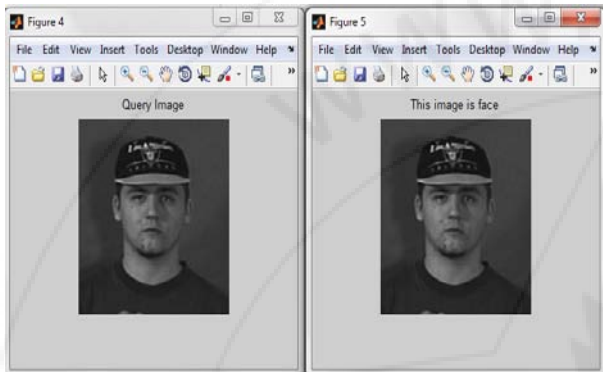


Figure 3: Query and Output Image face95 database

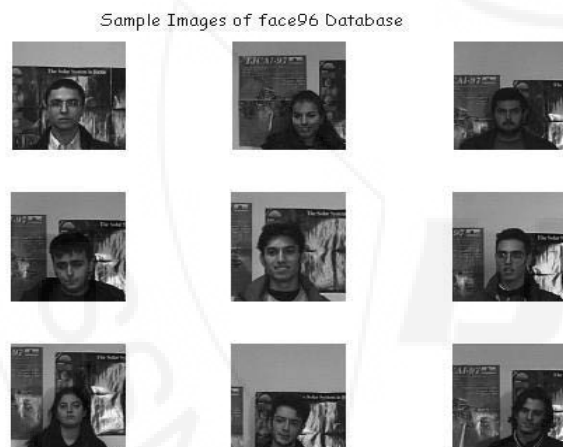


Figure 4: Sample Images of face96 database

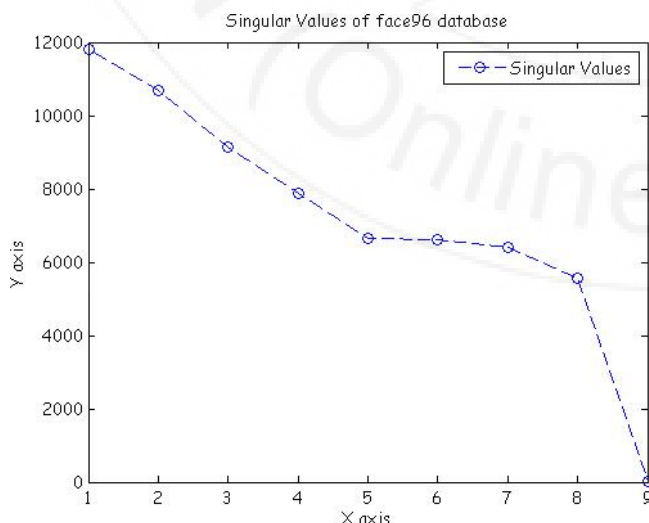


Figure 5: Singular Values of face96 database graph

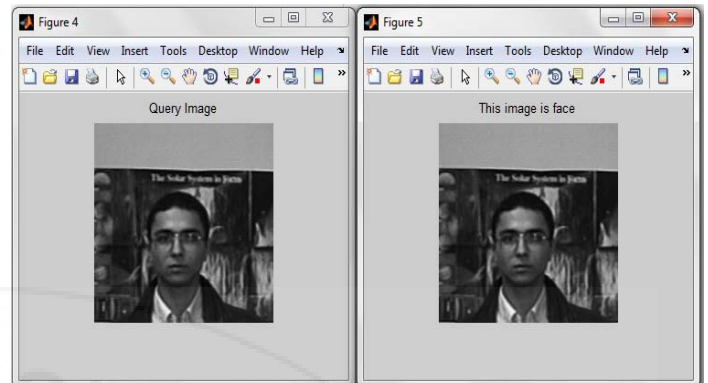


Figure 6: Query and Output Image face96 database

4.2 Experiment II

Experiment was conducted on Grimace, local and pose variation database. The Grimace database contains 18 individuals. The image resolution is 180x200 pixels. The content of images of male and female. The background of images is plain in which there are small head scale variation. The lighting variation is very little. The major expression variation was the two different classes are tested using singular value decomposition. The five images, there is no expression and same five images of some expression variation.

The local images is created by Digital Camera. The image format is color jpeg. The dimensions of these images 240 x 180 pixel. The pose variation database is created by Sony (5.1 mp) Digital Camera. The image format is color jpeg. The dimensions of these images 320 x 240 pixel. These database is available on website <http://dsmcsresearch.info>.

The 10, 10 and 5 face images in the database were tested using singular value decomposition. The threshold values of all database is changed. The figure 7 shows the sample images of two different classes for grimace database. The figure 8 shows the graph of singular values of grimace database and figure 9 gives the query and output image.

The figure 10 shows the sample images of two different classes for local database. The figure 11 shows the graph of singular values of local database and figure 12 gives the query and output image. The figure 13 shows the sample images of two different classes for pose variations database. The figure 14 shows the graph of singular values of pose variations database and figure 15 gives the query and output image. The success rate of recognition using Singular Value Decomposition is 100%. The Table 1 shows the Singular Value Decomposition performance.

6. Result

Sample Images of Grimance Database



Figure 7: Sample Images of two different classes

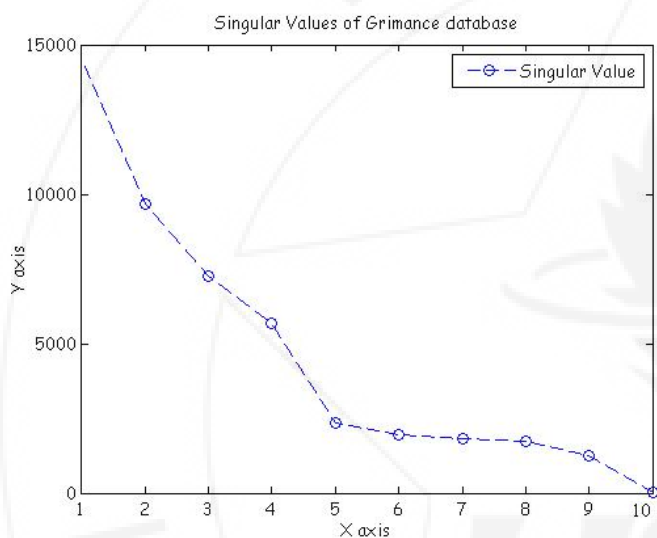


Figure 8: Singular Values of Grimance database graph

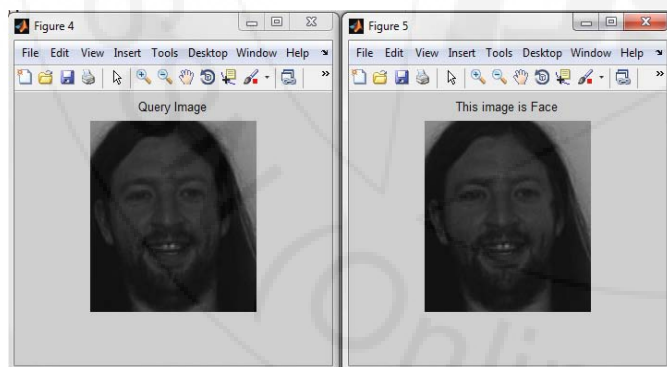


Figure 9: Query and Output Image Grimance Database

Sample Images of Local Database



Figure 10: Sample Images of local database

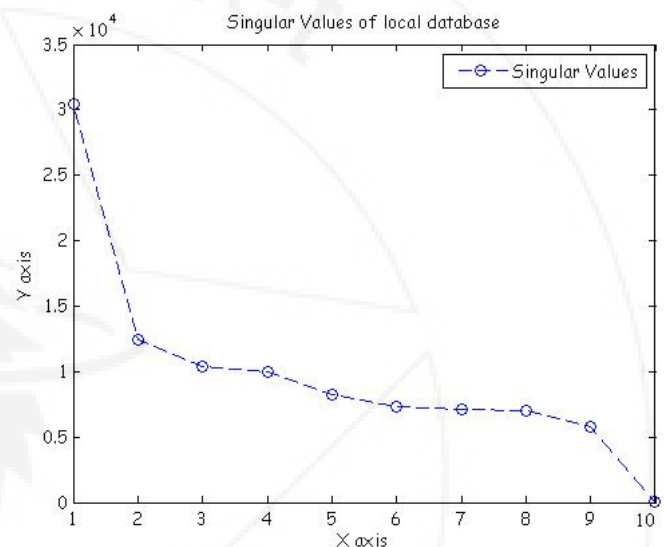


Figure 11: Singular Values of local database graph

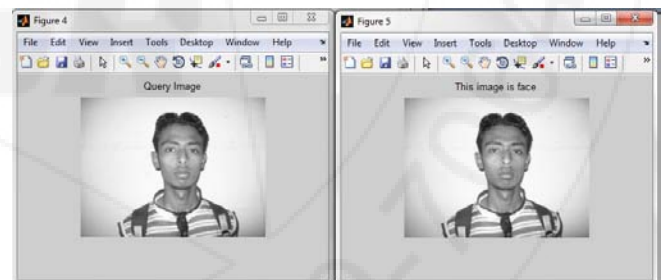


Figure 12: Query and Output Image local Database

Sample Images of Pose Variations Database



Figure 13: Sample Images of Pose Variations database

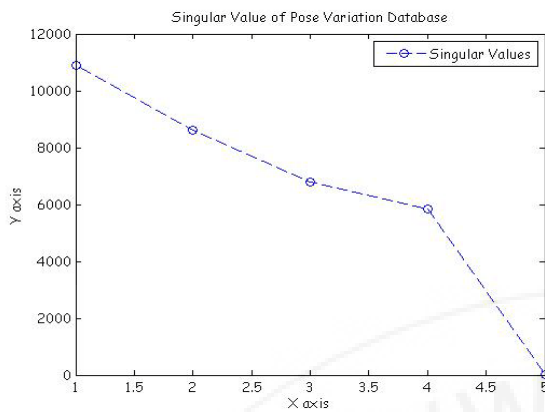


Figure 14: Singular Values of Pose Variations database graph

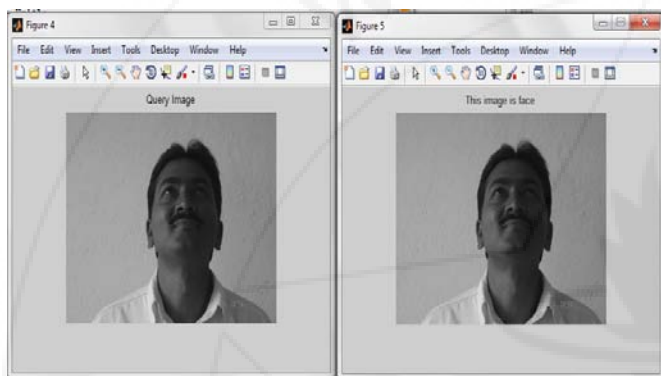


Figure 15: Query and Output Image Pose Variations Database

Table 1: Singular Value Decomposition Performance

Database	Method	Tested Image	Threshold Value	Recognition (Percentage)
Face 95	SVD	20	2.9500e+003	100
Face 96		9	6.3787e+003	100
Grimace		10	5.8029e+003	100
Local Database		10	7.5035e+003	100
Pose Variation Database		5	3.5013e+003	100

7. Conclusion

Face Recognition Using Singular Value Decomposition of Facial Colour Image Database is implemented in MATLAB. The Singular Value Decomposition is very useful techniques in data analysis and visualization. In this paper we have attempted a comparative study of Singular Value Decomposition. The first experiment is used standard face95 and face96 Database. The performance of SVD is 100%. The second experiment is used standard grimaces database. Two different classes are tested using SVD and its performance is 100%. The experiment is also tested for locally created poor image quality database and pose variation database and its recognition performance is 100%.

References

[1] Turk, M. And Pentland, A. , "Eigenfaces for Recognition", Journal of Cognitive Neuroscience, Vol. 3, 1991

[2] Roberto Bruunelli and Tomaso Poggio, "Face Recognition: Features versus Templates", IEEE Transactions on Pattern analysis and Machine intelligence Vol.15.No.10, October 1993

[3] P.N. Belhumeur, J.P. Hespanha, and D.J. Kriegman, "Eigenfaces vs. Fisherfaces: Recognition using class specific linear projection", IEEE Transactions on Pattern Analysis and Machine Intelligence, 19(7):711-720, 1997.

[4] Onsen Toygar, Adnan Acan, "Face Recognition Using PCA, LDA and ICA Approaches on Colored Images", Journal of Electrical and Electronics Engineering, Vol.3, no. 1, pp.735-743, 2003.

[5] W.Zhao, R.Chellappa, P.J..Phillips and A. Rosenfeld, "Face Recognition: A literature Survey.", ACM Comput.Surv., 35(4): 399-458, 2003.

[6] Z. Hong, "Algebraic feature extraction of image for recognition", Pattern Recognition, Vol.24, pp211-219, 1991.

[7] Thaahirah S.M.Raised, Othman O.Khalifa and Yuslina Binti Kamarudin, "Face Recognition Based on Singular value Decomposition and BackPropogation Neural Network", IEEE, 2005.

[8] Neeta Nain, Prashant Gour, Nitish Agarwal, Rakesh P Talwar, Subhash Chandra, "Face Recognition using PCA and LDA with Singular Value Decomposition (SVD) using 2DLDA", Proceedings of World Congress on Engineering 2008, Vol 1 WCE 2008, July 2-4, 2008, London, U.K.

[9] Mandeep Kaur, Rajeev Vashisht, Nirvair Neeru, "Recognition of Facial Expressions and Principal Component Analysis and Singular Value Decomposition", International Journal of Computer Applications, 0975-8887, Volume 9-No.12, November 2010.

[10] Jaizhong HE, Di Zhang, "Face Recognition Using Uniform Eigen-Space SVD on Enhanced Image for Single Training Sample", Journal of Computational Information Systems 7:5, 1655-1662, 2011.

[11] Lina Zhao, Wanbao Hu, Lihong Cui, "Face Recognition Feature Comparison Based SVD and FFT", Journal of Signal and Information Processing, 3, 259-262, 2012.

[12] Rehna, V.J., Jeyakumar.M.K., "Singular Value Decomposition Based Image for Achieving Additional Compression to JPEG Images", International Journal of Image Processing and Vision Sciences (IJIPVS), Volume-1, Issue-1, 2012.

[13] Lijie Cao, "Singular Value Decomposition Applied To Digital Image Processing", Division of Computing Studies, Arizona State University Polytechnic Campus Mesa, Arizona.

[14] Kirk Baker, "Singular Value Decomposition Tutorial", March 29, 2005.

[15] S.Jayaraman, S.Esakkirajan, T Veerakumar, "Digital Image Processing". Tata McGraw Hill, ISBN(13):978-0-07-014479-8, ISBN(10):0-07-014479-6.

[16] Libor Spacek., Description of Libor Spacek collection of Facial Images, 1996, online <http://cswww.essex.ac.uk/mv/allfaces/index.html>

Author Profile



Suhas S. Satonkar He is M.Sc.in Computer Science, currently working as Assistant Professor and Head, Department of Computer Science, Shri Sant Janabai Education Society's Arts, Commerce and Science College, Gangakhed District Parbhani, Maharashtra, India, from last 15 years. He has 7 Research papers published in Journals and 3 Research papers published in conferences. He is Ph.D. Scholar Student.



Ajay B. Kurhe He is M.Sc. in Computer Science, currently working as Assistant Professor and Head, Department of Computer Science, S.G.B.College, Purna district Parbhani, Maharashtra, India, from last 14 years. He has 7 Research papers published in Journals and 4 Research papers published in Conferences. He is Ph.D. Scholar student.



Prakash Khanale Dr. Prakash Khanale has an experience of 13+ years of research work in areas of computer applications in education, Fuzzy Logic and Statistical tools. He has Ph.D. degree in Electronics and is Gold Medalist and is author of several computer books. He holds fifty five international publications to his credit. His current areas of research are face recognition, visual perception and content based image retrieval. He has awarded "Best Teacher" now by SRTMU, Nanded, India.