



## **Access Control and Security in Kubernetes and Google Kubernetes Engine (GKE)**



Welcome to the Access Control and Security in Kubernetes and Google Kubernetes Engine module. In previous modules you've learned how to run workloads in your cluster. Now you will learn how to make sure that appropriate access policies are in place, to make your cluster and applications more secure.

## Learn how to ...

Understand Kubernetes authentication and authorization.

Define Kubernetes RBAC roles and role bindings for accessing resources in namespaces.

Define Kubernetes RBAC cluster roles and cluster role bindings for accessing cluster-scoped resources.

Use Kubernetes pod security admission enforcement to only allow pods with specific security-related attributes to run.

Understand the structure of Cloud IAM.

Define IAM roles and policies for Google Kubernetes Engine cluster administration.



In this module, you'll learn how to:

- Understand Kubernetes authentication and authorization, in order to control who is able to do which things inside your GKE clusters.
- You'll learn about role-based access control, which we like to call RBAC . Kubernetes RBAC lets you define roles and role bindings, so you can manage access to resources in Kubernetes namespaces.
- You'll also learn to define Kubernetes RBAC cluster roles and cluster role bindings, to manage resources that are within the scope of a cluster. That includes sharing roles across namespaces and granting permissions across all namespaces.
- You'll learn about defining Kubernetes pod security admission to only allow pods with specific security-related attributes to run.
- You'll also learn more about the structure of Cloud Identity and Access Management, which we call Cloud IAM, and define IAM roles and policies for Google Kubernetes Engine cluster administration.

---

## Agenda

### Authentication and Authorization

Cloud IAM

Kubernetes RBAC

Kubernetes Control Plane Security

Pod Security

Lab: Securing Google Kubernetes Engine with Cloud IAM and Pod Security Admission

Lab: Implementing Role-Based Access Control with Google Kubernetes Engine

Summary



Let's start with authentication and authorization. In this first lesson, you will learn about how user and service accounts work in Kubernetes. You'll then learn about how to create and manage those accounts in GKE.

## In Kubernetes, there are two main types of users

Normal users



Managed by Cloud  
IAM

Service accounts



Managed by  
Kubernetes



In Kubernetes, there are two main types of users, Normal users and Kubernetes service accounts. Both Google Cloud and Kubernetes have an entity called a “service account,” but they’re not the same. Keep in mind that your day-to-day focus will be on normal users. Normal users are managed outside of Kubernetes. That’s true everywhere you can run Kubernetes.

When you use Kubernetes clusters in GKE, you’ll define most user accounts through Google’s identity service. Informally, that encompasses the consumer Google accounts you’re familiar with, and accounts in Google Workspace domains. If you don’t have a Google Workspace domain, you should get a Google Cloud Identity domain for your business, which is at no additional charge in most circumstances. A Cloud Identity domain gives you much more organizational control than using consumer Google accounts for all your employees would. All these kinds of accounts together make up Google Cloud Identity. We use the word “member” to refer to each identity defined by the service. It’s a flexible service: it lets you define user identities directly, or mirror them from your existing directory service such as Active Directory. It also lets you group users, which turns out to be the key part of an important best practice discussed later in the module.


Google Cloud’s Cloud Identity and Access Management service, “Cloud IAM,” is where you bind permissions in your Google Cloud project to members. And then you

need to tell Kubernetes about the members you want to give permissions inside your clusters to. Any Google account, Google group, Google Workspace domain account, or Cloud Identity domain account can be configured as a normal user in GKE Kubernetes clusters.

In contrast to normal users, Kubernetes service accounts are accounts managed by Kubernetes. Kubernetes service accounts provide an identity for processes in a Pod and are used to interact with the Kubernetes cluster. These are different from Google Cloud Service Accounts. Those are managed by Google Cloud Identity, not Kubernetes, and you use them when you want Google Cloud resources to have an identity that's tied to an application or a virtual machine, not a human being. You can even configure Google Cloud service accounts as a normal Kubernetes user, if that proves necessary. In Kubernetes, every namespace has a default Kubernetes service account. When processes in containers within a Pod communicate with the kube-APIserver, they identify themselves as a Kubernetes service account.

If you are security-sensitive, you might be worried about these Kubernetes service accounts. What if an attacker compromised a container or Pod? Could they grab service account credentials and then use them in further attacks? Yes, they could. In Kubernetes 1.8 and higher, service accounts have no default permissions or access tokens. And GKE always lets you choose what version of Kubernetes runs in your cluster. So choose version 1.8 or higher, and you don't have to worry about this potential problem.

## There are two main ways to authorize in GKE

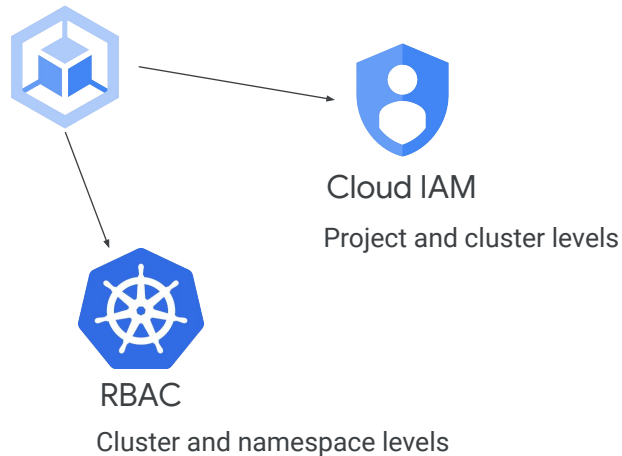


After an account is authenticated, for example a user authenticating via Cloud Identity, there are two main ways to authorize what that account can do. Cloud Identity & Access Management and Kubernetes role-based access control.

You need both levels. Cloud IAM is the access control system for managing Google Cloud resources. It lets you grant permissions to users to perform operations at the project and cluster levels-- in other words, outside your Kubernetes clusters.

On the other hand, Kubernetes RBAC gives you access control inside your Kubernetes clusters, at the cluster level and the namespace level. It lets you create finely tuned roles with granular access to resources within the cluster.

So you'll use Cloud IAM to define who can view or change the configurations of your GKE clusters. And you'll use Kubernetes RBAC to define who can view or change Kubernetes objects inside those clusters. With both these methods, it's a best practice to exercise the principle of least privilege. Each person who has access to your cluster should have the minimal set of permissions to do their job.

## API server authenticates in different ways

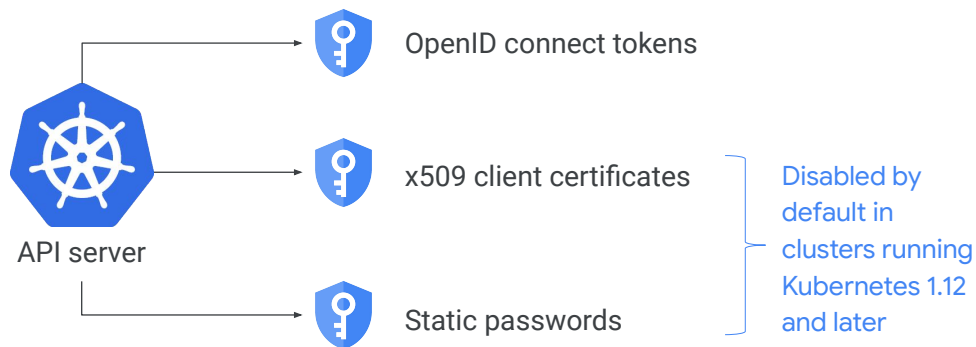

In Kubernetes, the API server listens for remote requests using HTTPS on port 443. Each request must be authenticated before it's acted upon. The API server can perform this authentication using various methods. GKE supports, as authentication methods: OpenID connect tokens, x509 client certificates and basic authentication using static passwords.

OpenID Connect is a simple identity layer on top of the OAuth 2.0 protocol. It lets clients verify the identity of an end-user by querying an authorization server. The clients can also get basic profile information about the end-user in an interoperable way.

x509 client certificates and static passwords present a wider surface of attack than OpenID. In Kubernetes versions earlier than 1.12, both of these access credentials are generated for you when you create a new cluster. Unless your application is using these methods of authentication, you should disable them and use the OpenID authentication method instead.

In GKE, both X509 and static password authentication are disabled by default in clusters running Kubernetes 1.12 and later. That improves the default security configuration.

---

## Agenda

Authentication and Authorization

Cloud IAM

Kubernetes RBAC

Kubernetes Control Plane Security

Pod Security

Lab: Securing Google Kubernetes Engine with Cloud IAM and Pod Security Admission

Lab: Implementing Role-Based Access Control with Google Kubernetes Engine


Summary



Now let's take a look at Cloud IAM access control. In this lesson, you will learn about how Cloud IAM access control is configured. You'll also learn how you use Cloud IAM policies and roles to control who can interact with and manage your GKE clusters.



## Three elements are defined in Cloud IAM access control

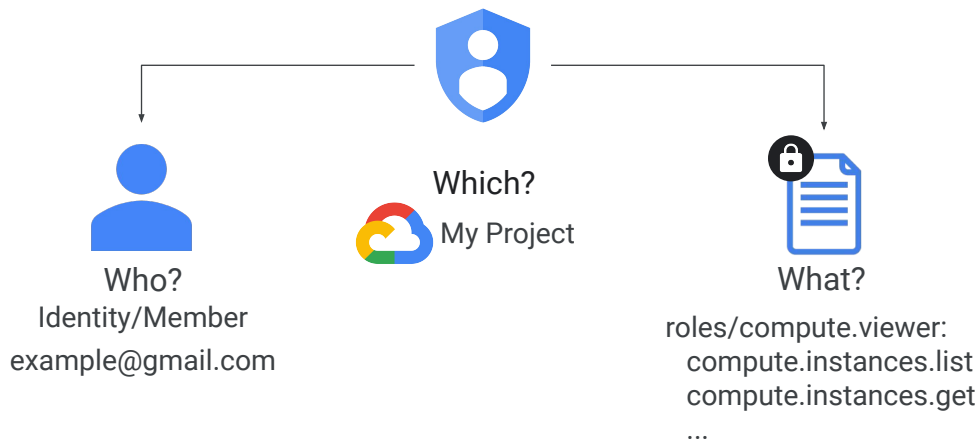

“Who” refers to the identity of the person making the request. “What” refers to the set of permissions that are granted. And “which” refers to which resources this policy applies to.

In Cloud IAM, you grant access to members. Cloud IAM will authenticate users against Cloud Identity. Don’t forget: Cloud Identity is the service that governs Google accounts, Google Workspace domain accounts and Google Cloud Service Accounts. And don’t forget that you can gather these identities into groups, and groups themselves can have permissions. What if your company uses Microsoft® Active Directory®, or has an LDAP server? You can configure Google Cloud Directory Sync to synchronize data from kind of directory service into your Google domain. It’s a one-way sync operation. That means that your Google users, groups, and shared contacts are synchronized to match the information in your directory service. The data in your directory service isn’t modified.


You’ll use Cloud IAM to grant permissions to members to let them perform certain operations on certain resources. Google Cloud permissions are grouped into roles that make sense. Permissions can’t be individually assigned to members. Instead, members are assigned roles. Every operation on a Google Cloud resource is carried out through calls to Google Cloud APIs. Each API call is controlled using a permission. If the member trying to do the operation doesn’t have the permission

needed by the API call, it's denied. Here's an example. There's a role called "compute viewer," which lets someone who has it fetch various kinds of information about a Compute Engine resources. This role consists of many permissions, which have names like `compute.instances.get`. These names consist of an abbreviated name for a Google Cloud service, a kind of Google Cloud resource, and a verb. The `compute.instances.get` permission, which we will see again later in this module, controls whether someone can view the metadata of a Compute engine virtual machine.

A Google Cloud administrator could give this role to the member called `example@gmail.com`, at the level of a Google Cloud project, which would let that member examine any Compute Engine resources in the project.

So, let's put the whole Cloud IAM story together. Whenever you make a request of Google Cloud, Cloud IAM authenticates you, validates that you have the needed permissions for what you are trying to do and on the resource you're trying to do it to.

## How a Cloud IAM policy grants roles to users

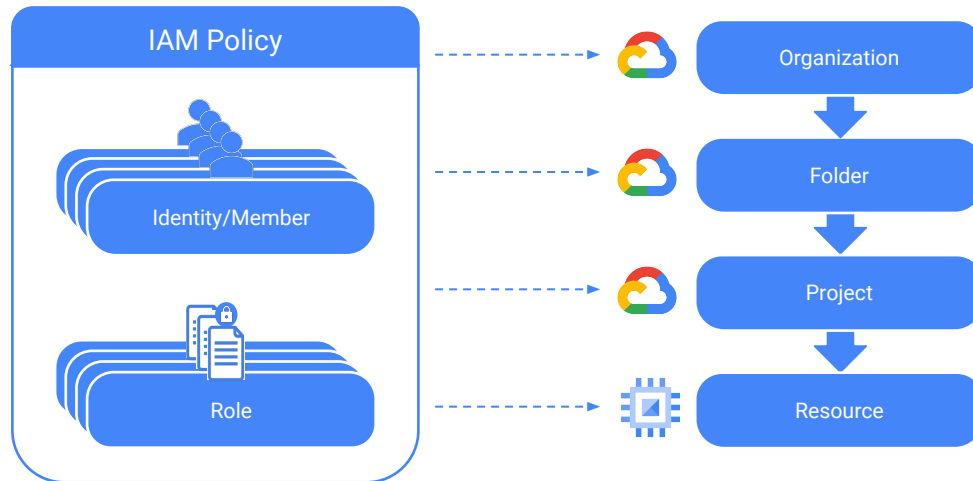


Let's look at how a Cloud IAM policy grants roles to users.

A Cloud IAM policy is a list of bindings, and in each binding a set of members is bound to one or more roles.

The IAM policy, in turn, can be attached to a specific resource, a project, a project folder, or a whole organization.


Google Cloud resources are organized hierarchically, starting with the organization. Underneath the organization, you can have multiple folders containing multiple projects, and so on. An IAM policy attached at the organization level will automatically have access to all folders, all projects, and ultimately all relevant resources. In this way, you can set up access control at any level within the organizational hierarchy and choose the most appropriate level for each IAM policy.

## How a Cloud IAM policy grants roles to users

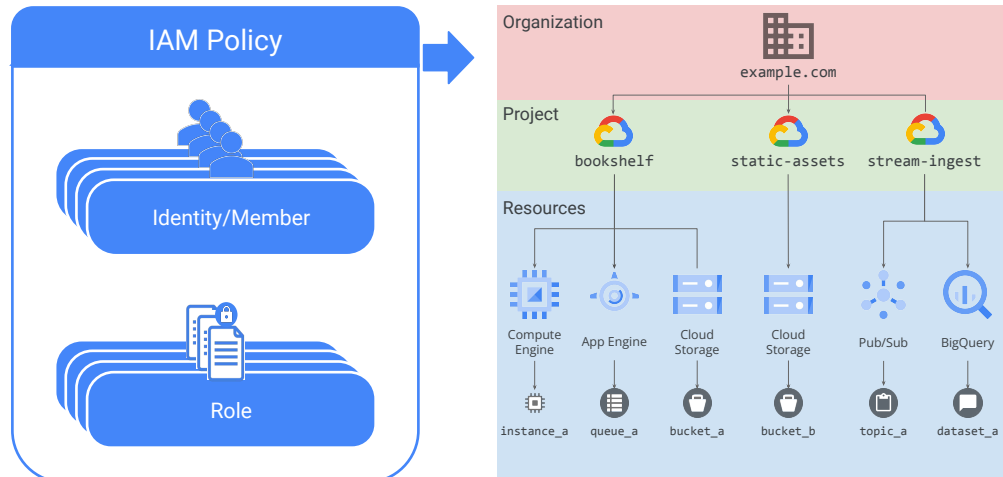


Cloud IAM policies applied at higher levels of a Google Cloud organizational hierarchy are inherited by resources lower down that hierarchy. Policies applied at the organizational level apply to every project, and to all resources in those projects. Policies applied at the project folder level apply to all projects in that folder. Policies applied at the project level only apply to the resources that belong to that project and policies that are applied to resources within a project only apply to those specific resources.

## Basic roles grant global, project-level access




Viewer role

- Read-only permissions



Editor role

- Write permissions
- All permissions of a viewer role



Owner role

- Manage roles and permissions
- Set up project billing
- All permissions of an editor role



There are three kinds of roles in Cloud IAM: Basic, Predefined, and Custom.

Basic roles are the first type of role. Basic roles existed before the introduction of Cloud IAM but can still be used with Cloud IAM. These roles can be used to grant users global, project-level access to all Google Cloud resources within a Project. There are three basic roles.

The first basic role, the viewer role, permits read-only actions, such as viewing existing resources or data across a whole project.

In addition to all viewer permissions, the editor role is allowed to modify existing resources.

The final basic role, the owner role, has all of the editor permissions and also has the right to manage roles and permissions and set up billing for a project. Any of these roles can access all resources such as App Engine, Compute Engine, and Cloud Storage.

Basic roles are very broad. I've mentioned the principle of least privilege: the idea that users should have the minimum set of permissions needed to do their jobs. If you are using basic roles, you probably aren't adhering to this principle, and you are exposing

yourself to risks of operator error, and maybe worse.

## GKE predefined Cloud IAM roles provide granular access to Kubernetes resources

| GKE Viewer   | GKE Developer  | GKE Admin   | GKE Cluster Admin   |
|--|--|---|---|
| Read-only permissions to cluster and Kubernetes resources. | Full access to Kubernetes resources within clusters. | Full access to clusters and their Kubernetes resources. | Create/delete/update/view clusters.<br>No access to Kubernetes resources. |



Predefined roles are the second type of Cloud IAM role. GKE provides several predefined Cloud IAM roles that provide granular access to Kubernetes Engine resources.

The GKE Viewer role gives read-only access, as might be needed for auditing. This commonly used role allows you to see the cluster, but role-based access control determines what you can do inside the cluster.

The GKE Developer role is suited to developers and release engineers. It grants full control to all resources within a cluster.

The GKE Admin role gives full access to clusters and the Kubernetes Engine resources inside the clusters. Example users are project owners, system administrators, and on-call engineers.

The GKE Cluster Admin role is used to create, delete, update, and view clusters, but provides no access to Kubernetes resources.

All of these roles are defined at a project level, not a cluster level.

## Use custom roles where predefined roles are insufficient



projects/project-id/roles/gkeProductionAdmin



projects/project-id/roles/gkeTestAdmin



projects/project-id/roles/gkeLogViewer



projects/project-id/roles/gkeProdClusterViewer



Finally, the third type of role. If the basic roles and the GKE predefined roles are too permissive, or the assumptions don't fit your business case, you can craft custom roles with more granular control. To build a custom role, you specify each individual permission that will make up the role.

For example, suppose you needed to create a specific user account that will be used solely to manage the software running inside a certain GKE cluster, but who should not have any access to view Google Cloud resources, not even to view them. You can create a custom IAM role that just has the permissions needed to authenticate to the cluster and nothing else. In the next section, we'll discuss how you can give permissions within Kubernetes to such a user.



---

## Agenda

Authentication and Authorization

Cloud IAM

Kubernetes RBAC

Kubernetes Control Plane Security

Pod Security

Lab: Securing Google Kubernetes Engine with Cloud IAM and Pod Security Admission


Lab: Implementing Role-Based Access Control with Google Kubernetes Engine

Summary



Next, let's look at the next level of access control. In this lesson you will learn about Kubernetes role-based access control (RBAC). RBAC is a native Kubernetes security feature that provides you with fine grained tools to manage user account permissions. In GKE environments, RBAC extends Cloud IAM security by offering control over Kubernetes resources within the cluster supplementing the control provided directly by Cloud IAM which allowed you control access at the GKE and cluster level.

## Kubernetes RBAC concepts

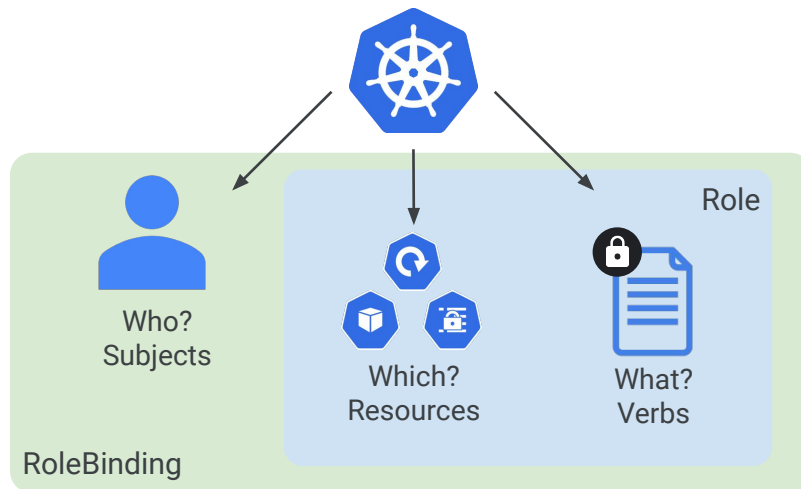

There are three main elements to Kubernetes role-based access control: subjects, resources, and verbs.

With Kubernetes RBAC you define what operations (verbs) can be executed over which objects (resources) by who (subjects).

A subject is a set of users or processes that can make requests to the Kubernetes API.


A resource is a set of Kubernetes API objects, such as Pods, Deployments, Services, or PersistentVolumes.

A verb is a set of operations that can be performed on resources, such as get, watch, create, and describe.

These three elements can be connected by creating two types of RBAC API objects: Roles and RoleBindings. Roles connect API resources and verbs.

RoleBindings connect roles to subjects. Roles and RoleBindings are applied at the cluster level or namespace level.

## Kubernetes RBAC components

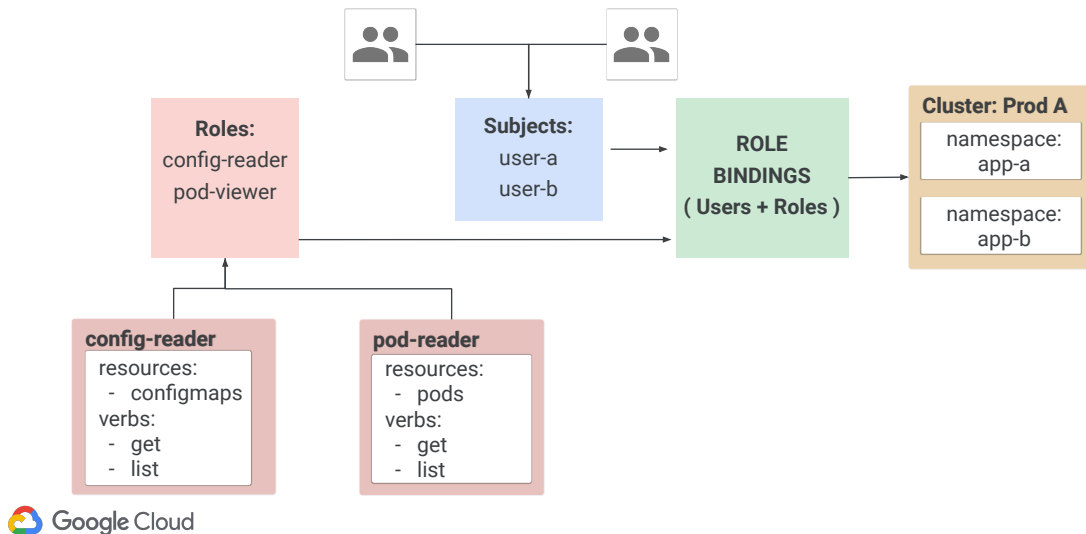

Kubernetes RBAC is helpful if you need to grant users access to specific Kubernetes namespaces. You add users as subjects, configure the roles with the proper permissions, and then bind them to the objects—in this case, the namespaces in the cluster. In Kubernetes, there are two types of roles: Role and ClusterRole.

RBAC roles are defined at the namespace level, and RBAC ClusterRoles are defined at the cluster level.

Image Source: <https://cloud.google.com/solutions/prep-kubernetes-engine-for-prod>

## A role contains rules that represent a set of permissions

```
apiVersion: rbac.authorization.k8s.io/v1
kind: Role
metadata:
  namespace: default
  name: demo-role
rules:
- apiGroups: [""]
  resource: ["pods"]
  verbs: ["get", "list", "watch"]
```

| Group | Version | Kind |
|-------|---------|------|
| core  | v1      | Pod  |

Kubernetes API



This example manifest defines an RBAC Role at the namespace level.

The Role type is defined and in this example the default namespace is specified. You can only define a single namespace for a Role.

Under rules, apiGroups in this case is defined as empty to indicate the role applies to the core api group, resource is specified as Pods, and the verbs *get*, *list*, and *watch* are allocated. If you put these three verbs in a role like this, that grants subjects who have the role to inspect the state of pods. It's common practice to always allocate *get*, *list*, and *watch* together. The apiGroups can be empty, indicating the core API group or it can specify specific Kubernetes API groups such as batch, extensions or apps.

Rules are purely additive; there are no “deny” rules. If no rule grants a user a verb on a given resource, that user can't do the action.

## Examples of how to refer to different resource types

```
rules:
- apiGroups: [""]
  resources: ["pods"]
  verbs: ["get", "list", "watch"]
```

```
rules:
- apiGroups: [""]
  resources: ["pods"]
  resourceName: ["demo-pod"]
  verbs: ["patch", "update"]
```

```
rules:
- apiGroups: [""]
  resources: ["pods", "services"]
  verbs: ["get", "list", "watch"]
```

```
rules:
- nonResourceURLs: ["metrics/",
"/metrics/*"]
  verbs: ["get", "post"]
```



Here are some examples of rule sets that specify the resources and verbs covered by a Role or ClusterRole.

On the top left is a basic assignment that specifies *get*, *list* and *watch* operations on all pod resources. On the bottom left, a subresource 'logs' is added to the resources list to specify access to Pod logs also. The combination of verbs, *get*, *list* and *watch*, are the standard read-only verbs. You should typically assign them as a unit, all or none.

On the top right, a resourceName is specified to limit the scope to specific instances of a resource and the verbs specified as *patch* and *update*. These are also a group of verbs that are typically treated as a unit and applied together.

Note that you can only use verbs such as *get*, *update*, *delete*, and *patch* on named resources.

And bottom right shows how you can specify *get* and *post* actions for non-resource endpoints. This form of rule is unique to ClusterRoles.

## Examples of how to refer to different subject types

```
subjects
- kind: User
  name: "joe@demo.com"
  apiGroup: rbac.authorization...
```

```
subjects
- kind: Group
  name: system.serviceaccounts
  apiGroup: rbac.authorization...
```

```
subjects
- kind: Group
  name: "Developers"
  apiGroup: rbac.authorization...
```

```
subjects
- kind: Group
  name: system.serviceaccounts:qa
  apiGroup: rbac.authorization...
```

```
subjects
- kind: ServiceAccount
  name: default
  namespace: kube-system
```

```
subjects
- kind: Group
  name: system.authenticated
  apiGroup: rbac.authorization...
```



Here are some examples of how to refer to different subject types including users, service accounts and groups.

Working from the top left, you see examples specifying a user and a group. On the bottom left you have an example of a ServiceAccount subject where the ServiceAccount name is 'default' and the namespace is specified as 'kube-system.'

Assigning Kubernetes RBAC permissions to Google Groups is a beta feature that is not currently supported and is not enabled by default. You can assign Cloud IAM permissions to a Google Group. However, Kubernetes can support groups provided the authentication provider is compatible, and you can assign Kubernetes RBAC permissions to Kubernetes groups if a supported identity provider is configured. In this example, you can see that there is a group available called "Developers".

In the right column you have more group types. The example includes all service accounts on all namespaces. Note that this is a system group, so it can be used for RBAC in GKE environments. The middle example on the right includes only the service accounts in the qa namespace, and the example on the bottom right includes all authenticated users.

## Attaching roles to RoleBindings

```
apiVersion: rbac.authorization.k8s.io/v1
kind: RoleBinding
metadata:
  namespace: default
  name: demo-rolebinding
subjects:
- kind: User
  name: "joe@example.com"
  apiGroup: rbac.authorization.k8s.io
roleRef:
  kind: Role
  name: demo-role
  apiGroup: rbac.authorization.k8s.io
```



Now that ClusterRoles have been defined, you can attach RoleBindings and ClusterRoleBindings to those roles. Let's attach a RoleBinding first. Define the namespace then the subjects. In Kubernetes, subject kind can be users, groups, or service accounts. Note that subject name is case-sensitive.

With RBAC in GKE, the type of account that you can control access for is either a Google Account, a Google Cloud service account, or a Kubernetes service account, and they are identified using an email address.

You bind a role to subjects in the RoleBinding using roleRef by defining the role kind and the role name. A RoleBinding can refer to roles or ClusterRoles. If a ClusterRole is bound in a RoleBinding, it only grants permissions to the resources of the particular namespaces defined for the RoleBinding, and not to the entire cluster.

You can identify namespaced / non namespaced resources using the command `kubectl api-resources --namespaced=true`

## A ClusterRole grants permissions at the cluster level

```
apiVersion: rbac.authorization.k8s.io/v1
kind: ClusterRole
metadata:
  name: demo-clusterrole
rules:
- apiGroups: [""]
  resource: ["storageclasses"]
  verbs: ["get", "list", "watch"]
```



Here, a ClusterRole is defined. A ClusterRole grants permissions at the cluster level; so there's no need to specify a namespace.

ApiGroups is defined in the same way as it is defined when creating a Role. Resources can be cluster-scope, such as nodes, Secrets, and PersistentVolumes, or they can be namespaced-resources such as Pods, Deployments, and StatefulSets.




## ClusterRoleBinding has a cluster-wide scope

```
apiVersion: rbac.authorization.k8s.io/v1
kind: ClusterRoleBinding
metadata:
  name: demo-clusterrolebinding
subjects:
- kind: User
  name: "admin@example.com"
  apiGroup: rbac.authorization.k8s.io
roleRef:
  kind: ClusterRole
  name: demo-clusterrole
  apiGroup: rbac.authorization.k8s.io
```



Here's an example of a ClusterRoleBinding. Note that namespace isn't mentioned, because a ClusterRoleBinding always has a cluster-wide scope. Note that a ClusterRoleBinding can only refer to a ClusterRole, not to a role.

## Kubernetes RBAC summary

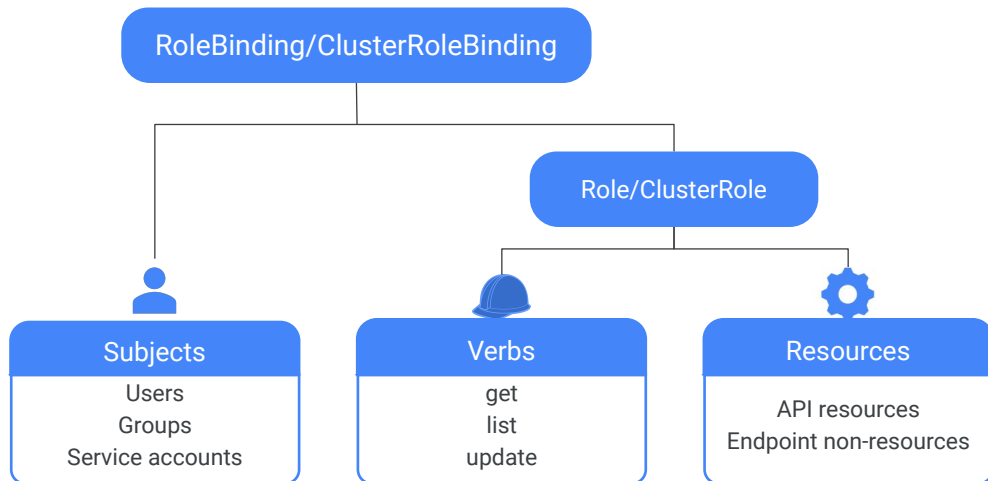

With Kubernetes RBAC, you can manage granular permissions for the people (using users and groups), and for containers (using service accounts) at both the namespace level and the cluster level. Resources and verbs are bound using either Roles or ClusterRoles. Roles and ClusterRoles are then bound to subjects using RoleBinding or ClusterRoleBinding.

A variety of ClusterRoles and ClusterRoleBindings are also predefined within the RBAC system. The Kubernetes documentation offers more information.

## Not all resources are NameSpaced

```
$ kubectl api-resources
```

| NAME                     | ... NAMESPACE |
|--------------------------|---------------|
| <i>bindings</i>          | <i>true</i>   |
| <i>componentstatuses</i> | <i>false</i>  |
| <i>configmaps</i>        | <i>true</i>   |
| <i>endpoints</i>         | <i>true</i>   |
| ...                      |               |
| <i>namespaces</i>        | <i>false</i>  |
| <i>nodes</i>             | <i>false</i>  |
| ...                      |               |



When you create Roles and ClusterRoles, you should take into account whether a resource is associated with a namespace or defined at the cluster level. You can use the `kubectl api-resources` command to list which resources are “NameSpaced,” as the command’s output phrases it, and which are not.

Typically, cluster level resources should be managed with ClusterRoles, and NameSpaced resources should be managed using Roles. However, if you need to define RBAC permissions across multiple NameSpaces then you will need to use a ClusterRole.

---

## Agenda

Authentication and Authorization

Cloud IAM

Kubernetes RBAC

**Kubernetes Control Plane Security**

Pod Security

Lab: Securing Google Kubernetes Engine with Cloud IAM and Pod Security Admission

Lab: Implementing Role-Based Access Control with Google Kubernetes Engine

Summary



Next, let's learn more about Kubernetes Control Plane Security.

## Google manages all the control plane components

- GKE manages cluster root Certificate Authority (CA) outside the cluster.
- Every cluster has its own CA.
- Certificates are used to secure cluster network communications.
- A shared Secret on each node is used for certificate signing requests.



In GKE, all the control plane components, such as the API server, etcd database, and controller manager, are managed by Google. Each cluster has its own root certificate authority (“CA” for short). An internal Google service manages the root keys for this CA.

Secure communications between the control plane and nodes in a cluster relies on the shared root of trust provided by the certificates issued by this CA.

GKE uses a separate per-cluster CA to provide certificates for the etcd databases within a cluster. You don’t have to do anything to turn on this feature; it’s automatic. It’s beneficial because it means there doesn’t have to be shared trust between the services running in the cluster and the databases that keep the cluster working.

Remember kubelets, which are the primary Kubernetes agents on the nodes? The Kubernetes API server and the kubelets use secure network communications protocols -- namely TLS and SSH -- when they communicate with each other. They use certificates issued by the cluster’s root CA to support those protocols.


Because separate CAs are used for each separate cluster, a compromised CA of one cluster cannot be used to compromise other clusters.

When a new node of a Kubernetes cluster is created, the node is injected with a shared Secret as part of its creation. This Secret is then used by its kubelet to submit certificate signing requests to the cluster root CA.

That way, it can get client certificates when the node is created, and new certificates when they need to be renewed or rotated. And finally, Kubelets use these client certificates to communicate securely with the API server. Note that this Secret can be accessed by Pods, and by extension their containers, unless metadata concealment is enabled.

## Rotate credentials to limit the impact of a breach

Before rotation

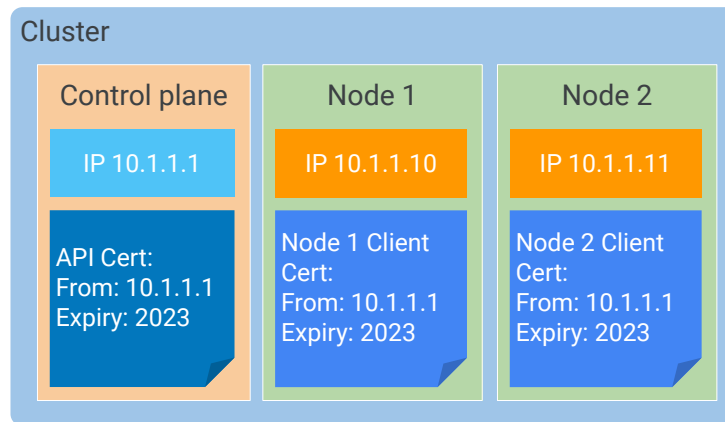


It's essential that these credentials are rotated periodically to improve the security posture of your cluster and limit the impact of potential security breaches that compromise credentials.

How often should you rotate credentials? It's a tradeoff: If a cluster manages high-value assets, you probably want to rotate credentials often. But whenever you do, the cluster's Kube-APIserver is unavailable for a short time. So you need to make the tradeoff that works for your organization's security policies.

You'll learn how to manually rotate the credentials used by the API server and clients during a lab activity. You can't manually rotate etcd certificates in GKE, though, because they're managed entirely by Google.

## Rotate credentials to limit the impact of a breach

Re-addressing starts; control plane now has 2 IP addresses

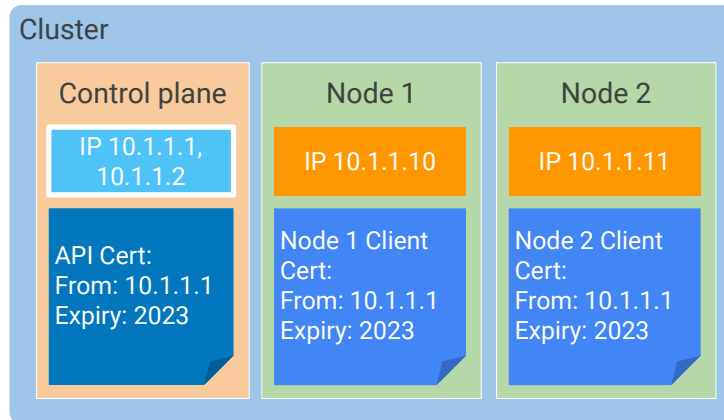


Let's look at an overview of the rotation process. The process starts by creating a new IP address for the cluster control plane that will be available along with its existing IP address. New certificate credentials are issued to the control plane with this new address. Note that the API server will not be available during this period, although Pods continue to run.



## Rotate credentials to limit the impact of a breach


Control plane credentials are updated to use the new IP

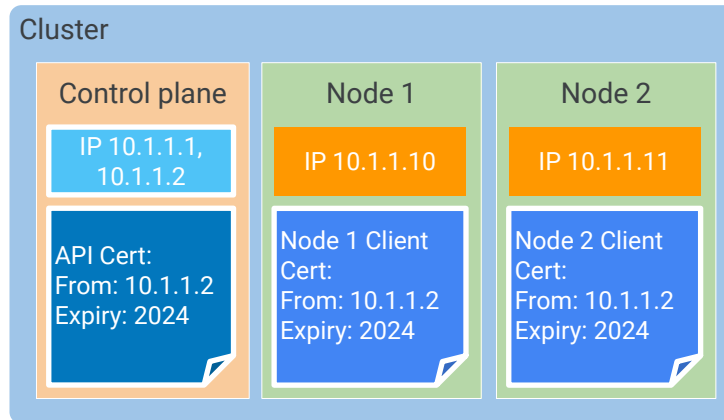

After the control plane is reconfigured, the nodes are automatically updated by GKE to use the new IP and credentials. This causes GKE to also automatically upgrade the node version to the closest supported version. Because Nodes are recreated, any Pod running without a controller will become unavailable. All of your API clients outside the cluster must also be updated to use the new credentials.

## Rotate credentials to limit the impact of a breach

Old control plane IP address is retired

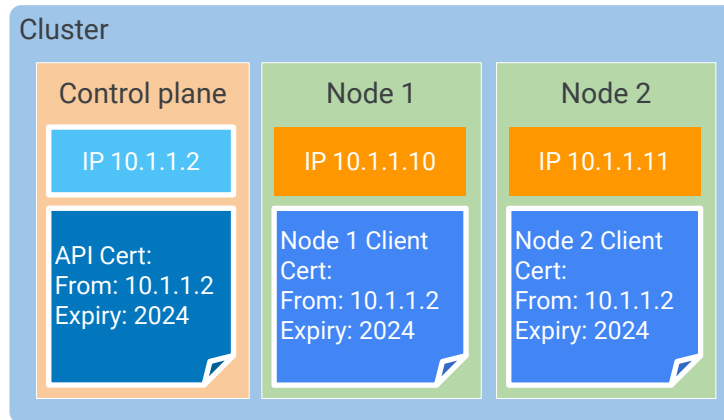

Address rotation must be completed for the cluster control plane to start serving with the new IP address and new credentials and remove the old IP address and old credentials. If the rotation is not completed manually, GKE will automatically complete the rotation after seven days.

## Initiating and completing credential rotation

### Initiating credential rotation

```
gcloud container clusters update [NAME] \  
--start-credential-rotation
```

### Completing credential rotation

```
gcloud container clusters update [NAME] \  
--complete-credential-rotation
```



To initiate a credential rotation, execute the `start-credential-rotation gcloud` command, which creates new credentials and issues these credentials to the control plane.

To complete the rotation, execute the `complete-credential-rotation gcloud` command, which configures the control plane to serve only with the new credential.

In these examples, `NAME` refers to the cluster name.

---

You can also rotate the IP address for your cluster

Initiating IP rotation

```
gcloud container clusters update [NAME] \  
--start-ip-rotation
```

Completing IP rotation

```
gcloud container clusters update [NAME] \  
--complete-ip-rotation
```



Note that you can also rotate the IP address for your cluster. This essentially goes through the same process, because the certificates must be renewed when the control plane ip-address is changed, but with different commands as shown here. In these examples, NAME refers to the cluster name.

## Protect your metadata

- Restrict `compute.instances.get` permission for nodes.
- Disable legacy Compute Engine API endpoint.
- Enable metadata concealment (temporary).



Compromised applications running on Pods can potentially access the metadata such as the Node Secret that is used for Node configuration. To prevent such exposure, there are a few steps that you can take.

First, you should always configure the Cloud IAM service account for the node with minimal permissions. Don't confuse this Google service account with the Kubernetes service account; this is the Cloud IAM Service Account used by the Node VM itself. The idea here is to not use the `compute.instances.get` permission through a service account, Compute Instance admin role, or any custom roles. With permissions set in this way, the metadata on the GKE nodes cannot be simply retrieved by making direct Compute Engine API calls to these nodes.

The second step you should take is to disable legacy metadata APIs. Compute Engine API endpoints using `/0.1/` and `/v1beta1/` support querying of metadata. The `/v1/` APIs restrict the retrieval of metadata. Starting from GKE version 1.12, the legacy Compute Engine metadata endpoints are disabled by default. With earlier versions, they can only be disabled by creating a new cluster or adding a new node pool to an existing cluster.

One further important security step is to enable metadata concealment. This is basically a firewall that prevents Pods from accessing a node's metadata. It does this

by restricting access to kube-env (which contains kubelet credentials) and the virtual machine's instance identity token. Note that this is a temporary solution that will be deprecated as better security improvements are developed in the future. There's a link associated with this lesson to Google Cloud's documentation on protecting cluster metadata.

---

## Agenda

Authentication and Authorization

Cloud IAM

Kubernetes RBAC

Kubernetes Control Plane Security

Pod Security

Lab: Securing Google Kubernetes Engine with Cloud IAM and Pod Security Admission

Lab: Implementing Role-Based Access Control with Google Kubernetes Engine


Summary



Finally, let's discuss Pod security. In this lesson, you will learn how to control what sort of things a Pod, or more specifically the containers inside a Pod, are allowed to do. You will learn about the best practices you should adhere to in order to increase the security of your GKE environment.

## Use security context to limit privileges to containers

```
apiVersion: v1
kind: Pod
metadata:
  name: security-context-demo
spec:
  securityContext:
    runAsUser: 1000
    fsGroup: 2000
    ...
```

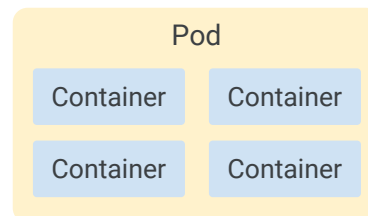

#Seccomp



By default, users can deploy containers inside a Pod that will allow privilege elevation and can access the host file system and the host network. Sometimes those capabilities are convenient, and sometimes they're undesirable from a security perspective. You can define restrictions on what the containers in a Pod can do by using security contexts. You can also enforce the use of specific security measures.

A security context is a set of security settings defined in a Pod specification. Here's an extract of a Pod manifest YAML. The `securityContext` definition inside the Pod specifies that the first process runs with user ID 1000 for any containers in the Pod, and group ID 2000 is associated with all containers in the Pod. This provides a specific user and group context for the containers. The most important thing about this context is that 1000 is not 0. In a Linux system, 0 is the privileged root user's user ID. Taking away root privilege from the code running inside the container decreases what it can do if it is compromised.

If you define a security context at the Pod level, it is applied to all of the Pod's containers.

Using security contexts in a Pod definition, you can exercise a lot of control: over the use of the host namespace, over networking, over filesystem and Volume types, over whether privileged containers can run, and whether code in a container can escalate



to root privileges.

You can also control other security settings. For example, you can enable Seccomp to block code running in containers from making system calls you know they should not legitimately make. You can enable AppArmor, which uses security profiles to restrict individual programs' actions. You can also limit access to some Linux capabilities, by granting certain but not all privileges to a process.

---

## Use built-in Pod Security Admission enforcement

- A policy is a set of restrictions, requirements, and defaults.
- All conditions must be fulfilled for a Pod to be created or updated in Enforce mode.
- PodSecurity is an admission controller.



What if you have dozens or hundreds of Pods? Directly configuring security contexts in each individual Pod can become a lot of work. Thankfully Kubernetes has built-in security admission enforcement using Pod Security Standards. Pod Security Standards are predefined security policies that cover the high-level needs of Pod security in Kubernetes. These policies range from being highly permissive to highly restrictive.

You can apply the following Pod Security Standards to your GKE clusters:

- **Privileged:** An unrestricted policy that provides the widest level of permissions. Allows for known privilege escalations.
- **Baseline:** A minimally restrictive policy that allows the default, minimally specified Pod configuration. Prevents known privilege escalations.
- **Restricted:** A highly restrictive policy that follows Pod hardening best practices.

You can use the PodSecurity admission controller to apply Pod Security Standards in the following modes:

- Enforce: Policy violations reject Pod creation. An audit event is added to the audit log.
- Audit: Policy violations trigger adding an audit event to the audit log. Pod creation is allowed.
- Warn: Policy violations trigger a user-facing warning. Pod creation is allowed.

The PodSecurity admission controller embeds these policies into the Kubernetes API. It is also possible to grant exceptions to the Pod Security Standards. This is done at the PodSecurity admission level. We can apply exceptions to Usernames, RuntimeClassNames, or Namespaces.

## Pod Security Admission example

Create namespaces for your cluster

```
kubectl create ns restricted-pods
```

Use labels to apply security policies

```
kubectl label --overwrite ns restricted-pods  
pod-security.kubernetes.io/enforce=restricted
```



To apply a pod security policy you need to first create a namespace for the policy.

Once this is created, you can use a label to apply the security policy

## Create manifest to escalation level

```
apiVersion: v1
kind: Pod
metadata:
  name: nginx
  labels:
    app: nginx
spec:
  containers:
  - name: nginx
    image: nginx
    securityContext:
      privileged: true
```



To test the configured policy, Update the deployment yaml file to include a **security context**. In this example the privileged flag is set to true, so it allows privilege escalation.

---

Apply the manifest to the namespace

```
kubectl apply -f workload.yaml  
--namespace=restricted-pods
```

We then can apply this manifest to the **restricted pods** namespace


## Manifest fails because of Security Context

```
Error from server (Forbidden): error when creating
"workload.yaml": pods "nginx"
is forbidden: violates PodSecurity "restricted:latest":
allowPrivilegeEscalation
!= false (container "nginx" must set
securityContext.allowPrivilegeEscalation=false),
unrestricted capabilities (container "nginx" must set
securityContext.capabilities.drop=["ALL"]),
runAsNonRoot != true (pod or container "nginx" must set
securityContext.runAsNonRoot=true),
seccompProfile (pod or container "nginx" must set
securityContext.seccompProfile.type
to "RuntimeDefault" or "Localhost")
```



The Pod won't deploy in the namespace. An audit entry is added to the log.

## You can take additional security measures in Kubernetes

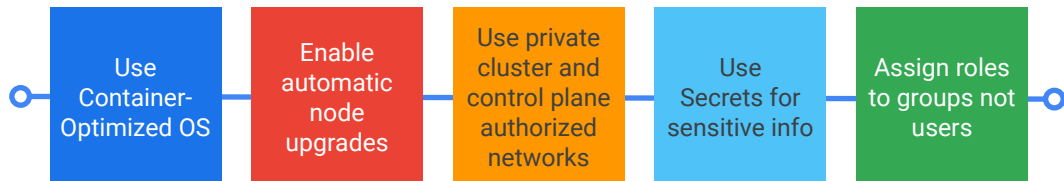

Many of these are enabled by default in GKE, especially if you choose to run recent versions of Kubernetes in your GKE cluster.

For example, GKE's default policy of using Google's Container-optimized OS for nodes improves node security automatically. Unlike a general-purpose Linux distribution, the Container-optimized OS implements a minimal read-only file system, performs system integrity checks, and implements firewalls, audit logging, and automatic updates.

You can enable automatic node upgrades to keep all your nodes updated to the latest version of Kubernetes.

You can choose to run private clusters, which contain nodes without external IP addresses. You can also choose to run the cluster control plane for a private cluster without a publicly-reachable endpoint. By default, private clusters do not allow Google Cloud IP addresses to access the cluster control plane endpoint. Using private clusters with authorized networks makes your cluster control plane reachable only by the specific address ranges you choose. Nodes within your cluster's VPC network can still access the control plane, and so can Google's internal production jobs that manage it for you.



Don't forget to take advantage of encrypted Secrets to store sensitive configuration information, rather than storing them in ConfigMaps.

Whenever possible, grant privilege to groups rather than individual users. This applies both to Cloud IAM, which lets you grant roles to Google groups, as well as to Kubernetes RBAC, which lets you bind roles to Kubernetes groups. Suppose you grant privileges to an administrator named "Pat" in many places, and then Pat leaves your company. You now must track down all the places where Pat has privileges and remove them. That's tedious and error-prone. If you have followed the best practice of always grant privileges to groups rather than to users, you can remove Pat's access simply by taking Pat out of the administrator group.

## Don't enable Kubernetes Dashboard



Kubernetes Dashboard is a traditional add-on to Kubernetes. It was originally intended to provide a convenient web-based way for administrators to manage a cluster.

In the past, the Kubernetes Dashboard was backed by a highly privileged Kubernetes Service Account by default. Kubernetes Dashboards were also often left accessible from the internet. This was a serious problem. The default configuration exposed an interface that might be vulnerable to remote attacks.

GKE takes steps to reduce this risk. GKE clusters running with Kubernetes version 1.7 or higher do not give the Kubernetes Dashboard admin access. GKE clusters running with Kubernetes version 1.10 or higher completely disable the Kubernetes Dashboard by default. Instead of using the Kubernetes Dashboard, use the Cloud Console's built in GKE dashboard or the `kubectl` commands instead, just as you have done throughout this specialization. These interfaces provide all the old Dashboard's functionality and more, without exposing an additional attack surface. If you must run any earlier versions of Kubernetes, Google recommends that you disable the Kubernetes Dashboard, or at least restrict its permissions.

---

## Agenda

Authentication and Authorization

Cloud IAM

Kubernetes RBAC

Kubernetes Control Plane Security

Pod Security


[Lab: Securing Google Kubernetes Engine with Cloud IAM and Pod Security Admission](#)

Lab: Implementing Role-Based Access Control with Google Kubernetes Engine

Summary

# Lab Intro

Securing Google Kubernetes  
Engine with Cloud IAM and Pod  
Security Admission

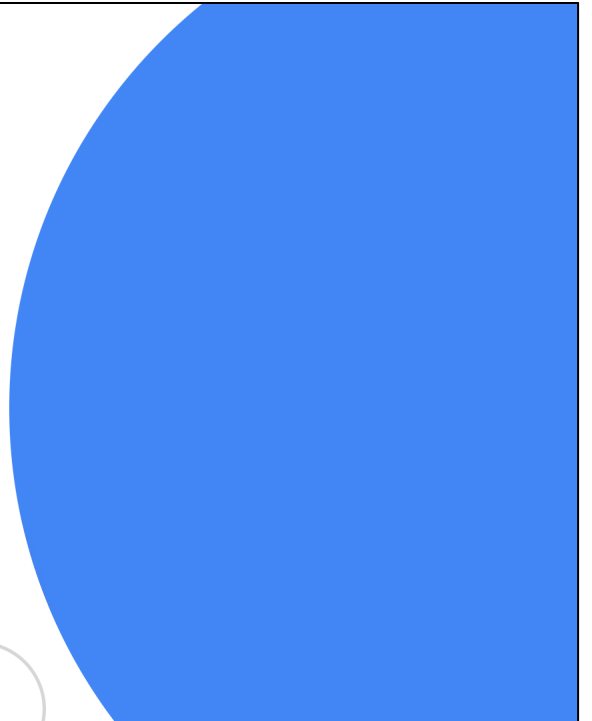

In this lab, you'll control access to GKE clusters using Cloud IAM. You'll create a Pod security policy to restrict privileged Pod creation, test that policy, and perform IP address and credential rotation.

---

## Agenda

Authentication and Authorization

Cloud IAM

Kubernetes RBAC

Kubernetes Control Plane Security

Pod Security


Lab: Securing Google Kubernetes Engine with Cloud IAM and Pod Security Admission

[Lab: Implementing Role-Based Access Control with Google Kubernetes Engine](#)

Summary

# Lab Intro

Implementing Role-Based Access  
Control with Google Kubernetes  
Engine

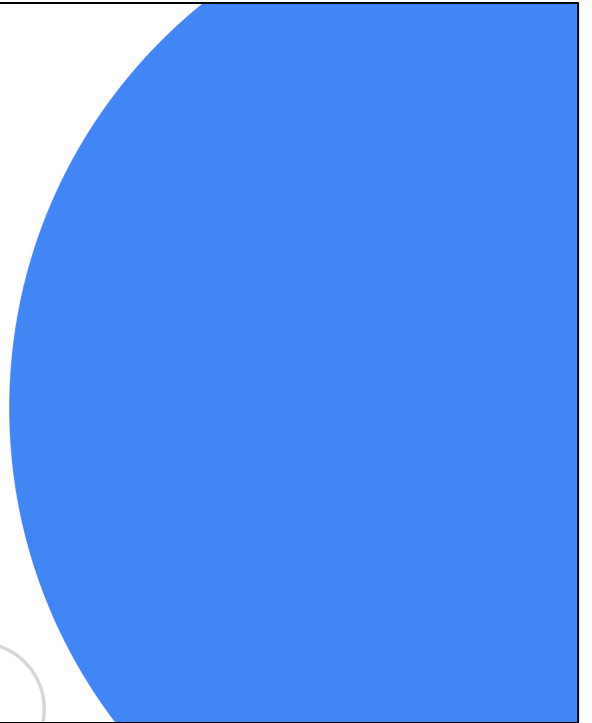

In this lab, you'll create Namespaces within a GKE cluster, and then use role-based access control to permit a non-admin user to work with Pods in a specific Namespace. You'll learn how to create Namespaces for users to control access to cluster resources and create Roles and RoleBindings to control access within a Namespace.

---

## Agenda

Authentication and Authorization

Cloud IAM

Kubernetes RBAC

Kubernetes Control Plane Security

Pod Security

Lab: Securing Google Kubernetes Engine with Cloud IAM and Pod Security Admission

Lab: Implementing Role-Based Access Control with Google Kubernetes Engine

[Summary](#)

---

## Summary

Use Kubernetes authentication and authorization for access control.

Define Kubernetes RBAC roles and role bindings for accessing resources in namespaces.

Define Kubernetes RBAC cluster roles and cluster role bindings for accessing cluster-scoped resources.

Define Kubernetes Pod Security Admission to only allow pods with specific security-related attributes to run.



That concludes Access Control and Security in Kubernetes and Google Kubernetes Engine. In this module, you learned how to understand the structure of Cloud Identity and Access Management access controls and define Cloud IAM roles and policies for Kubernetes Engine cluster administration. You learned how to use Kubernetes authentication and authorization to control who is able to do which things with the objects in your clusters. You learned how to manage access to resources in namespaces using Kubernetes RBAC Roles. You learned how to control access to cluster-scoped resources using Kubernetes RBAC cluster roles and cluster role bindings, and you learned how to configure admission control to enforce specific security-related attributes for Pods using Kubernetes Pod Security Admission.



