PalmSource™ 99

Login Script Enhancement

Waddah Kudaimi
Sr. Software Engineer

3Com
More connected.

Overview

- The Login Script Enhancement
- Login Script Plug-in Architecture
- Login Script Plug-in APIs
- Example plug-in
- Creating a new login script
- Demo

The Login Script Enhancement

PalmSource 99

New WaitForPrompt command

- Wait for a string from the input stream
- Prompt the user for input
- Send the user data entered

Support for Script Plug-in Application


- An application PRC of type ‘scpt’
- Written in C
- Created using a development environment that supports the Palm OS® software, such as Metrowerks CodeWarrior®

Login Script Plug-in Architecture

PalmSource 99

- Must have these two commands:
  - List Script Commands; called by the Network Panel Script UI
  - Execute a Script Command; called by the network interface
- Returns control to the login script after it terminates
- The Selector function:
  - Used during script command execution
  - Used by plug-in as a Callback function into the network interface functions

Plug-in Architecture Flow Chart

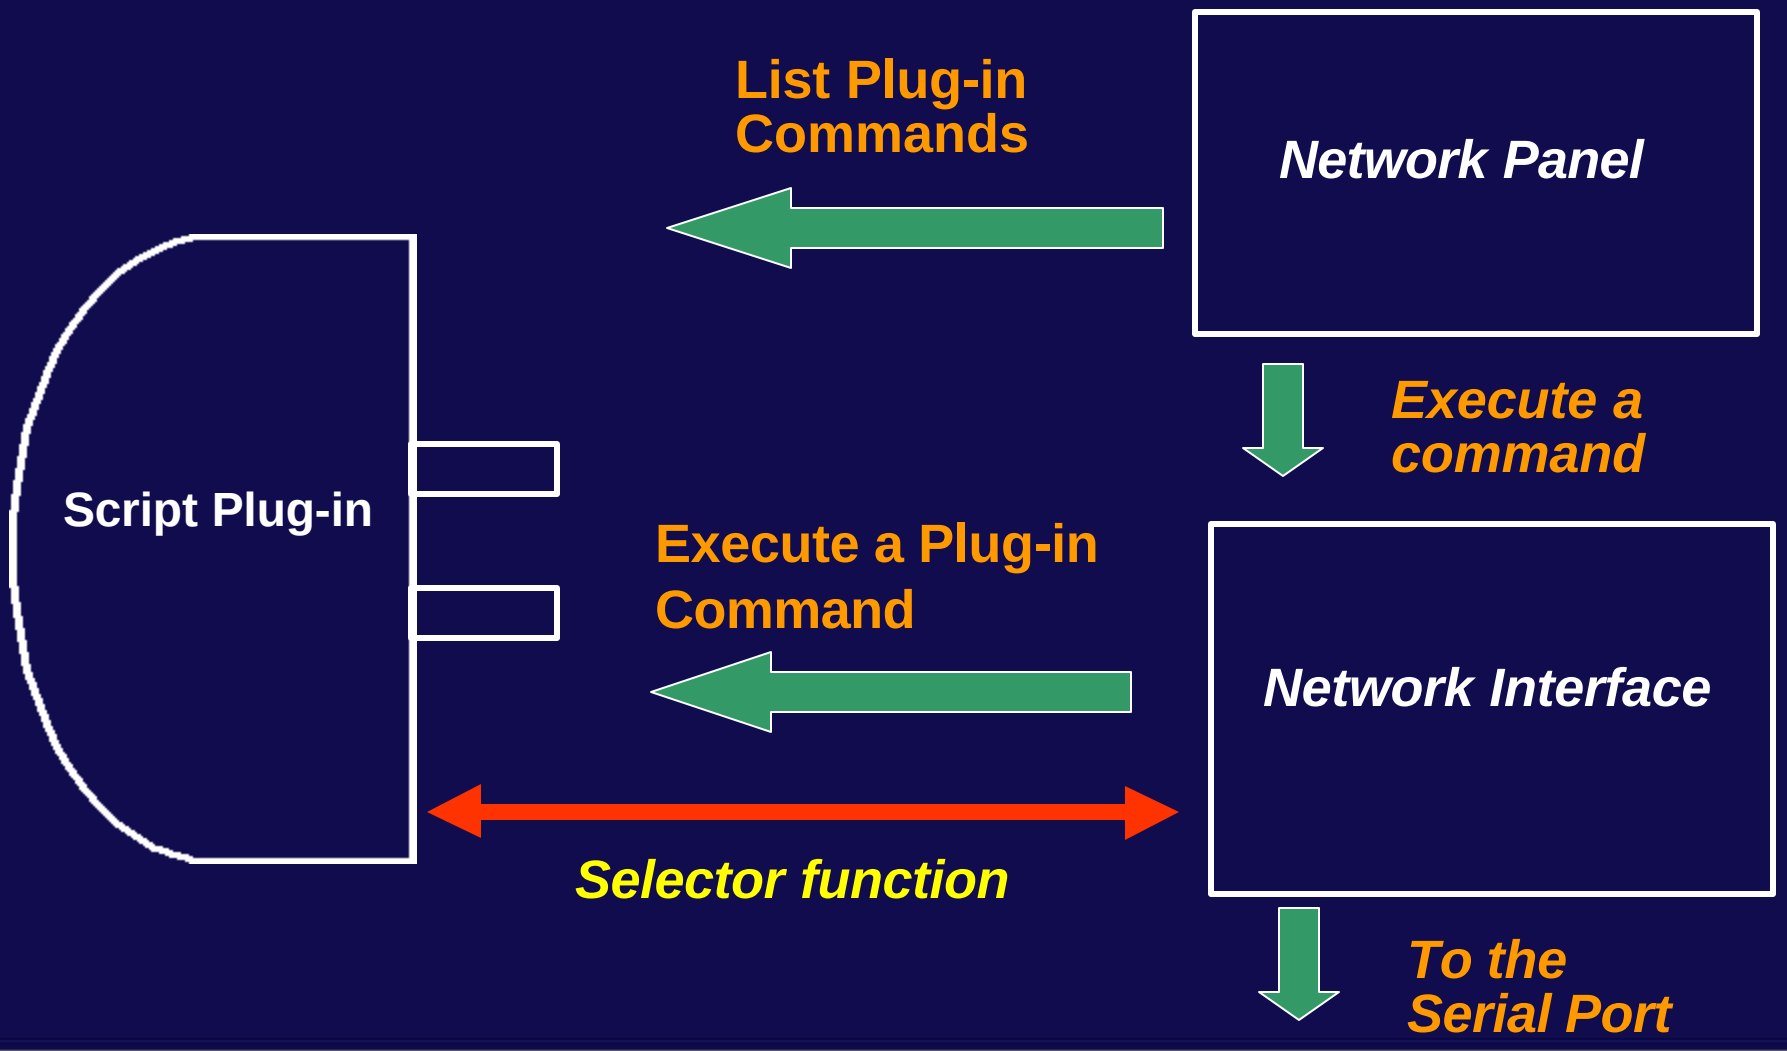

Login Script Plug-in APIs

PalmSource 99

- **APIs:**

```
Err (*ScriptPluginSelectorProcPtr) (void *
   handle, UInt16 command, void *
   dataBufferP, UInt16 * sizeP, UInt16 *
   dataTimeoutP, void * procAddrP);
```

handle: Handle to information specific to a particular connection

command: The command option to be executed

dataBufferP: A pointer to arguments to pass to the command or a pointer to data returned by the command

sizeP: The size of dataBufferP

dataTimeoutP: seconds to wait for Read or WriteBytes to finish

procAddrP: Pointer to your UI callback function to be executed

Login Script Plug-in APIs (Cont.)

- Use the selector function to call one of these command options. They are the building blocks of the script commands:
  1. ReadBytes
  2. WriteBytes
  3. GetUserName
  4. GetUserPwd
  5. CheckCancelStatus
  6. PromptUser
  7. ConnLog
  8. CallUIProc
  9. GetSerLibRefNum

Plug-in Issues

- UI issues: When writing your own UI routine:
  - Initialize resource forms before you call the Selector function with CallUIProc API
  - Put all your UI function parameters into one structure and pass them along in the Selector function
- Selector function return error codes
  - Returns 0 if successful
  - If non-zero is returned the plug-in should stop processing and returns the error condition from its PilotMain
- Plug-in Header File used: *ScriptPlugin.h*

Example Plug-in Contd.

- Plug-in Sample Source:

Creating a Login Script

PalmSource 99

- On a device:
  - Plug-in commands show up after the End command in the popup list
- On a desktop:
  - Use any text editor to create a login script containing the necessary desktop login script commands
  - Add the desired script commands (basic or plugin commands
  - Save the file with a .PNC extension
  - Use the Install Tool to place the file in the user's Install folder
  - Perform a HotSync® to transfer the script to the device


PalmSource™ 99
Demo
3Com
More connected.

Getting Login Script Enhancement

- Binary Download:

http://www.palm.com/custsupp/downloads/loginenhanc.html

Get lsesetup.exe (Windows only)

or upgrade to the latest Palm OS® Software 3.3

http://www.palm.com/custsupp/upgrade

- SDK for Plug-in development: 3.5 SDK

send E-mail to devsupp@palm.com


PalmSource™ 99
3Com
More connected.