Setup of Development Environment

Samba tftp

OS RedHat9

－Index－

1. Setup of samba 2
1.1. Modification of smb.conf file 2
1.1.1. Specification of workgroup 2
1.1.2. Specification of the free folder 3
1.2. Setup of user and password for samba 4
1.3. Execution of samba 4
2. Setup of tftp server 5
2.1. Confirmation of tftp operation 5

1. Setup of samba

1.1. Modification of smb.conf file


Specify the work group and the free folder used for samba.

Modify smb.conf file. It usually exists on /etc/samba/smb.conf.

The following shows the menu opened in the vi editor.

1.1.1. Specification of workgroup

Please specify the workgroup. The following example assumes the setup of MDS_SALES.

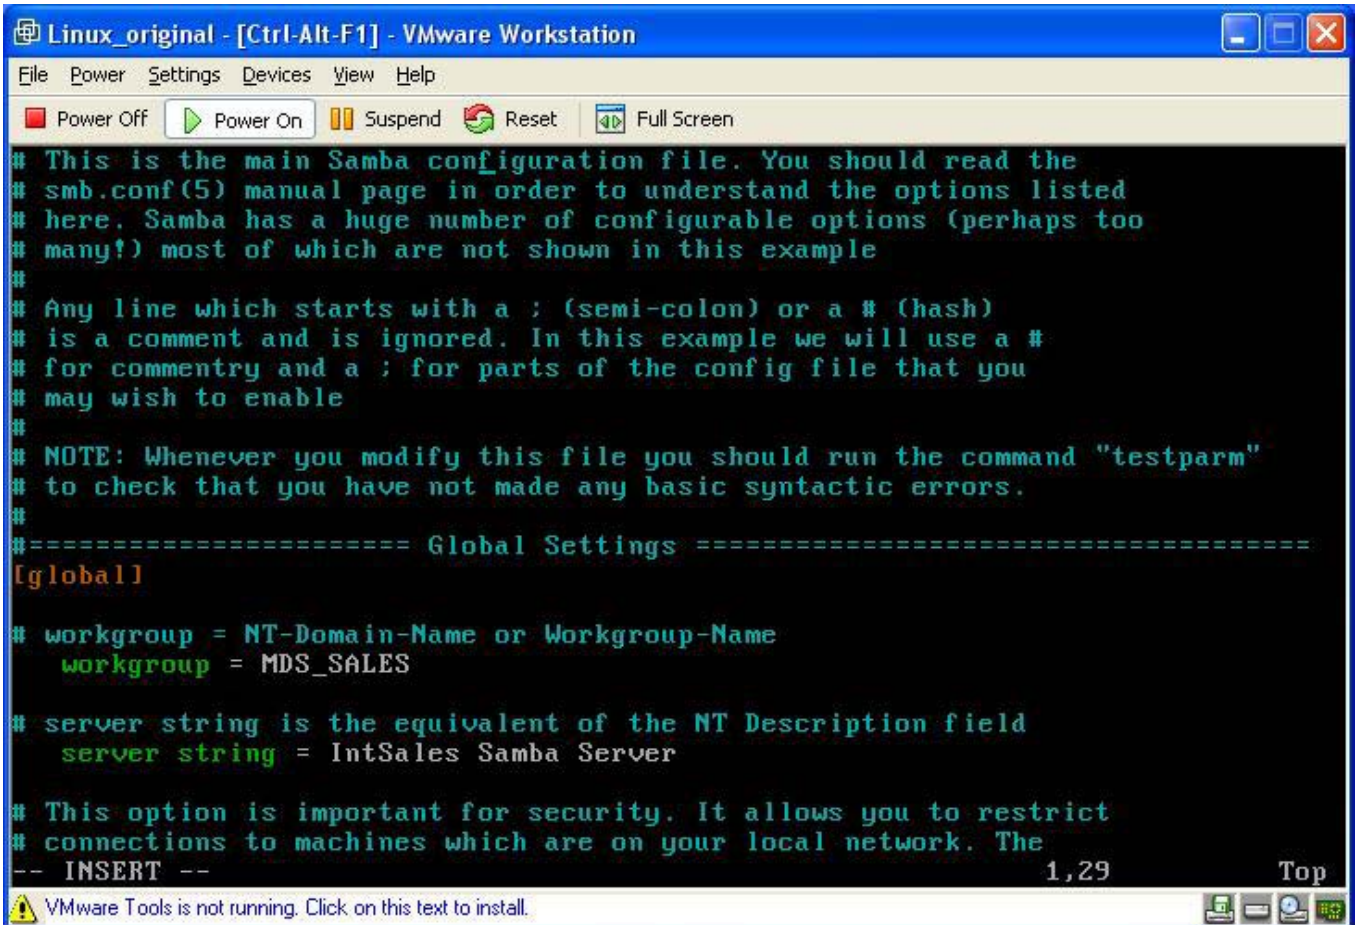

1.1.2. Specification of the free folder

The following example shows the menu that frees **/opt** and **/tftpboot**.

In the network, only the **[Name]** area is displayed.

It will be recommended to put it to the same name with the actual folder name.

```
;[myshare]
;    comment = Mary's and Fred's stuff
;    path = /usr/somewhere/shared
;    valid users = mary fred
;    public = no
;    writable = yes
;    printable = no
;    create mask = 0765
[opt]
   comment = opt
   path = /opt
;    valid users = mary fred
;    public = no
   writable = yes
;    printable = no
   create mask = 0765
[tftpboot]
   comment = tftpboot
   path = /tftpboot
;    valid users = mary fred
;    public = no
   writable = yes
;    printable = no
   create mask = 0765
:wq
```

1.2. Setup of user and password for samba


smbpasswd –a username <Enter>

In the display, you are asked to enter the password two times.

Enter the same password two times.

”-a” means “add a user”. When you just modify it, you do not need to put “-a”.


In the following example, the password is specified to the root user.

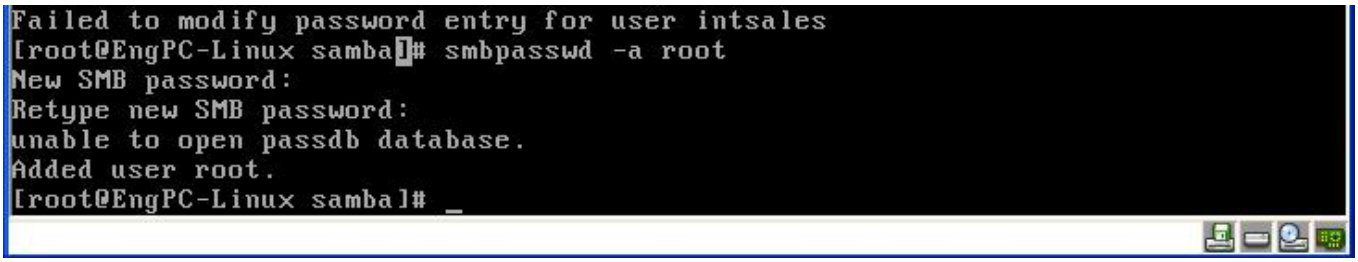

1.3. Execution of samba

Samba will be operated by the following commands.

Execution	service smb start
Stop	service smb stop
Re-execution	service smb restart
Status Display	service smb status

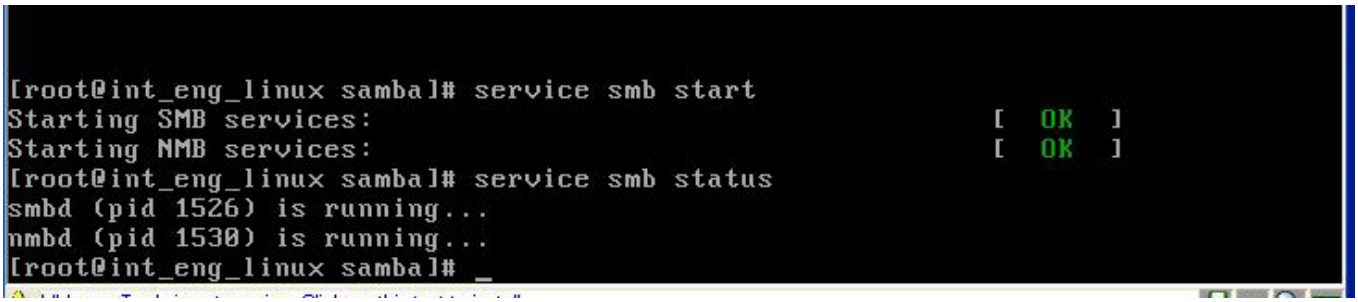


2. Setup of tftp server

Setup tftp server.

Modify /etc/xinetd.d/tftp file in vi.

Modify to "**desable = no"**.

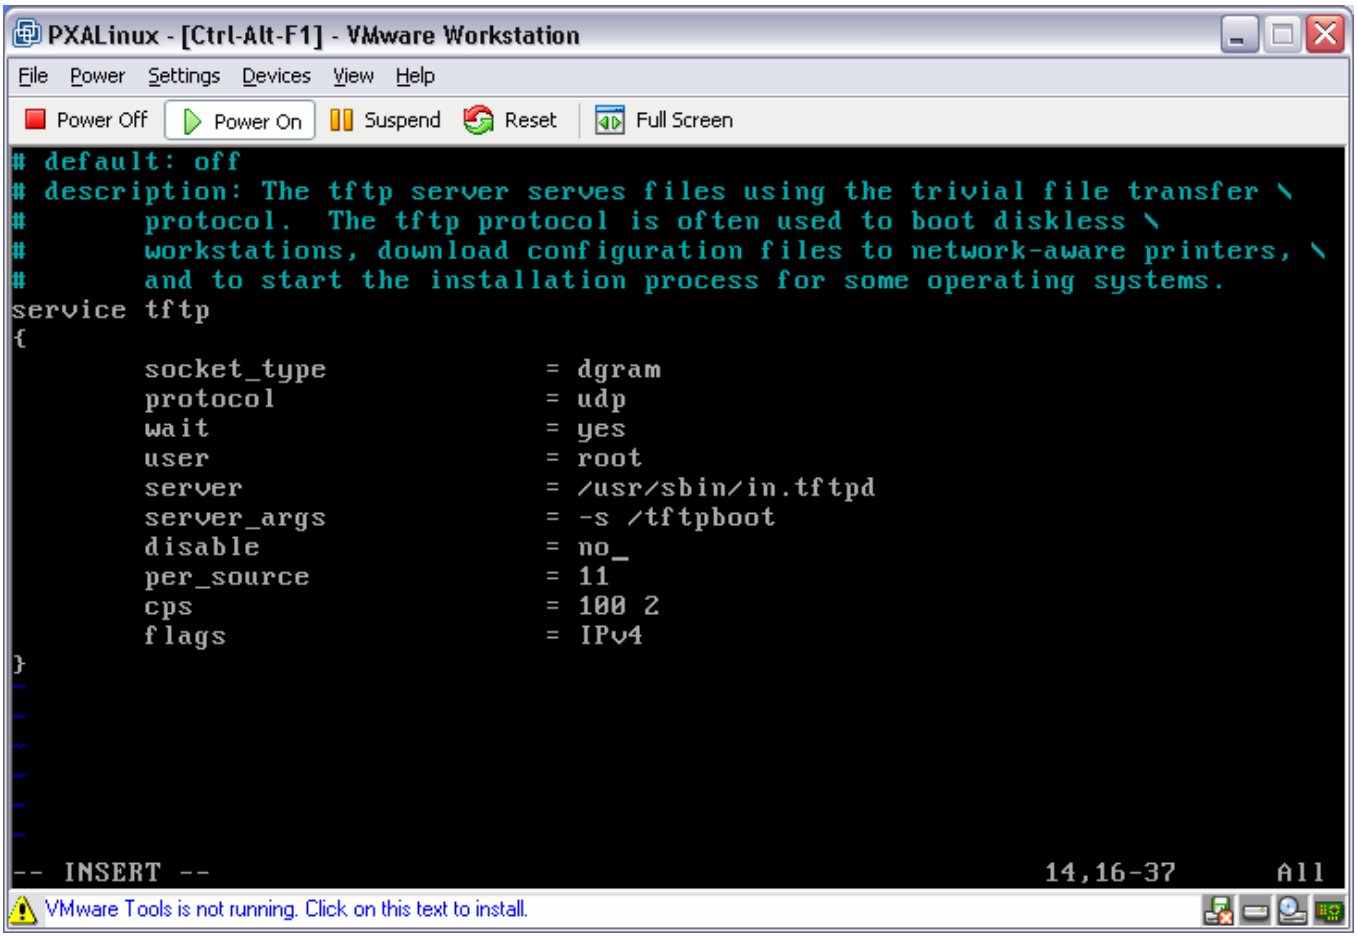

2.1. Confirmation of tftp operation

#chkconfig --list

It is O.K. if "tftp: on" is displayed

When it is off,

$chkconfig tftp on

Add a port to /etc/services, describing the following:

tftp 69/udp