

Intro (2)

Дизајн на интеракција човек-компјутер
(Human-computer interaction)

Иван Китановски

ivan.kitanovski@finki.ukim.mk

Бојан Илијоски

bojan.ilijoski@finki.ukim.mk

Влатко Спасев

vlatko.spasev@finki.ukim.mk



Components

Alerts

This is a primary alert—check it out!

This is a secondary alert—check it out!

This is a success alert—check it out!

This is a danger alert—check it out!

This is a warning alert—check it out!

This is a info alert—check it out!

This is a light alert—check it out!

This is a dark alert—check it out!


```
<div class="alert alert-primary" role="alert">  
  This is a primary alert—check it out!  
</div>  
<div class="alert alert-secondary" role="alert">  
  This is a secondary alert—check it out!  
</div>  
<div class="alert alert-success" role="alert">  
  This is a success alert—check it out!  
</div>  
<div class="alert alert-danger" role="alert">  
  This is a danger alert—check it out!  
</div>  
<div class="alert alert-warning" role="alert">  
  This is a warning alert—check it out!  
</div>  
<div class="alert alert-info" role="alert">  
  This is a info alert—check it out!  
</div>  
<div class="alert alert-light" role="alert">  
  This is a light alert—check it out!  
</div>  
<div class="alert alert-dark" role="alert">  
  This is a dark alert—check it out!  
</div>
```

Alerts (2)

Well done!


Aww yeah, you successfully read this important alert message. This example text is going of content.

Whenever you need to, be sure to use margin utilities to keep things nice and tidy.



```
<div class="alert alert-success" role="alert">
  <h4 class="alert-heading">Well done!</h4>
  <p>Aww yeah, you successfully read this important a
  <hr>
  <p class="mb-0">Whenever you need to, be sure to us
</div>
```

Holy guacamole! You should check in on some of those fields below.



```
<div class="alert alert-warning alert-dismissible fade show" role="alert">
  <strong>Holy guacamole!</strong> You should check in on some of those fields below.
  <button type="button" class="close" data-dismiss="alert" aria-label="Close">
    <span aria-hidden="true">&times;</span>
  </button>
</div>
```



Badge

Example heading **New**

Example heading **New**

Example heading **New**

Example heading **New**


Example heading **New**

Example heading **New**

```
<h1>Example heading <span class="badge bg-secondary">New</span></h1>  
<h2>Example heading <span class="badge bg-secondary">New</span></h2>  
<h3>Example heading <span class="badge bg-secondary">New</span></h3>  
<h4>Example heading <span class="badge bg-secondary">New</span></h4>  
<h5>Example heading <span class="badge bg-secondary">New</span></h5>  
<h6>Example heading <span class="badge bg-secondary">New</span></h6>
```


Badge

Primary Secondary Success Danger Warning Info Light Dark



```
<span class="badge text-bg-primary">Primary</span>  
<span class="badge text-bg-secondary">Secondary</span>  
<span class="badge text-bg-success">Success</span>  
<span class="badge text-bg-danger">Danger</span>  
<span class="badge text-bg-warning">Warning</span>  
<span class="badge text-bg-info">Info</span>  
<span class="badge text-bg-light">Light</span>  
<span class="badge text-bg-dark">Dark</span>
```

```
<span class="badge rounded-pill text-bg-primary">Primary</span>  
<span class="badge rounded-pill text-bg-secondary">Secondary</span>  
<span class="badge rounded-pill text-bg-success">Success</span>  
<span class="badge rounded-pill text-bg-danger">Danger</span>  
<span class="badge rounded-pill text-bg-warning">Warning</span>  
<span class="badge rounded-pill text-bg-info">Info</span>  
<span class="badge rounded-pill text-bg-light">Light</span>  
<span class="badge rounded-pill text-bg-dark">Dark</span>
```



Primary Secondary Success Danger Warning Info Light Dark

Breadcrumb

Home

[Home](#) / Library

[Home](#) / [Library](#) / Data

```
<nav aria-label="breadcrumb">
  <ol class="breadcrumb">
    <li class="breadcrumb-item active" aria-current="page">Home</li>
  </ol>
</nav>

<nav aria-label="breadcrumb">
  <ol class="breadcrumb">
    <li class="breadcrumb-item"><a href="#">Home</a></li>
    <li class="breadcrumb-item active" aria-current="page">Library</li>
  </ol>
</nav>

<nav aria-label="breadcrumb">
  <ol class="breadcrumb">
    <li class="breadcrumb-item"><a href="#">Home</a></li>
    <li class="breadcrumb-item"><a href="#">Library</a></li>
    <li class="breadcrumb-item active" aria-current="page">Data</li>
  </ol>
</nav>
```

Buttons

Bootstrap includes several predefined button styles, each serving its own semantic purpose, with a few extras thrown in for more control.




```
<button type="button" class="btn btn-primary">Primary</button>
<button type="button" class="btn btn-secondary">Secondary</button>
<button type="button" class="btn btn-success">Success</button>
<button type="button" class="btn btn-danger">Danger</button>
<button type="button" class="btn btn-warning">Warning</button>
<button type="button" class="btn btn-info">Info</button>
<button type="button" class="btn btn-light">Light</button>
<button type="button" class="btn btn-dark">Dark</button>

<button type="button" class="btn btn-link">Link</button>
```


Button tags

The `.btn` classes are designed to be used with the `<button>` element. However, you can also use these classes on `<a>` or `<input>` elements (though some browsers may apply a slightly different rendering).



```
<a class="btn btn-primary" href="#" role="button">Link</a>  
<button class="btn btn-primary" type="submit">Button</button>  
<input class="btn btn-primary" type="button" value="Input">  
<input class="btn btn-primary" type="submit" value="Submit">  
<input class="btn btn-primary" type="reset" value="Reset">
```



Button sizes

Large button

Large button

```
<button type="button" class="btn btn-primary btn-lg">Large button</button>  
<button type="button" class="btn btn-secondary btn-lg">Large button</button>
```

Small button

Small button

```
<button type="button" class="btn btn-primary btn-sm">Small button</button>  
<button type="button" class="btn btn-secondary btn-sm">Small button</button>
```



Button states

Primary link

Link

```
<a href="#" class="btn btn-primary btn-lg active" role="button" aria-pressed="true">Primary link</a>  
<a href="#" class="btn btn-secondary btn-lg active" role="button" aria-pressed="true">Link</a>
```

Primary button

Button

```
<button type="button" class="btn btn-lg btn-primary disabled">Primary button</button>  
<button type="button" class="btn btn-secondary btn-lg disabled">Button</button>
```

Primary link

Link

```
<a href="#" class="btn btn-primary btn-lg disabled" role="button" aria-disabled="true">Primary link</a>  
<a href="#" class="btn btn-secondary btn-lg disabled" role="button" aria-disabled="true">Link</a>
```

Button group

Left Middle Right

```
<div class="btn-group" role="group" aria-label="Basic example">  
  <button type="button" class="btn btn-secondary">Left</button>  
  <button type="button" class="btn btn-secondary">Middle</button>  
  <button type="button" class="btn btn-secondary">Right</button>  
</div>
```

1 2 3 4 5 6 7 8

```
<div class="btn-toolbar" role="toolbar" aria-label="Toolbar with button groups">  
  <div class="btn-group mr-2" role="group" aria-label="First group">  
    <button type="button" class="btn btn-secondary">1</button>  
    <button type="button" class="btn btn-secondary">2</button>  
    <button type="button" class="btn btn-secondary">3</button>  
    <button type="button" class="btn btn-secondary">4</button>  
  </div>  
  <div class="btn-group mr-2" role="group" aria-label="Second group">  
    <button type="button" class="btn btn-secondary">5</button>  
    <button type="button" class="btn btn-secondary">6</button>  
    <button type="button" class="btn btn-secondary">7</button>  
  </div>  
  <div class="btn-group" role="group" aria-label="Third group">  
    <button type="button" class="btn btn-secondary">8</button>  
  </div>  
</div>
```

Button
Button
Button
Button
Button
Button

```
<div class="btn-group-vertical">  
  ...  
</div>
```



Button group (2)


1 2 Dropdown ▾

```
<div class="btn-group" role="group" aria-label="Button group with nested dropdown">
  <button type="button" class="btn btn-secondary">1</button>
  <button type="button" class="btn btn-secondary">2</button>

  <div class="btn-group" role="group">
    <button id="btnGroupDrop1" type="button" class="btn btn-secondary dropdown-toggle" data-toggle="dropdown"
    aria-haspopup="true" aria-expanded="false">
      Dropdown
    </button>
    <div class="dropdown-menu" aria-labelledby="btnGroupDrop1">
      <a class="dropdown-item" href="#">Dropdown link</a>
      <a class="dropdown-item" href="#">Dropdown link</a>
    </div>
  </div>
</div>
```



Card

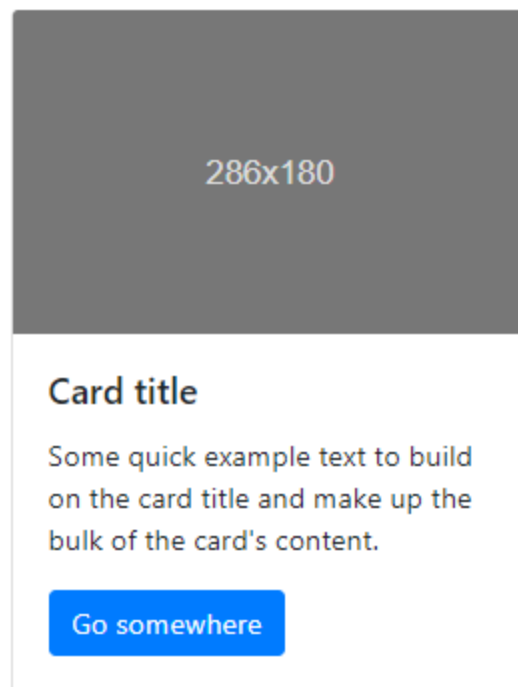

```
<div class="card" style="width: 18rem;">
  
  <div class="card-body">
    <h5 class="card-title">Card title</h5>
    <p class="card-text">Some quick example text to build on the card title and make up the bulk of the card's content.</p>
    <a href="#" class="btn btn-primary">Go somewhere</a>
  </div>
</div>
```

Carousel



Third slide



Third slide label

Some representative placeholder content for the third slide.



Carousel (2)

```
<div id="carouselExampleIndicators" class="carousel slide" data-bs-ride="carousel">
  <div class="carousel-indicators">
    <button type="button" data-bs-target="#carouselExampleIndicators" data-bs-slide-to="0" class="active" aria-current="true" aria-label="Slide 1">
    </button>
    <button type="button" data-bs-target="#carouselExampleIndicators" data-bs-slide-to="1" aria-label="Slide 2"></button>
    <button type="button" data-bs-target="#carouselExampleIndicators" data-bs-slide-to="2" aria-label="Slide 3"></button>
  </div>
  <div class="carousel-inner">
    <div class="carousel-item active">
      
    </div>
    <div class="carousel-item">
      
    </div>
    <div class="carousel-item">
      
    </div>
  </div>
  <button class="carousel-control-prev" type="button" data-bs-target="#carouselExampleIndicators" data-bs-slide="prev">
    <span class="carousel-control-prev-icon" aria-hidden="true"></span>
    <span class="visually-hidden">Previous</span>
  </button>
  <button class="carousel-control-next" type="button" data-bs-target="#carouselExampleIndicators" data-bs-slide="next">
    <span class="carousel-control-next-icon" aria-hidden="true"></span>
    <span class="visually-hidden">Next</span>
  </button>
</div>
```




Dropdown

Dropdown button ▾

```
<div class="dropdown">
  <button class="btn btn-secondary dropdown-toggle" type="button" id="dropdownMenuButton" data-toggle=
"dropdown" aria-haspopup="true" aria-expanded="false">
    Dropdown button
  </button>
  <div class="dropdown-menu" aria-labelledby="dropdownMenuButton">
    <a class="dropdown-item" href="#">Action</a>
    <a class="dropdown-item" href="#">Another action</a>
    <a class="dropdown-item" href="#">Something else here</a>
  </div>
</div>
```



Dropdown (2)



```
<!-- Example single danger button -->
<div class="btn-group">
  <button type="button" class="btn btn-danger dropdown-toggle" data-toggle="dropdown" aria-haspopup="true"
    Action
  </button>
  <div class="dropdown-menu">
    <a class="dropdown-item" href="#">Action</a>
    <a class="dropdown-item" href="#">Another action</a>
    <a class="dropdown-item" href="#">Something else here</a>
    <div class="dropdown-divider"></div>
    <a class="dropdown-item" href="#">Separated link</a>
  </div>
</div>
```



Forms

Email address

We'll never share your email with anyone else.

Password

☐ Check me out

Submit

```
<form>
  <div class="mb-3">
    <label for="exampleInputEmail1" class="form-label">Email address</label>
    <input type="email" class="form-control" id="exampleInputEmail1" aria-describedby="emailHelp">
    <div id="emailHelp" class="form-text">We'll never share your email with anyone else.</div>
  </div>
  <div class="mb-3">
    <label for="exampleInputPassword1" class="form-label">Password</label>
    <input type="password" class="form-control" id="exampleInputPassword1">
  </div>
  <div class="mb-3 form-check">
    <input type="checkbox" class="form-check-input" id="exampleCheck1">
    <label class="form-check-label" for="exampleCheck1">Check me out</label>
  </div>
  <button type="submit" class="btn btn-primary">Submit</button>
</form>
```



Forms (2)

Email address

Example textarea

```
<div class="mb-3">
  <label for="exampleFormControlInput1" class="form-label">Email address</label>
  <input type="email" class="form-control" id="exampleFormControlInput1" placeholder="name@example.com">
</div>
<div class="mb-3">
  <label for="exampleFormControlTextarea1" class="form-label">Example textarea</label>
  <textarea class="form-control" id="exampleFormControlTextarea1" rows="3"></textarea>
</div>
```



Forms (3)

.form-control-lg

Default input

.form-control-sm

```
<input class="form-control form-control-lg" type="text" placeholder=".form-control-lg" aria-label=".form-control-lg example">  
<input class="form-control" type="text" placeholder="Default input" aria-label="default input example">  
<input class="form-control form-control-sm" type="text" placeholder=".form-control-sm" aria-label=".form-control-sm example">
```



Forms (4)

email@example.com

Password

Confirm identity

```
<form class="row g-3">
  <div class="col-auto">
    <label for="staticEmail2" class="visually-hidden">Email</label>
    <input type="text" readonly class="form-control-plaintext" id="staticEmail2" value="email@example.com">
  </div>
  <div class="col-auto">
    <label for="inputPassword2" class="visually-hidden">Password</label>
    <input type="password" class="form-control" id="inputPassword2" placeholder="Password">
  </div>
  <div class="col-auto">
    <button type="submit" class="btn btn-primary mb-3">Confirm identity</button>
  </div>
</form>
```



Forms (5)

- ☐ Default checkbox
- ☒ Checked checkbox

```
<div class="form-check">
  <input class="form-check-input" type="checkbox" value="" id="flexCheckDefault">
  <label class="form-check-label" for="flexCheckDefault">
    Default checkbox
  </label>
</div>
<div class="form-check">
  <input class="form-check-input" type="checkbox" value="" id="flexCheckChecked" checked>
  <label class="form-check-label" for="flexCheckChecked">
    Checked checkbox
  </label>
</div>
```

☐ Indeterminate checkbox

```
<div class="form-check">
  <input class="form-check-input" type="checkbox" value="" id="flexCheckIndeterminate">
  <label class="form-check-label" for="flexCheckIndeterminate">
    Indeterminate checkbox
  </label>
</div>
```



Forms (6)

Open this select menu



Open this select menu



```
<select class="form-select form-select-lg mb-3" aria-label=".form-select-lg example">  
  <option selected>Open this select menu</option>  
  <option value="1">One</option>  
  <option value="2">Two</option>  
  <option value="3">Three</option>  
</select>
```

```
<select class="form-select form-select-sm" aria-label=".form-select-sm example">  
  <option selected>Open this select menu</option>  
  <option value="1">One</option>  
  <option value="2">Two</option>  
  <option value="3">Three</option>  
</select>
```





Forms (7)



```
<select class="form-select" size="3" aria-label="size 3 select example">  
  <option selected>Open this select menu</option>  
  <option value="1">One</option>  
  <option value="2">Two</option>  
  <option value="3">Three</option>  
</select>
```

Example range



```
<label for="customRange2" class="form-label">Example range</label>  
<input type="range" class="form-range" min="0" max="5" id="customRange2">
```





Forms (8)

- ☐ Default radio
- ☒ Default checked radio

```
<div class="form-check">
  <input class="form-check-input" type="radio" name="flexRadioDefault" id="flexRadioDefault1">
  <label class="form-check-label" for="flexRadioDefault1">
    Default radio
  </label>
</div>
<div class="form-check">
  <input class="form-check-input" type="radio" name="flexRadioDefault" id="flexRadioDefault2" checked>
  <label class="form-check-label" for="flexRadioDefault2">
    Default checked radio
  </label>
</div>
```



Forms (9)

-  Default switch checkbox input
-  Checked switch checkbox input
-  Disabled switch checkbox input
-  Disabled checked switch checkbox input

```
<div class="form-check form-switch">
  <input class="form-check-input" type="checkbox" role="switch" id="flexSwitchCheckDefault">
  <label class="form-check-label" for="flexSwitchCheckDefault">Default switch checkbox input</label>
</div>
<div class="form-check form-switch">
  <input class="form-check-input" type="checkbox" role="switch" id="flexSwitchCheckChecked" checked>
  <label class="form-check-label" for="flexSwitchCheckChecked">Checked switch checkbox input</label>
</div>
<div class="form-check form-switch">
  <input class="form-check-input" type="checkbox" role="switch" id="flexSwitchCheckDisabled" disabled>
  <label class="form-check-label" for="flexSwitchCheckDisabled">Disabled switch checkbox input</label>
</div>
<div class="form-check form-switch">
  <input class="form-check-input" type="checkbox" role="switch" id="flexSwitchCheckCheckedDisabled" checked disabled>
  <label class="form-check-label" for="flexSwitchCheckCheckedDisabled">Disabled checked switch checkbox input</label>
</div>
```



Input group

@	Username		
---	----------	--	--

Recipient's username		@example.com
----------------------	--	--------------

Your vanity URL

https://example.com/users/			
----------------------------	--	--	--

\$.00
----	--	--	-----

Username	@	Server	
----------	---	--------	--

With textarea			
---------------	--	--	--

Input group (2)

```
<div class="input-group mb-3">
  <span class="input-group-text" id="basic-addon1">@</span>
  <input type="text" class="form-control" placeholder="Username"
    aria-label="Username" aria-describedby="basic-addon1">
</div>

<div class="input-group mb-3">
  <input type="text" class="form-control" placeholder="Recipient's username"
    aria-label="Recipient's username" aria-describedby="basic-addon2">
  <span class="input-group-text" id="basic-addon2">@example.com</span>
</div>

<label for="basic-url" class="form-label">Your vanity URL</label>
<div class="input-group mb-3">
  <span class="input-group-text" id="basic-addon3">https://example.com/users/</span>
  <input type="text" class="form-control" id="basic-url" aria-describedby="basic-addon3">
</div>

<div class="input-group mb-3">
  <span class="input-group-text">$</span>
  <input type="text" class="form-control" aria-label="Amount (to the nearest dollar)">
  <span class="input-group-text">.<input type="text" class="form-control" id="basic-url" aria-describedby="basic-addon3">00</span>
</div>

<div class="input-group mb-3">
  <input type="text" class="form-control" placeholder="Username" aria-label="Username">
  <span class="input-group-text">@</span>
  <input type="text" class="form-control" placeholder="Server" aria-label="Server">
</div>

<div class="input-group">
  <span class="input-group-text">With textarea</span>
  <textarea class="form-control" aria-label="With textarea"></textarea>
</div>
```

Navs

Active Link Link Disabled

Active Link Link Disabled

```
<ul class="nav">
  <li class="nav-item">
    <a class="nav-link active" aria-current="page" href="#">Active</a>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="#">Link</a>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="#">Link</a>
  </li>
  <li class="nav-item">
    <a class="nav-link disabled">Disabled</a>
  </li>
</ul>
```

```
<nav class="nav">
  <a class="nav-link active" aria-current="page" href="#">Active</a>
  <a class="nav-link" href="#">Link</a>
  <a class="nav-link" href="#">Link</a>
  <a class="nav-link disabled">Disabled</a>
</nav>
```

Navs (2)

```
<ul class="nav flex-column">
  <li class="nav-item">
    <a class="nav-link active" aria-current="page" href="#">Active</a>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="#">Link</a>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="#">Link</a>
  </li>
  <li class="nav-item">
    <a class="nav-link disabled">Disabled</a>
  </li>
</ul>
```

Active

Link

Link

Disabled

Navs (3)

Active Link Link Disabled

```
<ul class="nav nav-tabs">
  <li class="nav-item">
    <a class="nav-link active" href="#">Active</a>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="#">Link</a>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="#">Link</a>
  </li>
  <li class="nav-item">
    <a class="nav-link disabled" href="#">Disabled</a>
  </li>
</ul>
```

Active Link Link Disabled

```
<ul class="nav nav-pills">
  <li class="nav-item">
    <a class="nav-link active" href="#">Active</a>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="#">Link</a>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="#">Link</a>
  </li>
  <li class="nav-item">
    <a class="nav-link disabled" href="#">Disabled</a>
  </li>
</ul>
```




Navs (4)

Active

Much longer nav link

Link

Disabled

```
<ul class="nav nav-pills nav-justified">
  <li class="nav-item">
    <a class="nav-link active" aria-current="page" href="#">Active</a>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="#">Much longer nav link</a>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="#">Link</a>
  </li>
  <li class="nav-item">
    <a class="nav-link disabled">Disabled</a>
  </li>
</ul>
```



Navs (5)

Active

Dropdown ▾

Link

Disabled


```
<ul class="nav nav-pills">
  <li class="nav-item">
    <a class="nav-link active" aria-current="page" href="#">Active</a>
  </li>
  <li class="nav-item dropdown">
    <a class="nav-link dropdown-toggle" data-bs-toggle="dropdown" href="#" role="button" aria-expanded="false">Dropdown</a>
    <ul class="dropdown-menu">
      <li><a class="dropdown-item" href="#">Action</a></li>
      <li><a class="dropdown-item" href="#">Another action</a></li>
      <li><a class="dropdown-item" href="#">Something else here</a></li>
      <li><hr class="dropdown-divider"></li>
      <li><a class="dropdown-item" href="#">Separated link</a></li>
    </ul>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="#">Link</a>
  </li>
  <li class="nav-item">
    <a class="nav-link disabled">Disabled</a>
  </li>
</ul>
```



Navbar

Navbars are responsive meta components that serve as navigation headers for your application or site.

They begin collapsed (and are toggleable) in mobile views and become horizontal as the available viewport width increases.



Navbar (2)

```
<nav class="navbar navbar-expand-lg navbar-light bg-light">
  <div class="container-fluid">
    <a class="navbar-brand" href="#">Navbar</a>
    <button class="navbar-toggler" type="button" data-bs-toggle="collapse"
      data-bs-target="#navbarSupportedContent" aria-controls="navbarSupportedContent"
      aria-expanded="false" aria-label="Toggle navigation">
      <span class="navbar-toggler-icon"></span>
    </button>
    <div class="collapse navbar-collapse" id="navbarSupportedContent">
      <ul class="navbar-nav me-auto mb-2 mb-lg-0">
        <li class="nav-item">
          <a class="nav-link active" aria-current="page" href="#">Home</a>
        </li>
        <li class="nav-item">
          <a class="nav-link" href="#">Link</a>
        </li>
        <li class="nav-item dropdown">
          <a class="nav-link dropdown-toggle" href="#" id="navbarDropdown" role="button" data-bs-toggle="dropdown" aria-expanded="false">
            Dropdown
          </a>
          <ul class="dropdown-menu" aria-labelledby="navbarDropdown">
            <li><a class="dropdown-item" href="#">Action</a></li>
            <li><a class="dropdown-item" href="#">Another action</a></li>
            <li><hr class="dropdown-divider"></li>
            <li><a class="dropdown-item" href="#">Something else here</a></li>
          </ul>
        </li>
        <li class="nav-item">
          <a class="nav-link disabled">Disabled</a>
        </li>
      </ul>
      <form class="d-flex">
        <input class="form-control me-2" type="search" placeholder="Search" aria-label="Search">
        <button class="btn btn-outline-success" type="submit">Search</button>
      </form>
    </div>
  </div>
</nav>
```

Navbar (3)

Navbar

Navbar

```
<!-- As a link -->
<nav class="navbar navbar-light bg-light">
  <div class="container-fluid">
    <a class="navbar-brand" href="#">Navbar</a>
  </div>
</nav>

<!-- As a heading -->
<nav class="navbar navbar-light bg-light">
  <div class="container-fluid">
    <span class="navbar-brand mb-0 h1">Navbar</span>
  </div>
</nav>
```



Navbar (4)

A screenshot of a Bootstrap navbar. It features a light gray background. Inside, there is a white search input field with the placeholder text "Search" and a green-outlined button with the text "Search".

```
<nav class="navbar navbar-light bg-light">
  <div class="container-fluid">
    <form class="d-flex">
      <input class="form-control me-2" type="search" placeholder="Search" aria-label="Search">
      <button class="btn btn-outline-success" type="submit">Search</button>
    </form>
  </div>
</nav>
```



Navbar (5)

Navbar Home Features Pricing About

Navbar Home Features Pricing About

Navbar Home Features Pricing About

```
<nav class="navbar navbar-dark bg-dark">
  <!-- Navbar content -->
</nav>

<nav class="navbar navbar-dark bg-primary">
  <!-- Navbar content -->
</nav>

<nav class="navbar navbar-light" style="background-color: #e3f2fd;">
  <!-- Navbar content -->
</nav>
```



Navbar (6)





```
<div class="collapse" id="navbarToggleExternalContent">
  <div class="bg-dark p-4">
    <h5 class="text-white h4">Collapsed content</h5>
    <span class="text-muted">Toggleable via the navbar brand.</span>
  </div>
</div>
<nav class="navbar navbar-dark bg-dark">
  <div class="container-fluid">
    <button class="navbar-toggler" type="button" data-bs-toggle="collapse"
      data-bs-target="#navbarToggleExternalContent" aria-controls="navbarToggleExternalContent"
      aria-expanded="false" aria-label="Toggle navigation">
      <span class="navbar-toggler-icon"></span>
    </button>
  </div>
</nav>
```




Pagination

Provide pagination links for your site or app with the multi-page pagination component, or the simpler pager alternative.

Default pagination



```
<nav aria-label="Page navigation example">
  <ul class="pagination">
    <li class="page-item"><a class="page-link" href="#">Previous</a></li>
    <li class="page-item"><a class="page-link" href="#">1</a></li>
    <li class="page-item"><a class="page-link" href="#">2</a></li>
    <li class="page-item"><a class="page-link" href="#">3</a></li>
    <li class="page-item"><a class="page-link" href="#">Next</a></li>
  </ul>
</nav>
```



Pagination (2)

Links are customizable for different circumstances. Use **.disabled** for unclickable links and **.active** to indicate the current page.



```
<nav aria-label="...">
  <ul class="pagination">
    <li class="page-item disabled">
      <a class="page-link" href="#" tabindex="-1">Previous</a>
    </li>
    <li class="page-item"><a class="page-link" href="#">1</a></li>
    <li class="page-item active">
      <a class="page-link" href="#">2 <span class="sr-only">(current)</span></a>
    </li>
    <li class="page-item"><a class="page-link" href="#">3</a></li>
    <li class="page-item">
      <a class="page-link" href="#">Next</a>
    </li>
  </ul>
</nav>
```

Progress bars

Provide up-to-date feedback on the progress of a workflow or action with simple yet flexible progress bars.



```
<div class="progress">
  <div class="progress-bar" role="progressbar" aria-valuenow="60" aria-valuemin="0"
aria-valuemax="100" style="width: 60%;">
    <span class="sr-only">60% Complete</span>
  </div>
</div>
```

Remove the `` with `.sr-only` class from within the progress bar to show a visible percentage.




```
<div class="progress">
  <div class="progress-bar" role="progressbar" aria-valuenow="60" aria-valuemin="0"
aria-valuemax="100" style="width: 60%;">
    60%
  </div>
</div>
```



Contextual alternatives

Progress bars use some of the same button and alert classes for consistent styles.

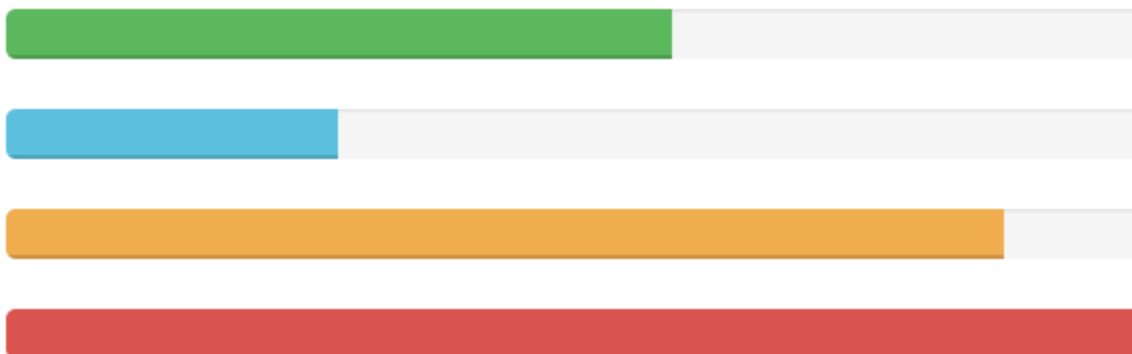


```
<div class="progress">  
  <div class="progress-bar bg-success" r  
</div>  
<div class="progress">  
  <div class="progress-bar bg-info" role  
</div>  
<div class="progress">  
  <div class="progress-bar bg-warning" r  
</div>  
<div class="progress">  
  <div class="progress-bar bg-danger" r  
</div>
```

Striped

Uses a gradient to create a striped effect.


```
<div class="progress">  
  <div class="progress-bar progress-bar-striped bg-success" role="progressbar" style="width: 25%" aria-valuenow="25" aria-valuemin="0" aria-valuemax="100">  
</div>
```





Modals

Modals are streamlined, but flexible, dialog prompts with the minimum required functionality and smart defaults.

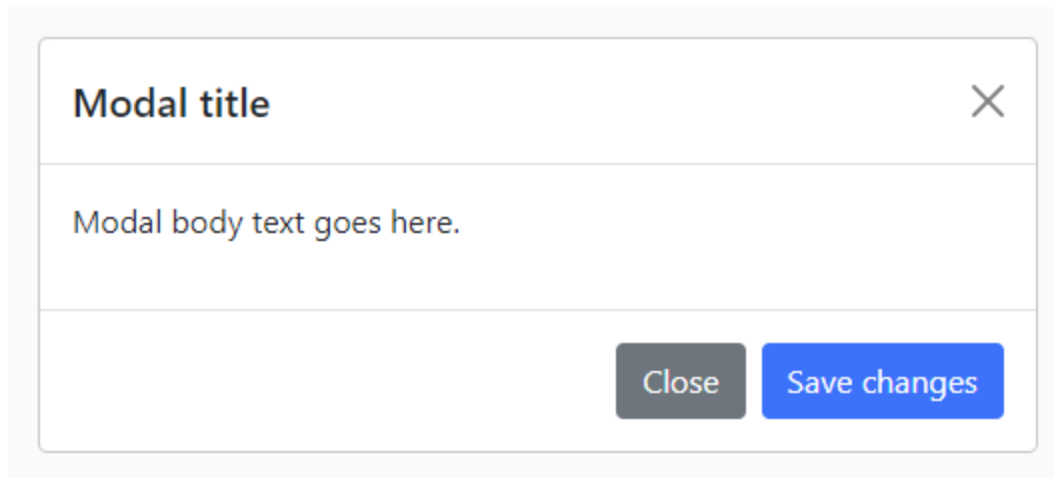

Modals (2)


```
<div class="modal" tabindex="-1">
  <div class="modal-dialog">
    <div class="modal-content">
      <div class="modal-header">
        <h5 class="modal-title">Modal title</h5>
        <button type="button" class="btn-close" data-bs-dismiss="modal" aria-label="Close"></button>
      </div>
      <div class="modal-body">
        <p>Modal body text goes here.</p>
      </div>
      <div class="modal-footer">
        <button type="button" class="btn btn-secondary" data-bs-dismiss="modal">Close</button>
        <button type="button" class="btn btn-primary">Save changes</button>
      </div>
    </div>
  </div>
</div>
```



Popover

You can add small overlays of content, like those on the iPad, to any element for housing secondary information.

Popovers whose both title and content are zero-length are never displayed.

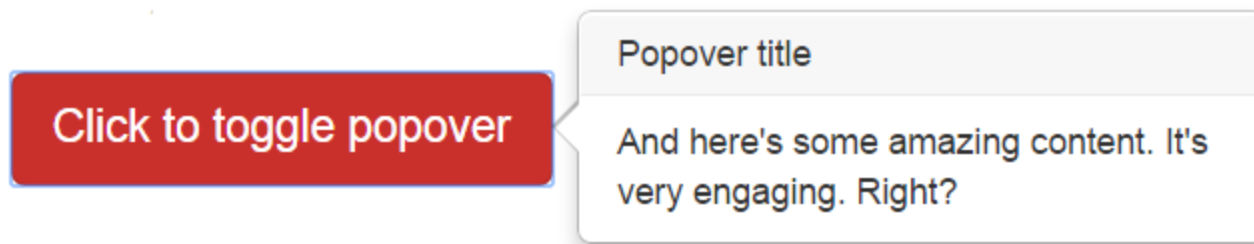

```
<button type="button" class="btn btn-lg btn-danger" data-bs-toggle="popover"  
  title="Popover title"  
  data-bs-content="And here's some amazing content. It's very engaging. Right?">  
  Click to toggle popover  
</button>
```



Questions?