

SET-10 (A) Concept Design with E-R Model : Relationship between PASSENGER Entity and RESERVATION Entity


(B) Write a query to update PNR_No=5 WHERE PNR_No=4 in reservation relation.

(C) Create triggers on a table which acts on event INSERT

1 ans .

Relationship between PASSENGER Entity and RESERVATION Entity:

The following diagram depicts the relationship exists between PASSENGER Entity and RESERVATION Entity

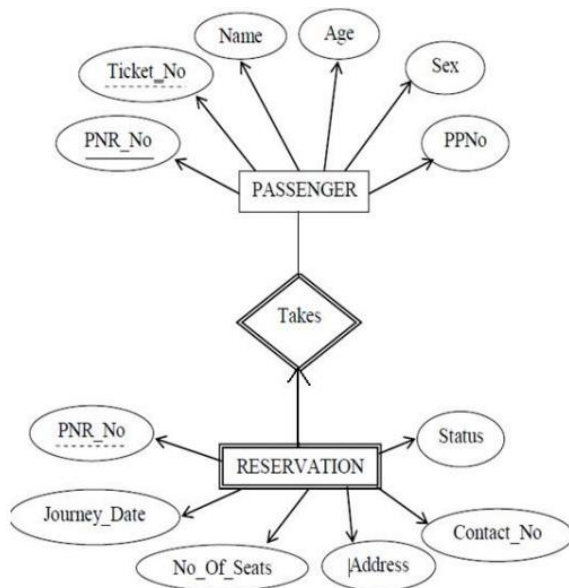

The relationship between PASSENGER Entity and RESERVATION Entity is weak relationship. Because the one entity consists of primary key and another entity consists of foreign key. Here the one entity is strong entity (single border rectangle) and another entity is weak entity (double border rectangle). The relationship between strong entity and weak entity is weak relationship.

2 ans.

UPDATE Command is used to update the existing data within the table

The syntax of the command is as follows. SQL> UPDATE tablename SET value WHERE condition;

Create the Reservation Table

```
CREATE TABLE reservation ( PNR_No INT PRIMARY KEY, Passenger_Name VARCHAR(50));
```

```
INSERT INTO reservation VALUES (4, 'Rahul');
```

```
INSERT INTO reservation VALUES (6, 'Anjali');
```

```
UPDATE reservation SET PNR_No = 5 WHERE PNR_No = 4;
```

Output : select*from reservation

PNR_No | Passenger_Name

5 | Rahul

6 | Anjali

3 ans

MySQL 8.0 Command Line Client

```
mysql> Create table Bus(Bus_No int, Source varchar(20), Destination varchar(20), Dep_Time time);
Query OK, 0 rows affected (1.25 sec)
```

MySQL 8.0 Command Line Client

```
mysql> delimiter /
mysql> Create TRIGGER t1
  -> before INSERT on Bus
  -> for each row
  -> begin
  -> if new.Source='Hyderabad' then set @count=@count+1;
  -> end if;
  -> end;
  -> /
Query OK, 0 rows affected (0.19 sec)

mysql> set @count=0;
  -> /
Query OK, 0 rows affected (0.00 sec)

mysql> INSERT into Bus values(5, 'Hyderabad', 'Bangalore', '05:15:20');
  -> /
Query OK, 1 row affected (0.11 sec)

mysql> INSERT into Bus values(7, 'Kerala', 'Karnataka', '10:15:00');
  -> /
Query OK, 1 row affected (0.19 sec)

mysql> INSERT into Bus values(10, 'Hyderabad', 'Pune', '20:05:10');
  -> /
Query OK, 1 row affected (0.13 sec)

mysql> Select @count as 'No. of trips from Hyderabad';
  -> /
+-----+
| No. of trips from Hyderabad |
+-----+
| 2 |
+-----+
1 row in set (0.00 sec)
```