


my boss app — Orange Apigee

Connection Guide

Audience: Apigee / API platform team

Purpose: Route mobile app, admin portal, and chat APIs through Apigee to demo backend

1. Architecture

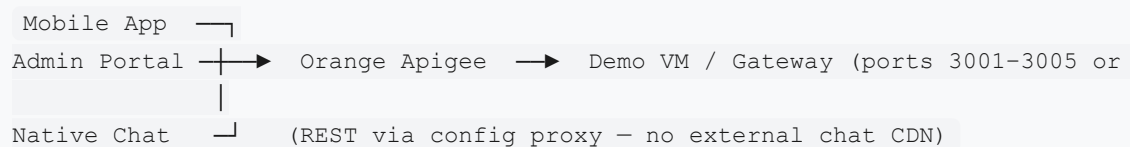

- **All REST API traffic** goes through Apigee
 - **Chat** uses native REST messaging on the **config** proxy (`/config/api/v1/chat/*`)
 - Full chat spec: [`docs/api/CHAT_API.md`](`../../api/CHAT_API.md`)
-

2. API base URL (demo)

```
https://api-demo.orange.com
```

3. Proxy routes to create

Apigee proxy path	Target (demo VM)	Methods
<code>/auth/api/v1/**</code>	<code>http://<VM_IP>:3001/api/v1/**</code>	GET, POST, PUT, DELETE, OPTIONS
<code>/user/api/v1/**</code>	<code>http://<VM_IP>:3002/api/v1/**</code>	GET, POST, PUT, DELETE, OPTIONS
<code>/config/api/v1/**</code>	<code>http://<VM_IP>:3003/api/v1/**</code>	GET, POST, PUT, DELETE, OPTIONS
<code>/squad/api/v1/**</code>	<code>http://<VM_IP>:3004/api/v1/**</code>	GET, POST, PUT, DELETE, OPTIONS
<code>/survey/api/v1/**</code>	<code>http://<VM_IP>:3005/api/v1/**</code>	GET, POST, PUT, DELETE, OPTIONS

Example URLs:

```
https://api-demo.orange.com/auth/api/v1/auth/sign-in
https://api-demo.orange.com/auth/api/v1/auth/verify-2fa
https://api-demo.orange.com/config/api/v1/chat/messages
https://api-demo.orange.com/survey/api/v1/surveys/catalog
```

4. Recommended Apigee policies

All proxies

- TLS termination at Apigee
- Spike arrest: 100 req/min/IP
- CORS for admin + mobile web origins

Authenticated routes

- Verify JWT (Bearer from auth-service)
- Pass `Authorization` and `Accept-Language` unchanged

Public routes (no JWT)

- `POST /auth/api/v1/auth/sign-in , /sign-up , /verify-2fa , /resend-otp , /refresh`
 - `GET /config/api/v1/config/*` (read-only reference data)
 - `GET /config/api/v1/chat/config , /chat/health`
 - `GET /**/health`
-

5. Chat endpoints (config proxy)

Endpoint	Auth	Description
<code>GET /config/api/v1/chat/config</code>	Public	Chat bootstrap metadata
<code>GET /config/api/v1/chat/health</code>	Public	Monitoring
<code>GET /config/api/v1/chat/visitor</code>	JWT	User identity
<code>GET /config/api/v1/chat/messages</code>	JWT	Poll direct messages
<code>POST /config/api/v1/chat/messages</code>	JWT	Send direct message

See: [`docs/architecture/APIGEE_CHAT.md`]([../architecture/APIGEE_CHAT.md](#))

6. Error response format

All services return Orange Common Response errors:

```
{ "code": 41, "reason": "Invalid credentials", "message": "..." }
```

7. Swagger (non-production)

Each service exposes OpenAPI at `/api/v1/docs` when enabled:

```
https://api-demo.orange.com/auth/api/v1/docs
https://api-demo.orange.com/config/api/v1/docs ← Chat tag
```

8. Client configuration after Apigee is live

Admin portal

```
VITE_AUTH_API_URL=https://api-demo.orange.com/auth/api/v1
VITE_USER_API_URL=https://api-demo.orange.com/user/api/v1
VITE_CONFIG_API_URL=https://api-demo.orange.com/config/api/v1
VITE_SURVEY_API_URL=https://api-demo.orange.com/survey/api/v1
```

Mobile app

```
fvm flutter build web --dart-define=DEMO_MODE=true --base-href=/app/
# or use: apps/mobile/build-demo-web.sh
```

9. Apigee verification

```
curl https://api-demo.orange.com/auth/api/v1/health
curl https://api-demo.orange.com/config/api/v1/chat/config

curl -X POST https://api-demo.orange.com/auth/api/v1/auth/sign-in \
-H "Content-Type: application/json" \
-d '{"email":"demo@orange.com"}'
```

10. Checklist

- ☐ 5 API proxies (auth, user, config, squad, survey)
- ☐ JWT verify on protected routes (including chat messages)
- ☐ Orange error format preserved end-to-end
- ☐ Swagger reachable for QA (optional)
- ☐ Chat documented in config Swagger

Orange — my boss app — Apigee Integration

