



## **NetApp for AWS / VMC**

NetApp Solutions

NetApp

October 20, 2023

# Table of Contents

NetApp Hybrid Multicloud Solutions for AWS / VMC .....	1
Protecting Workloads on AWS / VMC .....	1
Migrating Workloads on AWS / VMC .....	131
Region Availability – Supplemental NFS datastore for VMC .....	149

# NetApp Hybrid Multicloud Solutions for AWS / VMC

## Protecting Workloads on AWS / VMC

### TR-4931: Disaster Recovery with VMware Cloud on Amazon Web Services and Guest Connect


Authors: Chris Reno, Josh Powell, and Suresh Thoppay - NetApp Solutions Engineering

#### Overview

A proven disaster recovery (DR) environment and plan is critical for organizations to ensure that business-critical applications can be rapidly restored in the event of a major outage. This solution focuses on demonstrating DR use cases with a focus on VMware and NetApp technologies, both on-premises and with VMware Cloud on AWS.

NetApp has a long history of integration with VMware as evidenced by the tens of thousands of customers that have chosen NetApp as their storage partner for their virtualized environment. This integration continues with guest-connected options in the cloud and recent integrations with NFS datastores as well. This solution focuses on the use case commonly referred to as guest-connected storage.

In guest-connected storage, the guest VMDK is deployed on a VMware-provisioned datastore, and application data is housed on iSCSI or NFS and mapped directly to the VM. Oracle and MS SQL applications are used to demonstrate a DR scenario, as shown in the following figure.

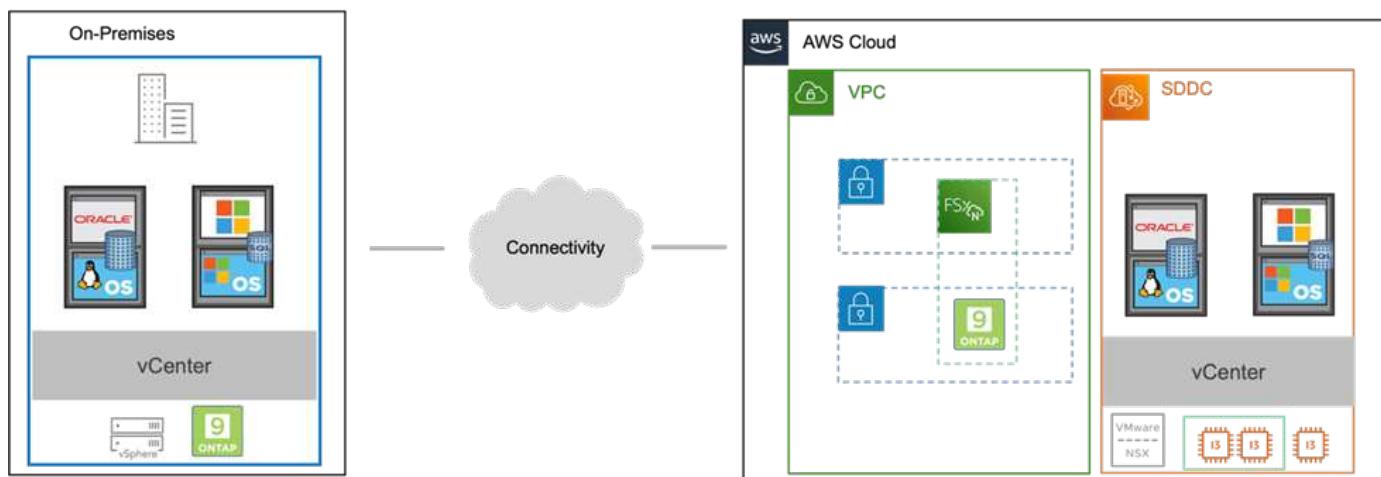

#### Assumptions, pre-requisites and component overview

Before deploying this solution, review the overview of the components, the required pre-requisites to deploy the solution and assumptions made in documenting this solution.

#### [DR Solution Requirements, Pre-requisites and Planning](#)

#### Performing DR with SnapCenter

In this solution, SnapCenter provides application-consistent snapshots for SQL Server and Oracle application data. This configuration, together with SnapMirror technology, provides high-speed data replication between

our on-premises AFF and FSx ONTAP cluster. Additionally, Veeam Backup & Replication provides backup and restore capabilities for our virtual machines.

In this section, we cover the configuration of SnapCenter, SnapMirror, and Veeam for both backup and restore.

The following sections cover configuration and the steps needed to complete a failover at the secondary site:

#### **Configure SnapMirror relationships and retention schedules**

SnapCenter can update SnapMirror relationships within the primary storage system (primary > mirror) and to secondary storage systems (primary > vault) for the purpose of long-term archiving and retention. To do so, you must establish and initialize a data replication relationship between a destination volume and a source volume using SnapMirror.

The source and destination ONTAP systems must be in networks that are peered using Amazon VPC peering, a transit gateway, AWS Direct Connect, or an AWS VPN.

The following steps are required for setting up SnapMirror relationships between an on-premises ONTAP system and FSx ONTAP:



Refer to the [FSx for ONTAP – ONTAP User Guide](#) for more information on creating SnapMirror relationships with FSx.

## Record the source and destination Intercluster logical interfaces

For the source ONTAP system residing on-premises, you can retrieve the inter-cluster LIF information from System Manager or from the CLI.

1. In ONTAP System Manager, navigate to the Network Overview page and retrieve the IP addresses of Type: Intercluster that are configured to communicate with the AWS VPC where FSx is installed.

Name	Status	Storage VM	IPspace	Address	Current Node	Current Port	Portset	Protocols	Type	Thru
veeam_repo	✓	Backup	Default	10.61.181.179	E13A300_1	a0a-181		SMB/CIFS,NFS,S3	Data	0
CM01	✓		Default	10.61.181.180	E13A300_1	a0a-181			Cluster/Node Mgmt	0
HC_N1	✓		Default	10.61.181.183	E13A300_1	a0a-181			Intercluster,Cluster/Node Mgmt	0
HC_N2	✓		Default	10.61.181.184	E13A300_2	a0a-181			Intercluster,Cluster/Node Mgmt	0
lif_ora_svm_614	✓	ora_svm	Default	10.61.181.185	E13A300_1	a0a-181		SMB/CIFS,NFS,FL...	Data	0

2. To retrieve the Intercluster IP addresses for FSx, log into the CLI and run the following command:

```
FSx-Dest::> network interface show -role intercluster
```

```
FsxId0ae40e08acc0dea67::> network interface show -role intercluster
      Logical      Status      Network          Current      Current Is
Vserver     Interface   Admin/Oper Address/Mask    Node        Port   Home
----- -----
FsxId0ae40e08acc0dea67
      inter_1      up/up     172.30.15.42/25      FsxId0ae40e08acc0dea67-01
                                         e0e      true
      inter_2      up/up     172.30.14.28/26      FsxId0ae40e08acc0dea67-02
                                         e0e      true
2 entries were displayed.
```

## Establish cluster peering between ONTAP and FSx

To establish cluster peering between ONTAP clusters, a unique passphrase entered at the initiating ONTAP cluster must be confirmed in the other peer cluster.

1. Set up peering on the destination FSx cluster using the `cluster peer create` command. When prompted, enter a unique passphrase that is used later on the source cluster to finalize the creation process.

```
FSx-Dest::> cluster peer create -address-family ipv4 -peer-addrs  
source_intercluster_1, source_intercluster_2  
Enter the passphrase:  
Confirm the passphrase:
```

2. At the source cluster, you can establish the cluster peer relationship using either ONTAP System Manager or the CLI. From ONTAP System Manager, navigate to Protection > Overview and select Peer Cluster.

**DASHBOARD****STORAGE**

Overview

Volumes

LUNs

Consistency Groups

NVMe Namespaces

Shares

Buckets

Qtrees

Quotas

Storage VMs

Tiers

**NETWORK**

Overview

Ethernet Ports

FC Ports

**EVENTS & JOBS****PROTECTION**

Overview

Relationships

**HOSTS**

## Overview

[◀ Intercluster Settings](#)

### Network Interfaces

## IP ADDRESS

- 10.61.181.184
- 172.21.146.217
- 10.61.181.183
- 172.21.146.216

### Cluster Peers

## PEERED CLUSTER NAME

- Fsxlid0ae40e08acc0dea67
- OTS02

[Peer Cluster](#)[Generate Passphrase](#)[Manage Cluster Peers](#)

### Mediator



Not configured.

[Configure](#)

### Storage VM Peers




## PEERED STORAGE VMS

- 3

3. In the Peer Cluster dialog box, fill out the required information:

- Enter the passphrase that was used to establish the peer cluster relationship on the destination FSx cluster.

- b. Select Yes to establish an encrypted relationship.
- c. Enter the intercluster LIF IP address(es) of the destination FSx cluster.
- d. Click Initiate Cluster Peering to finalize the process.

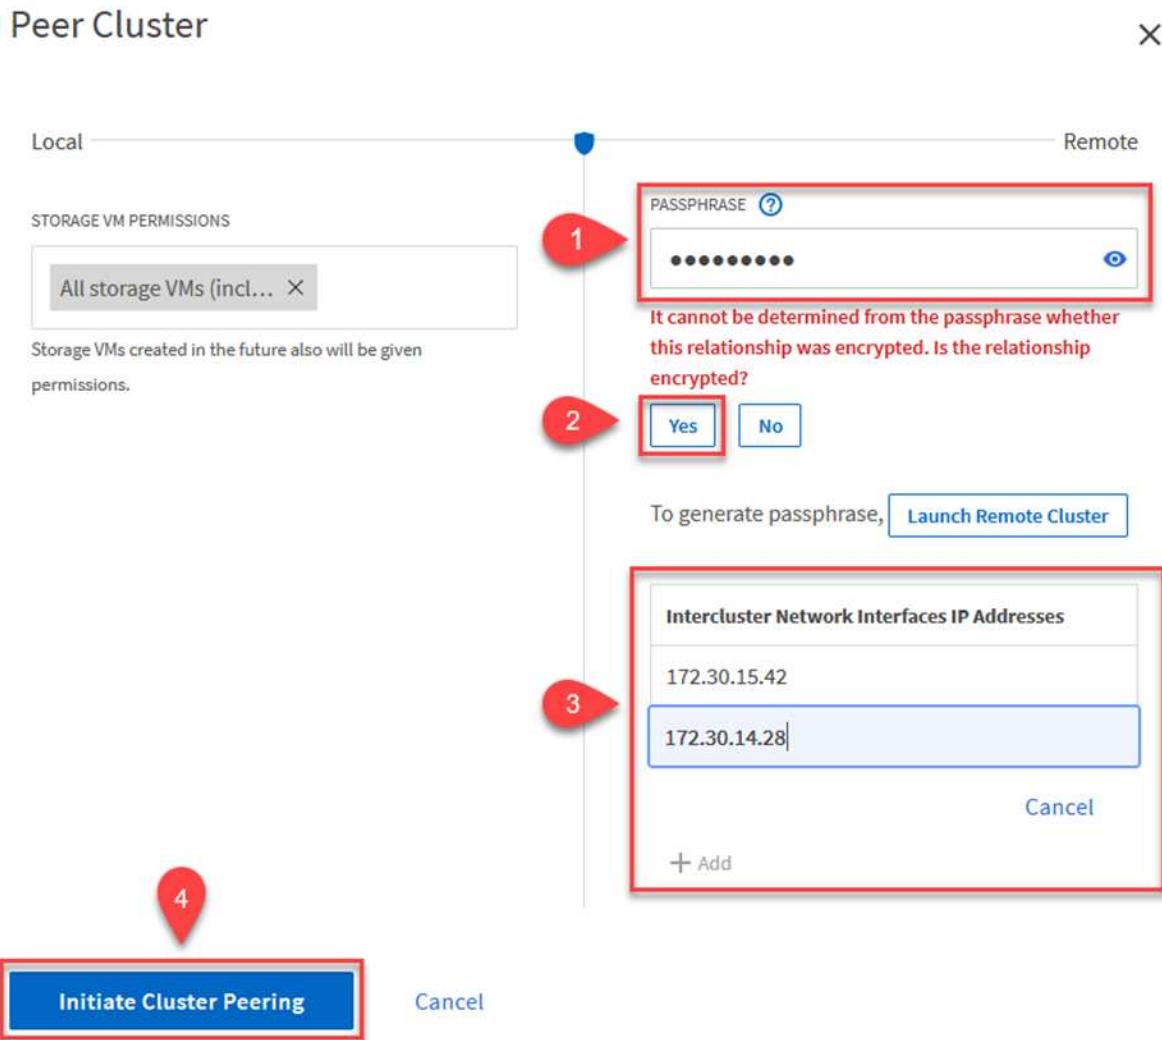

4. Verify the status of the cluster peer relationship from the FSx cluster with the following command:

```
FSx-Dest::> cluster peer show
```

```
FsxId0ae40e08acc0dea67::> cluster peer show
Peer Cluster Name      Cluster Serial Number Availability  Authentication
-----  -----
E13A300                1-80-000011          Available       ok
```


## Establish SVM peering relationship

The next step is to set up an SVM relationship between the destination and source storage virtual machines that contain the volumes that will be in SnapMirror relationships.

1. From the source FSx cluster, use the following command from the CLI to create the SVM peer relationship:

```
FSx-Dest::> vserver peer create -vserver DestSVM -peer-vserver  
Backup -peer-cluster OnPremSourceSVM -applications snapmirror
```

2. From the source ONTAP cluster, accept the peering relationship with either ONTAP System Manager or the CLI.
3. From ONTAP System Manager, go to Protection > Overview and select Peer Storage VMs under Storage VM Peers.

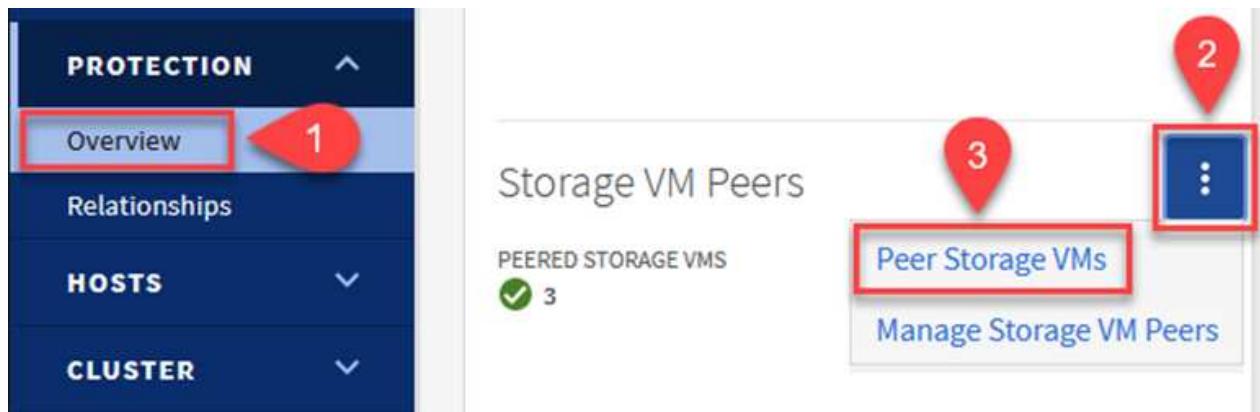

4. In the Peer Storage VM's dialog box, fill out the required fields:

- The source storage VM
- The destination cluster
- The destination storage VM



5. Click Peer Storage VMs to complete the SVM peering process.

## Create a snapshot retention policy

SnapCenter manages retention schedules for backups that exist as snapshot copies on the primary storage system. This is established when creating a policy in SnapCenter. SnapCenter does not manage retention policies for backups that are retained on secondary storage systems. These policies are managed separately through a SnapMirror policy created on the secondary FSx cluster and associated with the destination volumes that are in a SnapMirror relationship with the source volume.

When creating a SnapCenter policy, you have the option to specify a secondary policy label that is added to the SnapMirror label of each snapshot generated when a SnapCenter backup is taken.



On the secondary storage, these labels are matched to policy rules associated with the destination volume for the purpose of enforcing retention of snapshots.

The following example shows a SnapMirror label that is present on all snapshots generated as part of a policy used for daily backups of our SQL Server database and log volumes.

### Select secondary replication options

Update SnapMirror after creating a local Snapshot copy.

Update SnapVault after creating a local Snapshot copy.

Secondary policy label

Custom Label

sql-daily

Error retry count

3



For more information on creating SnapCenter policies for a SQL Server database, see the [SnapCenter documentation](#).

You must first create a SnapMirror policy with rules that dictate the number of snapshot copies to retain.

1. Create the SnapMirror Policy on the FSx cluster.

```
FSx-Dest::> snapmirror policy create -vserver DestSVM -policy
PolicyName -type mirror-vault -restart always
```

2. Add rules to the policy with SnapMirror labels that match the secondary policy labels specified in the SnapCenter policies.

```
FSx-Dest::> snapmirror policy add-rule -vserver DestSVM -policy
PolicyName -snapmirror-label SnapMirrorLabelName -keep
#ofSnapshotsToRetain
```

The following script provides an example of a rule that could be added to a policy:

```
FSx-Dest::> snapmirror policy add-rule -vserver sql_svm_dest -policy Async_SnapCenter_SQL -snapmirror-label sql-ondemand -keep 15
```



Create additional rules for each SnapMirror label and the number of snapshots to be retained (retention period).

## Create destination volumes

To create a destination volume on FSx that will be the recipient of snapshot copies from our source volumes, run the following command on FSx ONTAP:

```
FSx-Dest::> volume create -vserver DestSVM -volume DestVolName  
-aggregate DestAggrName -size VolSize -type DP
```

## Create the SnapMirror relationships between source and destination volumes

To create a SnapMirror relationship between a source and destination volume, run the following command on FSx ONTAP:

```
FSx-Dest::> snapmirror create -source-path  
OnPremSourceSVM:OnPremSourceVol -destination-path DestSVM:DestVol -type  
XDP -policy PolicyName
```

## Initialize the SnapMirror relationships

Initialize the SnapMirror relationship. This process initiates a new snapshot generated from the source volume and copies it to the destination volume.

```
FSx-Dest::> snapmirror initialize -destination-path DestSVM:DestVol
```

## Deploy and configure Windows SnapCenter server on-premises.

## Deploy Windows SnapCenter Server on premises

This solution uses NetApp SnapCenter to take application-consistent backups of SQL Server and Oracle databases. In conjunction with Veeam Backup & Replication for backing up virtual machine VMDKs, this provides a comprehensive disaster recovery solution for on-premises and cloud-based datacenters.

SnapCenter software is available from the NetApp support site and can be installed on Microsoft Windows systems that reside either in a domain or workgroup. A detailed planning guide and installation instructions can be found at the [NetApp Documentation Center](#).

The SnapCenter software can be obtained at [this link](#).

After it is installed, you can access the SnapCenter console from a web browser using `https://Virtual_Cluster_IP_or_FQDN:8146`.

After you log into the console, you must configure SnapCenter for backup SQL Server and Oracle databases.

## Add storage controllers to SnapCenter

To add storage controllers to SnapCenter, complete the following steps:

1. From the left menu, select Storage Systems and then click New to begin the process of adding your storage controllers to SnapCenter.



The screenshot shows the NetApp SnapCenter interface. On the left is a navigation sidebar with icons for Dashboard, Resources, Monitor, Reports, Hosts, Storage Systems (which is selected), Settings, and Alerts. The main content area is titled 'ONTAP Storage' and shows 'ONTAP Storage Connections'. A dropdown menu indicates the type is 'ONTAP SVMs'. There is a search bar labeled 'Search by Name'. In the top right, there are several icons: a bell, envelope, question mark, user icon, and sign out. Below these are two buttons: a blue one with a white plus sign labeled 'New' and a grey one labeled 'Delete'. The main table lists eight storage connections with columns for Name, IP, Cluster Name, User Name, Platform, and Controller License. Most connections have a green checkmark in the license column, except for 'ora\_svm\_dest' which says 'Not applicable'.

	Name	IP	Cluster Name	User Name	Platform	Controller License
<input type="checkbox"/>	<a href="#">Backup</a>	172.16.13.17	172.16.13.17		AFF	✓
<input type="checkbox"/>	<a href="#">FS02</a>	172.16.13.17	172.16.13.17		AFF	✓
<input type="checkbox"/>	<a href="#">ora_svm</a>	172.16.13.17	172.16.13.17		AFF	✓
<input type="checkbox"/>	<a href="#">ora_svm_dest</a>		172.30.15.42		AFF	Not applicable
<input type="checkbox"/>	<a href="#">sql_svm</a>	172.16.13.17	172.16.13.17		AFF	✓
<input type="checkbox"/>	<a href="#">sql_svm_dest</a>		172.30.15.42		AFF	Not applicable
<input type="checkbox"/>	<a href="#">svm_HCapps</a>		172.30.15.42		AFF	Not applicable

2. In the Add Storage System dialog box, add the management IP address for the local on-premises ONTAP cluster and the username and password. Then click Submit to begin discovery of the storage system.

## Add Storage System

### Add Storage System i

Storage System

Username

Password

#### Event Management System (EMS) & AutoSupport Settings

Send AutoSupport notification to storage system

Log SnapCenter Server events to syslog

 **More Options** : Platform, Protocol, Preferred IP etc..

**Submit**

**Cancel**

**Reset**

3. Repeat this process to add the FSx ONTAP system to SnapCenter. In this case, select More Options at the bottom of the Add Storage System window and click the check box for Secondary to designate the FSx system as the secondary storage system updated with SnapMirror copies or our primary backup snapshots.

## More Options

X

Platform	FAS	<input checked="" type="checkbox"/> Secondary <span>i</span>
Protocol	HTTPS	
Port	443	
Timeout	60	seconds <span>i</span>
<input type="checkbox"/> Preferred IP	<span>i</span>	


Save Cancel

For more information related to adding storage systems to SnapCenter, see the documentation at [this link](#).

## Add hosts to SnapCenter

The next step is adding host application servers to SnapCenter. The process is similar for both SQL Server and Oracle.

1. From the left menu, select Hosts and then click Add to begin the process of adding storage controllers to SnapCenter.
2. In the Add Hosts window, add the Host Type, Hostname, and the host system Credentials. Select the plug-in type. For SQL Server, select the Microsoft Windows and Microsoft SQL Server plug-in.

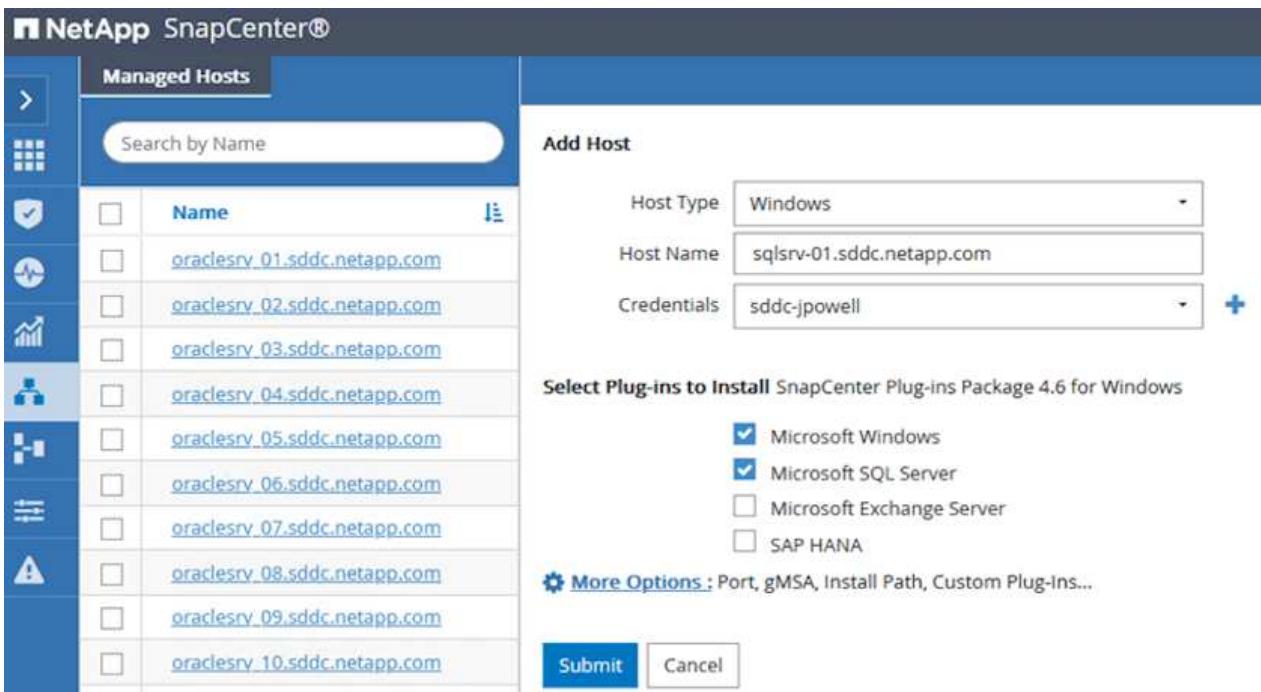

3. For Oracle, fill out the required fields in the Add Host dialog box and select the check box for the Oracle Database plug-in. Then click Submit to begin the discovery process and to add the host to SnapCenter.

## Add Host

Host Type	Linux	
Host Name	oraclesrv_11.sddc.netapp.com	
Credentials	root	 

### Select Plug-ins to Install SnapCenter Plug-ins Package 4.6 for Linux

Oracle Database

SAP HANA

 [More Options](#) : Port, Install Path, Custom Plug-Ins...

 Submit

 Cancel

## Create SnapCenter policies

Policies establish the specific rules to be followed for a backup job. They include, but are not limited to, the backup schedule, replication type, and how SnapCenter handles backing up and truncating transaction logs.

You can access policies in the Settings section of the SnapCenter web client.



Name	Backup Type	Schedule Type	Replication
SQL-Daily	Full and Log backup	Daily	SnapVault
SQL-Hourly	Full and Log backup	Hourly	SnapVault
SQL-Hourly-Logs	Log backup	Hourly	SnapVault
SQL-OnDemand	Full and Log backup	On demand	SnapVault
SQL-Weekly	Full and Log backup	Weekly	SnapVault

For complete information on creating policies for SQL Server backups, see the [SnapCenter documentation](#).

For complete information on creating policies for Oracle backups, see the [SnapCenter documentation](#).

### Notes:

- As you progress through the policy creation wizard, take special note of the Replication section. In this section you stipulate the types of secondary SnapMirror copies that you want taken during the backups process.
- The “Update SnapMirror after creating a local Snapshot copy” setting refers to updating a SnapMirror relationship when that relationship exists between two storage virtual machines residing on the same cluster.
- The “Update SnapVault after creating a local Snapshot copy” setting is used to update a SnapMirror relationship that exists between two separate cluster and between an on-premises ONTAP system and Cloud Volumes ONTAP or FSxN.

The following image shows the preceding options and how they look in the backup policy wizard.

## New SQL Server Backup Policy

- 1 Name
- 2 Backup Type
- 3 Retention
- 4 Replication
- 5 Script

### Select secondary replication options i

Update SnapMirror after creating a local Snapshot copy.

Update SnapVault after creating a local Snapshot copy.

Secondary policy label

Choose i

Error retry count

3 i

## Create SnapCenter Resource Groups

Resource Groups allow you to select the database resources you want to include in your backups and the policies followed for those resources.

1. Go to the Resources section in the left-hand menu.
2. At the top of the window, select the resource type to work with (In this case Microsoft SQL Server) and then click New Resource Group.

The screenshot shows the NetApp SnapCenter interface. On the left, there's a sidebar with icons for Dashboard, Resources (which is selected), Monitor, Reports, Hosts, Storage Systems, Settings, and Alerts. The main area has a header with 'Microsoft SQL Server' (highlighted with a red box and number 1) and a search bar. To the right is a table of resource groups:

Name	Resource Count	Tags	Policies	Last Backup	Overall Status
SQLSRV-01	1		SQL-Daily SQL-Hourly SQL-OnDemand SQL-Weekly	05/11/2022 ...	Completed
SQLSRV-02	1		SQL-Daily SQL-Hourly SQL-OnDemand SQL-Weekly	03/28/2022 ...	Failed
SQLSRV-03	1		SQL-Daily SQL-Hourly	05/11/2022 ...	Completed

A red box with number 2 highlights the 'New Resource Group' button in the top right corner of the main area.

The SnapCenter documentation covers step-by-step details for creating Resource Groups for both SQL Server and Oracle databases.

For backing up SQL resources, follow [this link](#).

For Backing up Oracle resources, follow [this link](#).

## **Deploy and configure Veeam Backup Server**

Veeam Backup & Replication software is used in the solution to back up our application virtual machines and archive a copy of the backups to an Amazon S3 bucket using a Veeam scale-out backup repository (SOBR). Veeam is deployed on a Windows server in this solution. For specific guidance on deploying Veeam, see the [Veeam help Center Technical documentation](#).

## Configure Veeam scale-out backup repository

After you deploy and license the software, you can create a scale-out backup repository (SOBR) as target storage for backup jobs. You should also include an S3 bucket as a backup of VM data offsite for disaster recovery.

See the following prerequisites before getting started.

1. Create an SMB file share on your on-premises ONTAP system as the target storage for backups.
2. Create an Amazon S3 bucket to include in the SOBR. This is a repository for the offsite backups.

## Add ONTAP Storage to Veeam

First, add the ONTAP storage cluster and associated SMB/NFS filesystem as storage infrastructure in Veeam.

1. Open the Veeam console and log in. Navigate to Storage Infrastructure and then select Add Storage.



2. In the Add Storage wizard, select NetApp as the storage vendor and then select Data ONTAP.
3. Enter the management IP address and check the NAS Filer box. Click Next.

## New NetApp Data ONTAP Storage

X

**Name**  
Register NetApp Data ONTAP storage by specifying DNS name or IP address.

Name	Management server DNS name or IP address: <input type="text" value="10.61.181.180"/>
Credentials	Description: <input type="text" value="Created by SDDC\jpowell at 5/17/2022 10:34 AM."/>
NAS Filer	
Apply	
Summary	<b>Role:</b> <input type="checkbox"/> Block or file storage for VMware vSphere <input type="checkbox"/> Block storage for Microsoft Windows servers <input checked="" type="checkbox"/> NAS filer

< Previous **Next >** Finish Cancel

4. Add your credentials to access the ONTAP cluster.

## New NetApp Data ONTAP Storage

X

**Credentials**  
Specify account with storage administrator privileges.

Name	Credentials: <input type="button" value="HCIEUC\Admin (HCIEUC\Admin, last edited: 98 days ago)"/>
Credentials	Add... <a href="#">Manage accounts</a>
NAS Filer	Protocol: <input type="button" value="HTTPS"/>
Apply	Port: <input type="button" value="443"/>
Summary	

< Previous **Next >** Finish Cancel

5. On the NAS Filer page choose the desired protocols to scan and select Next.

## New NetApp Data ONTAP Storage

X


**NAS Filer**
Specify how this storage can be accessed by file backup jobs.

Name	Protocol to use:			
	<input checked="" type="checkbox"/> SMB <input type="checkbox"/> NFS <input checked="" type="checkbox"/> Create required export rules automatically			
Credentials				
<b>NAS Filer</b>				
Apply				
Summary				
	Volumes to scan: <input type="text" value="All volumes"/> <span style="border: 1px solid #ccc; padding: 2px 10px; margin-left: 10px;">Choose...</span>			
	Backup proxies to use: <input type="text" value="Automatic selection"/> <span style="border: 1px solid #ccc; padding: 2px 10px; margin-left: 10px;">Choose...</span>			
	<a href="#" style="border: 1px solid #ccc; padding: 2px 10px;">&lt; Previous</a>	<a href="#" style="border: 1px solid #0070C0; background-color: #0070C0; color: white; padding: 2px 10px;">Apply</a>	<a href="#" style="border: 1px solid #ccc; padding: 2px 10px;">Finish</a>	<a href="#" style="border: 1px solid #ccc; padding: 2px 10px;">Cancel</a>

6. Complete the Apply and Summary pages of the wizard and click Finish to begin the storage discovery process. After the scan completes, the ONTAP cluster is added along with the NAS filers as available resources.



7. Create a backup repository using the newly discovered NAS shares. From Backup Infrastructure, select Backup Repositories and click the Add Repository menu item.



8. Follow all steps in the New Backup Repository Wizard to create the repository. For detailed information on creating Veeam Backup Repositories, see the [Veeam documentation](#).

## New Backup Repository

X



### Share

Type in UNC path to share (mapped drives are not supported), specify share access credentials and how backup jobs should write data to this share.

Name	Shared folder: <input type="text" value="\\172.21.162.181\VBRRepo"/> <a href="#">Browse...</a>
Share	<input checked="" type="checkbox"/> This share requires access credentials: <input type="button" value="sddc\administrator (sddc\administrator, last edited: 85 days ago)"/> <a href="#">Add...</a> <a href="#">Manage accounts</a>
Repository	Gateway server:
Mount Server	<input checked="" type="radio"/> Automatic selection
Review	<input type="radio"/> The following server: <input type="button" value="veeam.sddc.netapp.com (Backup server)"/>
Apply	Use this option to improve performance and reliability of backup to a NAS located in a remote site.
Summary	

[< Previous](#) [Next >](#) [Finish](#) [Cancel](#)

## Add the Amazon S3 bucket as a backup repository

The next step is to add the Amazon S3 storage as a backup repository.

1. Navigate to Backup Infrastructure > Backup Repositories. Click Add Repository.



2. In the Add Backup Repository wizard, select Object Storage and then Amazon S3. This starts the New Object Storage Repository wizard.

## Add Backup Repository

Select the type of backup repository you want to add.



### Direct attached storage

Microsoft Windows or Linux server with internal or direct attached storage. This configuration enables data movers to run directly on the server, allowing for fastest performance.



### Network attached storage

Network share on a file server or a NAS device. When backing up to a remote share, we recommend that you select a gateway server located in the same site with the share.



### Deduplicating storage appliance

Dell EMC Data Domain, ExaGrid, HPE StoreOnce or Quantum DXi. If you are unable to meet the requirements of advanced integration via native appliance API, use the network attached storage option instead.



### Object storage

On-prem object storage system or a cloud object storage provider. Object storage can only be used as a Capacity Tier of scale-out backup repositories, backing up directly to object storage is not currently supported.

3. Provide a name for your object storage repository and click Next.
4. In the next section, provide your credentials. You need an AWS Access Key and Secret Key.

New Object Storage Repository

**Account**  
Specify AWS account to use for connecting to Amazon S3 storage bucket.

Name	Credentials:
Account	AKIAJX4H4ZT557HXQT2W (last edited: 107 days ago) <a href="#">Add...</a> <a href="#">Manage cloud accounts</a>
Bucket	AWS region:
Summary	Global

Use the following gateway server:

Select a gateway server to proxy access to Amazon S3. If no gateway server is specified, all scale-out backup repository extents must have direct Internet access.

[< Previous](#) [Next >](#) [Finish](#) [Cancel](#)

5. After the Amazon configuration loads, choose your datacenter, bucket, and folder and click Apply. Finally, click Finish to close out the wizard.



## Create scale-out backup repository

Now that we have added our storage repositories to Veeam, we can create the SOBR to automatically tier backup copies to our offsite Amazon S3 object storage for disaster recovery.

1. From Backup Infrastructure, select Scale-out Repositories and then click the Add Scale-out Repository menu item.



2. In the New Scale-out Backup Repository provide a name for the SOBR and click Next.
3. For the Performance Tier, choose the backup repository that contains the SMB share residing on your local ONTAP cluster.

## New Scale-out Backup Repository

**Performance Tier**



Select backup repositories to use as the landing zone and for the short-term retention.

Name	Extents:			
Performance Tier	<table border="1"> <thead> <tr> <th>Name</th> </tr> </thead> <tbody> <tr> <td>VBRRepo2</td> </tr> </tbody> </table>	Name	VBRRepo2	<input type="button" value="Add..."/> <input type="button" value="Remove"/>
Name				
VBRRepo2				
Placement Policy				

4. For the Placement Policy, choose either Data Locality or Performance based your requirements. Select next.
5. For Capacity Tier we extend the SOBR with Amazon S3 object storage. For the purposes of disaster recovery, select Copy Backups to Object Storage as Soon as They are Created to ensure timely delivery of our secondary backups.

## New Scale-out Backup Repository

**Capacity Tier**



Specify object storage to copy backups to for redundancy and DR purposes. Older backups can be moved to object storage completely to reduce long-term retention costs while preserving the ability to restore directly from offloaded backups.

Name	<input checked="" type="checkbox"/> Extend scale-out backup repository capacity with object storage: Amazon S3 Repo	
Performance Tier	<input type="button" value="Add..."/> <input type="button" value="Window..."/>	
Placement Policy		
<b>Capacity Tier</b>	<input checked="" type="checkbox"/> Copy backups to object storage as soon as they are created Create additional copy of your backups for added redundancy by having all backups copied to the capacity tier as soon as they are created on the performance tier.	
Archive Tier	<input checked="" type="checkbox"/> Move backups to object storage as they age out of the operational restore window Reduce your long-term retention costs by moving older backups to object storage completely while preserving the ability to restore directly from offloaded backups.	
Summary	Move backup files older than <input type="text" value="14"/> days (your operational restore window) <input type="button" value="Override..."/>	
	<input type="checkbox"/> Encrypt data uploaded to object storage Password: <input type="password"/> <input type="button" value="Add..."/> <input type="button" value="Manage passwords"/>	

6. Finally, select Apply and Finish to finalize creation of the SOBR.

## Create the scale-out backup repository jobs

The final step to configuring Veeam is to create backup jobs using the newly created SOBR as the backup destination. Creating backup jobs is a normal part of any storage administrator's repertoire and we do not cover the detailed steps here. For more complete information on creating backup jobs in Veeam, see the [Veeam Help Center Technical Documentation](#).

## **BlueXP backup and recovery tools and configuration**

To conduct a failover of application VMs and database volumes to VMware Cloud Volume services running in AWS, you must install and configure a running instance of both SnapCenter Server and Veeam Backup and Replication Server. After the failover is complete, you must also configure these tools to resume normal backup operations until a failback to the on-premises datacenter is planned and executed.

### **Deploy secondary Windows SnapCenter Server**

SnapCenter Server is deployed in the VMware Cloud SDDC or installed on an EC2 instance residing in a VPC with network connectivity to the VMware Cloud environment.

SnapCenter software is available from the NetApp support site and can be installed on Microsoft Windows systems that reside either in a domain or workgroup. A detailed planning guide and installation instructions can be found at the [NetApp documentation center](#).

You can find the SnapCenter software at [this link](#).

### **Configure secondary Windows SnapCenter Server**

To perform a restore of application data mirrored to FSx ONTAP, you must first perform a full restore of the on-premises SnapCenter database. After this process is complete, communication with the VMs is reestablished and application backups can now resume using FSx ONTAP as the primary storage.

To achieve this, you must complete the following items on the SnapCenter Server:

1. Configure the computer name to be identical to the original on-premises SnapCenter Server.
2. Configure networking to communicate with VMware Cloud and the FSx ONTAP instance.
3. Complete the procedure to restore the SnapCenter database.
4. Confirm that SnapCenter is in Disaster Recovery mode to make sure that FSx is now the primary storage for backups.
5. Confirm that communication is reestablished with the restored virtual machines.

For more information on completing these steps, see to section "["SnapCenter database Restore Process"](#)".

### **Deploy secondary Veeam Backup & Replication server**

You can install the Veeam Backup & Replication server on a Windows server in the VMware Cloud on AWS or on an EC2 instance. For detailed implementation guidance, see the [Veeam Help Center Technical Documentation](#).

## Configure secondary Veeam Backup & Replication server

To perform a restore of virtual machines that have been backed up to Amazon S3 storage, you must install the Veeam Server on a Windows server and configure it to communicate with VMware Cloud, FSx ONTAP, and the S3 bucket that contains the original backup repository. It must also have a new backup repository configured on FSx ONTAP to conduct new backups of the VMs after they are restored.

To perform this process, the following items must be completed:

1. Configure networking to communicate with VMware Cloud, FSx ONTAP, and the S3 bucket containing the original backup repository.
2. Configure an SMB share on FSx ONTAP to be a new backup repository.
3. Mount the original S3 bucket that was used as part of the scale-out backup repository on premises.
4. After restoring the VM, establish new backup jobs to protect SQL and Oracle VMs.

For more information on restoring VMs using Veeam, see the section "["Restore Application VMs with Veeam Full Restore"](#)".

## SnapCenter database backup for disaster recovery

SnapCenter allows for the backup and recovery of its underlying MySQL database and configuration data for the purpose of recovering the SnapCenter server in the case of a disaster. For our solution, we recovered the SnapCenter database and configuration on an AWS EC2 instance residing in our VPC. For more information on this step, see [this link](#).

## SnapCenter backup prerequisites

The following prerequisites are required for SnapCenter backup:

- A volume and SMB share created on the on-premises ONTAP system to locate the backed-up database and configuration files.
- A SnapMirror relationship between the on-premises ONTAP system and FSx or CVO in the AWS account. This relationship is used for transporting the snapshot containing the backed-up SnapCenter database and configuration files.
- Windows Server installed in the cloud account, either on an EC2 instance or on a VM in the VMware Cloud SDDC.
- SnapCenter installed on the Windows EC2 instance or VM in VMware Cloud.

## SnapCenter backup and restore process summary

- Create a volume on the on-premises ONTAP system for hosting the backup db and config files.
- Set up a SnapMirror relationship between on-premises and FSx/CVO.
- Mount the SMB share.
- Retrieve the Swagger authorization token for performing API tasks.
- Start the db restore process.
- Use the xcopy utility to copy the db and config file local directory to the SMB share.
- On FSx, create a clone of the ONTAP volume (copied via SnapMirror from on-premises).
- Mount the SMB share from FSx to EC2/VMware Cloud.
- Copy the restore directory from the SMB share to a local directory.
- Run the SQL Server restore process from Swagger.

## **Back up the SnapCenter database and configuration**

SnapCenter provides a web client interface for executing REST API commands. For information on accessing the REST APIs through Swagger, see the SnapCenter documentation at [this link](#).

## Log into Swagger and obtain authorization token

After you have navigated to the Swagger page, you must retrieve an authorization token to initiate the database restore process.

1. Access the SnapCenter Swagger API web page at <https://<SnapCenter Server IP>:8146/swagger/>.



## SnapCenter API

[ Base URL: /api ]

<https://snapcentersddc.netapp.com:8146/Content/swagger/SnapCenter.yaml>

Manage your SnapCenter Server using the SnapCenter API.

To access the swagger documentation of "SnapCenter Plug-in for VMware vSphere" API's, please use  
[https://{{SCV\\_hostname}}:{{SCV\\_host\\_port}}/api/swagger-ui.html](https://{{SCV_hostname}}:{{SCV_host_port}}/api/swagger-ui.html)

2. Expand the Auth section and click Try it Out.

### Auth

POST

/4.6/auth/login Service login

The login endpoint exposes the method required to log in to the SnapCenter service. The login method returns a token that is used to authenticate subsequent requests.

Parameters

Try it out

3. In the UserOperationContext area, fill in the SnapCenter credentials and role and click Execute.

Name	Description
TokenNeverExpires boolean (query)	<input type="text" value="false"/>
UserOperationContext * required object (body)	<p>User credentials</p> <p><a href="#">Edit Value</a>   <a href="#">Model</a></p> <pre>{   "UserOperationContext": {     "User": {       "Name": "localhost\\scadmin",       "Passphrase": "NetApp321",       "Rolename": "SnapCenterAdmin"     }   } }</pre> <p><a href="#">Cancel</a></p> <p>Parameter content type <input type="text" value="application/json"/></p> <p><a href="#">Execute</a></p>

4. In the Response body below, you can see the token. Copy the token text for authentication when executing the backup process.

200      Response body

```

{
  "PluginName": null,
  "HostId": 0,
  "RoleId": null,
  "JobIds": null
},
"User": {
  "Token": "KLYxOg==tsV6EOditdAmAYpe8q5SG6wcoGaSjmE6jrNy5CsY63HQ51koZLIESRNAhpGJJ0UUQynENDgtVGDZnvx+I/ZJZIn5M1NZrj6
CLfGTApq1GmcagT08bgb5bNTx07EcdrAidzAXUDb3GyLOKtW0GdwKzSeUwKj3uVupnk1E3lskK6PRBv9RS8j0qHQvo4v4RL0hhThhwPhV
9/23nFejVP/p1Ev4vrV/zeZVTUHFHUM069XRe5cuW9nwyj4b0I5Y5PN3XDkjO==",
  "Name": "SCAdmin",
  "TokenHashed": null,
  "Type": "",
  "TokenTime": "2022-03-22T14:21:57.3665661-07:00",
  "Id": "1",
  "FullName": "SCAdmin",
  "Host": null,
  "Author": null,
  "UserName": "",
  "Domain": "",
  "Passphrase": ""
}

```

[Download](#)

## Perform a SnapCenter database backup

Next go to the Disaster Recovery area on the Swagger page to begin the SnapCenter backup process.

1. Expand the Disaster Recovery area by clicking it.

### Disaster Recovery

**GET** /4.6/disasterrecovery/server/backup Fetch all the existing SnapCenter Server DR Backups.

**POST** /4.6/disasterrecovery/server/backup Starts the SnapCenter Server DR backup.

**DELETE** /4.6/disasterrecovery/server/backup Deletes the existing Snapcenter DR backup.

**POST** /4.6/disasterrecovery/server/restore Starts SnapCenter Server Restore.

**POST** /4.6/disasterrecovery/storage Enable or disable the storage disaster recovery.

2. Expand the /4.6/disasterrecovery/server/backup section and click Try it Out.

**POST** /4.6/disasterrecovery/server/backup Starts the SnapCenter Server DR backup.

Starts and creates a new SnapCenter Server DR backup.

Parameters

Try it out

3. In the SmDRBackupRequest section, add the correct local target path and select Execute to start the backup of the SnapCenter database and configuration.



The backup process does not allow backing up directly to an NFS or CIFS file share.

Name	Description
<b>Token</b> * required string (header)	User authorization token  TUHFHUM069XRe5cuW9nwyj4b0l5Y5FN3XDkjQ==
<b>SmDRBackupRequest</b> * required object (body)	Parameters to take Backup  <a href="#">Edit Value</a>   <a href="#">Model</a>  <pre>{     "TargetPath": "C:\\SnapCenter_Backups\\\"} }</pre>

[Cancel](#)

Parameter content type  
[application/json](#) ▾

[Execute](#)

## Monitor the backup job from SnapCenter

Log into SnapCenter to review log files when starting the database restore process. Under the Monitor section, you can view the details of the SnapCenter server disaster recovery backup.

### Job Details

SnapCenter Server disaster recovery backup

- ✓ ▾ SnapCenter Server disaster recovery backup
  - ✓ ▶ Precheck validation
  - ✓ ▶ Disaster recovery backup of 'oraclesrv\_04.sddc.netapp.com'
  - ✓ ▶ Disaster recovery backup of SnapCenter Server 'SnapCenter.sddc.netapp.com'
  - ✓ ▶ Disaster recovery backup of 'oraclesrv\_02.sddc.netapp.com'
  - ✓ ▶ Disaster recovery backup of 'oraclesrv\_03.sddc.netapp.com'
  - ✓ ▶ Disaster recovery backup of 'oraclesrv\_05.sddc.netapp.com'
  - ✓ ▶ Disaster recovery backup of 'oraclesrv\_07.sddc.netapp.com'
  - ✓ ▶ Disaster recovery backup of 'sqlsrv-02.sddc.netapp.com'
  - ✓ ▶ Disaster recovery backup of 'sqlsrv-03.sddc.netapp.com'
  - ✓ ▶ Disaster recovery backup of 'oraclesrv\_10.sddc.netapp.com'
  - ✓ ▶ Disaster recovery backup of 'sqlsrv-04.sddc.netapp.com'
  - ✓ ▶ Disaster recovery backup of 'sqlsrv-01.sddc.netapp.com'
  - ✓ ▶ Disaster recovery backup of 'sqlsrv-05.sddc.netapp.com'
  - ✓ ▶ Disaster recovery backup of 'oraclesrv\_09.sddc.netapp.com'
  - ✓ ▶ Disaster recovery backup of 'sqlsrv-06.sddc.netapp.com'
  - ✓ ▶ Disaster recovery backup of 'sqlsrv-07.sddc.netapp.com'

Task Name: SnapCenter Server disaster recovery backup Start Time: 03/23/2022 10:27:11 AM End Time: 03/23/2022 10:27:47 AM

[View Logs](#) [Cancel Job](#) [Close](#)

## Use XCOPY utility to copy the database backup file to the SMB share

Next you must move the backup from the local drive on the SnapCenter server to the CIFS share that is used to SnapMirror copy the data to the secondary location located on the FSx instance in AWS. Use xcopy with specific options that retain the permissions of the files.

Open a command prompt as Administrator. From the command prompt, enter the following commands:

```
xcopy <Source_Path> \\<Destination_Server_IP>\<Folder_Path> /O /X  
/E /H /K  
xcopy c:\SC_Backups\SnapCenter_DR \\10.61.181.185\snapcenter_dr /O  
/X /E /H /K
```

## Failover

### Disaster occurs at primary site

For a disaster that occurs at the primary on-premises datacenter, our scenario includes failover to a secondary site residing on Amazon Web Services infrastructure using VMware Cloud on AWS. We assume that the virtual machines and our on-premises ONTAP cluster are no longer accessible. In addition, both the SnapCenter and Veeam virtual machines are no longer accessible and must be rebuilt at our secondary site.

This section address failover of our infrastructure to the cloud, and we cover the following topics:

- SnapCenter database restore. After a new SnapCenter server has been established, restore the MySQL database and configuration files and toggle the database into disaster recovery mode in order to allow the secondary FSx storage to become the primary storage device.
- Restore the application virtual machines using Veeam Backup & Replication. Connect the S3 storage that contains the VM backups, import the backups, and restore them to VMware Cloud on AWS.
- Restore the SQL Server application data using SnapCenter.
- Restore the Oracle application data using SnapCenter.

## SnapCenter database restore process

SnapCenter supports disaster recovery scenarios by allowing the backup and restore of its MySQL database and configuration files. This allows an administrator to maintain regular backups of the SnapCenter database at the on-premises datacenter and later restore that database to a secondary SnapCenter database.

To access the SnapCenter backup files on the remote SnapCenter server, complete the following steps:

1. Break the SnapMirror relationship from the FSx cluster, which makes the volume read/write.
2. Create a CIFS server (if necessary) and create a CIFS share pointing to the junction path of the cloned volume.
3. Use xcopy to copy the backup files to a local directory on the secondary SnapCenter system.
4. Install SnapCenter v4.6.
5. Ensure that SnapCenter server has the same FQDN as the original server. This is required for the db restore to be successful.

To start the restore process, complete the following steps:

1. Navigate to the Swagger API web page for the secondary SnapCenter server and follow the previous instructions to obtain an authorization token.
2. Navigate to the Disaster Recovery section of the Swagger page, select `/4.6/disasterrecovery/server/restore`, and click Try it Out.

The screenshot shows the 'Try it out' interface for the `/4.6/disasterrecovery/server/restore` endpoint. The method is POST. The description is 'Starts SnapCenter Server Restore.' Below the description, there is a note: 'Starts SnapCenter Server Restore.' To the right of the note is a 'Try it out' button. Below the note is a 'Parameters' section.

3. Paste in your authorization token and, in the SmDRRestRequest section, paste in the name of the backup and the local directory on the secondary SnapCenter server.

The screenshot shows the 'Try it out' interface for the `/4.6/disasterrecovery/server/restore` endpoint. The method is POST. The description is 'Starts SnapCenter Server Restore.' The 'Parameters' section is filled with the following data:

Name	Description
<b>Token</b> * required string (header)	User authorization token KIYxOg==rMXzS7EPIGrzTXjfton6Q+JoNGpueQt
<b>SmDRRestRequest</b> * required object (body)	Parameters to take for Restore Edit Value   Model { "BackupName": "SnapCenter.sddc.netapp.com_03-23-2022_12.38.00.6713", "BackupPath": "C:\\\\SnapCenter\\\\" }

4. Select the Execute button to start the restore process.

5. From SnapCenter, navigate to the Monitor section to view the progress of the restore job.

ID	Status	Name
20482	✓	SnapCenter Server Disaster Recovery
20481	✓	SnapCenter Server disaster recovery backup
20480	✗	SnapCenter Server disaster recovery backup
20475	✓	Backup of Resource Group 'SQLSRV-09' with policy 'SQL-Hourly'
20474	✓	Backup of Resource Group 'SQLSRV-05' with policy 'SQL-Hourly'
20473	⌚	Backup of Resource Group 'OracleSrv_06' with policy 'Oracle-Hourly'
20472	✗	SnapCenter Server disaster recovery backup

## Job Details

### SnapCenter Server Disaster Recovery

- ✓ ▾ SnapCenter Server Disaster Recovery
- ✓ ▾ Prepare for restore job
- ✓ ▾ Precheck validation
- ✓ ▾ Saving original server state
- ✓ ▾ Schedule restore
- ✓ ▾ Repository restore
- ✓ ▾ Config restore
- ✓ ▾ Reset MySQL password

6. To enable SQL Server restores from secondary storage, you must toggle the SnapCenter database into Disaster Recovery mode. This is performed as a separate operation and initiated on the Swagger API web page.

- Navigate to the Disaster Recovery section and click /4.6/disasterrecovery/storage.
- Paste in the user authorization token.
- In the SmSetDisasterRecoverySettingsRequest section, change EnableDisasterRecover to true.
- Click Execute to enable disaster recovery mode for SQL Server.

Name	Description
<b>Token</b> <small>* required</small> string (header)	User authorization token  KIYxOg==rMXzS7EPIGRzTXjfton6Q+JoNGpueQl
<b>SmSetDisasterRecoverySettingsRequest</b> <small>* required</small> object (body)	Parameters to enable or disable the DR mode  Edit Value   Model  { "EnableDisasterRecovery": true }



See comments regarding additional procedures.


## Restore application VMs with Veeam full restore

## Create a backup repository and import backups from S3

From the secondary Veeam server, import the backups from S3 storage and restore the SQL Server and Oracle VMs to your VMware Cloud cluster.

To import the backups from the S3 object that was part of the on-premises scale-out backup repository, complete the following steps:

1. Go to Backup Repositories and click Add Repository in the top menu to launch the Add Backup Repository wizard. On the first page of the wizard, select Object Storage as the backup repository type.

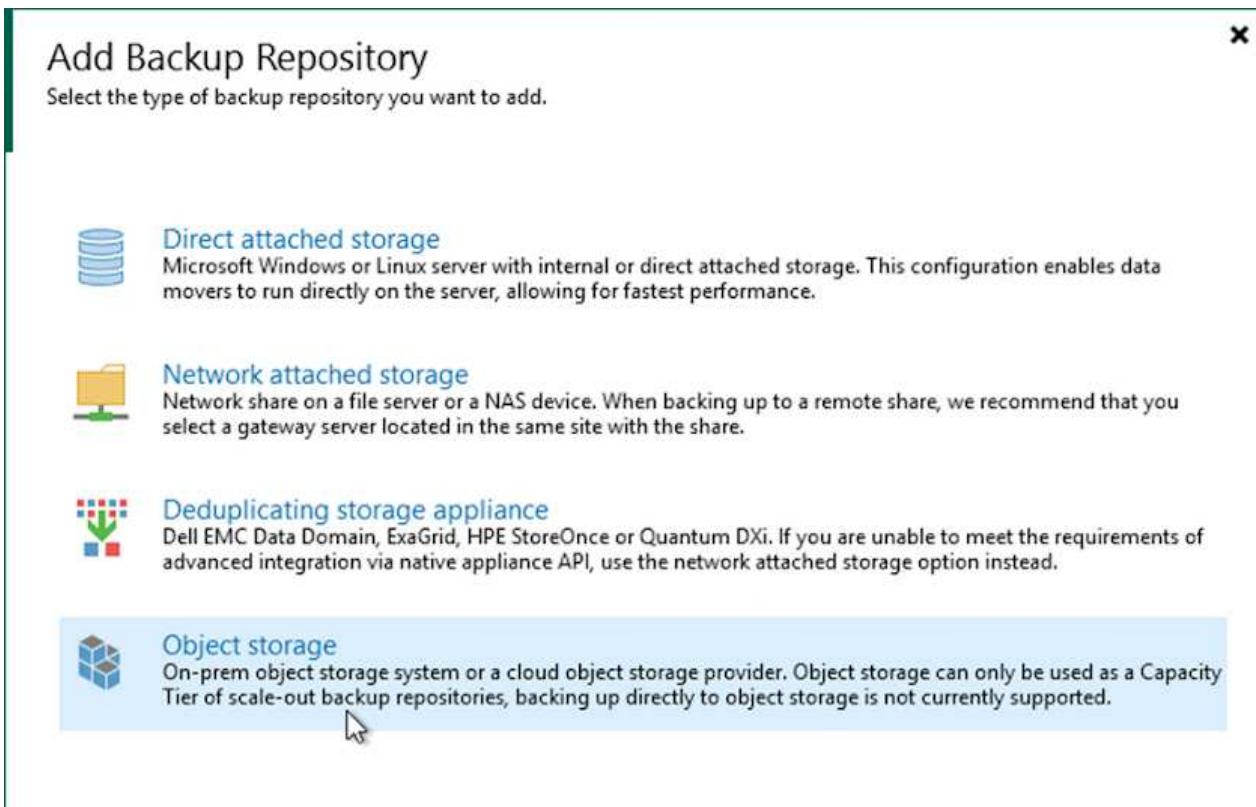

2. Select Amazon S3 as the Object Storage type.

## Object Storage



Select the type of object storage you want to use as a backup repository.



### S3 Compatible

Adds an on-premises object storage system or a cloud object storage provider.



### Amazon S3

Adds Amazon cloud object storage. Amazon S3, Amazon S3 Glacier (including Deep Archive) and Amazon Snowball Edge are supported.



### Google Cloud Storage

Adds Google Cloud storage. Both Standard and Nearline storage classes are supported.



### IBM Cloud Object Storage

Adds IBM Cloud object storage. S3 compatible versions of both on-premises and IBM Cloud storage offerings are supported.



### Microsoft Azure Storage

Adds Microsoft Azure cloud object storage. Microsoft Azure Blob Storage, Microsoft Azure Archive Storage and Microsoft Azure Data Box are supported.

- From the list of Amazon Cloud Storage Services, select Amazon S3.



## Amazon Cloud Storage Services



Select the type of Amazon storage you want to use as a backup repository.



### Amazon S3

Adds Amazon S3 storage. Both Standard and Infrequent Access (IA) storage classes are supported.



### Amazon S3 Glacier

Adds Amazon S3 Glacier storage. Both Amazon S3 Glacier and Glacier Deep Archive are supported.



### AWS Snowball Edge

Adds AWS Snowball Edge appliance to enable seeding of backups into Amazon S3 object storage.

- Select your pre-entered credentials from the drop-down list or add a new credential for accessing the cloud storage resource. Click Next to continue.



5. On the Bucket page, enter the data center, bucket, folder, and any desired options. Click Apply.

### New Object Storage Repository

X



#### Bucket

Specify Amazon S3 bucket to use.

Name

Data center:

US East (N. Virginia)

Account

Bucket:

ehcveeamrepo

Browse...

Bucket

Summary

Folder:

RTP

Browse...

Limit object storage consumption to: 10 TB

This is a soft limit to help control your object storage spend. If the specified limit is exceeded, already running backup offload tasks will be allowed to complete, but no new tasks will be started.

Make recent backups immutable for: 30 days

Protects backups from modification or deletion by ransomware, hackers or malicious insiders using native object storage capabilities.

Use infrequent access storage class (may result in higher costs)

With lower price per GB but higher retrieval and early deletion fees, this storage class is best suited for long-term storage of GFS full backups. Avoid using it for short-term storage of recent backups.

Store backups in a single availability zone (even lower price per GB, reduced resilience)

< Previous

Apply

Finish


Cancel

- Finally, select Finish to complete the process and add the repository.


## Import backups from S3 object storage

To import the backups from the S3 repository that was added in the previous section, complete the following steps.

1. From the S3 backup repository, select Import Backups to launch the Import Backups wizard.

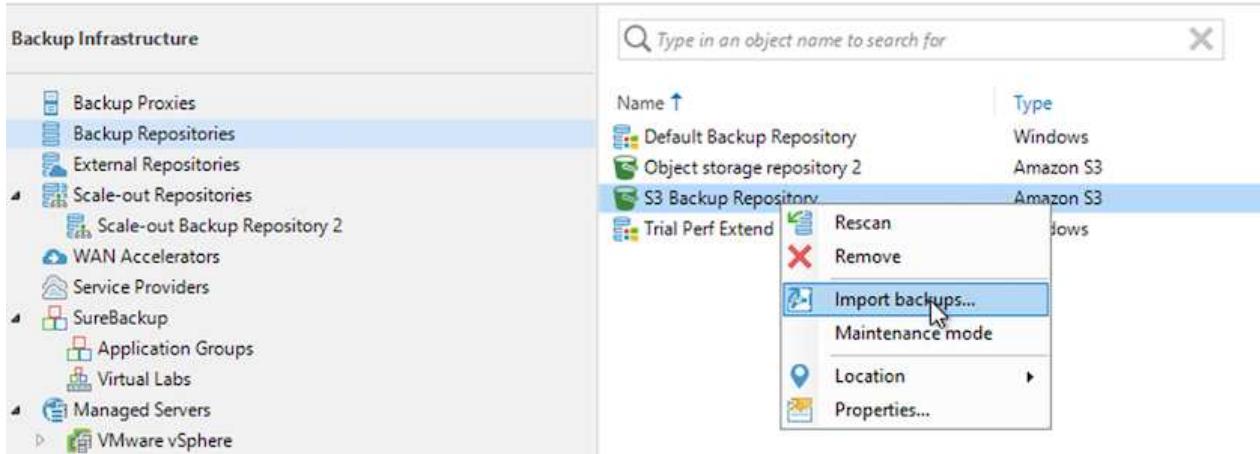

2. After the database records for the import have been created, select Next and then Finish at the summary screen to start the import process.

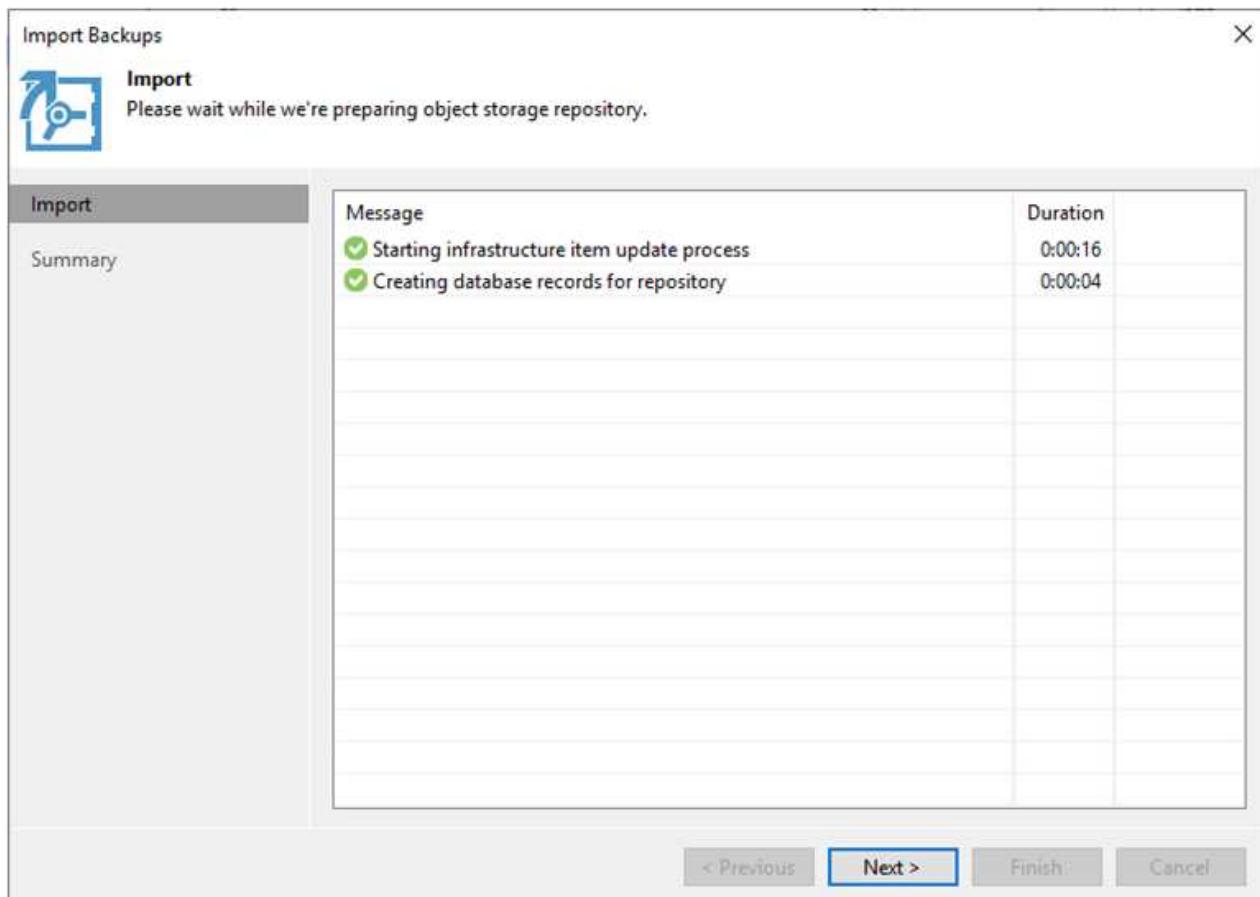

3. After the import is complete, you can restore VMs into the VMware Cloud cluster.

System X

Name: Configuration Database Resynchroniz... Status: Success  
Action type: Configuration Resynchronize Start time: 4/6/2022 3:01:30 PM  
Initiated by: EC2AMAZ-3POTKQV\vadmin End time: 4/6/2022 3:04:57 PM

Log


Message	Duration
✓ Starting backup repositories synchronization	
✓ Enumerating repositories	
✓ Found 1 repository	
✓ Processing capacity tier extent of S3 Backup Repository 2	0:03:23
✓ S3 Backup Repository: added 2 unencrypted	0:03:20
✓ Importing backup 2 out of 2	0:03:15
✓ Backup repositories synchronization completed successfully	

Close


## Restore application VMs with Veeam full restore to VMware Cloud

To restore SQL and Oracle virtual machines to the VMware Cloud on AWS workload domain/cluster, complete the following steps.


1. From the Veeam Home page, select the object storage containing the imported backups, select the VMs to restore, and then right click and select Restore Entire VM.

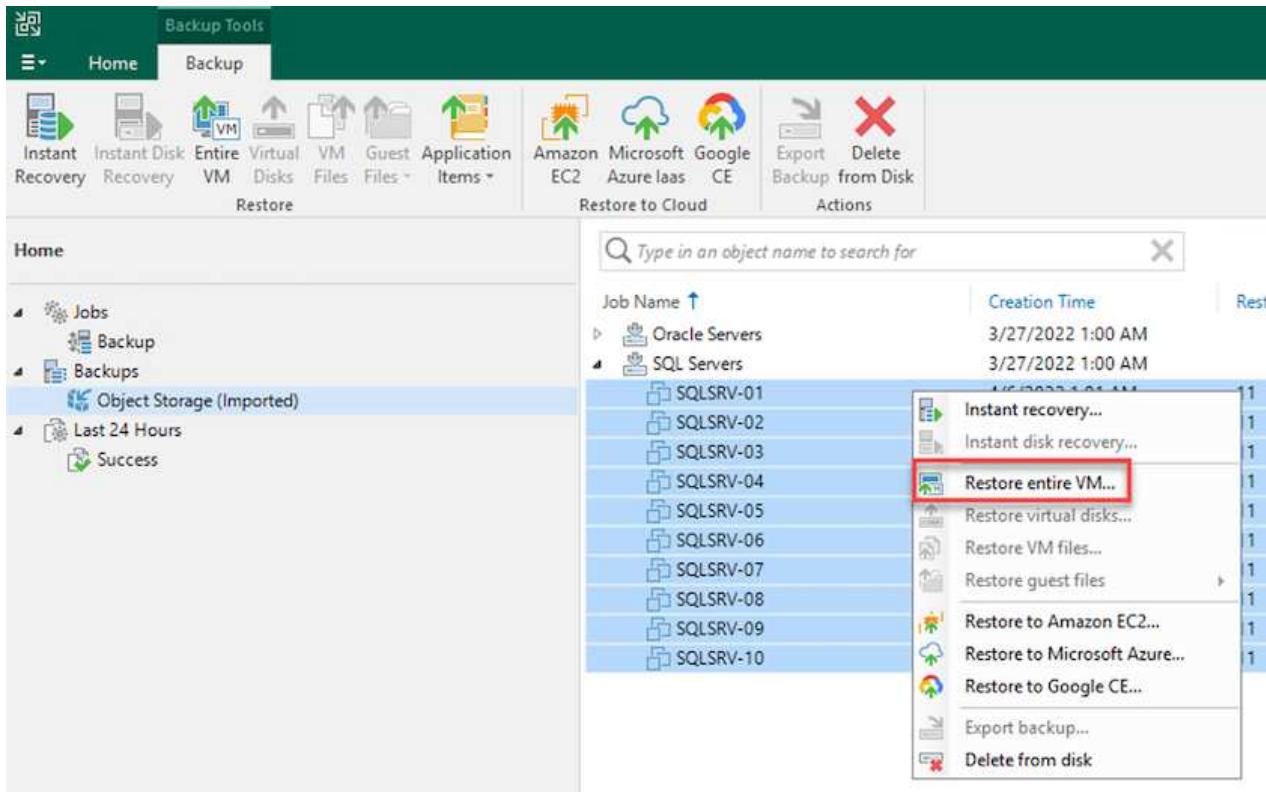

2. On the first page of the Full VM Restore wizard, modify the VMs to backup if desired and select Next.

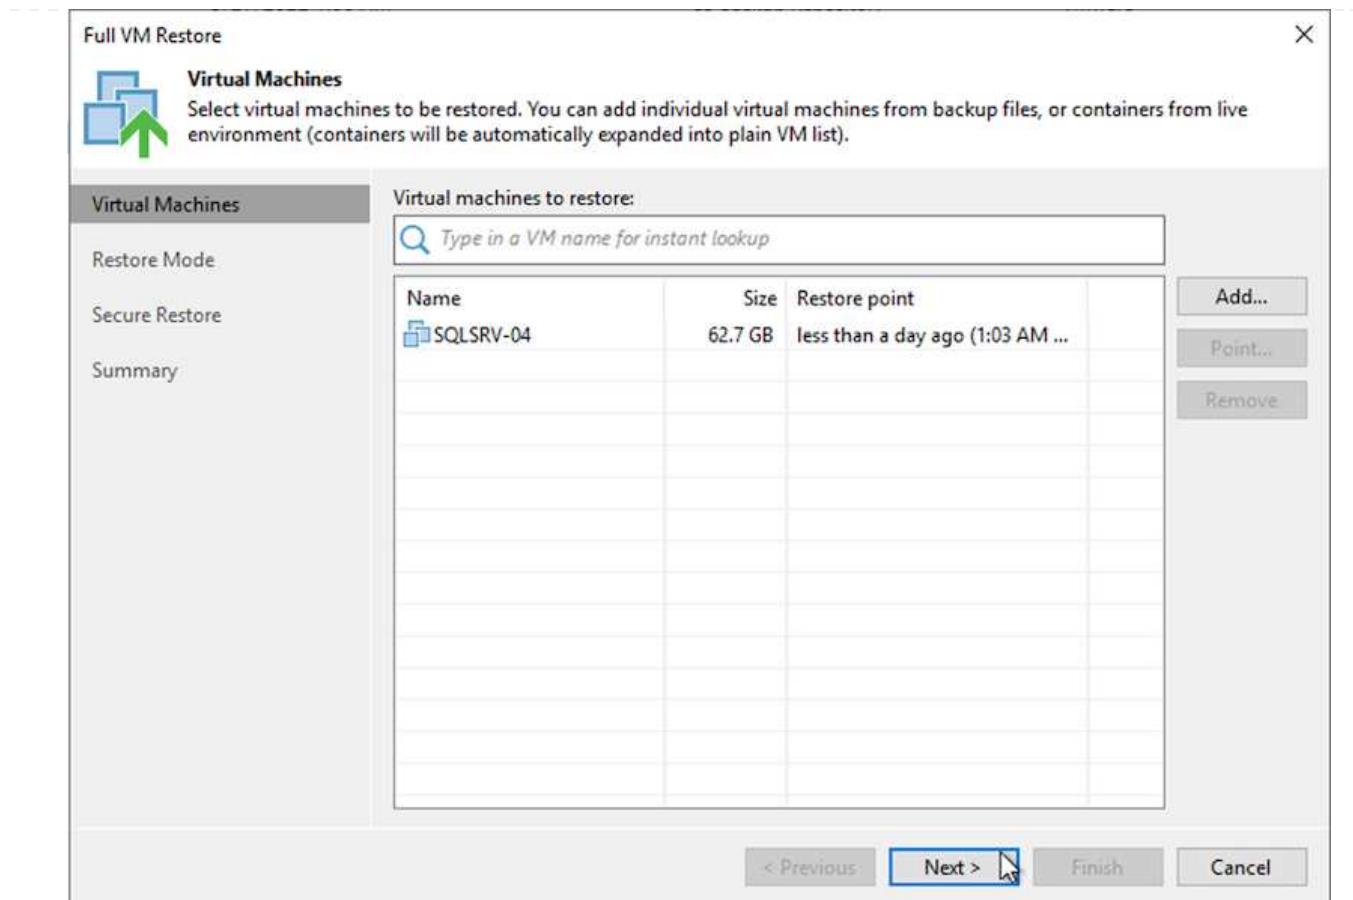

3. On the Restore Mode page, select Restore to a New Location, or with Different Settings.

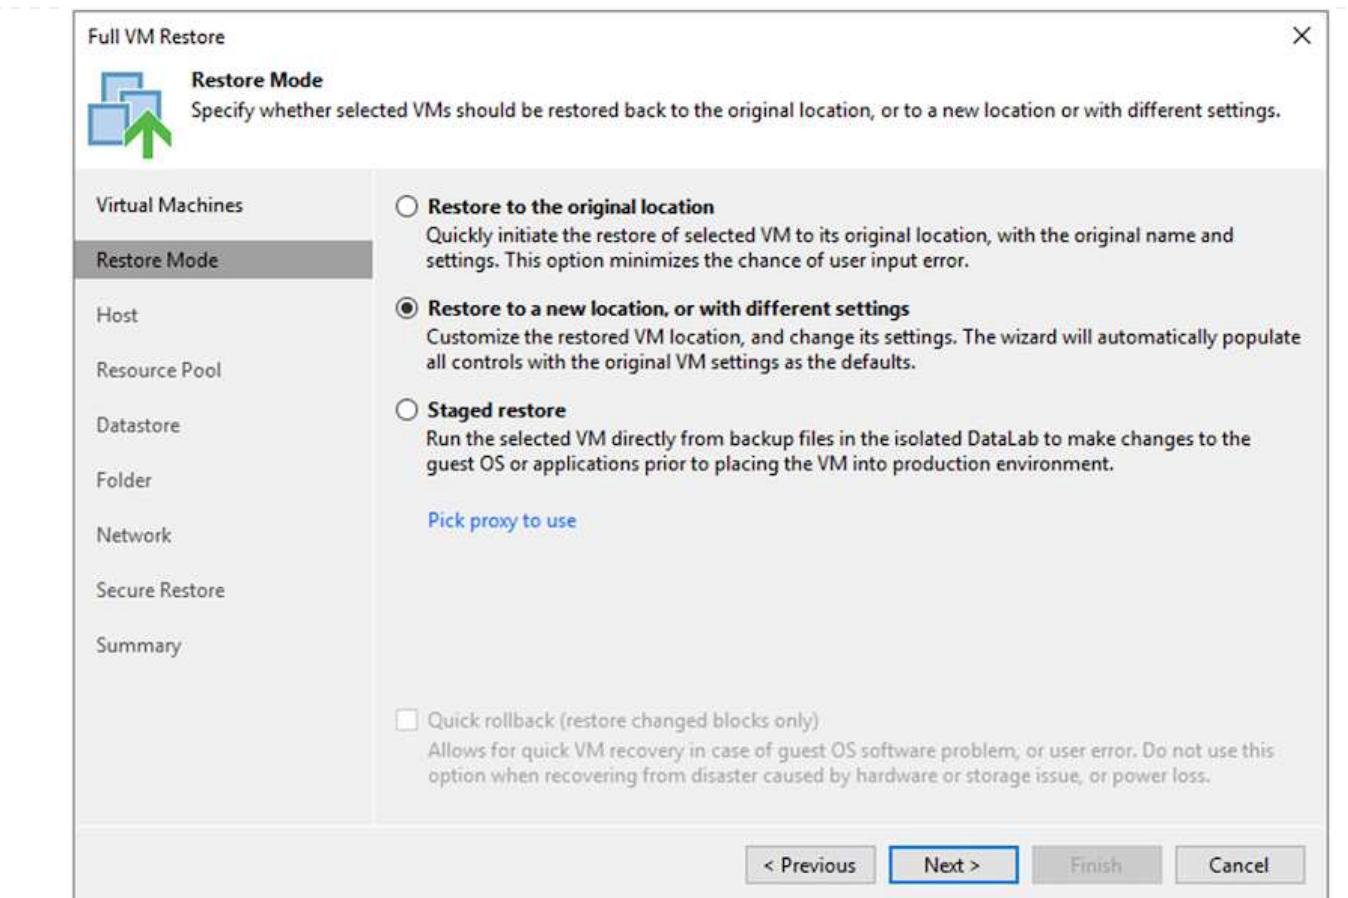

4. On the host page, select the Target ESXi host or cluster to restore the VM to.



5. On the Datastores page, select the target datastore location for both the configuration files and hard disk.

Full VM Restore

**Datastore**

By default, original datastore and disk type are selected for each VM file. You can change them by selecting desired VM file, and clicking Datastore or Disk Type. Use multi-select (Ctrl-click and Shift-click) to select multiple VMs at once.

Virtual Machines

Restore Mode

Host

Resource Pool

**Datastore**

Folder

Network

Secure Restore

Summary

Files location:

File	Size	Datastore	Disk type
SQLSRV-04		WorkloadDatastore (VM...)	
Configuration files			
Hard disk 1 (SQLSRV-04)	100 GB	WorkloadDatastore (VM...)	Same as source

Select multiple VMs to apply settings in bulk.

[Datastore...](#) [Disk Type...](#)

[< Previous](#) [Next >](#) [Finish](#) [Cancel](#)

6. On the Network page, map the original networks on the VM to the networks in the new target location.

## Full VM Restore



### Network

By default, we will connect the restored VM to the same virtual networks as the original VM. If you are restoring to a different location, specify how networks map between original and new locations.

#### Virtual Machines

Restore Mode

Host

Resource Pool

Datastore

Folder

**Network**

Secure Restore

Summary

#### Network connections:

Source	Target
SQLSRV-04	
Management 181 (DSwitch)	Not connected
Data - A - 3374 (DSwitch)	Not connected
Data - B - 3375 (DSwitch)	Not connected

Select multiple VMs to apply settings change in bulk.

[Network...](#)


[Disconnect](#)

[< Previous](#)

[Next](#)

[Finish](#)

[Cancel](#)

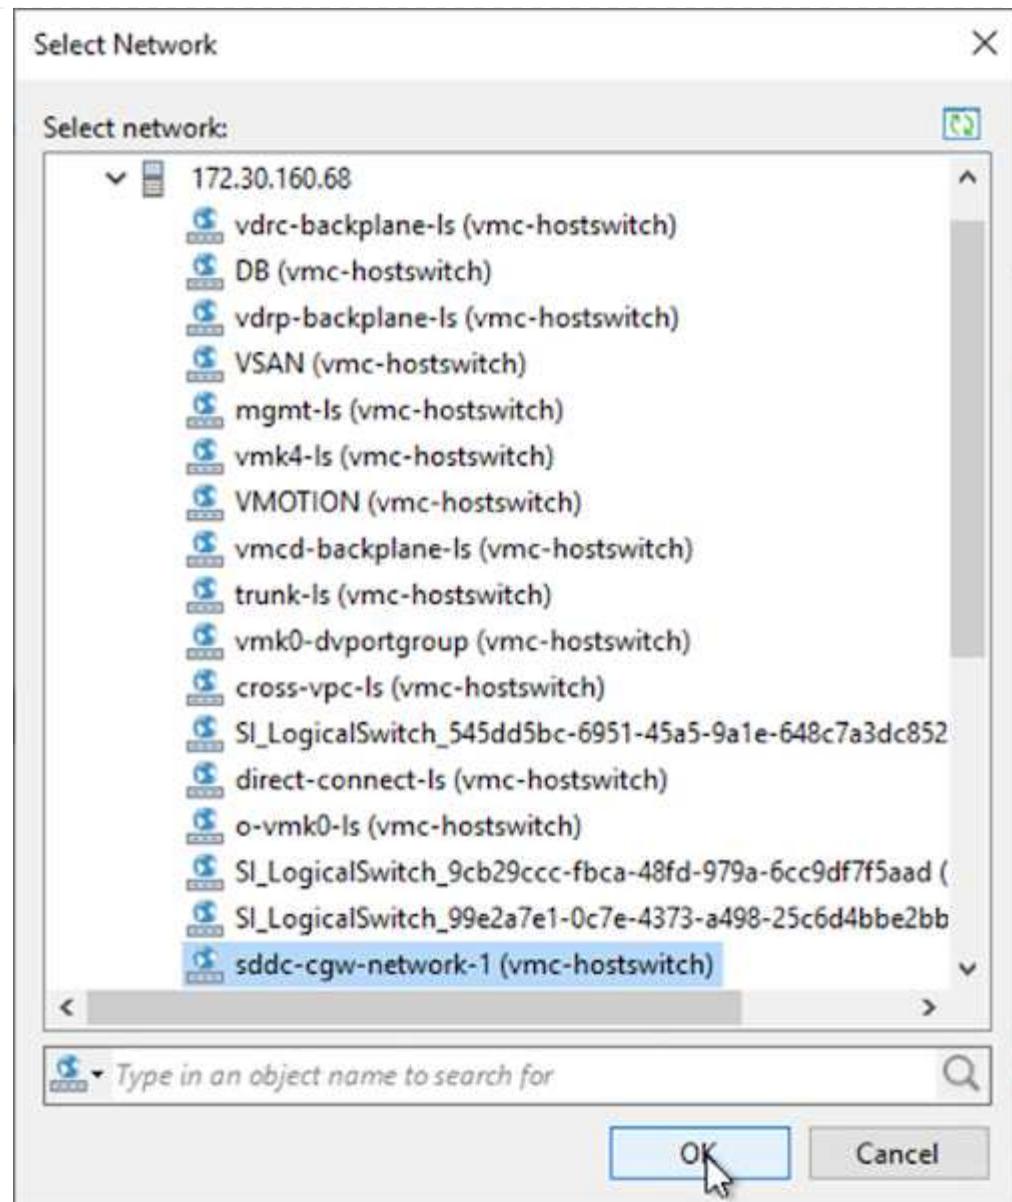

7. Select whether to scan the restored VM for malware, review the summary page, and click Finish to start the restore.

#### Restore SQL Server application data

The following process provides instructions on how to recover a SQL Server in VMware Cloud Services in AWS in the event of a disaster that renders the on-premises site inoperable.

The following prerequisites are assumed to be complete in order to continue with the recovery steps:

1. The Windows Server VM has been restored to the VMware Cloud SDDC using Veeam Full Restore.
2. A secondary SnapCenter server has been established and SnapCenter database restore and configuration has been completed using the steps outlined in the section "["SnapCenter backup and restore process summary."](#)

## VM: Post restore configuration for SQL Server VM

After the restore of the VM is complete, you must configure networking and other items in preparation for rediscovering the host VM within SnapCenter.

1. Assign new IP addresses for Management and iSCSI or NFS.
2. Join the host to the Windows domain.
3. Add the hostnames to DNS or to the hosts file on the SnapCenter server.



If the SnapCenter plug-in was deployed using domain credentials different than the current domain, you must change the Log On account for the Plug-in for Windows Service on the SQL Server VM. After changing the Log On account, restart the SnapCenter SMCore, Plug-in for Windows, and Plug-in for SQL Server services.



To automatically rediscover the restored VMs in SnapCenter, the FQDN must be identical to the VM that was originally added to the SnapCenter on premises.

## Configure FSx storage for SQL Server restore

To accomplish the disaster recovery restore process for a SQL Server VM, you must break the existing SnapMirror relationship from the FSx cluster and grant access to the volume. To do so, complete the following steps.

1. To break the existing SnapMirror relationship for the SQL Server database and log volumes, run the following command from the FSx CLI:

```
FSx-Dest:::> snapmirror break -destination-path DestSVM:DestVolName
```

2. Grant access to the LUN by creating an initiator group containing the iSCSI IQN of the SQL Server Windows VM:

```
FSx-Dest:::> igrup create -vserver DestSVM -igroup igrupNome  
-protocol iSCSI -ostype windows -initiator IQN
```

3. Finally, map the LUNs to the initiator group that you just created:

```
FSx-Dest:::> lun mapping create -vserver DestSVM -path LUNPath igrup  
igroupNome
```

4. To find the path name, run the `lun show` command.

## Set up the Windows VM for iSCSI access and discover the file systems

1. From the SQL Server VM, set up your iSCSI network adapter to communicate on the VMware Port Group that has been established with connectivity to the iSCSI target interfaces on your FSx instance.
2. Open the iSCSI Initiator Properties utility and clear out the old connectivity settings on the Discovery, Favorite Targets, and Targets tabs.
3. Locate the IP address(es) for accessing the iSCSI logical interface on the FSx instance/cluster. This can be found in the AWS console under Amazon FSx > ONTAP > Storage Virtual Machines.

### Endpoints

Management DNS name	Management IP address
svm-045c077375d3d9799.fs-0ae40e08acc0dea67.fsx.us-east-1.amazonaws.com	198.19.254.53
NFS DNS name	NFS IP address
svm-045c077375d3d9799.fs-0ae40e08acc0dea67.fsx.us-east-1.amazonaws.com	198.19.254.53
iSCSI DNS name	iSCSI IP addresses
iscsi.svm-045c077375d3d9799.fs-0ae40e08acc0dea67.fsx.us-east-1.amazonaws.com	172.30.15.101, 172.30.14.49

4. From the Discovery tab, click Discover Portal and enter the IP addresses for your FSx iSCSI targets.



## Discover Target Portal



Enter the IP address or DNS name and port number of the portal you want to add.

To change the default settings of the discovery of the target portal, click the Advanced button.

IP address or DNS name:

Port: (Default is 3260.)

5. On the Target tab, click Connect, select Enable Multi-Path if appropriate for your configuration and then click OK to connect to the target.

## iSCSI Initiator Properties

X

Targets   Discovery   Favorite Targets   Volumes and Devices   RADIUS   Configuration

### Quick Connect

To discover and log on to a target using a basic connection, type the IP address or DNS name of the target and then click Quick Connect.

Target:

Quick Connect...

### Discovered targets

Refresh

Name	Status
iqn.1992-08.com.netapp:sn.5918b03f9ef411ecb007495... vs.6	Inactive

1

To connect using advanced options, select a target and then click Connect.

Connect

### Connect To Target

X

For Target name:

1992-08.com.netapp:sn.5918b03f9ef411ecb0074956fb75f45c:vs.6

For the  Add this connection to the list of Favorite Targets.  
This will make the system automatically attempt to restore the connection every time this computer restarts.

Enable multi-path

2

Advanced...

3

OK


Cancel

OK

Cancel

Apply

6. Open the Computer Management utility and bring the disks online. Verify that they retain the same drive letters that they previously held.

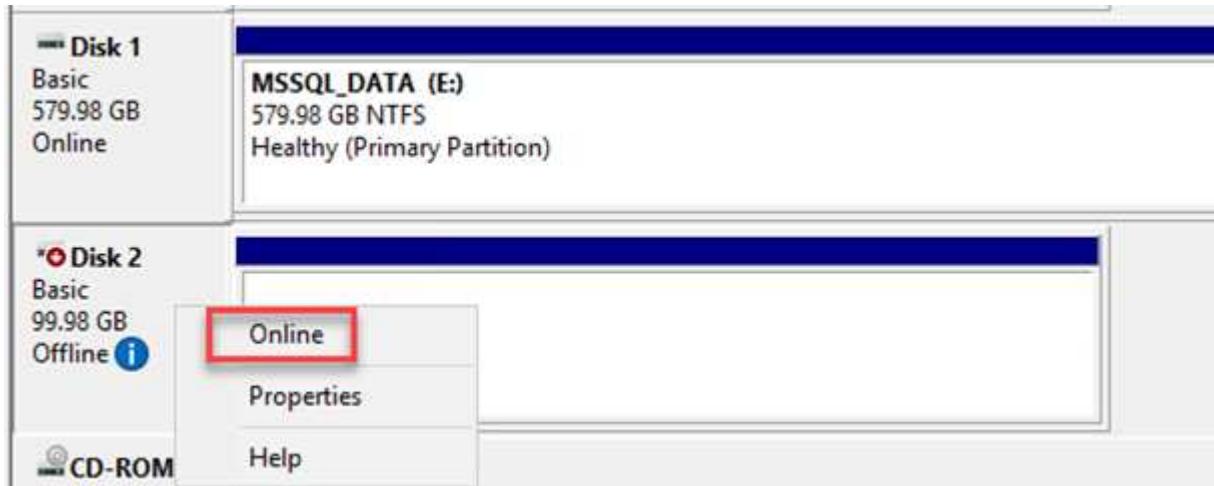


## Attach the SQL Server databases

1. From the SQL Server VM, open Microsoft SQL Server Management Studio and select Attach to start the process of connecting to the database.



2. Click Add and navigate to the folder containing the SQL Server primary database file, select it, and click OK.

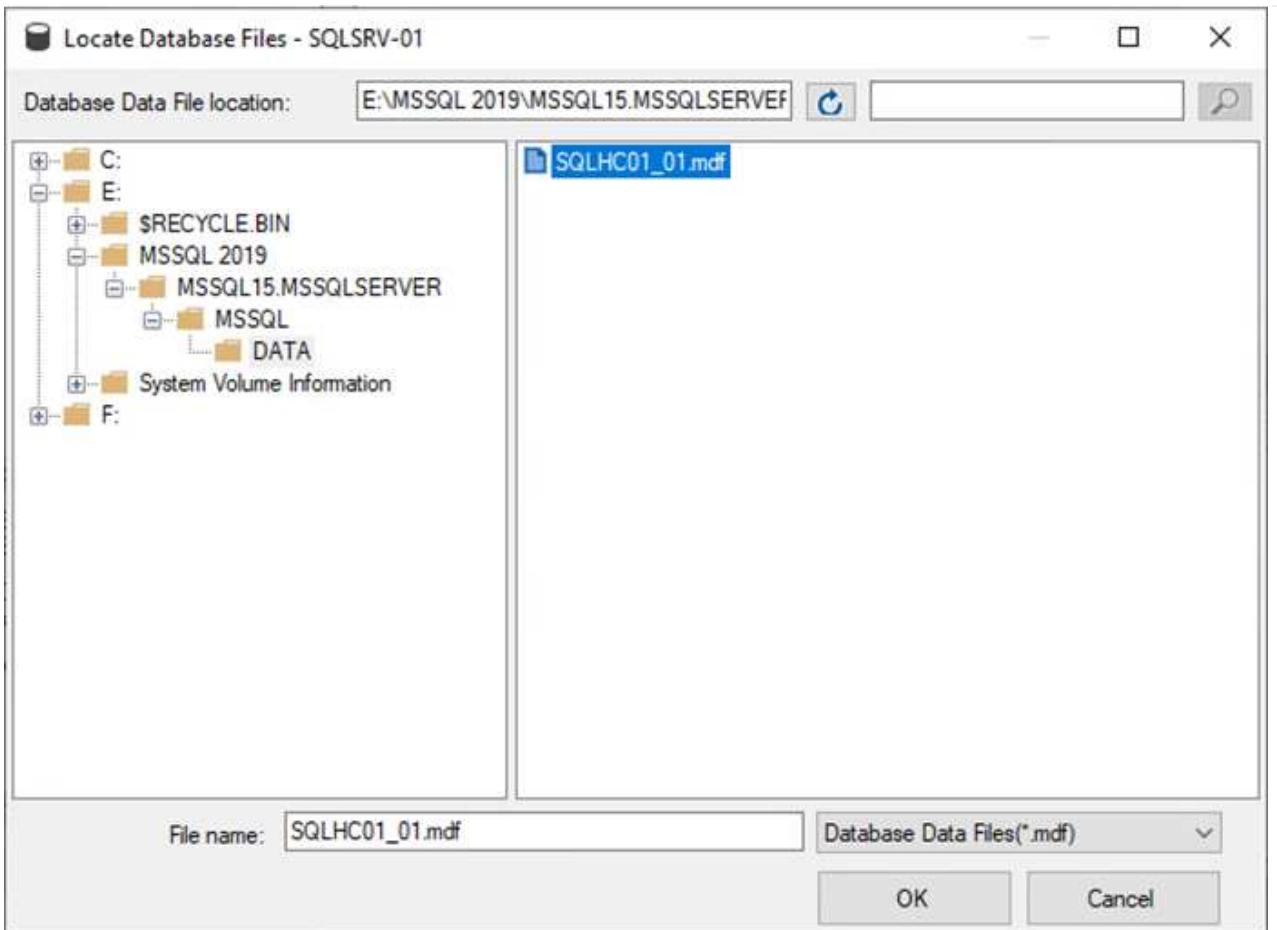

3. If the transaction logs are on a separate drive, choose the folder that contains the transaction log.
4. When finished, click OK to attach the database.

Object Explorer

Connect ▾

SQLSRV-01 (SQL Server 15.0.2080.9 - sa)

Databases

System Databases

Database Snapshots

SQLHC01

Security

Server Objects

Replication

PolyBase

Always On High Availability

Management

Integration Services Catalogs

SQL Server Agent (Agent XPs disabled)

XEvent Profiler

Select a page

General

Files

Filegroups

Options

Change Tracking

Permissions

Extended Properties

Mirroring

Transaction Log Shipping

Query Store

Script ▾

Help

Backup

Last Database Backup: None

Last Database Log Backup: None

Database

Name: SQLHC01

Status: Normal

Owner: sa

Date Created: 4/13/2022 9:37:18 PM

Size: 514944.00 MB

Space Available: 501701.86 MB

Number of Users: 4

Memory Allocated To Memory Optimized Objects: 0.00 MB

Memory Used By Memory Optimized Objects: 0.00 MB

Maintenance

Collation: SQL\_Latin1\_General\_CI\_AS

## Confirm SnapCenter communication with SQL Server Plug-in

With the SnapCenter database restored to its previous state, it automatically redisCOVERS the SQL Server hosts. For this to work correctly, keep in mind the following prerequisites:

- SnapCenter must be placed in Disaster Recover mode. This can be accomplished through the Swagger API or in Global Settings under Disaster Recovery.
- The FQDN of the SQL Server must be identical to the instance that was running in the on-premises datacenter.
- The original SnapMirror relationship must be broken.
- The LUNs containing the database must be mounted to the SQL Server instance and the database attached.

To confirm that SnapCenter is in Disaster Recovery mode, navigate to Settings from within the SnapCenter web client. Go to the Global Settings tab and then click Disaster Recovery. Make sure that the Enable Disaster Recovery checkbox is enabled.

The screenshot shows the NetApp SnapCenter web interface. The left sidebar has navigation links: Dashboard, Resources, Monitor, Reports, Hosts, Storage Systems, Settings (which is selected), and Alerts. The main content area has tabs: Global Settings (selected), Policies, and Users and Access. Under Global Settings, there are several sections: Hypervisor Settings, Notification Server Settings, Configuration Settings, Purge Jobs Settings, Domain Settings, and CA Certificate Settings. Below these is the Disaster Recovery section, which is highlighted with a blue background. Inside this section, the 'Enable Disaster Recovery' checkbox is checked, and there is an 'Apply' button. The overall theme is blue and white, with the NetApp logo at the top.

## **Restore Oracle application data**

The following process provides instructions on how to recover Oracle application data in VMware Cloud Services in AWS in the event of a disaster that renders the on-premises site inoperable.

Complete the following prerequisites to continue with the recovery steps:

1. The Oracle Linux server VM has been restored to the VMware Cloud SDDC using Veeam Full Restore.
2. A secondary SnapCenter server has been established and the SnapCenter database and configuration files have been restored using the steps outlined in this section "["SnapCenter backup and restore process summary."](#)

## Configure FSx for Oracle restore – Break the SnapMirror relationship

To make the secondary storage volumes hosted on the FSxN instance accessible to the Oracle servers, you must first break the existing SnapMirror relationship.

1. After logging into the FSx CLI, run the following command to view the volumes filtered by the correct name.

```
FSx-Dest::> volume show -volume VolumeName*
```

```
FsxId0ae40e08acc0dea67::> volume show -volume oraclesrv_03*
Vserver      Volume      Aggregate      State      Type      Size   Available Used%
-----      -----      -----      -----      -----      -----   -----   -----
ora_svm_dest      oraclesrv_03_u01_dest      aggr1      online      DP      100GB    93.12GB    6%
ora_svm_dest      oraclesrv_03_u02_dest      aggr1      online      DP      200GB    34.98GB    82%
ora_svm_dest      oraclesrv_03_u03_dest      aggr1      online      DP      150GB    33.37GB    77%
3 entries were displayed.
```

```
FsxId0ae40e08acc0dea67::> █
```

2. Run the following command to break the existing SnapMirror relationships.

```
FSx-Dest::> snapmirror break -destination-path DestSVM:DestVolName
```

```
FsxId0ae40e08acc0dea67::> snapmirror break -destination-path ora_svm_dest:oraclesrv_03_u02_dest
Operation succeeded: snapmirror break for destination "ora_svm_dest:oraclesrv_03_u02_dest".
FsxId0ae40e08acc0dea67::> snapmirror break -destination-path ora_svm_dest:oraclesrv_03_u03_dest
Operation succeeded: snapmirror break for destination "ora_svm_dest:oraclesrv_03_u03_dest".
```

3. Update the junction-path in the Amazon FSx web client:

## oraclesrv\_03\_u01\_dest (fsvol-01167370e9b7aefaa0)

Actions ▾

- [Attach](#)
- [Update volume](#)
- [Create backup](#)
- [Delete volume](#)

**Summary**

Volume ID fsvol-01167370e9b7aefaa0	Creation time 2022-03-08T14:52:09-05:00	SVM ID svm-02b2ad25c6b2e5bc2
Volume name oraclesrv_03_u01_dest	Lifecycle state <span style="color: green;">Created</span>	Junction path -
UUID 3d7338ce-9f19-11ec-b007-4956fb75f45c	Volume type ONTAP	Tiering policy name SNAPSHOT_ONLY
File system ID fs-0ae40e08acc0dea67	Size 100.00 GB	Tiering policy cooling period (days) 2
Resource ARN arn:aws:fsx:us-east-1:541696183547:volume/fs-0ae40e08acc0dea67/fsvol-01167370e9b7aefaa0		Storage efficiency enabled Disabled

4. Add the junction path name and click Update. Specify this junction path when mounting the NFS volume from the Oracle server.

## Update volume

X

### Junction path

/oraclesrv\_03\_u01\_dest

The location within your file system where your volume will be mounted.

### Volume size

102400



Minimum 20 MiB; Maximum 104857600 MiB

### Storage efficiency

Select whether you would like to enable ONTAP storage efficiencies on your volume: deduplication, compression, and compaction.

- Enabled (recommended)  
 Disabled

### Capacity pool tiering policy

You can optionally enable automatic tiering of your data to lower-cost capacity pool storage.

Snapshot Only




Cancel

Update

## Mount NFS volumes on Oracle Server

In Cloud Manager, you can obtain the mount command with the correct NFS LIF IP address for mounting the NFS volumes that contain the Oracle database files and logs.

1. In Cloud Manager, access the list of volumes for your FSx cluster.

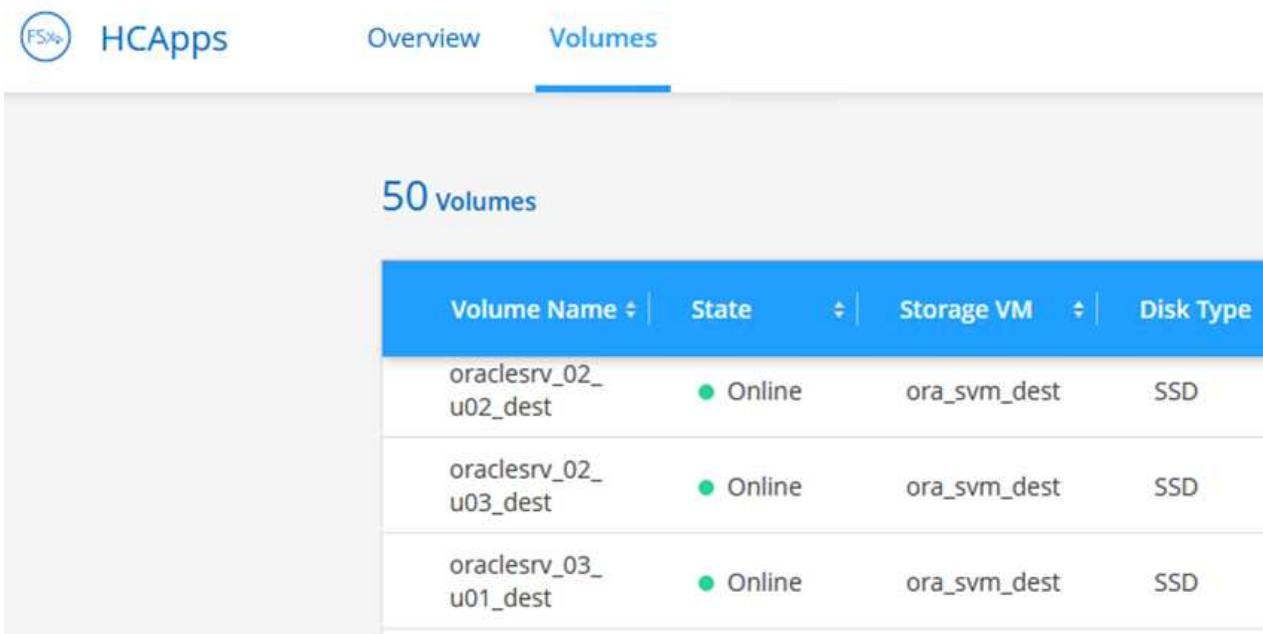

The screenshot shows the Cloud Manager interface with the 'Volumes' tab selected. The title bar includes icons for FSx, HCApps, Overview, and Volumes. Below the title bar, it says '50 Volumes'. A table lists three volumes:

Volume Name	State	Storage VM	Disk Type
oraclesrv_02_u02_dest	● Online	ora_svm_dest	SSD
oraclesrv_02_u03_dest	● Online	ora_svm_dest	SSD
oraclesrv_03_u01_dest	● Online	ora_svm_dest	SSD

2. From the action menu, select Mount Command to view and copy the mount command to be used on our Oracle Linux server.



### Mount Volume NFS

oraclesrv\_03\_u01\_dest

Go to your linux machine and enter this mount command

Mount Command

```
mount 198.19.254.180:/oraclesrv_03_u01_dest <dest_d...>
```

Copy

3. Mount the NFS file system to the Oracle Linux Server. The directories for mounting the NFS share already exist on the Oracle Linux host.
4. From the Oracle Linux server, use the mount command to mount the NFS volumes.

```
FSx-Dest::> mount -t oracle_server_ip:/junction-path
```

Repeat this step for each volume associated with the Oracle databases.



To make the NFS mount persistent upon rebooting, edit the `/etc/fstab` file to include the mount commands.

5. Reboot the Oracle server. The Oracle databases should start up normally and be available for use.

## Fallback

Upon successful completion of the failover process outlined in this solution, SnapCenter and Veeam resume their backup functions running in AWS, and FSx for ONTAP is now designated as primary storage with no existing SnapMirror relationships with the original on-premises datacenter. After normal function has resumed on premises, you can use a process identical to the one outlined in this documentation to mirror data back to the on-premises ONTAP storage system.

As is also outlined in this documentation, you can configure SnapCenter to mirror the application data volumes from FSx for ONTAP to an ONTAP storage system residing on premises. Similarly, you can configure Veeam to replicate backup copies to Amazon S3 using a scale-out backup repository so that those backups are accessible to a Veeam backup server residing at the on-premises datacenter.

Failback is outside the scope of this documentation, but failback differs little from the detailed process outlined here.

## Conclusion

The use case presented in this documentation focuses on proven disaster recovery technologies that highlight the integration between NetApp and VMware. NetApp ONTAP storage systems provide proven data-mirroring technologies that allow organizations to design disaster recovery solutions that span on-premises and ONTAP technologies residing with the leading cloud providers.

FSx for ONTAP on AWS is one such solution that allows for seamless integration with SnapCenter and SyncMirror for replicating application data to the cloud. Veeam Backup & Replication is another well-known technology that integrates well with NetApp ONTAP storage systems and can provide failover to vSphere-native storage.

This solution presented a disaster recovery solution using guest connect storage from an ONTAP system hosting SQL Server and Oracle application data. SnapCenter with SnapMirror provides an easy-to-manage solution for protecting application volumes on ONTAP systems and replicating them to FSx or CVO residing in the cloud. SnapCenter is a DR-enabled solution for failing over all application data to VMware Cloud on AWS.

## Where to find additional information

To learn more about the information that is described in this document, review the following documents and/or websites:

- Links to solution documentation

[NetApp Hybrid Multicloud with VMware Solutions](#)

[NetApp Solutions](#)

# Veeam Backup & Restore in VMware Cloud, with Amazon FSx for ONTAP

Author: Josh Powell - NetApp Solutions Engineering

## Overview

Veeam Backup & Replication is an effective and reliable solution for protecting data in VMware Cloud. This solution demonstrates the proper setup and configuration for using Veeam Backup and Replication to backup and restore application VMs residing on FSx for ONTAP NFS datastores in VMware Cloud.

VMware Cloud (in AWS) supports the use of NFS datastores as supplemental storage, and FSx for NetApp ONTAP is a secure solution for customers who need to store large amounts of data for their cloud applications that can scale independent of the number of ESXi hosts in the SDDC cluster. This integrated AWS storage service offers highly efficient storage with all of the traditional NetApp ONTAP capabilities.

## Use Cases

This solution addresses the following use cases:

- Backup and restore of Windows and Linux virtual machines hosted in VMC using FSx for NetApp ONTAP as a backup repository.
- Backup and restore of Microsoft SQL Server application data using FSx for NetApp ONTAP as a backup repository.
- Backup and restore of Oracle application data using FSx for Netapp ONTAP as a backup repository.

## NFS Datastores Using Amazon FSx for ONTAP

All virtual machines in this solution reside on FSx for ONTAP supplemental NFS datastores. Using FSx for ONTAP as a supplemental NFS datastore has several benefits. For example, it allows you to:

- Create a scalable and highly available file system in the cloud without the need for complex setup and management.
- Integrate with your existing VMware environment, allowing you to use familiar tools and processes to manage your cloud resources.
- Benefit from the advanced data management features provided by ONTAP, such as snapshots and replication, to protect your data and ensure its availability.

## Solution Deployment Overview

This list provides the high level steps necessary to configure Veeam Backup & Replication, execute backup and restore jobs using FSx for ONTAP as a backup repository, and perform restores of SQL Server and Oracle VMs and databases:

1. Create the FSx for ONTAP file system to be used as iSCSI backup repository for Veeam Backup & Replication.
2. Deploy Veeam Proxy to distribute backup workloads and mount iSCSI backup repositories hosted on FSx for ONTAP.
3. Configure Veeam Backup Jobs to backup SQL Server, Oracle, Linux and Windows virtual machines.
4. Restore SQL Server virtual machines and individual databases.
5. Restore Oracle virtual machines and individual databases.


## Prerequisites

The purpose of this solution is to demonstrate data protection of virtual machines running in VMware Cloud and located on NFS Datastores hosted by FSx for NetApp ONTAP. This solution assumes the following components are configured and ready for use:

1. FSx for ONTAP filesystem with one or more NFS datastores connected to VMware Cloud.
2. Microsoft Windows Server VM with Veeam Backup & Replication software installed.
  - vCenter server has been discovered by the Veeam Backup & Replication server using their IP address or fully qualified domain name.
3. Microsoft Windows Server VM to be installed with Veeam Backup Proxy components during the solution deployment.
4. Microsoft SQL Server VMs with VMDKs and application data residing on FSx for ONTAP NFS datastores. For this solution we had two SQL databases on two separate VMDKs.
  - Note: As a best practice database and transaction log files are placed on separate drives as this will improve performance and reliability. This is in part due to the fact that transaction logs are written sequentially, whereas database files are written randomly.
5. Oracle Database VMs with VMDKs and application data residing on FSx for ONTAP NFS datastores.
6. Linux and Windows file server VMs with VMDKs residing on FSx for ONTAP NFS datastores.
7. Veeam requires specific TCP ports for communication between servers and components in the backup environment. On Veeam backup infrastructure components, the required firewall rules are automatically created.  
For a full listing of the network port requirements refer to the Ports section of the [Veeam Backup and Replication User Guide for VMware vSphere](#).

## High Level Architecture

The testing / validation of this solution was performed in a lab that may or may not match the final deployment environment. For more information, please refer to the following sections.

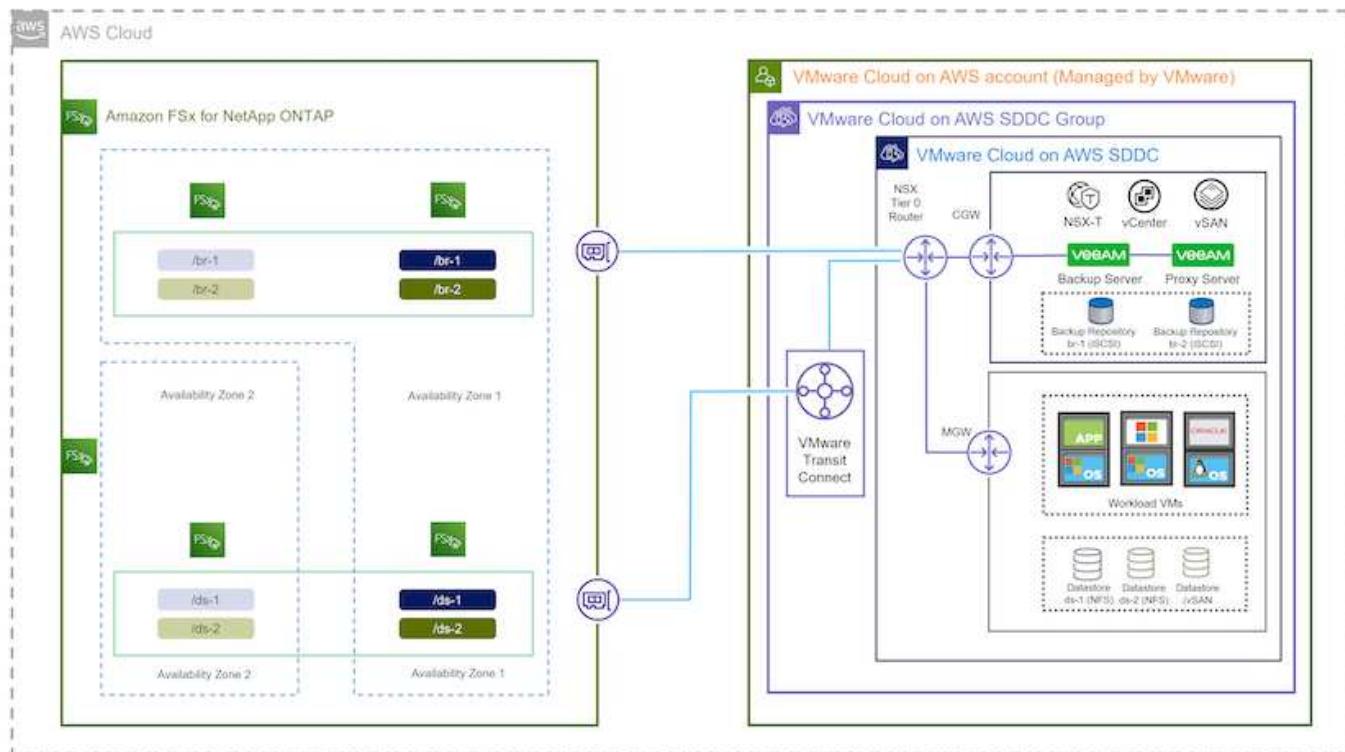

## Hardware / Software Components

The purpose of this solution is to demonstrate data protection of virtual machines running in VMware Cloud and located on NFS Datastores hosted by FSx for NetApp ONTAP. This solution assumes the following components are already configured and ready for use:

- Microsoft Windows VM's located on an FSx for ONTAP NFS Datastore
- Linux (CentOS) VM's located on an FSx for ONTAP NFS Datastore
- Microsoft SQL Server VM's located on an FSx for ONTAP NFS Datastore
  - Two databases hosted on separate VMDK's
- Oracle VM's located on an FSx for ONTAP NFS Datastore

## Solution Deployment

In this solution we provide detailed instructions for deploying and validating a solution utilizing Veeam Backup and Replication software to perform backup and recovery of SQL Server, Oracle, and Windows and Linux file server virtual machines in a VMware Cloud SDDC on AWS. The Virtual Machines in this solution reside on a supplemental NFS datastore hosted by FSx for ONTAP. In addition, a separate FSx for ONTAP file system is used to host iSCSI volumes that will be used for Veeam backup repositories.

We will go over FSx for ONTAP file system creation, mounting iSCSI volumes to be used as backup repositories, creating and running backup jobs, and performing VM and database restores.

For detailed information on FSx for NetApp ONTAP refer to the [FSx for ONTAP User Guide](#).

For detailed information on Veeam Backup and Replication refer to the [Veeam Help Center Technical Documentation](#) site.

For considerations and limitations when using Veeam Backup and Replication with VMware Cloud on AWS, refer to [VMware Cloud on AWS](#) and [VMware Cloud on Dell EMC Support. Considerations and Limitations](#).

#### **Deploy Veeam Proxy server**

A Veeam proxy server is a component of the Veeam Backup & Replication software that acts as an intermediary between the source and the backup or replication target. The proxy server helps to optimize and accelerate data transfer during backup jobs by processing data locally and can use different Transport Modes to access data using VMware vStorage APIs for Data Protection or through direct storage access.

When choosing a Veeam proxy server design it is important to consider the number of concurrent tasks and the transport mode or type of storage access desired.

For sizing the number of proxy servers, and for their system requirements, refer to the [Veeam VMware vSphere Best Practice Guide](#).

The Veeam Data Mover is a component of the Veeam Proxy Server and utilizes a Transport Mode as a method for obtaining VM data from the source and transferring it to the target. The transport mode is specified during the configuration of the backup job. It is possible to increase the efficiency backups from NFS datastores by using direct storage access.

For more information on Transport Modes refer to the [Veeam Backup and Replication User Guide for VMware vSphere](#).

In the following step we cover deployment of the Veeam Proxy Server on a Windows VM in the VMware Cloud SDDC.


## Deploy Veeam Proxy to distribute backup workloads

In this step the Veeam Proxy is deployed to an existing Windows VM. This allows backup jobs to be distributed between the primary Veeam Backup Server and the Veeam Proxy.

1. On the Veeam Backup and Replication server, open the administration console and select **Backup Infrastructure** in the lower left menu.
2. Right click on **Backup Proxies** and click on **Add VMware backup proxy...** to open the wizard.




3. In the **Add VMware Proxy** wizard click the **Add New...** button to add a new proxy server.

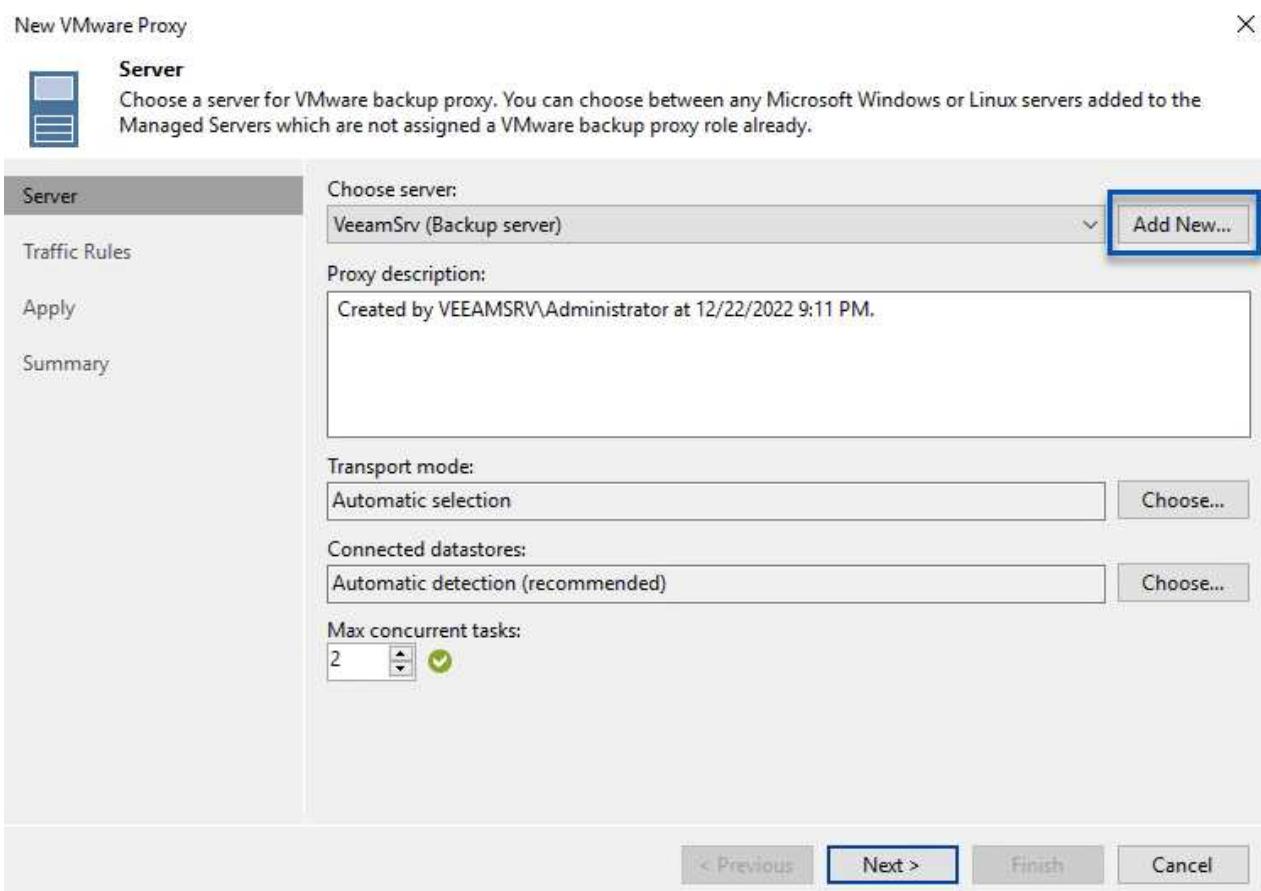


4. Select to add Microsoft Windows and follow the prompts to add the server:
  - Fill out the DNS name or IP address


- Select an account to use for Credentials on the new system or add new credentials
- Review the components to be installed and then click on **Apply** to begin the deployment

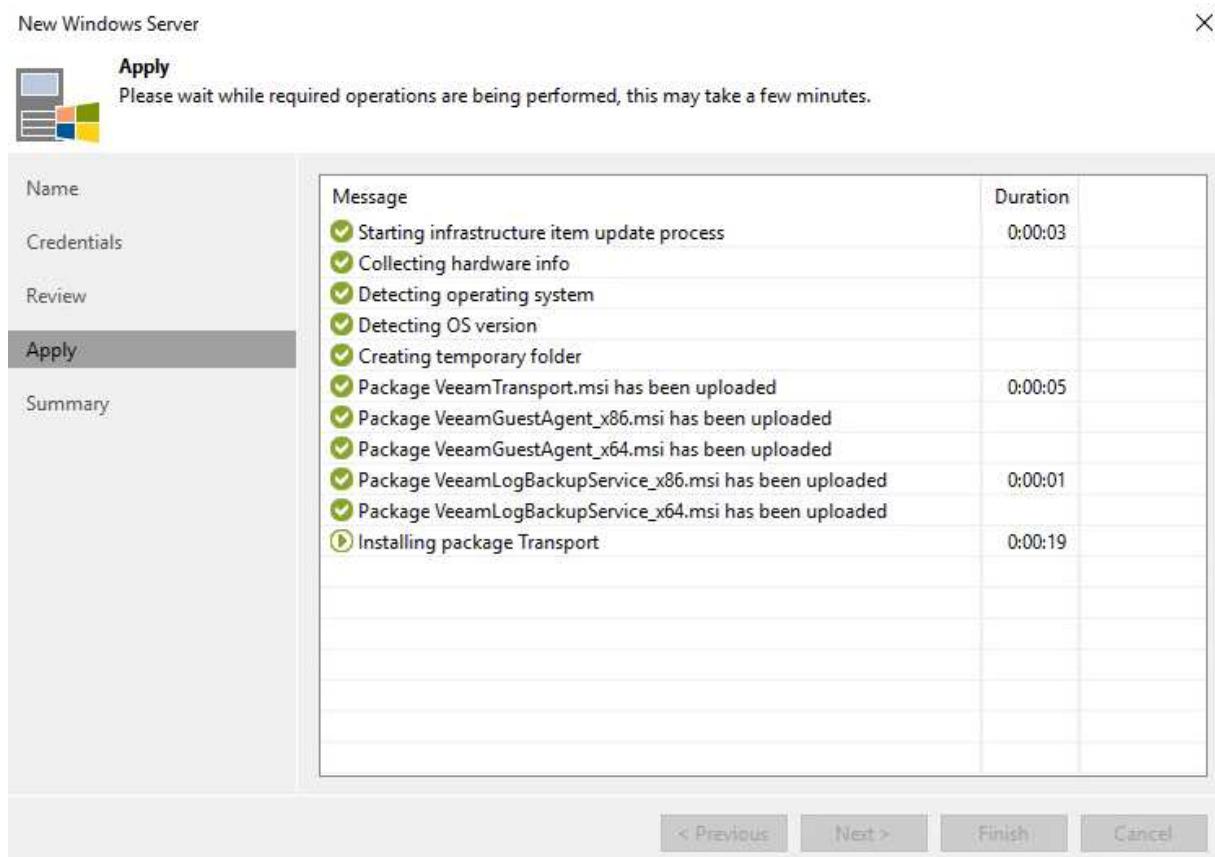

5. Back in the **New VMware Proxy** wizard, choose a Transport Mode. In our case we chose **Automatic Selection**.

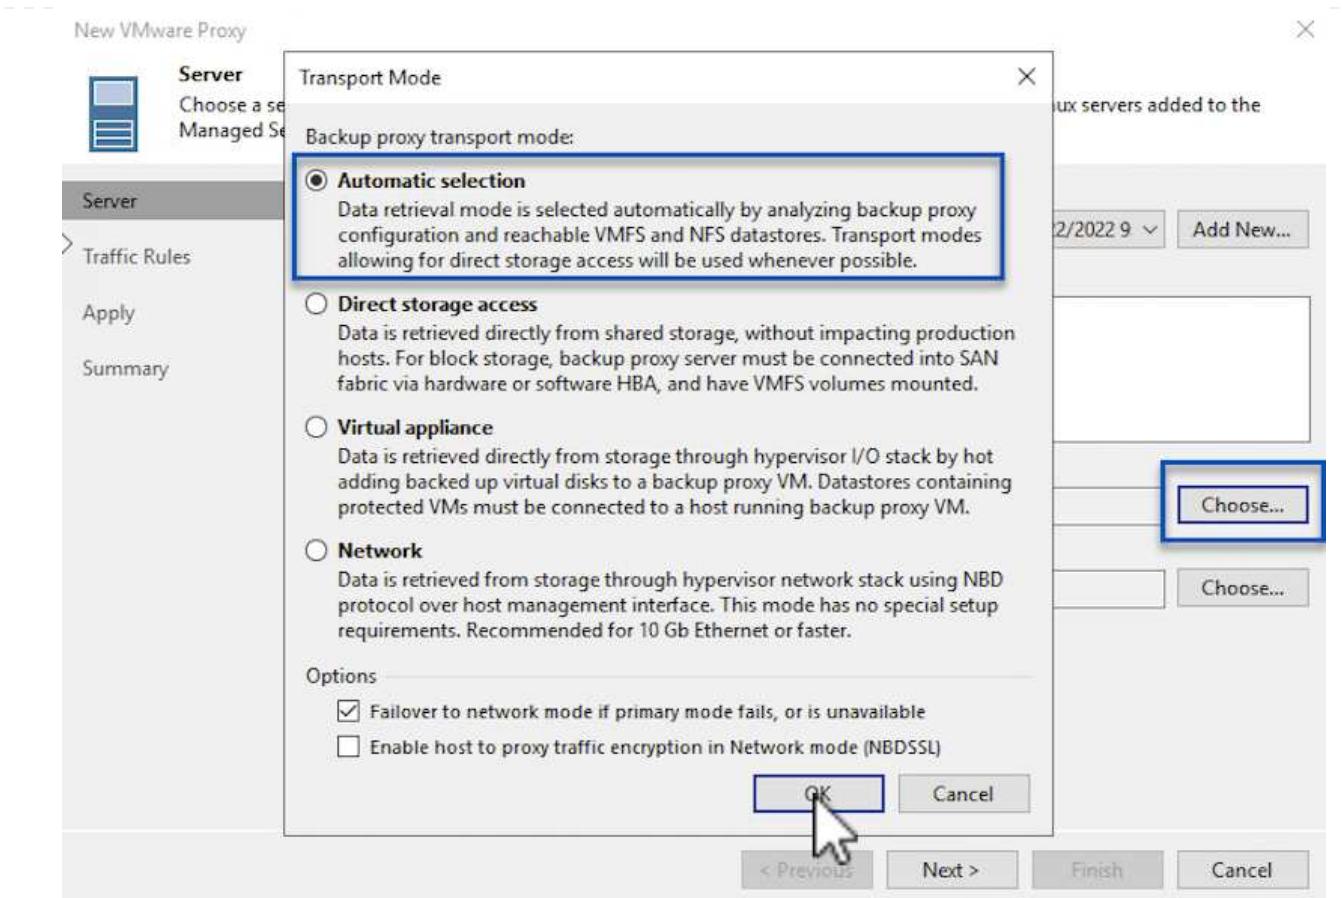

6. Select the Connected datastores that you want the VMware Proxy to have direct access to.

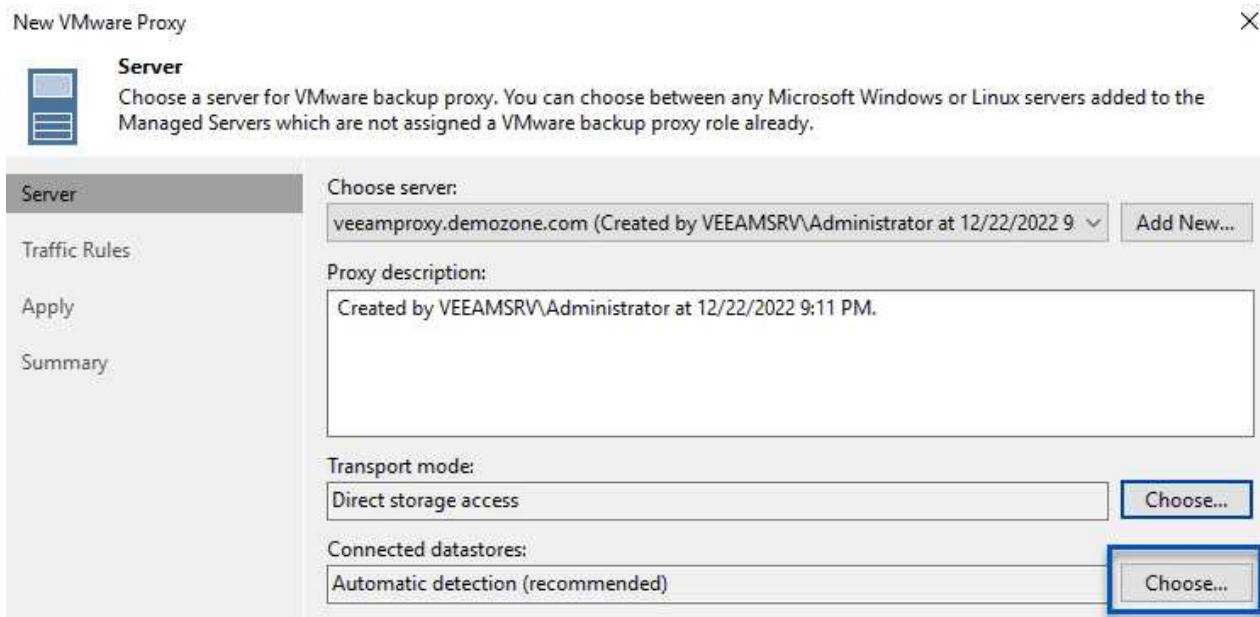



7. Configure and apply any specific network traffic rules such as encryption or throttling that are desired. When complete click on the **Apply** button to complete the deployment.

New VMWare Proxy

**Traffic Rules**

Review network traffic encryption and throttling rules which apply to this backup proxy.

Server

**Traffic Rules**

Apply

Summary

Network traffic rules control encryption and throttling of network traffic based on the destination. Throttling is global, with set bandwidth split equally across all backup proxies falling into the rule.

The following network traffic rules apply to this proxy:

Name	Encryption	Throttling	Time period
Internet	Enabled	Disabled	

[View](#)

[Manage network traffic rules](#)

< Previous **Apply** Finish Cancel




### Configure storage and Backup Repositories

The primary Veeam Backup server and Veeam Proxy server have access to a backup repository in the form of direct connected storage. In this section we cover creating an FSx for ONTAP file system, mounting iSCSI LUNs to the Veeam servers and creating Backup Repositories.

## Create FSx for ONTAP file system


Create an FSx for ONTAP file system that will be used to host the iSCSI volumes for the Veeam Backup Repositories.

1. In the AWS console, Go to FSx and then **Create file system**

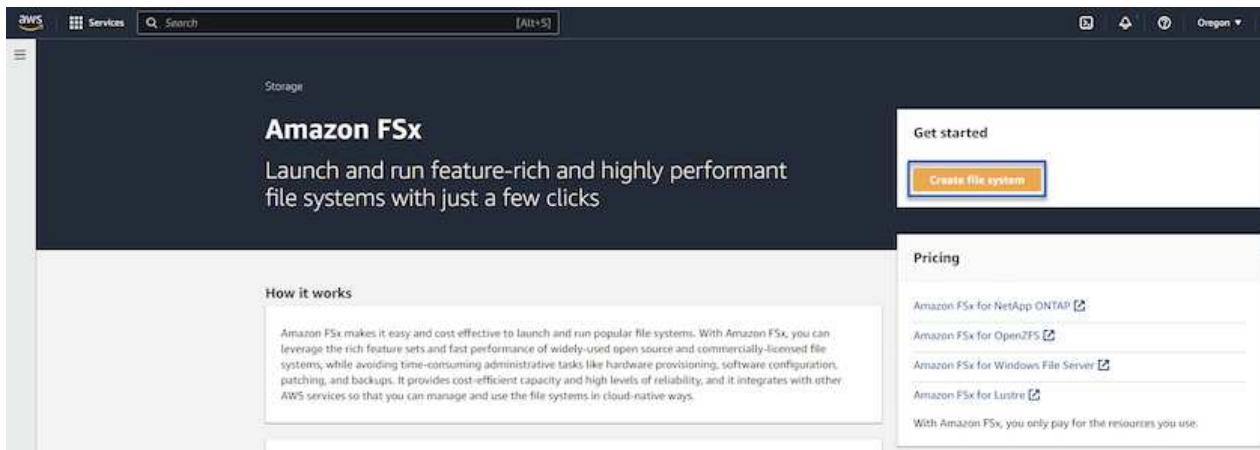

2. Select **Amazon FSx for NetApp ONTAP** and then **Next** to continue.

Select file system type

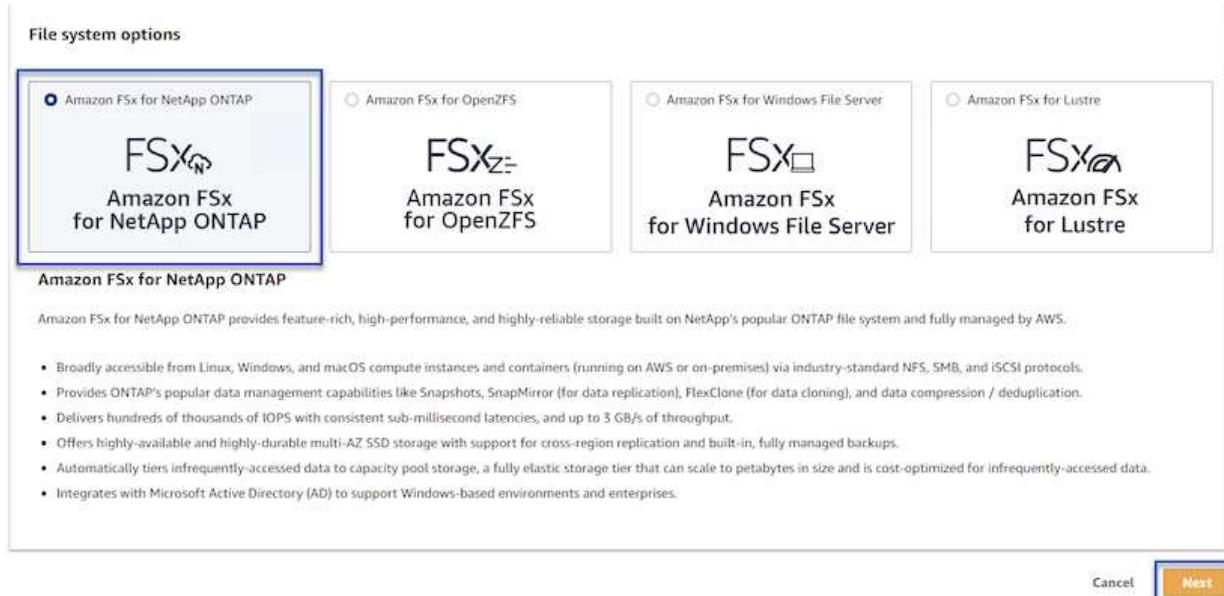

3. Fill in the file system name, deployment type, SSD storage capacity and the VPC in which the FSx for ONTAP cluster will reside. This must be a VPC configured to communicate with the virtual machine network in VMware Cloud. Click on **Next**.

# Create file system

## Creation method

### Quick create

Use recommended best-practice configurations. Most configuration options can be changed after the file system is created.

### Standard create

You set all of the configuration options, including specifying performance, networking, security, backups, and maintenance.

## Quick configuration

### File system name - optional [Info](#)

BackupFSxN

1

Maximum of 256 Unicode letters, whitespace, and numbers, plus + - = . \_ : /

### Deployment type [Info](#)

- Multi-AZ
- Single-AZ

2

### SSD storage capacity [Info](#)

4096 GiB

3

Minimum 1024 GiB; Maximum 192 TiB

### Virtual Private Cloud (VPC) [Info](#)

Specify the VPC from which your file system is accessible.

Demo-FsxforONTAP-VPC | vpc-05596abe79cb653b7

4

### Storage efficiency

Select whether you would like to enable ONTAP's storage efficiency features: deduplication, compression, and compaction

- Enabled (recommended)
- Disabled

Cancel

Back

Next

4. Review the deployment steps and click on **Create File System** to begin the file system creation process.

## Configure and mount iSCSI LUNs

Create and configure the iSCSI LUNs on FSx for ONTAP and mount to the Veeam backup and proxy servers. These LUNs will later be used to create Veeam backup repositories.



Creating an iSCSI LUN on FSx for ONTAP is a multi-step process. The first step of creating the volumes can be accomplished in the Amazon FSx Console or with the NetApp ONTAP CLI.



For more information on using FSx for ONTAP, see the [FSx for ONTAP User Guide](#).

- From the NetApp ONTAP CLI create the initial volumes using the following command:

```
FSx-Backup::> volume create -vserver svm_name -volume vol_name  
-aggregate aggregate_name -size vol_size -type RW
```

- Create LUNs using the volumes created in the previous step:

```
FSx-Backup::> lun create -vserver svm_name -path  
/vol/vol_name/lun_name -size size -ostype windows -space-allocation  
enabled
```

- Grant access to the LUNs by creating an initiator group containing the iSCSI IQN of the Veeam backup and proxy servers:

```
FSx-Backup::> igrup create -vserver svm_name -igroup igroup_name  
-protocol iSCSI -ostype windows -initiator IQN
```



To complete the preceding step you will need to first retrieve the IQN from the iSCSI initiator properties on the Windows servers.

- Finally, map the LUNs to the initiator group that you just created:

```
FSx-Backup::> lun mapping create -vserver svm_name -path  
/vol/vol_name/lun_name igrup igroup_name
```

- To mount the iSCSI LUNs, log into the Veeam Backup & Replication Server and open iSCSI Initiator Properties. Go to the **Discover** tab and enter the iSCSI target IP address.


## iSCSI Initiator Properties



6. On the **Targets** tab, highlight the inactive LUN and click on **Connect**. Check the **Enable multi-path** box and click on **OK** to connect to the LUN.



7. In the Disk Management utility initialize the new LUN and create a volume with the desired name and drive letter. Check the **Enable multi-path** box and click on **OK** to connect to the LUN.

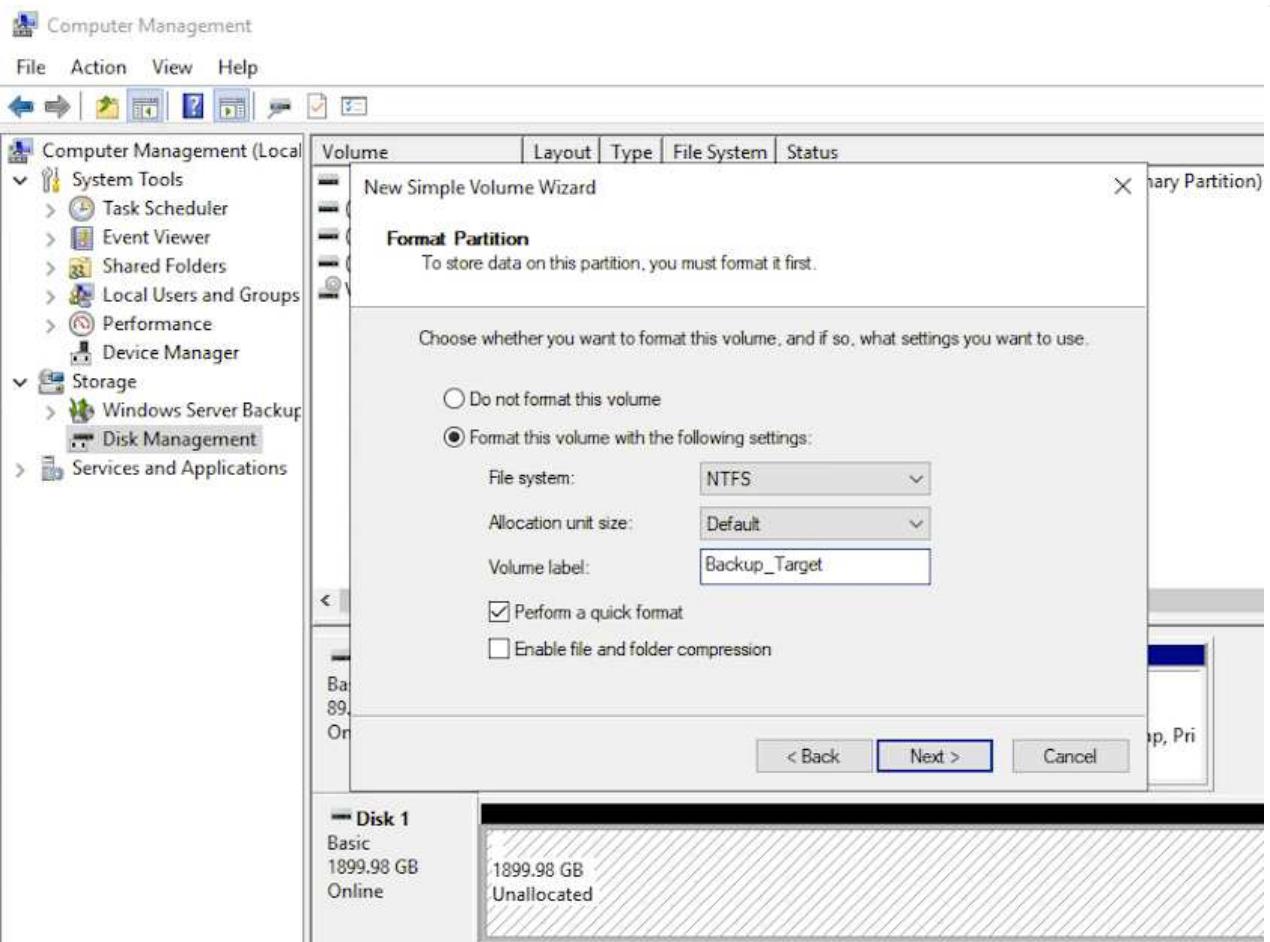


8. Repeat these steps to mount the iSCSI volumes on the Veeam Proxy server.

## Create Veeam Backup Repositories

In the Veeam Backup and Replication console, create backup repositories for the Veeam Backup and Veeam Proxy servers. These repositories will be used as backup targets for the virtual machines backups.

1. In the Veeam Backup and Replication console click on **Backup Infrastructure** in the lower left and then select **Add Repository**

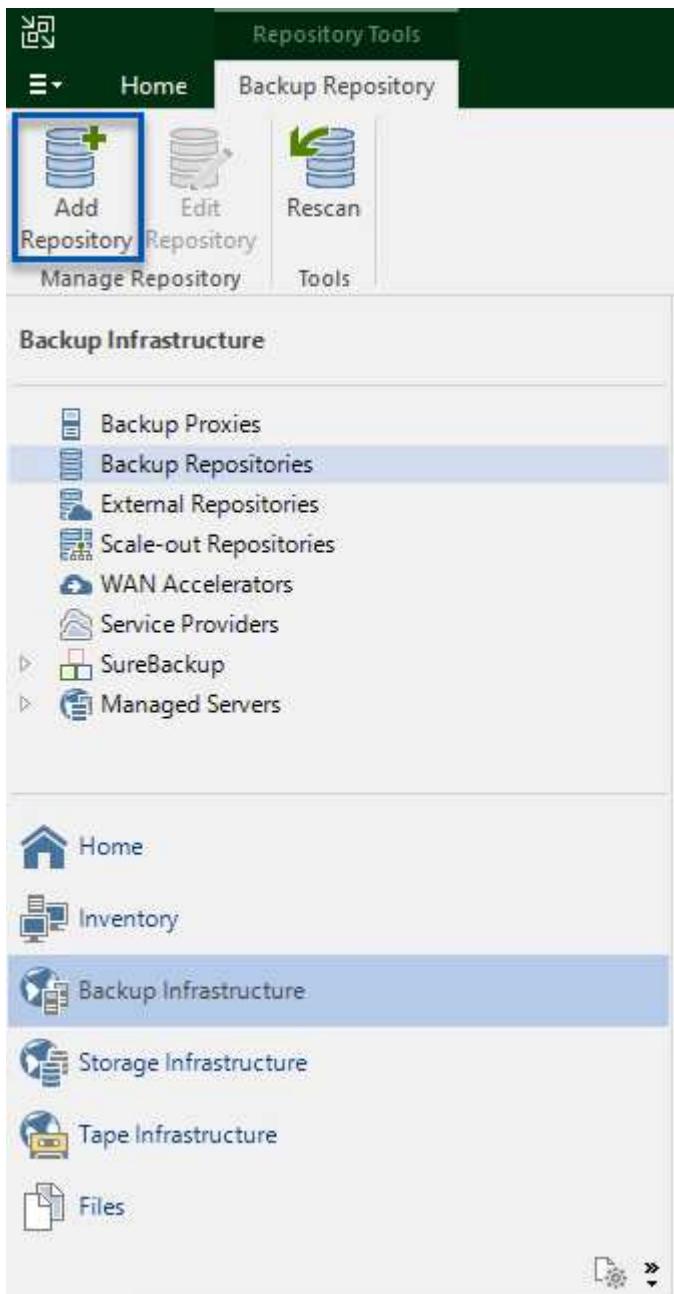

2. In the New Backup Repository wizard, enter a name for the repository and then select the server from the drop-down list and click on the **Populate** button to choose the NTFS volume that will be used.



3. On the next page choose a Mount server that will be used to mount backups to when performing advanced restores. By default this is the same server that has the repository storage connected.
4. Review your selections and click on **Apply** to start the backup repository creation.



5. Repeat these steps for any additional proxy servers.

### Configure Veeam backup jobs

Backup jobs should be created utilizing the the Backup Repositories in the previous section. Creating backup jobs is a normal part of any storage administrator's repertoire and we do not cover all of the steps here. For more complete information on creating backup jobs in Veeam, see the [Veeam Help Center Technical Documentation](#).

In this solution separate backup jobs were created for:


- Microsoft Windows SQL Servers
- Oracle database servers
- Windows file servers
- Linux file servers

## General considerations when configuring Veeam backup jobs

1. Enable application-aware processing to create consistent backups and perform transaction log processing.
2. After enabling application-aware processing add the correct credentials with admin privileges to the application as this may be different than the guest OS credentials.



3. To manage the retention policy for the backup check the **Keep certain full backups longer for archival purposes** and click the **Configure...** button to configure the policy.

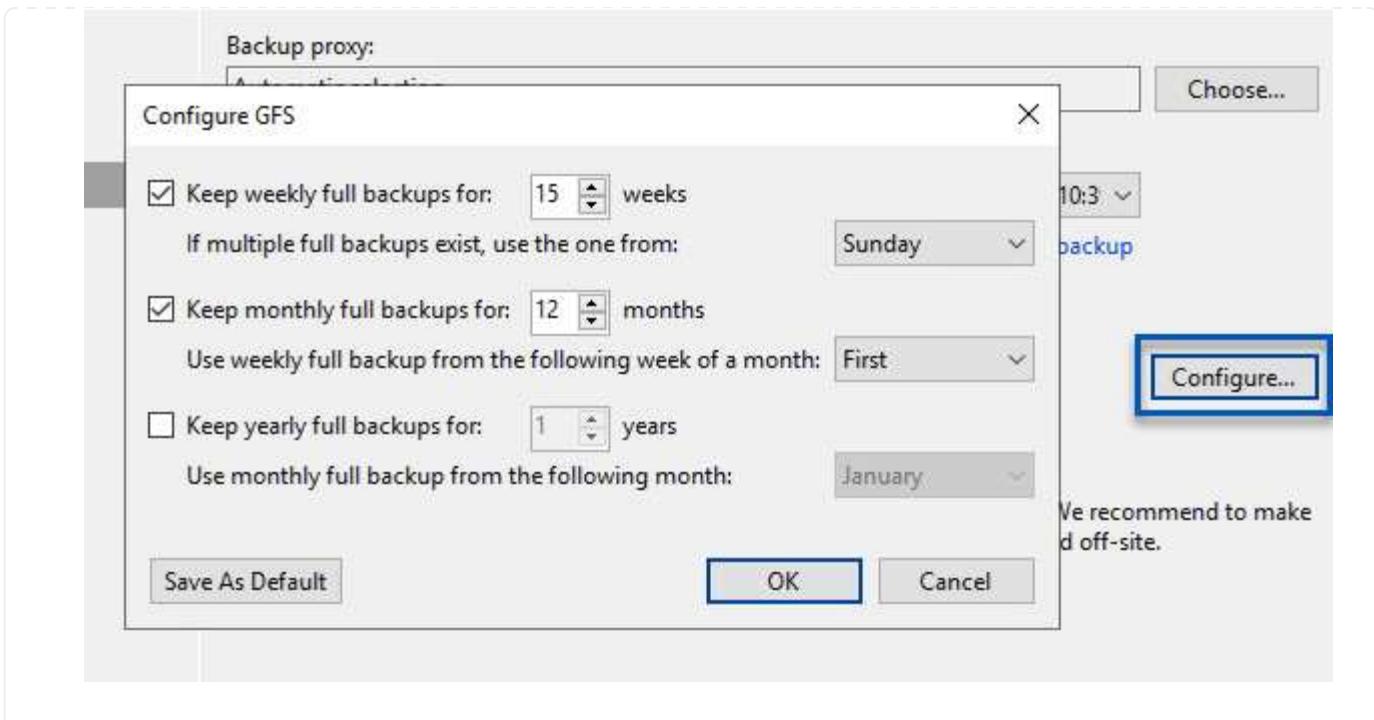

### Restore Application VMs with Veeam full restore

Performing a full restore with Veeam is the first step in performing an application restore. We validated that full restores of our VMs powered on and all services were running normally.

Restoring servers is a normal part of any storage administrator's repertoire and we do not cover all of the steps here. For more complete information on performing full restores in Veeam, see the [Veeam Help Center Technical Documentation](#).


### Restore SQL Server databases

Veeam Backup & Replication provides several options for restoring SQL Server databases. For this validation we used the Veeam Explorer for SQL Server with Instant Recovery to execute restores of our SQL Server databases. SQL Server Instant Recovery is a feature that allows you to quickly restore SQL Server databases without having to wait for a full database restore. This rapid recovery process minimizes downtime and ensures business continuity. Here's how it works:


- Veeam Explorer **mounts the backup** containing the SQL Server database to be restored.
- The software **publishes the database** directly from the mounted files, making it accessible as a temporary database on the target SQL Server instance.
- While the temporary database is in use, Veeam Explorer **redirects user queries** to this database, ensuring that users can continue to access and work with the data.
- In the background, Veeam **performs a full database restore**, transferring data from the temporary database to the original database location.
- Once the full database restore is complete, Veeam Explorer **switches user queries back to the original database** and removes the temporary database.

## Restore SQL Server database with Veeam Explorer Instant Recovery

1. In the Veeam Backup and Replication console, navigate to the list of SQL Server backups, right click on a server and select **Restore application items** and then **Microsoft SQL Server databases....**

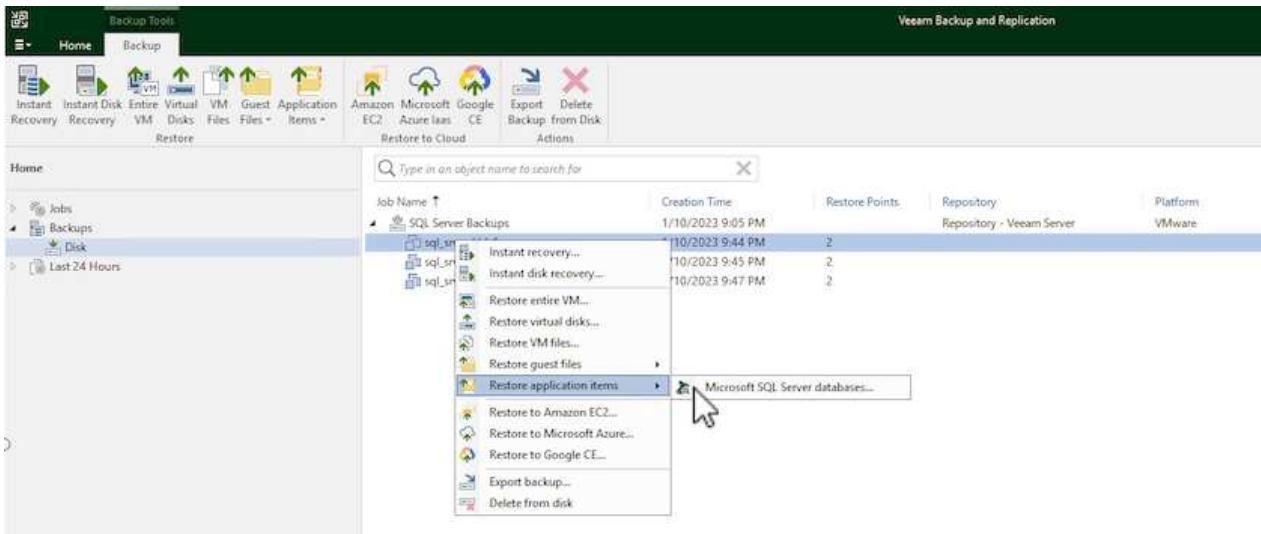


2. In the Microsoft SQL Server Database Restore Wizard select a restore point from the list and click on **Next**.

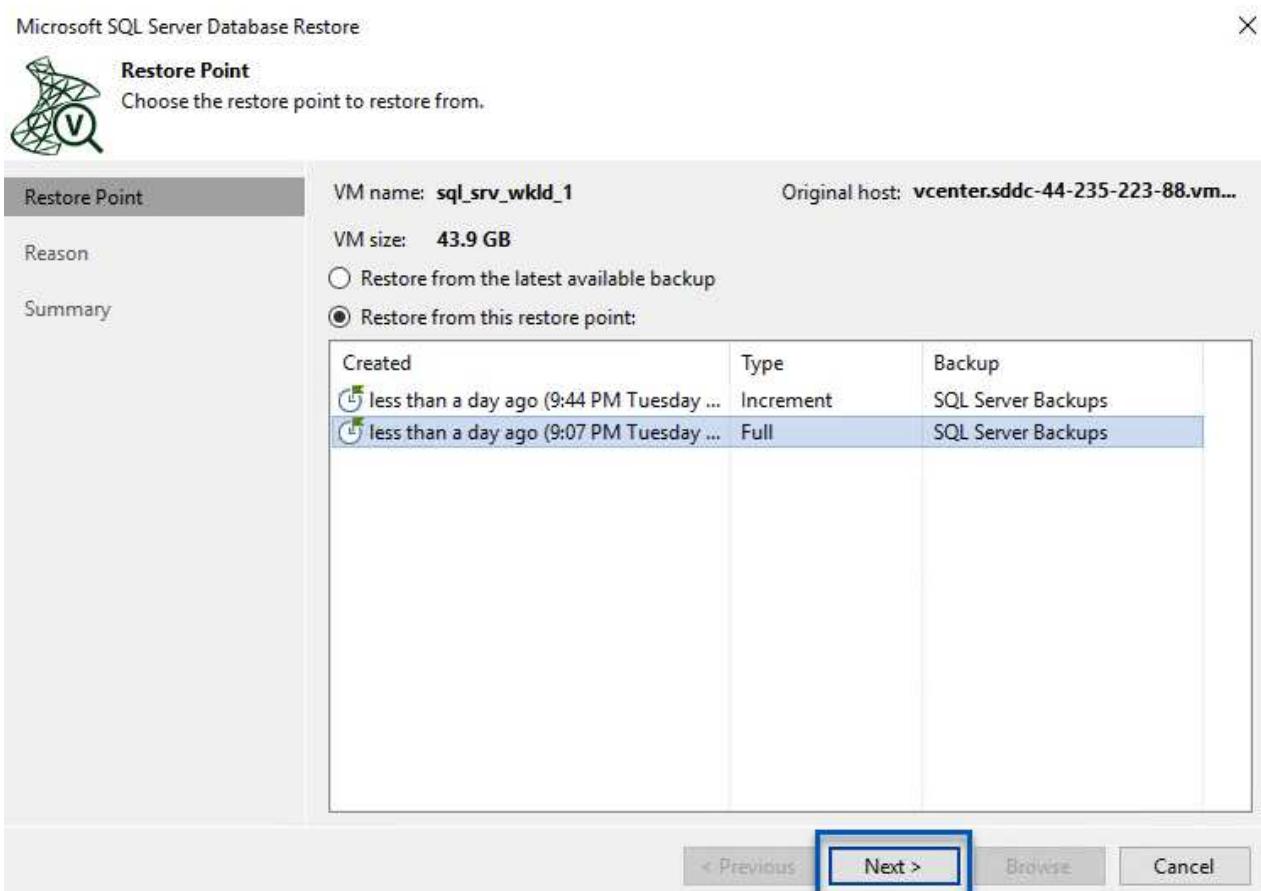


3. Enter a **Restore reason** if desired and then, on the Summary page, click on the **Browse** button to launch Veeam Explorer for Microsoft SQL Server.

## Microsoft SQL Server Database Restore

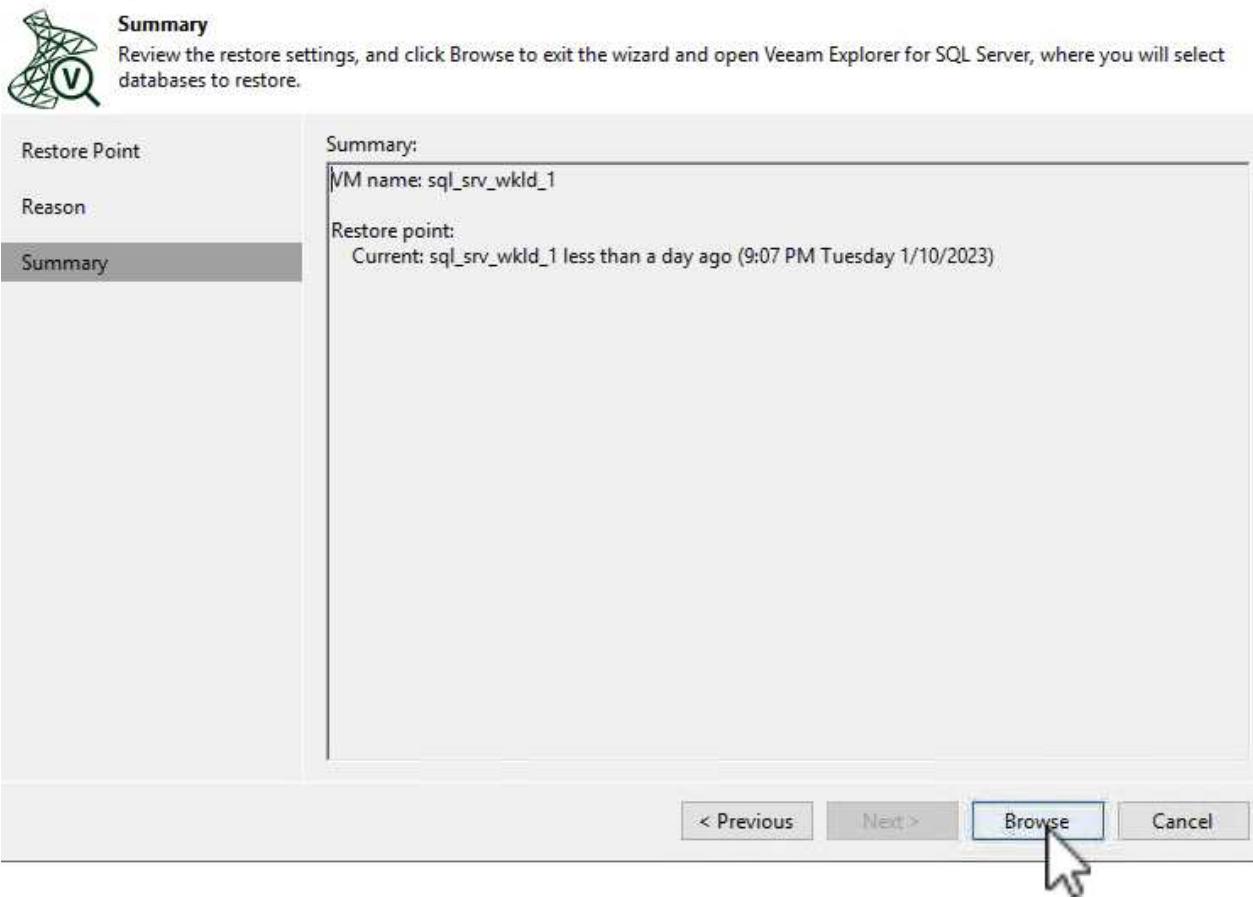

4. In Veeam Explorer expand the list of database instances, right click and select **Instant recovery** and then the specific restore point to recover to.

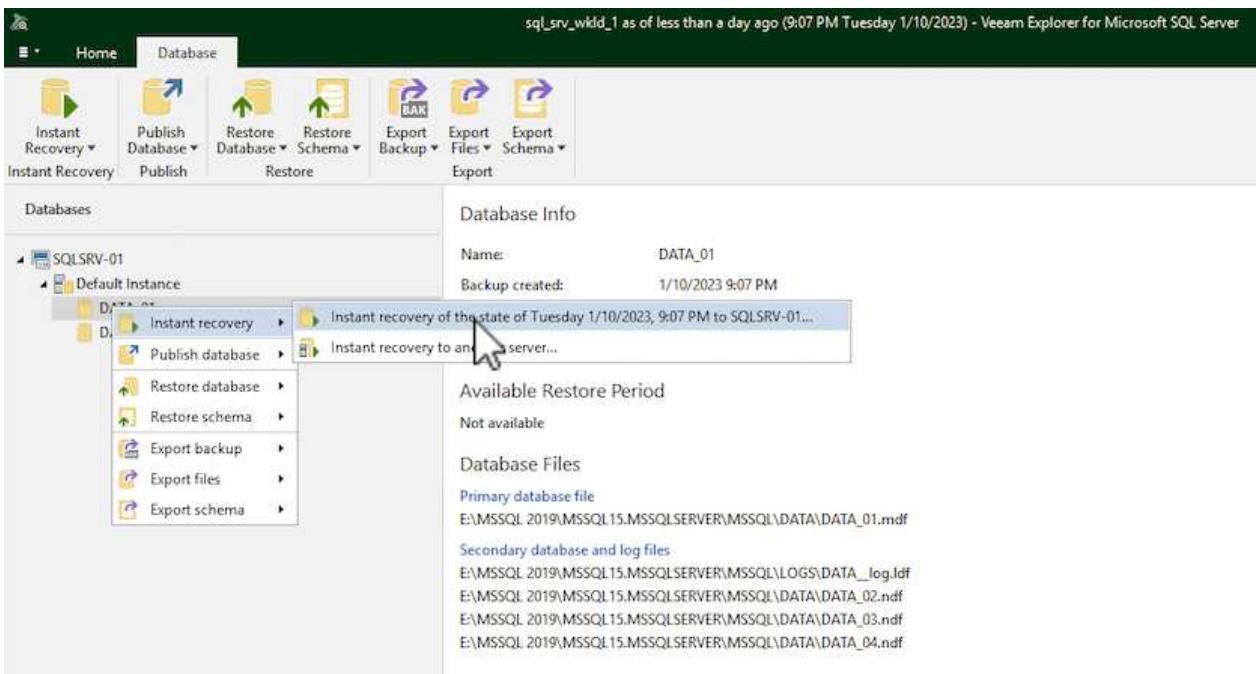

5. In the Instant Recovery Wizard specify the switchover type. This can either be automatically with minimal downtime, manually, or at a specified time. Then click the **Recover** button to begin the restore process.

Instant Recovery Wizard

### Specify database switchover scheduling options

**Specify switchover type:**


Auto  
Switchover will be performed automatically with minimal possible downtime once the database is ready.

Manual  
Switchover can be performed manually at any point in time after the database is ready.

Scheduled at:

---

6. The recovery process can be monitored from Veeam Explorer.

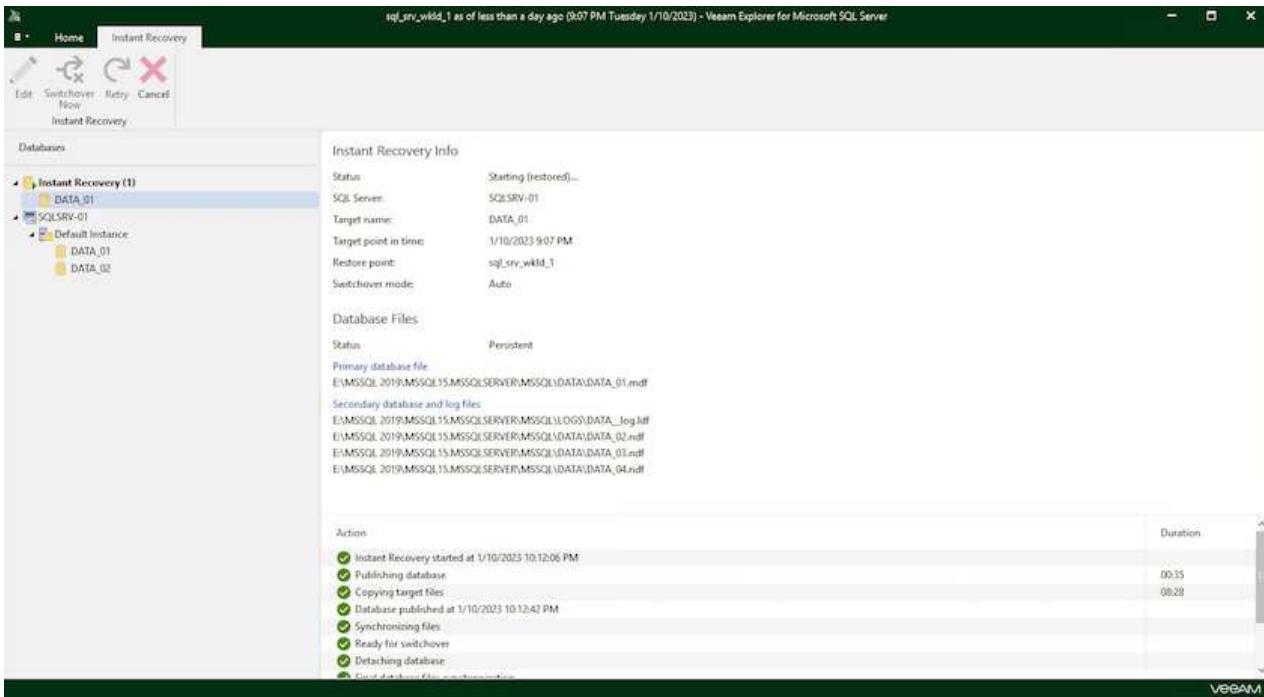

The screenshot shows the Veeam Explorer interface for Microsoft SQL Server. The title bar indicates the session is for 'sql\_svr\_wkld\_1' as of less than a day ago (9:07 PM Tuesday 1/10/2023). The main window displays the 'Instant Recovery' tab. On the left, the 'Databases' tree view shows 'Instant Recovery (1)' under 'SQLSRV-01'. The 'Instant Recovery Info' panel on the right provides details: Status is 'Starting (restored)...'; SQL Server is 'SQLSRV-01'; Target name is 'DATA\_01'; Target point in time is '1/10/2023 9:07 PM'; Restore point is 'sql\_svr\_wkld\_1'; and Switchover mode is 'Auto'. The 'Database Files' section lists the primary and secondary database files and their log files. The 'Actions' table at the bottom tracks the progress of the recovery process, showing tasks like 'Instant Recovery started at 1/10/2023 10:12:06 PM' and 'Publishing database' with a duration of 00:35.

For more detailed information on performing SQL Server restore operations with Veeam Explorer refer to the Microsoft SQL Server section in the [Veeam Explorers User Guide](#).

## **Restore Oracle databases with Veeam Explorer**


Veeam Explorer for Oracle database provides the ability to perform a standard Oracle database restore or an uninterrupted restore using Instant Recovery. It also supports publishing databases for fast access, recovery of Data Guard databases and restores from RMAN backups.

For more detailed information on performing Oracle database restore operations with Veeam Explorer refer to the Oracle section in the [Veeam Explorers User Guide](#).

## Restore Oracle database with Veeam Explorer

In this section an Oracle database restore to a different server is covered using Veeam Explorer.

1. In the Veeam Backup and Replication console, navigate to the list of Oracle backups, right click on a server and select **Restore application items** and then **Oracle databases....**

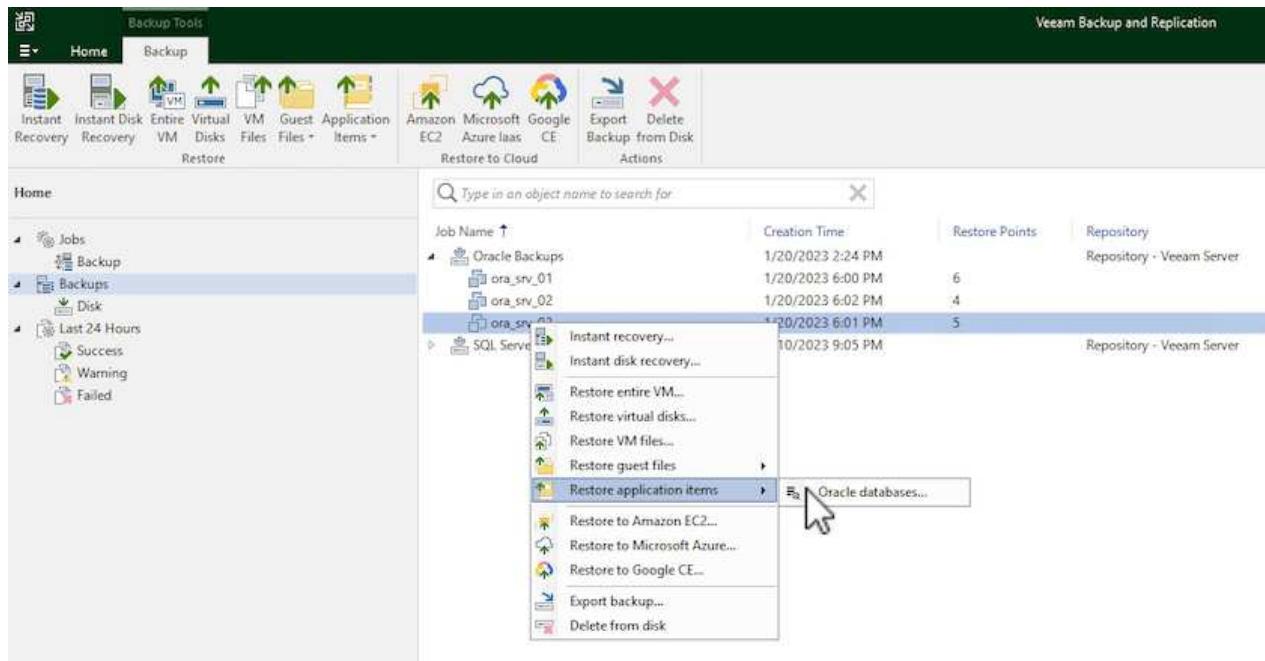

2. In the Oracle Database Restore Wizard select a restore point from the list and click on **Next**.

**ORACLE® Restore Point**

Choose the restore point to restore from.

**Restore Point**VM name: **ora\_srv\_03**Original host: **vcenter.sddc-44-235-223-88.vm...****Reason**VM size: **38.5 GB** **Restore from the latest available backup** **Restore from this restore point:**

Created	Type	Backup
🕒 less than a day ago (6:01 PM Friday 1/...	Increment	Oracle Backups
🕒 less than a day ago (5:01 PM Friday 1/...	Increment	Oracle Backups
🕒 less than a day ago (4:02 PM Friday 1/...	Increment	Oracle Backups
🕒 less than a day ago (3:47 PM Friday 1/...	Increment	Oracle Backups
🕒 less than a day ago (2:47 PM Friday 1/...	Full	Oracle Backups

&lt; Previous

Next &gt;


Browse

Cancel




3. Enter a **Restore reason** if desired and then, on the Summary page, click on the **Browse** button to launch Veeam Explorer for Oracle.

## Oracle Database Restore

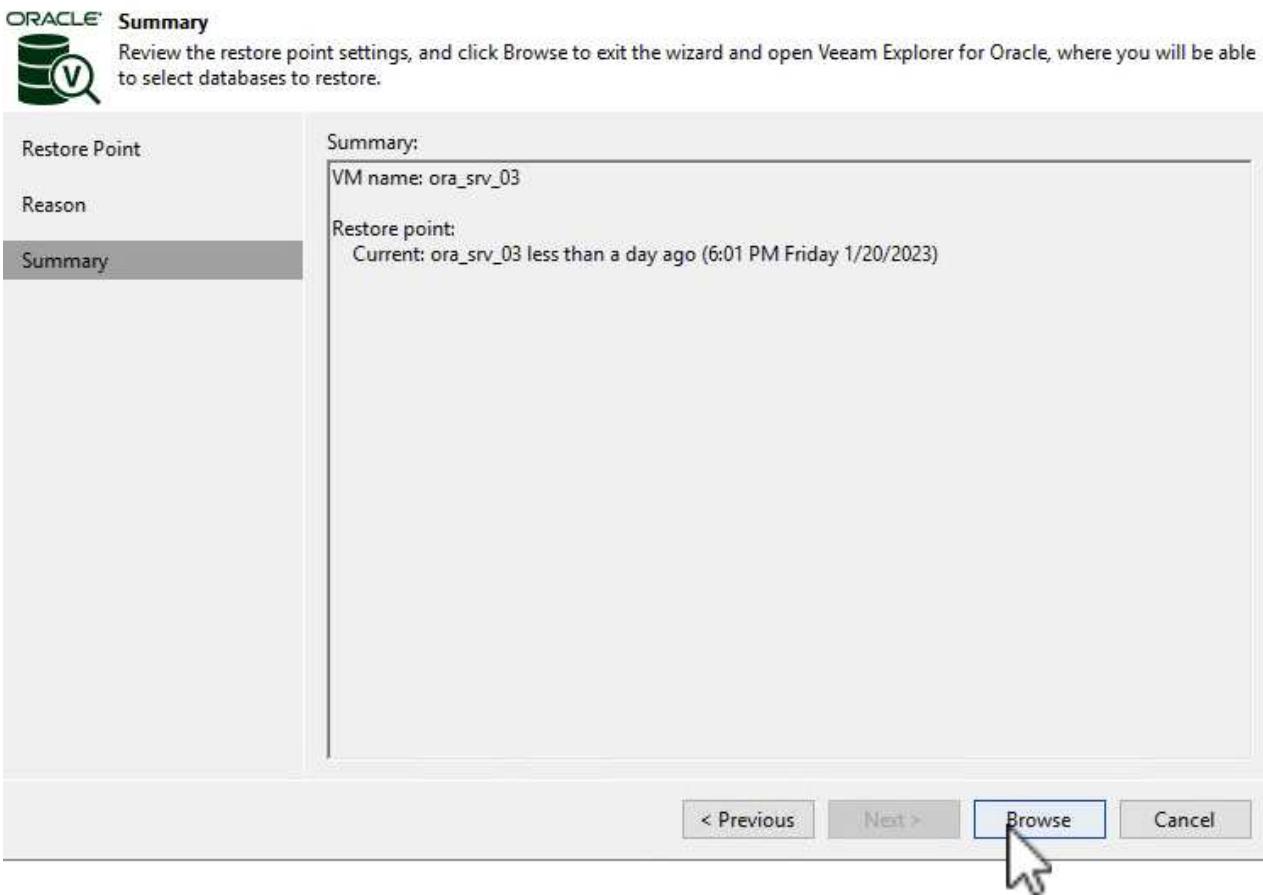

4. In Veeam Explorer expand the list of database instances, click on the database to be restored and then from the **Restore Database** drop-down menu at the top select **Restore to another server....**

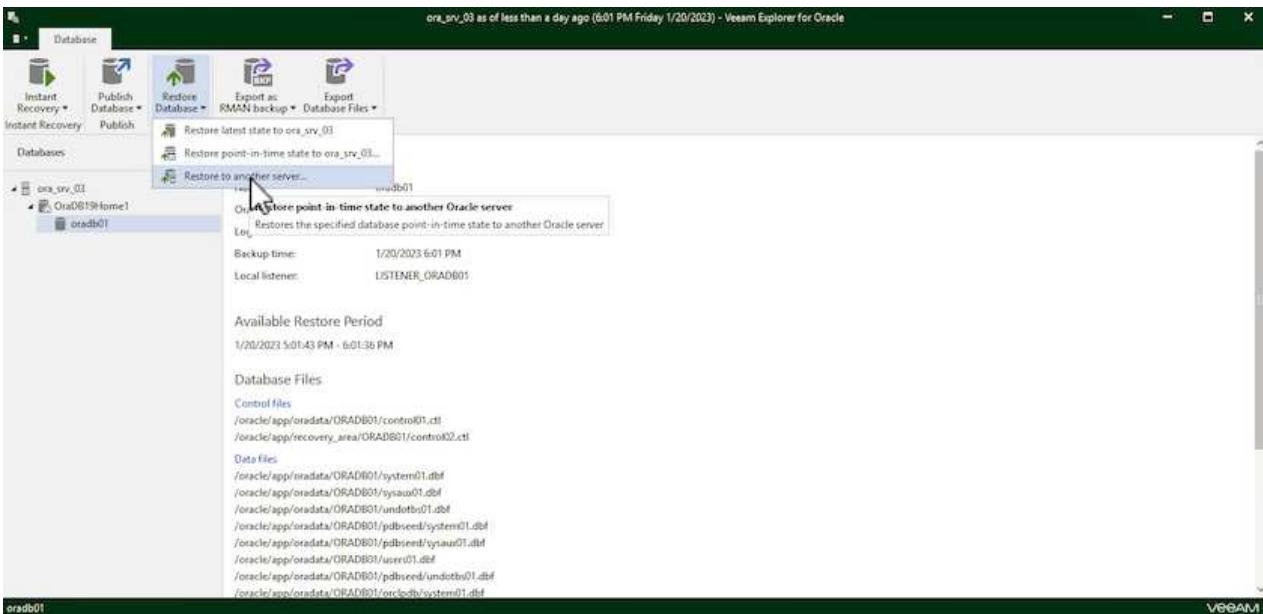

5. In the Restore Wizard specify the restore point to restore from and click **Next**.

Restore Wizard X

### Specify restore point

Specify point in time you want to restore the database to:

Restore to the point in time of the selected image-level backup

Restore to a specific point in time (requires redo log backups)

5:01 PM  6:01 PM  
1/20/2023  1/20/2023

Friday, January 20, 2023 6:01 PM

Perform restore to the specific transaction  
Enables you to review major database transactions around the selected time, and restore the database to the moment in time right before the unwanted change.  
**! To enable this functionality, specify the staging Oracle server under Menu > Options.**

Back Next Cancel

6. Specify the target server the database will be restored to and the account credentials and click **Next**.

Restore Wizard X

### Specify target Linux server connection credentials

Server:  SSH port:

Account:  Advanced...

Password:

Private key is required for this connection

Private key:  Browse...

Passphrase:

Back Next Cancel

7. Finally, specify the database files target location and click the **Restore** button to start the restore process.



## Specify database files target location

## Control files

/oracle/app/oradata/oradb01/control01.ctl  
/oracle/app/recovery\_area/oradb01/control02.ctl

## Data files

/oracle/app/oradata/oradb01/system01.dbf  
/oracle/app/oradata/oradb01/sysaux01.dbf  
/oracle/app/oradata/oradb01/undotbs01.dbf  
/oracle/app/oradata/oradb01/pdbseed/system01.dbf  
/oracle/app/oradata/oradb01/pdbseed/sysaux01.dbf  
/oracle/app/oradata/oradb01/users01.dbf

Back

Restore


Cancel

- Once the database recovery is complete check that the Oracle database starts properly on the server.


## Publish Oracle database to alternate server

In this section a database is published to an alternate server for fast access without launching a full restore.


1. In the Veeam Backup and Replication console, navigate to the list of Oracle backups, right click on a server and select **Restore application items** and then **Oracle databases....**

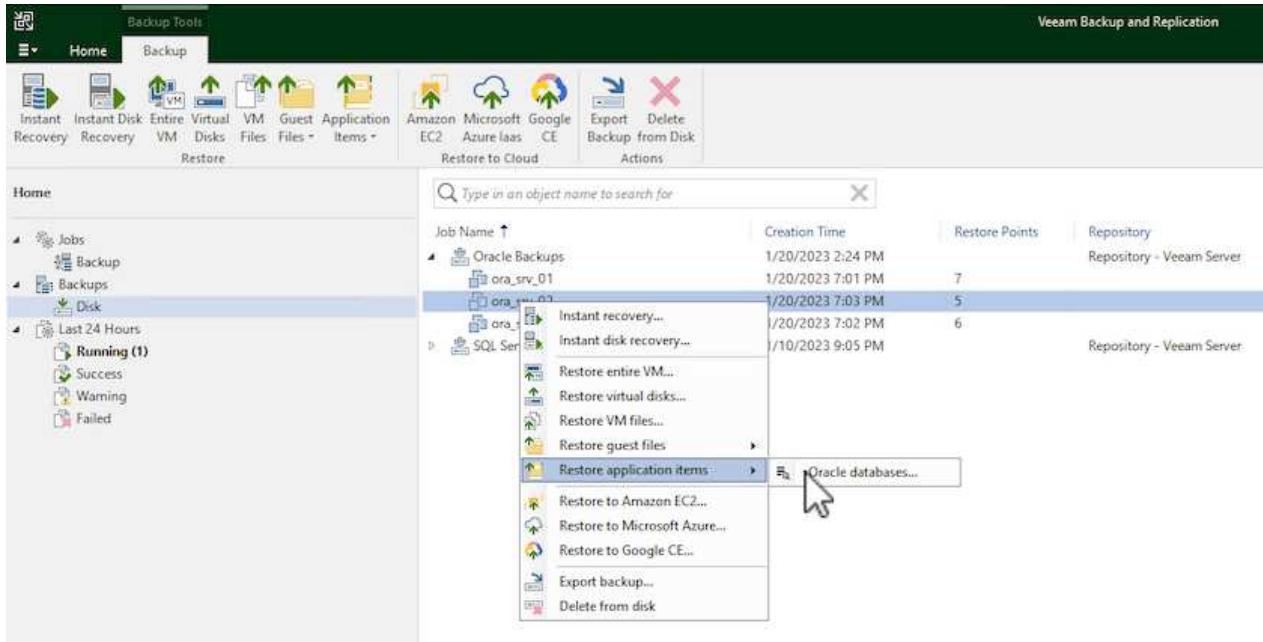

2. In the Oracle Database Restore Wizard select a restore point from the list and click on **Next**.

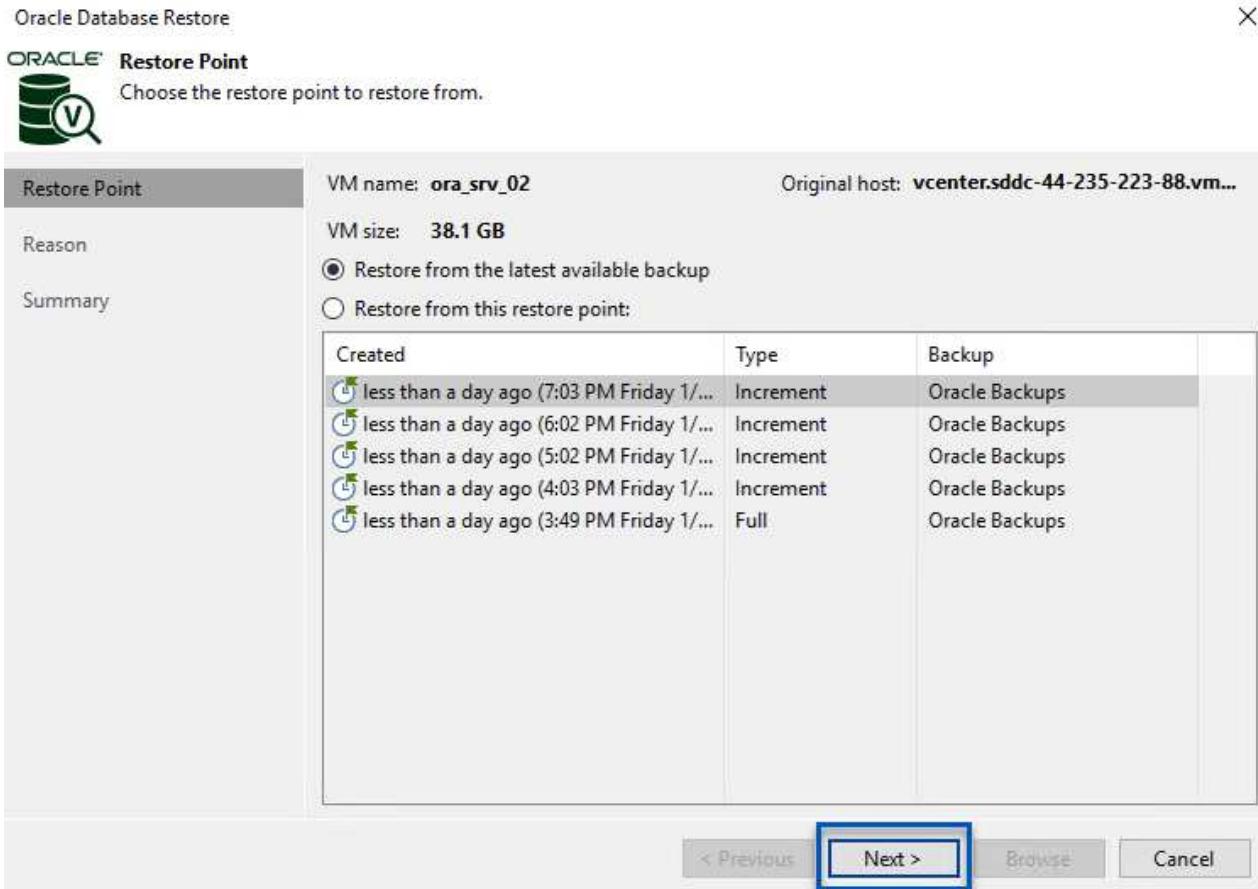

3. Enter a **Restore reason** if desired and then, on the Summary page, click on the **Browse** button to launch Veeam Explorer for Oracle.
4. In Veeam Explorer expand the list of database instances, click on the database to be restored and then from the **Publish Database** drop-down menu at the top select **Publish to another server....**

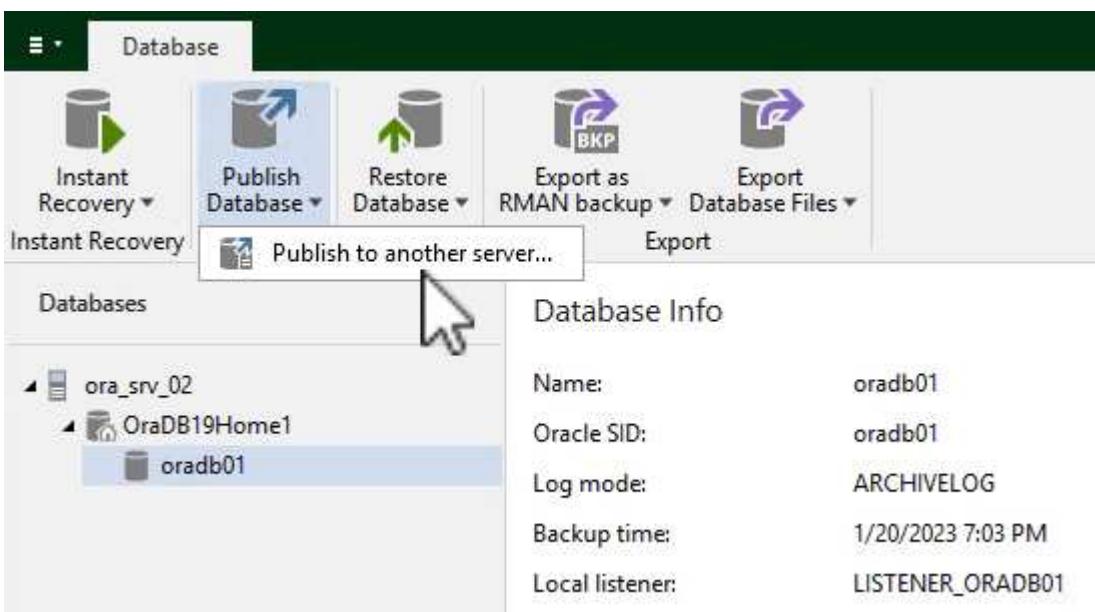

5. In the Publish wizard, specify the restore point at which to publish the database from and click **Next**.
6. Finally, specify the target linux file system location and click on **Publish** to begin the restore process.

## Specify Oracle settings

- Restore to the original location  
 Restore to a different location:

Oracle Home:

/oracle/app/product/19c

Browse...

Global Database Name:

oradb01.demozone.com

Oracle SID:

oradb01

Back

Publish

Cancel

7. Once the publish has completed log into the target server and run the following commands to ensure the database is running:

```
oracle@ora_srv_01> sqlplus / as sysdba
```

```
SQL> select name, open_mode from v$database;
```

```
oracle@ora_srv_01:~  
File Edit View Search Terminal Help  
[oracle@ora_srv_01 ~]$ sqlplus / as sysdba  
SQL*Plus: Release 19.0.0.0.0 - Production on Fri Jan 20 16:46:39 2023  
Version 19.3.0.0.0  
Copyright (c) 1982, 2019, Oracle. All rights reserved.  
  
Connected to:  
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production  
Version 19.3.0.0.0  
  
SQL> select name, open_mode from v$database;  
NAME      OPEN_MODE  
-----  
ORADB01   READ WRITE
```

## Conclusion

VMware Cloud is a powerful platform for running business-critical applications and storing sensitive data. A secure data protection solution is essential for businesses that rely on VMware Cloud to ensure business continuity and help protect against cyber threats and data loss. By choosing a reliable and robust data protection solution, businesses can be confident that their critical data is safe and secure, no matter what.

The use case presented in this documentation focuses on proven data protection technologies that highlight the integration between NetApp, VMware, and Veeam. FSx for ONTAP is supported as supplemental NFS datastores for VMware Cloud in AWS and is used for all virtual machine and application data. Veeam Backup & Replication is a comprehensive data protection solution designed to help businesses improve, automate, and streamline their backup and recovery processes. Veeam is used in conjunction with iSCSI backup target volumes, hosted on FSx for ONTAP, to provide a secure and easy to manage data protection solution for application data residing in VMware Cloud.

## Additional Information

To learn more about the technologies presented in this solution refer to the following additional information.

- [FSx for ONTAP User Guide](#)
- [Veeam Help Center Technical Documentation](#)
- [VMware Cloud on AWS Support. Considerations and Limitations](#)

## TR-4955: Disaster Recovery with FSx for ONTAP and VMC (AWS VMware Cloud)


Niyaz Mohamed, NetApp

### Overview

Disaster recovery to cloud is a resilient and cost-effective way of protecting the workloads against site outages

and data corruption events (for example, ransomware). With NetApp SnapMirror technology, on-premises VMware workloads can be replicated to FSx for ONTAP running in AWS.

Disaster Recovery Orchestrator (DRO; a scripted solution with UI) can be used to seamlessly recover workloads replicated from on-premises to FSx for ONTAP. DRO automates the recovery from the SnapMirror level, through VM registration to VMC, to network mappings directly on NSX-T. This feature is included with all VMC environments.

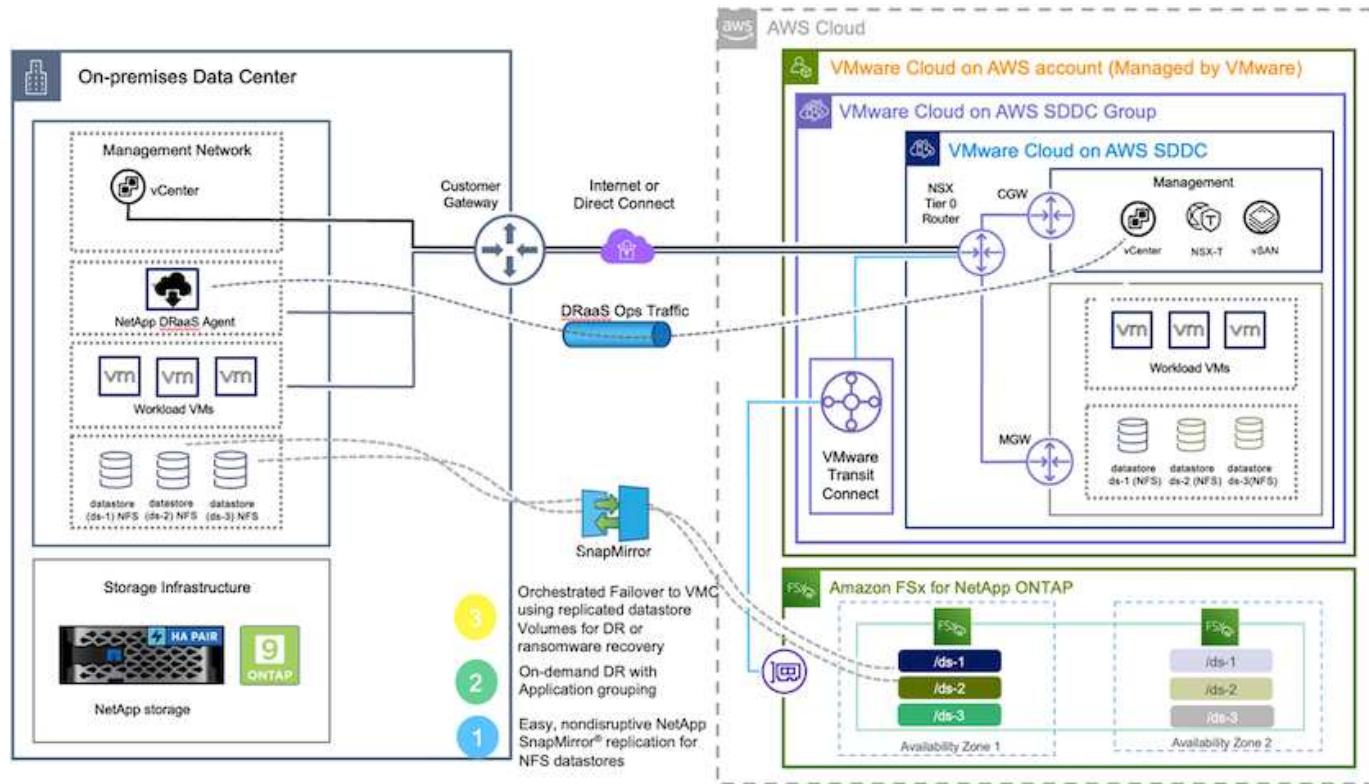

## Getting started

### Deploy and configure VMware Cloud on AWS

VMware Cloud on AWS provides a cloud-native experience for VMware-based workloads in the AWS ecosystem. Each VMware Software-Defined Data Center (SDDC) runs in an Amazon Virtual Private Cloud (VPC) and provides a full VMware stack (including vCenter Server), NSX-T software-defined networking, vSAN software-defined storage, and one or more ESXi hosts that provide compute and storage resources to the workloads. To configure a VMC environment on AWS, follow the steps at this [link](#). A pilot-light cluster can also be used for DR purposes.




In the initial release, DRO supports an existing pilot-light cluster. On-demand SDDC creation will be available in an upcoming release.

### Provision and configure FSx for ONTAP

Amazon FSx for NetApp ONTAP is a fully managed service that provides highly reliable, scalable, high-performing, and feature-rich file storage built on the popular NetApp ONTAP file system. Follow the steps at this [link](#) to provision and configure FSx for ONTAP.

## Deploy and configure SnapMirror to FSx for ONTAP

The next step is to use NetApp BlueXP and discover the provisioned FSx for ONTAP on AWS instance and replicate the desired datastore volumes from an on-premises environment to FSx for ONTAP with the appropriate frequency and NetApp Snapshot copy retention:

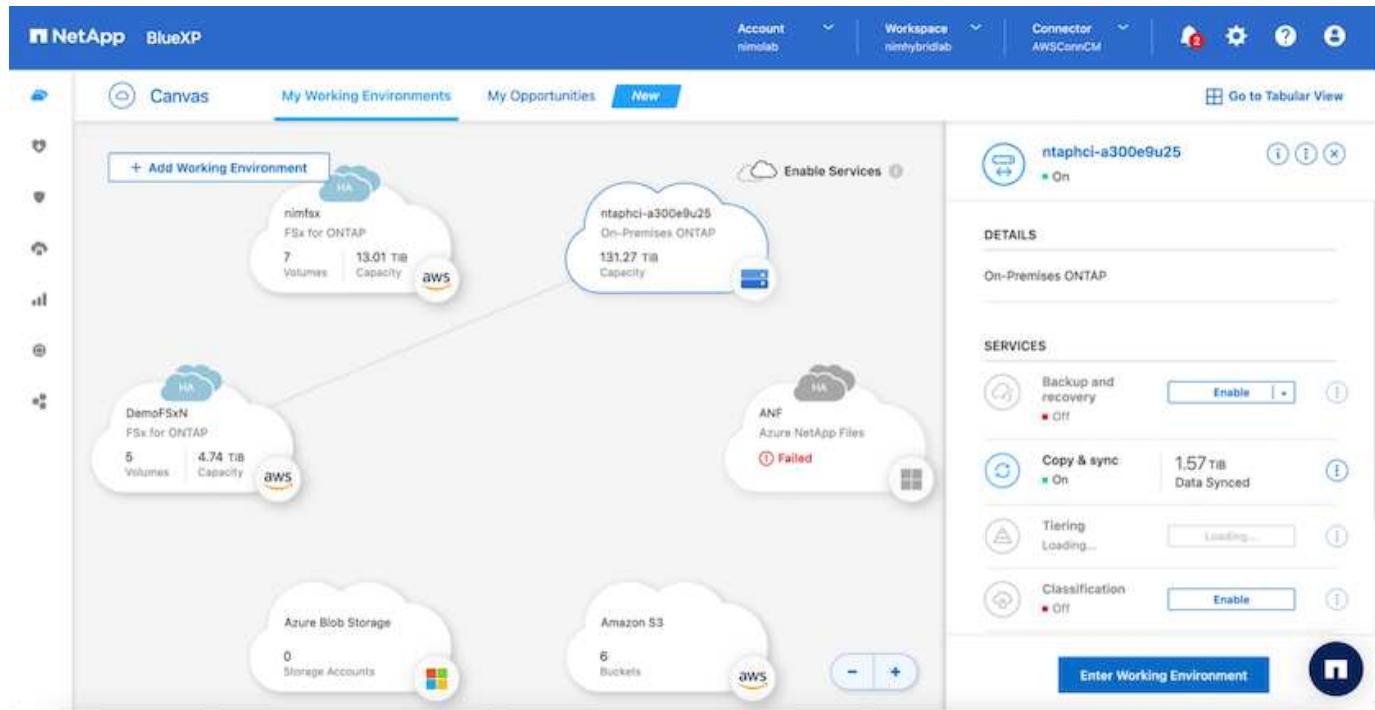

Follow the steps in this link to configure BlueXP. You can also use the NetApp ONTAP CLI to schedule replication following this link.



A SnapMirror relationship is a prerequisite and must be created beforehand.

## DRO installation

To get started with DRO, use the Ubuntu operating system on a designated EC2 instance or virtual machine to make sure you meet the prerequisites. Then install the package.

### Prerequisites

- Make sure that connectivity to the source and destination vCenter and storage systems exists.
- DNS resolution should be in place if you are using DNS names. Otherwise, you should use IP addresses for the vCenter and storage systems.
- Create a user with root permissions. You can also use sudo with an EC2 instance.

### OS requirements

- Ubuntu 20.04 (LTS) with minimum of 2GB and 4 vCPUs
- The following packages must be installed on the designated agent VM:
  - Docker
  - Docker-compose
  - Jq

Change permissions on docker.sock: sudo chmod 666 /var/run/docker.sock.



The deploy.sh script executes all the required prerequisites.

## Install the package

1. Download the installation package on the designated virtual machine:

```
git clone https://github.com/NetApp/DRO-AWS.git
```



The agent can be installed on-premises or within an AWS VPC.

2. Unzip the package, run the deployment script, and enter the host IP (for example, 10.10.10.10).

```
tar xvf DRO-prereq.tar
```

3. Navigate to the directory and run the deploy script as follows:

```
sudo sh deploy.sh
```

4. Access the UI using:


```
https://<host-ip-address>
```

with the following default credentials:

```
Username: admin  
Password: admin
```



The password can be changed using the "Change Password" option.

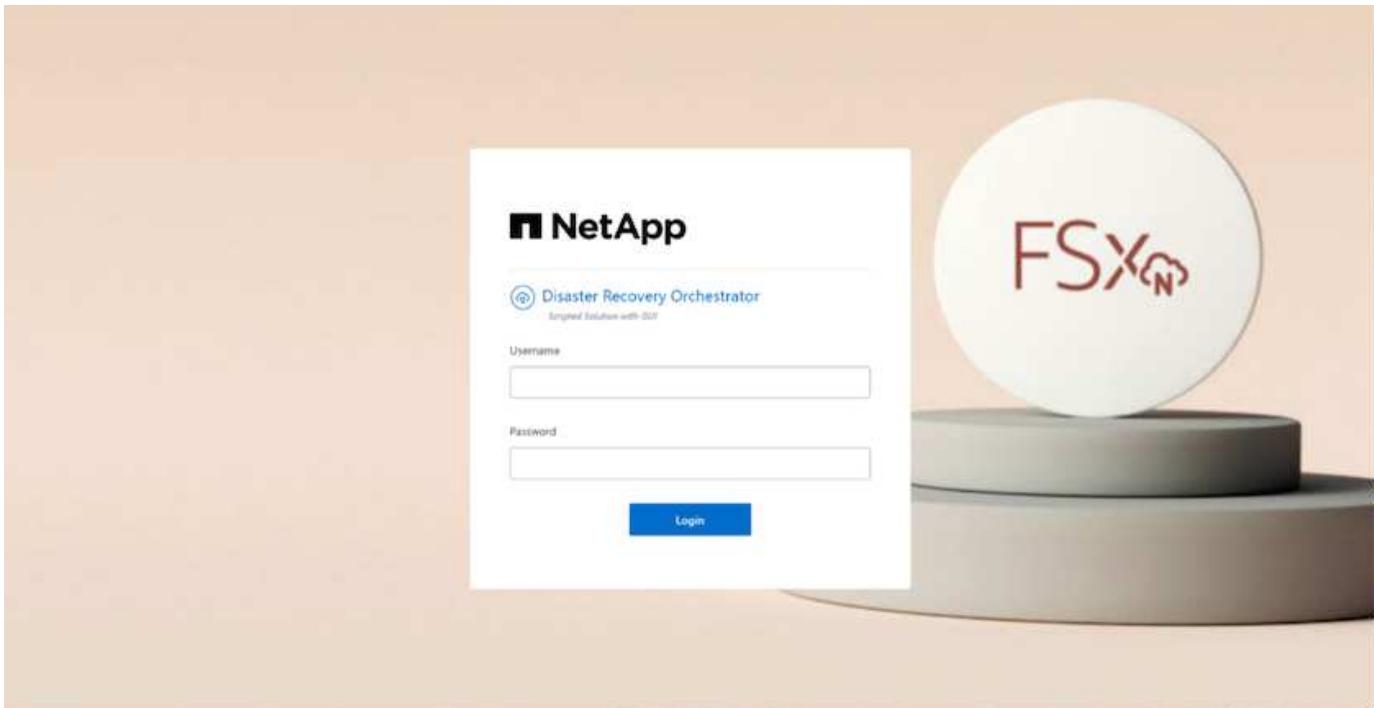

## DRO configuration

After FSx for ONTAP and VMC have been configured properly, you can begin configuring DRO to automate the recovery of on-premises workloads to VMC by using the read-only SnapMirror copies on FSx for ONTAP.

NetApp recommends deploying the DRO agent in AWS and also to the same VPC where FSx for ONTAP is deployed (it can be peer connected too), so that the DRO agent can communicate through the network with your on-premises components as well as with the FSx for ONTAP and VMC resources.

The first step is to discover and add the on-premises and cloud resources (both vCenter and storage) to DRO. Open DRO in a supported browser and use the default username and password (admin/admin) and Add Sites. Sites can also be added using the Discover option. Add the following platforms:

- On-premises
  - On-premises vCenter
  - ONTAP storage system
- Cloud
  - VMC vCenter
  - FSx for ONTAP



The screenshot shows the 'Site Management' screen of DRO. It displays summary statistics: 2 Sites, 2 vCenters, and 2 Storages. Below this, there are three cards: 'Site Type' (1 Source, 1 Destination), 'Site Location' (1 On Prem, 1 Cloud), and a table of discovered sites. The table has columns: Site Name, Site Type, Location, vCenter, Storage, VM List, and Discovery Status. Two rows are listed: 'Cloud' (Destination, Cloud, 1 vCenter, 1 Storage, 1 VM, Success) and 'On Prem' (Source, On Prem, 1 vCenter, 1 Storage, 1 VM, Success). An 'Add New Site' button is at the top right of the table area.

Site Name	Site Type	Location	vCenter	Storage	VM List	Discovery Status
Cloud	Destination	Cloud	1	1	View VM List	• 44.235.223.88 Success
On Prem	Source	On Prem	1	1	View VM List	• 172.21.253.160 Success

Once added, DRO performs automatic discovery and displays the VMs that have corresponding SnapMirror replicas from the source storage to FSx for ONTAP. DRO automatically detects the networks and portgroups used by the VMs and populates them.

The screenshot shows the NetApp Disaster Recovery Orchestrator (DRO) interface. At the top, there's a navigation bar with links for NetApp, Disaster Recovery Orchestrator, Dashboard, Discover, Resource Groups, Replication Plans, and Job Monitoring. On the right side of the header are icons for notifications, settings, and help.

The main area is titled "VM List" and shows the following summary statistics:

- 10 Datastores
- 219 Virtual Machines
- VM Protection: 3 Protected, 216 Unprotected

Below this, a search bar and a "Create Resource Group" button are visible. A table lists 38 VMs with the following columns:

VM Name	VM Status	VM State (1)	DataStore	CPU	Memory (MB)
a300-vcsa02	Not Protected	Powered On	A300_NFS_DS04	16	65536
PFsense	Not Protected	Powered On	A300_NFS_DS04	4	8192
PFsense260	Not Protected	Powered On	A300_NFS_DS04	4	16384
NimDC02	Not Protected	Powered On	A300_NFS_DS04	4	8192
jH8Bhoja-1B7	Not Protected	Powered On	A300_NFS_DS04	4	16384
jHNimo-1B7	Not Protected	Powered On	A300_NFS_DS04	4	16384
NimMSdesktop	Not Protected	Powered On	A300_NFS_DS04	8	12288

The next step is to group the required VMs into functional groups to serve as resource groups.

## Resource groupings

After the platforms have been added, you can group the VMs you want to recover into resource groups. DRO resource groups allow you to group a set of dependent VMs into logical groups that contain their boot orders, boot delays, and optional application validations that can be executed upon recovery.

To start creating resource groups, complete the following steps:

1. Access **Resource Groups**, and click **Create New Resource Group**.
2. Under **New resource group**, select the source site from the dropdown and click **Create**.
3. Provide **Resource Group Details** and click **Continue**.
4. Select the appropriate VMs using the search option.
5. Select the boot order and boot delay (secs) for the selected VMs. Set the order of the power-on sequence by selecting each VM and setting up the priority for it. Three is the default value for all VMs.

Options are as follows:

- 1 – The first virtual machine to power on
- 3 – Default
- 5 – The last virtual machine to power on

6. Click **Create Resource Group**.

The screenshot shows the NetApp Disaster Recovery Orchestrator interface. At the top, there are four summary cards: '1 Resource Group', '1 Site', '1 vCenter', and '3 Virtual Machines'. Below these are two tabs: 'Resource Groups' (which is highlighted with a red box) and 'Replication Plans'. Further down, there's a search bar and a 'Create New Resource Group' button (also highlighted with a red box). The main table lists one resource group named 'DemoRG1' with details like 'Site Name: On Prem' and 'Source vCenter: 172.21.253.160'.

## Replication plans

You need a plan to recover applications in the event of a disaster. Select the source and destination vCenter platforms from the drop down and pick the resource groups to be included in this plan, along with the grouping of how applications should be restored and powered on (for example, domain controllers, then tier-1, then tier-2, and so on). Such plans are sometimes also called blueprints. To define the recovery plan, navigate to the **Replication Plan** tab and click **New Replication Plan**.

To start creating a replication plan, complete the following steps:

1. Access **Replication Plans**, and click **Create New Replication Plan**.

This screenshot shows the 'Replication Plans' tab. It displays '1 Replication Plans' and '1 Resource Groups'. Below this are sections for 'Source Details' (1 Sites, 1 vCenters) and 'Destination Details' (1 Sites, 1 vCenters). The main table for '1 Replication Plan' includes columns for 'Plan Name', 'Active Site', 'Status', 'Compliance', 'Source Site', and 'Destination Site'. A 'Create New Replication Plan' button is highlighted with a red box.

2. Under **New Replication Plan**, provide a name for the plan and add recovery mappings by selecting the source site, associated vCenter, destination site, and associated vCenter.

NetApp Disaster Recovery Orchestrator

Create New Replication Plan

1 Replication Plan and Site Details    2 Select Resource Groups    3 Set Execution Order    4 Set VM Details

**Replication Plan Details**

Plan Name:

**Recovery Mapping**

Source Site:    Destination Site:

Source vCenter:    Destination vCenter:

**Pre-requisite - You must configure SnapMirror relationships between the source site and target site to create successful replication plan**

**Continue**

3. After Recovery mapping is completed, select the cluster mapping.

NetApp Disaster Recovery Orchestrator

Create New Replication Plan

1 Replication Plan and Site Details    2 Select Resource Groups    3 Set Execution Order    4 Set VM Details

**Replication Plan Details**

Plan Name: DemoRP

**Recovery Mapping**

Source Site: On Prem   Destination Site: Cloud

Source vCenter: 172.21.253.160   Destination vCenter: 44.235.223.88

**Cluster Mapping**

Source Site Resource: TempCluster   Destination Site Resource: Cluster-1

Add

Source Resource	Destination Resource	
A300-Cluster01	Cluster-1	Delete

**Continue**

4. Select **Resource Group Details** and click **Continue**.
5. Set the execution order for the resource group. This option enables you to select the sequence of operations when multiple resource groups exist.
6. After you are done, select the network mapping to the appropriate segment. The segments should already be provisioned within VMC, so select the appropriate segment to map the VM.
7. Based on the selection of VMs, datastore mappings are automatically selected.



SnapMirror is at the volume level. Therefore, all VMs are replicated to the replication destination. Make sure to select all VMs that are part of the datastore. If they are not selected, only the VMs that are part of the replication plan are processed.

Resource Group Name	Execution Order
DemoRG1	3

No more Source/Destination network resources available for mapping

Source Resource	Destination Resource	Delete
VLAN 3375	sddc-cgw-network-1	

DataStore Mapping

Source DataStore	Destination Volume
DRO_Mini	DRO_Mini_copy

Previous Continue

8. Under the VM details, you can optionally resize the VM's CPU and RAM parameters; this can be very helpful when recovering large environments to smaller target clusters or for conducting DR tests without having to provision a one-to-one physical VMware infrastructure. Also, you can modify the boot order and boot delay (seconds) for all the selected VMs across the resource groups. There is an additional option to modify the boot order if there are any changes required from those selected during the resource-group boot-order selection. By default, the boot order selected during resource-group selection is used; however, any modifications can be performed at this stage.

VM Name	No. of CPUs	Memory (MB)	NIC/IP	Boot Order
Resource Group : DemoRG1				<input checked="" type="checkbox"/> Override
Mini_Test01	1	2048	<input type="radio"/> Static <input checked="" type="radio"/> Dynamic	3
Mini_Test02	1	2048	<input type="radio"/> Static <input checked="" type="radio"/> Dynamic	2
Mini_Test03	1	2048	<input type="radio"/> Static <input checked="" type="radio"/> Dynamic	1

Previous Create Replication Plan

## 9. Click Create Replication Plan.

Plan Name	Active Site	Status	Compliance	Source Site	Destination Site	Resource Groups	...
DemoRP	Source	Active	Not Available	On Prem	Cloud	<a href="#">Resource Groups</a>	...
DemoRP	Source	Active	Healthy	On Prem	Cloud	<a href="#">Resource Groups</a>	...

After the replication plan is created, the failover option, the test-failover option, or the migrate option can be exercised depending on the requirements. During the failover and test-failover options, the most recent SnapMirror Snapshot copy is used, or a specific Snapshot copy can be selected from a point-in-time Snapshot copy (per the retention policy of SnapMirror). The point-in-time option can be very helpful if you are facing a corruption event like ransomware, where the most recent replicas are already compromised or encrypted. DRO shows all available points in time. To trigger failover or test failover with the configuration specified in the replication plan, you can click **Failover** or **Test failover**.

Plan Details
  
Edit Plan
  

Failover

Test Failover

Migrate

  
Run Compliance
  
Delete Plan

## Failover Details



### Volume Snapshot Details

- Use latest snapshot (i)
- Select specific snapshot (i)

**Start Failover**

The replication plan can be monitored in the task menu:

The screenshot shows the NetApp Disaster Recovery Orchestrator interface. The top navigation bar includes 'NetApp' and 'Disaster Recovery Orchestrator' with a red alert icon, followed by 'Dashboard', 'Discover', 'Resource Groups', 'Replication Plans', and 'Job Monitoring'. A red box highlights the 'Job Monitoring' tab. Below the navigation is a toolbar with icons for bell, gear, help, and user. The main content area has a 'Back' link and a 'Failover Steps' section. A red box highlights the 'Failover Steps' header. Underneath it, the 'Replication Plan: DemoRP' is listed. The failover steps are as follows:

Step	Status	Time
Breaking SnapMirror relationships (in parallel)	Success	11.3 Seconds (i)
Mounting volumes and creating datastores (in parallel)	Success	34.7 Seconds (i)
Registering VMs (in parallel)	Success	13.2 Seconds (i)
Powering on VMs in protection group - DemoRG1 - in target	Success	95.8 Seconds (i)
Updating replication status	Success	0.5 Seconds (i)

After failover is triggered, the recovered items can be seen in the VMC vCenter (VMs, networks, datastores). By default, the VMs are recovered to the Workload folder.



Failback can be triggered at the replication-plan level. For a test failover, the tear-down option can be used to roll back the changes and remove the FlexClone relationship. Failback related to failover is a two-step process. Select the replication plan and select **Reverse data sync**.

The Replication Plans page lists two plans:

Plan Name	Active Site	Status	Compliance	Source Site	Destination Site
DemoRP	Destination	Running In Failover Mode	Healthy	On Prem	Cloud
DemoRP	Source	Active	Healthy	On Prem	Cloud

A modal window titled "Plan Details" is open for the "DemoRP" plan, showing the "Resource Groups" tab. The "Reverse Data Sync" option is highlighted with a red box.

The "Reverse Data Sync Steps" page shows the following steps for the "DemoRP" plan:

- Powering off VMs in protection group - DemoRG1 - in source: In progress
- Reversing SnapMirror relationships (in parallel): Initialized

Once completed, you can trigger failback to move back to original production site.

The screenshot shows the NetApp Disaster Recovery Orchestrator (DRO) interface. At the top, there are summary counts: 2 Replication Plans, 1 Resource Groups, 1 Site, and 1 vCenter. Below this is a table of replication plans:

Plan Name	Active Site	Status	Compliance	Source Site	Destination Site
DemoRP	Destination	Active	Healthy	On Prem	Cloud
DemoRP	Source	Active	Healthy	On Prem	Cloud


A tooltip for the 'Resource' tab under 'Plan Details' highlights the 'Fallback' section.

**Fallback Steps**  
Replication Plan: DemoRP

- Powering off VMs in protection group - DemoRG1 - in target: In progress
- Unregistering VMs in target (in parallel): Initialized
- Unmounting volumes in target (in parallel): Initialized
- Breaking reverse SnapMirror relationships (in parallel): Initialized
- Updating VM networks (in parallel): Initialized
- Powering on VMs in protection group - DemoRG1 - in source: Initialized
- Deleting reverse SnapMirror relationships (in parallel): Initialized
- Resuming SnapMirror relationships to target (in parallel): Initialized

From NetApp BlueXP, we can see that replication health has broken off for the appropriate volumes (those that were mapped to VMC as read-write volumes). During test failover, DRO does not map the destination or replica volume. Instead, it makes a FlexClone copy of the required SnapMirror (or Snapshot) instance and exposes the FlexClone instance, which does not consume additional physical capacity for FSx for ONTAP. This process makes sure that the volume is not modified and replica jobs can continue even during DR tests or triage workflows. Additionally, this process makes sure that, if errors occur or corrupted data is recovered, the recovery can be cleaned up without the risk of the replica being destroyed.

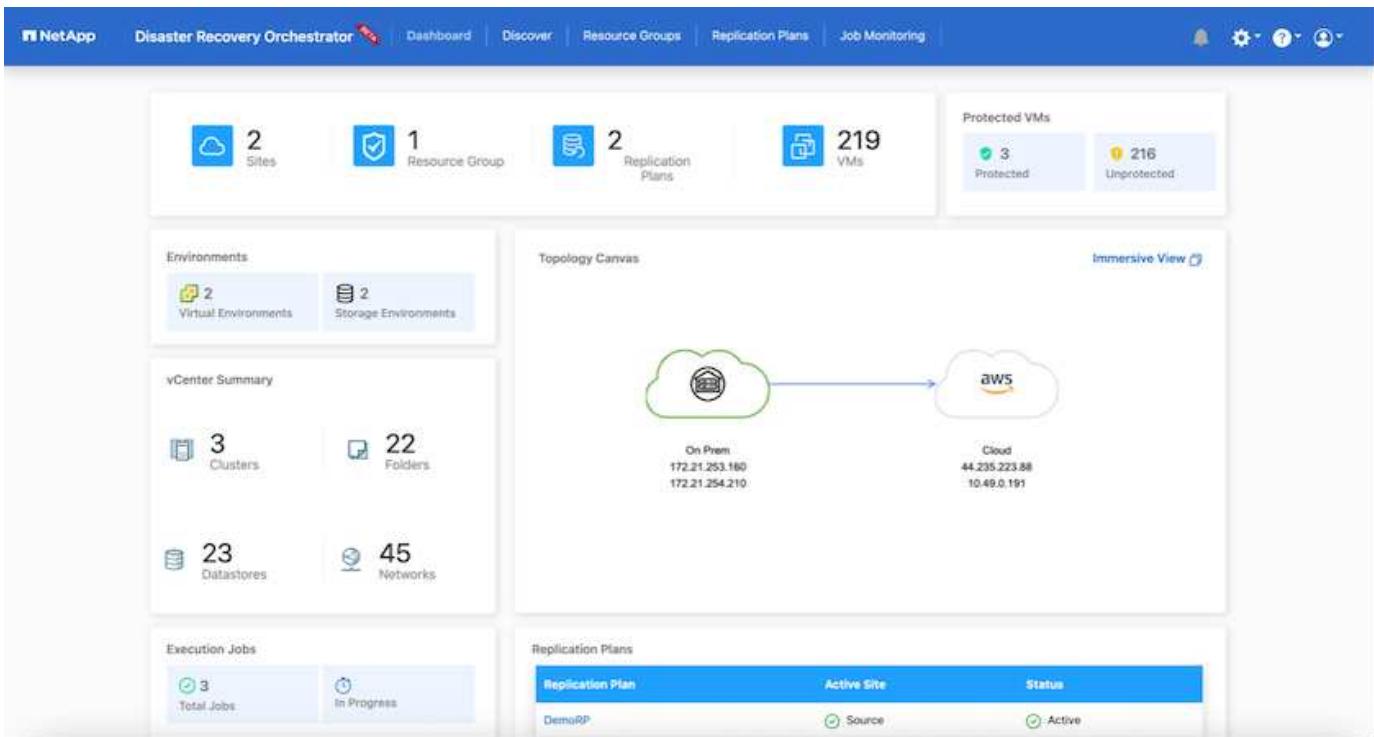

## Ransomware recovery

Recovering from ransomware can be a daunting task. Specifically, it can be hard for IT organizations to pinpoint where the safe point of return is and, once that is determined, to protect recovered workloads from reoccurring attacks from, for example, sleeping malware or vulnerable applications.

DRO addresses these concerns by enabling you to recover your system from any available point in time. You can also recover workloads to functional and yet isolated networks so that applications can function and communicate with each other in a location where they are not exposed to north-south traffic. This gives your security team a safe place to conduct forensics and make sure there is no hidden or sleeping malware.

## Benefits

- Use of the efficient and resilient SnapMirror replication.
- Recovery to any available point in time with Snapshot copy retention.
- Full automation of all required steps to recover hundreds to thousands of VMs from the storage, compute, network, and application validation steps.
- Workload recovery with ONTAP FlexClone technology using a method that doesn't change the replicated volume.
  - Avoids risk of data corruption for volumes or Snapshot copies.
  - Avoids replication interruptions during DR test workflows.
  - Potential use of DR data with cloud computing resources for workflows beyond DR such as Dev/Test, security testing, patch or upgrade testing, and remediation testing.
- CPU and RAM optimization to help lower cloud costs by allowing recovery to smaller compute clusters.

# **Using Veeam Replication and FSx for ONTAP for Disaster recovery to VMware Cloud on AWS**

Author: Niyaz Mohamed - NetApp Solutions Engineering

## **Overview**

Amazon FSx for NetApp ONTAP integration with VMware Cloud on AWS is an AWS-managed external NFS datastore built on NetApp's ONTAP file system that can be attached to a cluster in the SDDC. It provides customers with flexible, high-performance virtualized storage infrastructure that scales independently of compute resources.

For those customers looking to use VMware Cloud on AWS SDDC as the disaster recovery target, FSx for ONTAP datastores can be used to replicate data from on-premises using any validated third-party solution that provides VM replication capability. By adding FSx for ONTAP datastore, it will enable cost optimised deployment than building VMware cloud on AWS SDDC with enormous amount of ESXi hosts just to accommodate the storage.

This approach also helps customers to use pilot light cluster in VMC along with FSx for ONTAP datastores to host the VM replicas. The same process can also be extended as a migration option to VMware Cloud on AWS by gracefully failing over the replication plan.

## **Problem Statement**


This document describes how to use FSx for ONTAP datastore and Veeam Backup and replication to set up disaster recovery for on-premises VMware VMs to VMware Cloud on AWS using the VM replication functionality.

Veeam Backup & Replication allows onsite and remote replication for disaster recovery (DR). When virtual machines are replicated, Veeam Backup & Replication creates an exact copy of the VMs in the native VMware vSphere format on the target VMware Cloud on AWS SDDC cluster and keeps the copy synchronized with the original VM.

Replication provides the best recovery time objective (RTO) values as there is a copy of a VM in the ready-to-start state. This replication mechanism ensures that the workloads can quickly start in VMware Cloud on AWS SDDC in case of a disaster event. The Veeam Backup & Replication software also optimizes traffic transmission for replication over WAN and slow connections. In addition, it also filters out duplicate data blocks, zero data blocks, swap files and excluded VM guest OS files, and compresses the replica traffic.

To prevent replication jobs from consuming the entire network bandwidth, WAN accelerators and network throttling rules can be put in place. The replication process in Veeam Backup & Replication is job driven which means replication is performed by configuring replication jobs. In case of a disaster event, failover can be triggered to recover the VMs by failing over to its replica copy.

When failover is performed, a replicated VM takes over the role of the original VM. Fail over can be performed to the latest state of a replica or to any of its good known restore points. This enables ransomware recovery or isolated testing as needed. In Veeam Backup & Replication, failover and fallback are temporary intermediate step that should be further finalized. Veeam Backup & Replication offers multiple options to handle different disaster recovery scenarios.

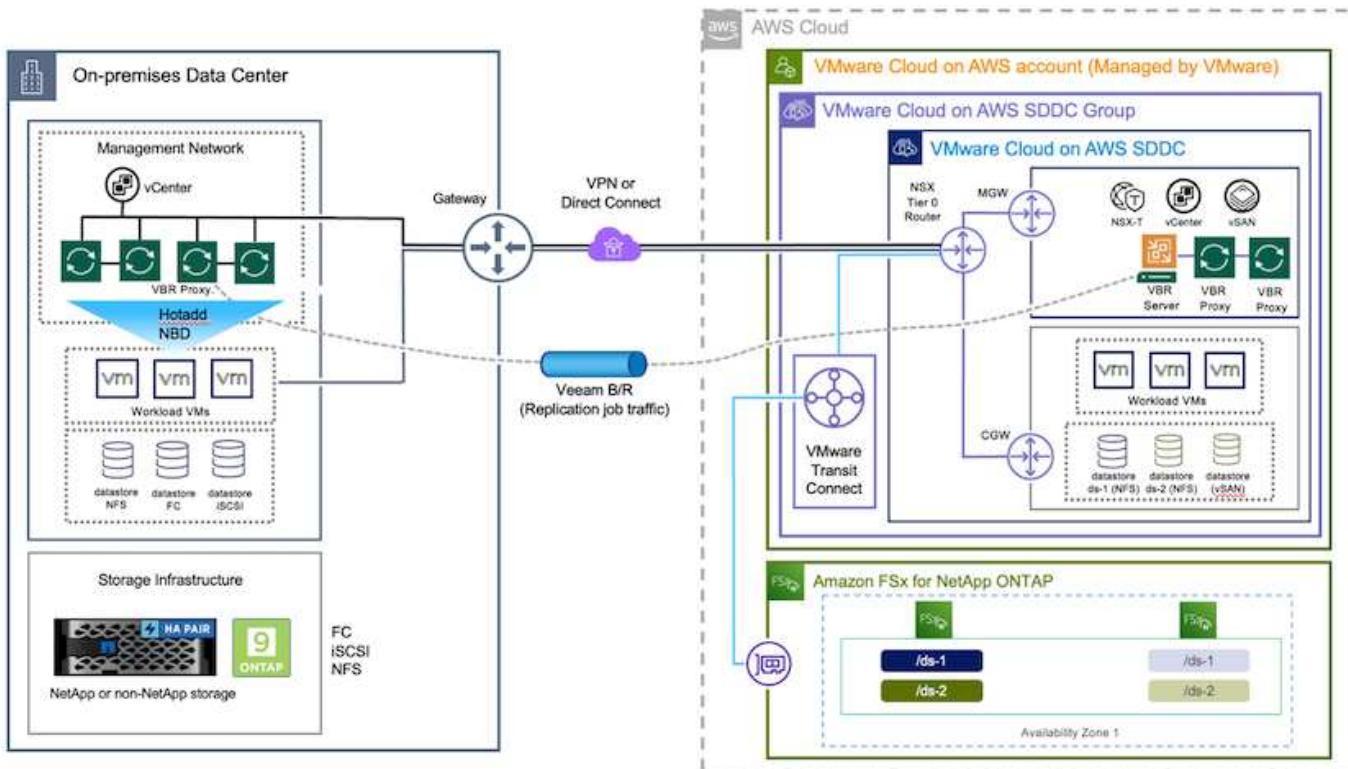

## Solution Deployment

### High level steps

1. Veeam Backup and Replication software is running in on-premises environment with appropriate network connectivity.
2. Configure VMware Cloud on AWS, see the VMware Cloud Tech Zone article [VMware Cloud on AWS integration with Amazon FSx for NetApp ONTAP Deployment Guide](#) to deploy, configure VMware Cloud on AWS SDDC and FSx for ONTAP as NFS datastore. (A pilot-light environment set up with a minimal configuration can be used for DR purposes. VMs will fail over to this cluster in the event of an incident, and additional nodes can be added).
3. Set up replication jobs to create VM replicas using Veeam Backup and Replication.
4. Create failover plan and perform failover.
5. Switch back to production VMs once the disaster event is complete and primary site is Up.

### Pre-requisites for Veeam VM Replication to VMC and FSx for ONTAP datastores

1. Ensure Veeam Backup & Replication backup VM is connected to the source vCenter as well as the target VMware cloud on AWS SDDC clusters.
2. The backup server must be able to resolve short names and connect to source and target vCenters.
3. The target FSx for ONTAP datastore must have enough free space to store VMDKs of replicated VMs

For additional information, refer to "Considerations and Limitations" covered [here](#).


### Deployment Details

## Step 1: Replicate VMs

Veeam Backup & Replication leverages VMware vSphere snapshot capabilities and during replication, Veeam Backup & Replication requests VMware vSphere to create a VM snapshot. The VM snapshot is the point-in-time copy of a VM that includes virtual disks, system state, configuration and so on. Veeam Backup & Replication uses the snapshot as a source of data for replication.

To replicate VMs, follow the below steps:

1. Open the Veeam Backup & Replication Console.
2. On the Home view, select Replication Job > Virtual machine > VMware vSphere.
3. Specify a job name and select the appropriate advanced control checkbox. Click Next.
  - Select the Replica seeding check box if connectivity between on-premises and AWS has restricted bandwidth.
  - Select the Network remapping (for AWS VMC sites with different networks) check box if segments on VMware Cloud on AWS SDDC do not match that of on-premises site networks.
  - If the IP addressing scheme in on-premises production site differs from the scheme in the AWS VMC site, select the Replica re-IP (for DR sites with different IP addressing scheme) check box.

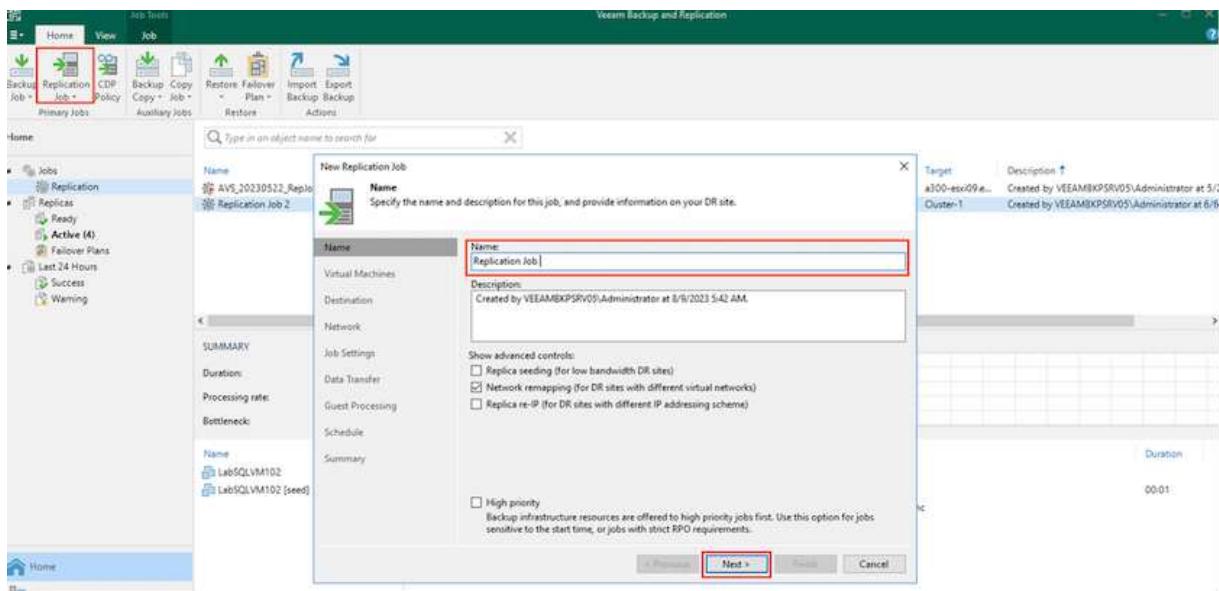

4. Select the VMs that needs to be replicated to FSx for ONTAP datastore attached to VMware Cloud on AWS SDDC in the **Virtual Machines** step. The Virtual machines can be placed on vSAN to fill the available vSAN datastore capacity. In a pilot light cluster, the usable capacity of a 3-node cluster will be limited. The rest of the data can be replicated to FSx for ONTAP datastores. Click **Add**, then in the **Add Object** window select the necessary VMs or VM containers and click **Add**. Click **Next**.

**Virtual Machines**  
Select one or more VMs to replicate. Use exclusion settings to exclude specific VMs and virtual disks from replication.

Virtual machines to replicate:			
Name	Type	Size	
TestVeeam21	Virtual Machine	873 MB	Add...
TestVeeam22	Virtual Machine	890 MB	
TestVeeam23	Virtual Machine	883 MB	
TestVeeam24	Virtual Machine	879 MB	
TestVeeam25	Virtual Machine	885 MB	
TestVeeam26	Virtual Machine	883 MB	
TestVeeam27	Virtual Machine	879 MB	
TestVeeam28	Virtual Machine	880 MB	
TestVeeam29	Virtual Machine	878 MB	
TestVeeam30	Virtual Machine	876 MB	
TestVeeam31	Virtual Machine	888 MB	
TestVeeam32	Virtual Machine	881 MB	
TestVeeam33	Virtual Machine	877 MB	
TestVeeam34	Virtual Machine	875 MB	
TestVeeam35	Virtual Machine	882 MB	
WinSQL401	Virtual Machine	20.3 GB	
WinSQL405	Virtual Machine	24.2 GB	

Total size:  
**120 GB**

< Previous    **Next >**    Finish    Cancel

5. After that, select the destination as VMware Cloud on AWS SDDC cluster / host and the appropriate resource pool, VM folder and FSx for ONTAP datastore for VM replicas. Then Click **Next**.

**Destination**  
Specify where replicas should be created in the DR site.

Name	Host or cluster:	Choose...
Virtual Machines		
Destination	Resource pool:	Choose...
Network	Resources	Choose...
Job Settings	Pick resource pool for selected replicas	
Data Transfer	VM folder:	Choose...
Guest Processing	vm	Choose...
Schedule	Datastore:	Choose...
Summary	Pick datastore for selected virtual disks	

< Previous    Next >    Finish    Cancel

6. In the next step, create the mapping between source and destination virtual network as needed.


**Network**  
Select how virtual networks map to each other between production and DR sites.

Name	Network mapping:	
	Source network	Target network
Virtual Machines	VM_3508 (vDS-Switch0)	SepSeg
Destination	VM_3510 (vDS-Switch0)	SegmentTemp

Add... Edit... Remove

< Previous Next > Finish Cancel

7. In the **Job Settings** step, specify the backup repository that will store metadata for VM replicas, retention policy and so on.
8. Update the **Source** and **Target** proxy servers in the **Data Transfer** step and leave **Automatic** selection (default) and keep **Direct** option selected and click **Next**.
9. At the **Guest Processing** step, select **Enable application-aware processing** option as needed. Click **Next**.

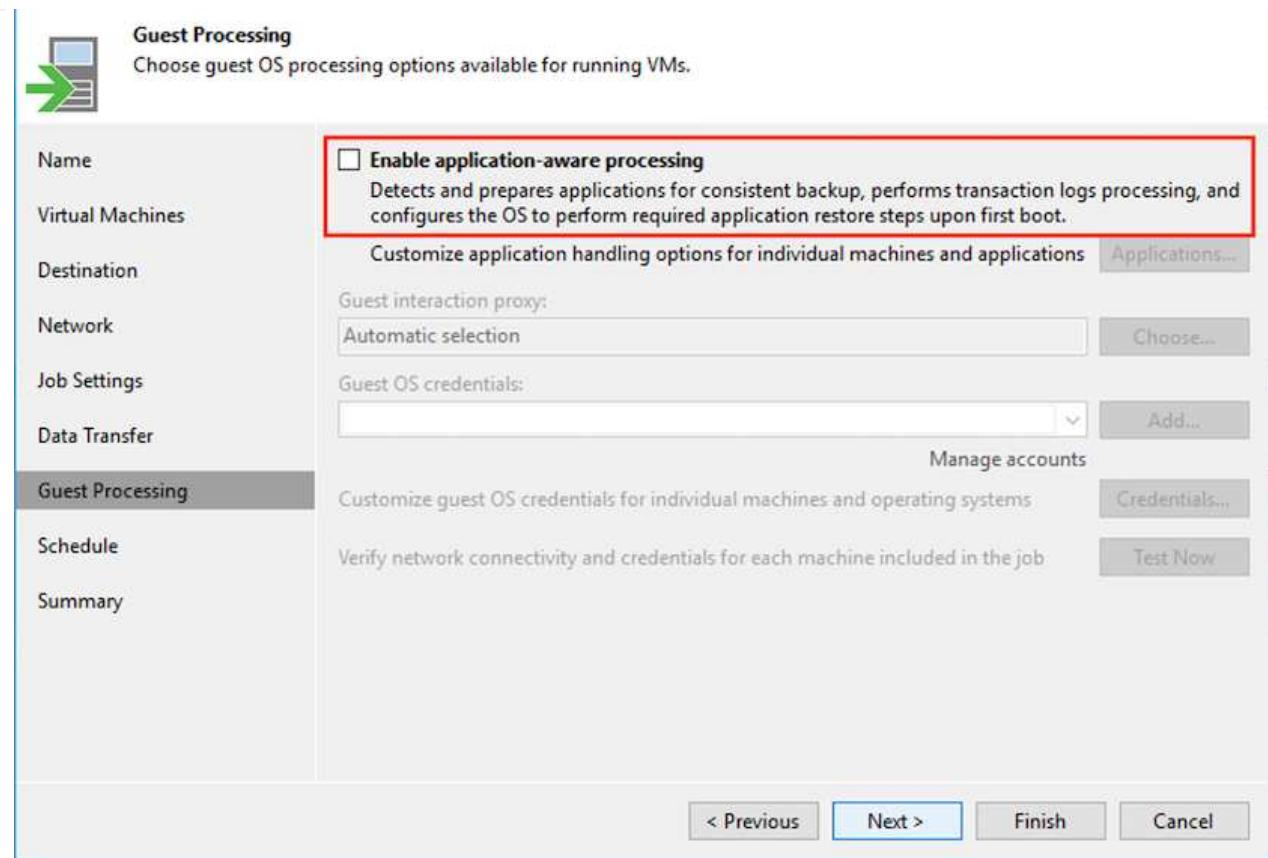

10. Choose the replication schedule to run the replication job to run on a regular basis.
11. At the **Summary** step of the wizard, review details of the replication job. To start the job right after the wizard is closed, select the **Run the job when I click Finish** check box, otherwise leave the check box unselected. Then click **Finish** to close the wizard.

Name	Type	Objects	Status	Last Run	Last Result	Next Run	Target	Description
AMR_Replica01	VMware Replication	6	Stopped	2 days ago	Failed	<not scheduled>	Owner-1	Created by VEEAMBACKUP01\Administrator at 2/16/2022...
AMR_Replica01	VMware Replication	7	Stopped	2 days ago	Success	<not scheduled>	Owner-1	Created by VEEAMBACKUP01\Administrator at 2/16/2022...
FishH_18VM_20220319	VMware Replication	18	Stopped	2 days ago	Success	<not scheduled>	172.30.160.88	Created by VEEAMBACKUP01\Administrator at 3/16/2022...
FishH_Replica01_20220311	VMware Replication	3	Stopped	6 days ago	Success	<not scheduled>	172.30.160.88	Created by VEEAMBACKUP01\Administrator at 3/13/2022...

Once the replication job starts, the VMs with the suffix specified will be populated on the destination VMC SDDC cluster / host.

Job

Start Stop Abort Statistics Report Edit Clone Delete

Job Control Details Manage Job

Type an object name to search for

**Jobs**

- Replication
- Replicas
- Ready
- Failover Plans
- Last 24 Hours
- Success

Name	Type	Objects	Status	Last Run	Last Result	Next Run	Target	Description
AVS_RepJob01	VMware Replication	2	Stopped	39 days ago	Success	<not scheduled>	Cluster-1	Created by VEEAM\KPSRV05\Administrator at 2/16/2023 2:12 AM.
ANF_RepJob01	VMware Replication	6	Stopped	6 days ago	Failed	<not scheduled>	Cluster-1	Created by VEEAM\KPSRV05\Administrator at 2/16/2023 7:27 AM.
FSN_RepJob01_20230313	VMware Replication	5	Stopped	3 days ago	Success	<not scheduled>	172.30.160.66	Created by VEEAM\KPSRV05\Administrator at 3/13/2023 2:53 AM.
FSN_16VMA_20230316	VMware Replication	16	Stopped	3 days ago	Success	<not scheduled>	172.30.160.66	Created by VEEAM\KPSRV05\Administrator at 3/16/2023 6:57 AM.

**SUMMARY**

Duration:	01:21:27	Processed:	256 GB (100%)	Success:	16	Speed: 594 MB/s
Processing rate:	494 MB/s	Read:	256 GB	Warnings:	0	
Bottleneck:	Proxy	Transferred:	38.0 MB (> 99%)	Errors:	0	

**THROUGHPUT (ALL TIME)**

**DATA**

Name	Status	Action	Duration
TestVteam01	Success	Processing TestVteam05	08:13
TestVteam02	Success	Processing TestVteam06	07:09
TestVteam03	Success	Processing TestVteam07	13:21
TestVteam04	Success	Processing TestVteam08	09:05
TestVteam05	Success	Processing TestVteam09	14:59
TestVteam06	Success	Processing TestVteam10	08:53
TestVteam07	Success	Processing TestVteam11	15:47
TestVteam08	Success	Processing TestVteam12	08:45
TestVteam09	Success	Processing TestVteam13	09:24
TestVteam10	Success	Processing TestVteam14	14:34
TestVteam11	Success	Processing TestVteam15	16:16
TestVteam12	Success	Processing TestVteam16	17:21
TestVteam13	Success	All VMs have been queued for processing	00:00
TestVteam14	Success	Load: Source 60% > Proxy 80% > Network 42% > Target 30%	
TestVteam15	Success	Primary bottleneck: Proxy	
TestVteam16	Success	Job finished at 3/24/2023 5:16:05 AM	

**Inventory**

**Backup Infrastructure**

**Storage Infrastructure**

**Tape Infrastructure**

**Files**

For additional information for Veeam replication, refer to [How Replication Works](#).

## Step 2: Create a failover plan


When the initial replication or seeding is complete, create the failover plan. Failover plan helps in performing failover for dependent VMs one by one or as a group automatically. Failover plan is the blueprint for the order in which the VMs are processed including the boot delays. The failover plan also helps to ensure that critical dependant VMs are already running.

To create the plan, navigate to the new sub section called Replicas and select Failover Plan. Choose the appropriate VMs. Veeam Backup & Replication will look for the closest restore points to this point in time and use them to start VM replicas.


- i The failover plan can only be added once the initial replication is complete and the VM replicas are in Ready state.
- i The maximum number of VMs that can be started simultaneously when running a failover plan is 10.
- i During the failover process, the source VMs will not be powered off.

To create the **Failover Plan**, do the following:

1. On the Home view, select **Failover Plan > VMware vSphere**.
2. Next, provide a name and a description to the plan. Pre and Post-failover script can be added as required. For instance, run a script to shutdown VMs before starting the replicated VMs.

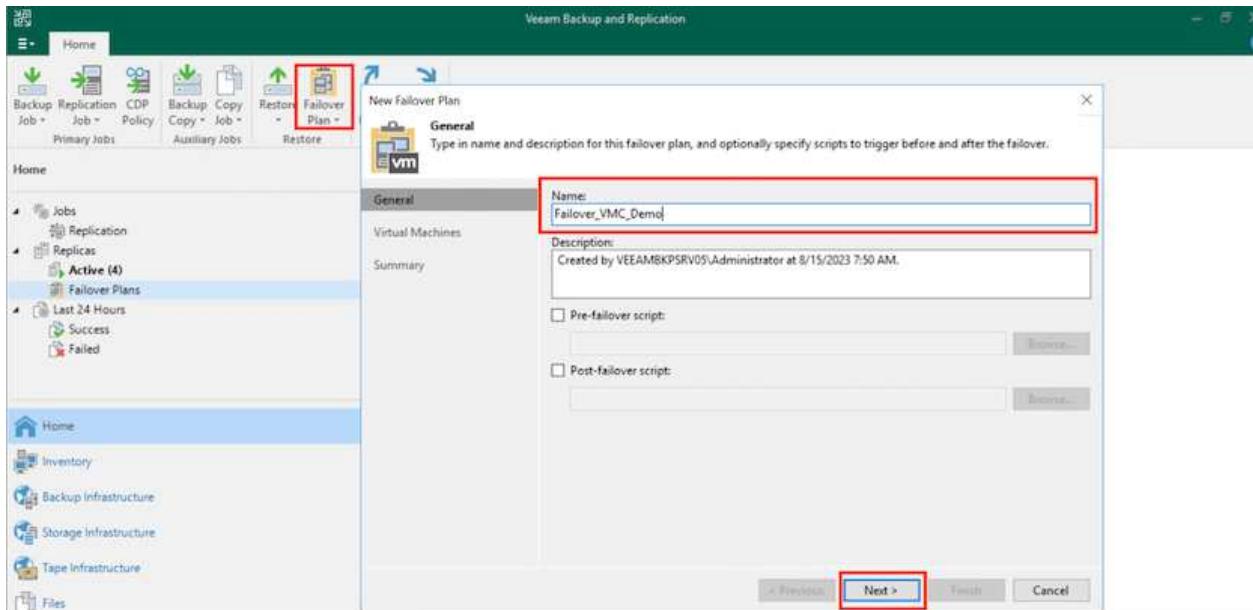

3. Add the VMs to the plan and modify the VM boot order and boot delays to meet the application dependencies.

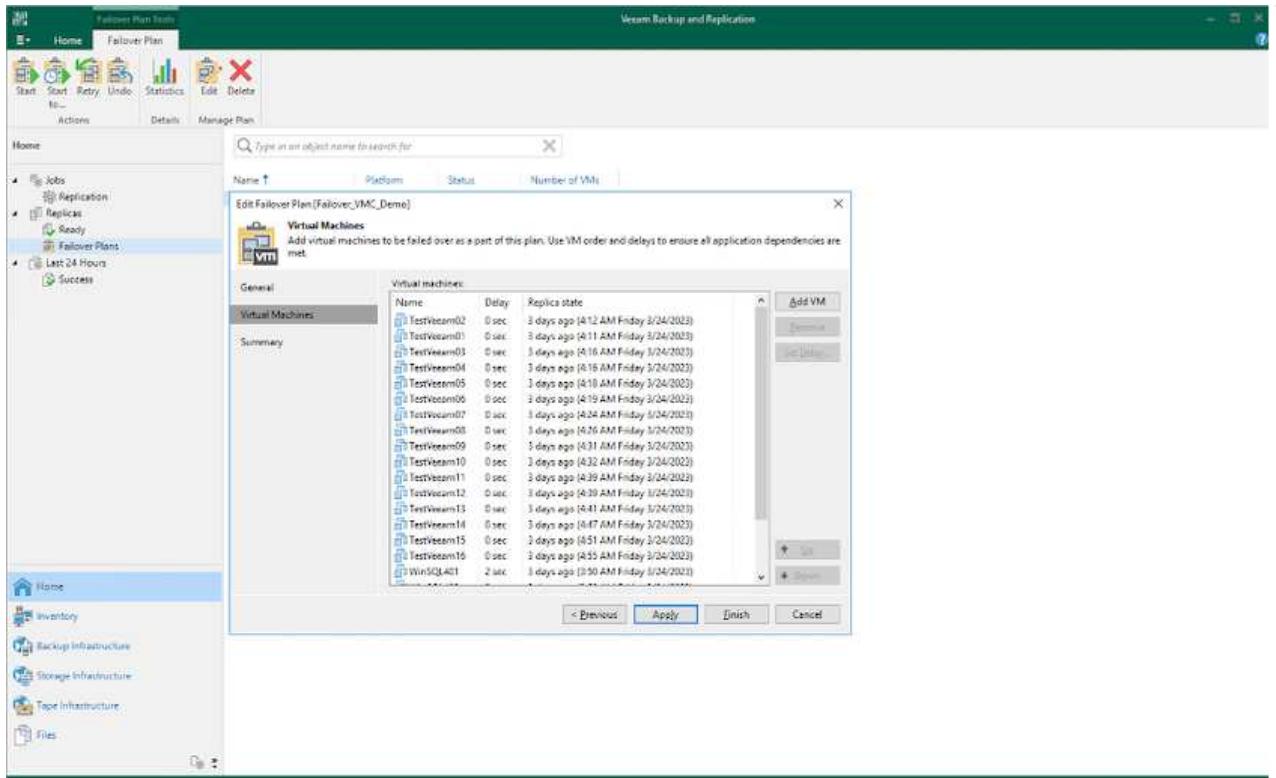

For additional information for creating replication jobs, refer [Creating Replication Jobs](#).

### Step 3: Run the failover plan

During failover, the source VM in the production site is switched over to its replica at the disaster recovery site. As part of the failover process, Veeam Backup & Replication restores the VM replica to the required restore point and moves all I/O activities from the source VM to its replica. Replicas can be used not only in case of a disaster, but also to simulate DR drills. During failover simulation, the source VM remains running. Once all the necessary tests have been conducted, you can undo the failover and return to normal operations.



Make sure network segmentation is in place to avoid IP conflicts during DR drills.

To start the failover plan, simply click in **Failover Plans** tab and right click on the failover plan. Select **Start**. This will failover using the latest restore points of VM replicas. To fail over to specific restore points of VM replicas, select **Start to**.

The screenshot shows the Veeam Backup & Replication interface. On the left, there's a navigation tree with 'Jobs', 'Replicas' (which has 'Ready' and 'Active (1)' branches), 'Failover Plans' (which is selected and highlighted with a red box), 'Last 24 Hours', 'Success', and 'Failed'. At the top, there's an 'Actions' bar with buttons for Start, Retry, Undo, Statistics, Edit, and Delete. Below the navigation tree is a search bar with placeholder text 'Type in an object name to search for'. To the right of the search bar is a table with columns 'Name', 'Platform', 'Status', and 'Number of VMs'. A single row is visible: 'Failover\_VMC\_Demo' (Platform: VMware, Status: Ready, Number of VMs: 21), which is also highlighted with a red box.

The screenshot shows a dialog box titled 'Executing failover Plan: Failover\_VMC\_Demo'. It displays information about the failover plan: Name: Failover\_VMC\_Demo, Restore type: Failover Plan, Initiated by: VEEAMBKPSRV05\Administrator, Status: In progress, and Start time: 3/23/2023 11:53:59 PM. There is a 'Cancel restore task' link. The main area is divided into two sections: 'VM name' and 'Status' on the left, and a 'Log' table on the right. The 'VM name' section lists 21 VMs, many of which are currently 'Processing' (indicated by a green circle with a dot). The 'Log' section shows a timeline of events with their duration:

Message	Duration
Processing VM: TestVeeam01	0:00:23
Waiting 0 sec before the next VM	0:00:23
Processing VM: TestVeeam03	0:00:22
Waiting 0 sec before the next VM	0:00:22
Processing VM: TestVeeam04	0:00:22
Waiting 0 sec before the next VM	0:00:22
Processing VM: TestVeeam05	0:00:22
Waiting 0 sec before the next VM	0:00:22
Processing VM: TestVeeam06	0:00:22
Waiting 0 sec before the next VM	0:00:22
Processing VM: TestVeeam07	0:00:22
Waiting 0 sec before the next VM	0:00:22
Processing VM: TestVeeam08	0:00:22
Waiting 0 sec before the next VM	0:00:22
Processing VM: TestVeeam09	0:00:22
Waiting 0 sec before the next VM	0:00:22
Processing VM: TestVeeam10	0:00:22
Waiting 0 sec before the next VM	0:00:22
Processing VM: TestVeeam11	0:00:21
Waiting 0 sec before the next VM	0:00:21
Processing VM: TestVeeam12	0:00:21
Waiting 0 sec before the next VM	0:00:21
Processing VM: TestVeeam13	0:00:21
Waiting 0 sec before the next VM	0:00:21
Processing VM: TestVeeam14	0:00:21
Waiting 0 sec before the next VM	0:00:21
Processing VM: TestVeeam15	0:00:21
Waiting 0 sec before the next VM	0:00:21
Processing VM: TestVeeam16	0:00:21
Waiting for resources availability	0:00:21

The state of the VM replica changes from Ready to Failover and VMs will start on the destination VMware Cloud on AWS SDDC cluster / host.

Once the failover is complete, the status of the VMs will change to "Failover".

Name	Job Name	Type	Status	Creation Time	Remote Po...	Original Location	Replica Location	Platform
TestVm001	FlsH_1VM_20230318	Regular	Failover	2/16/2023 3:15 AM	1	a300-vca05.sh...	172.30.156.2/Cluster-1	VMware
TestVm002	FlsH_1VM_20230318	Regular	Failover	3/23/2023 11:15 PM	4	a300-vca05.sh...	vcenter addr:35-145-115-210.vmcwaremc.com 173.30.160.68	VMware
TestVm003	FlsH_1VM_20230318	Regular	Failover	3/23/2023 11:15 PM	4	a300-vca05.sh...	vcenter addr:35-145-115-210.vmcwaremc.com 173.30.160.68	VMware
TestVm004	FlsH_1VM_20230318	Regular	Failover	3/21/2023 8:29 AM	3	a300-vca05.sh...	vcenter addr:35-145-115-210.vmcwaremc.com 173.30.160.68	VMware
TestVm005	FlsH_1VM_20230318	Regular	Failover	3/21/2023 8:31 AM	3	a300-vca05.sh...	vcenter addr:35-145-115-210.vmcwaremc.com 173.30.160.68	VMware
TestVm006	FlsH_1VM_20230318	Regular	Failover	3/21/2023 8:32 AM	3	a300-vca05.sh...	vcenter addr:35-145-115-210.vmcwaremc.com 173.30.160.68	VMware
TestVm007	FlsH_1VM_20230318	Regular	Failover	3/21/2023 8:32 AM	3	a300-vca05.sh...	vcenter addr:35-145-115-210.vmcwaremc.com 173.30.160.68	VMware
TestVm008	FlsH_1VM_20230318	Regular	Failover	3/21/2023 8:32 AM	3	a300-vca05.sh...	vcenter addr:35-145-115-210.vmcwaremc.com 173.30.160.68	VMware
TestVm009	FlsH_1VM_20230318	Regular	Failover	3/21/2023 8:33 AM	3	a300-vca05.sh...	vcenter addr:35-145-115-210.vmcwaremc.com 173.30.160.68	VMware
TestVm10	FlsH_1VM_20230318	Regular	Failover	3/21/2023 8:34 AM	3	a300-vca05.sh...	vcenter addr:35-145-115-210.vmcwaremc.com 173.30.160.68	VMware
TestVm11	FlsH_1VM_20230318	Regular	Failover	3/21/2023 8:34 AM	3	a300-vca05.sh...	vcenter addr:35-145-115-210.vmcwaremc.com 173.30.160.68	VMware
TestVm12	FlsH_1VM_20230318	Regular	Failover	3/21/2023 8:34 AM	3	a300-vca05.sh...	vcenter addr:35-145-115-210.vmcwaremc.com 173.30.160.68	VMware
TestVm13	FlsH_1VM_20230318	Regular	Failover	3/21/2023 8:35 AM	3	a300-vca05.sh...	vcenter addr:35-145-115-210.vmcwaremc.com 173.30.160.68	VMware
TestVm14	FlsH_1VM_20230318	Regular	Failover	3/21/2023 8:36 AM	3	a300-vca05.sh...	vcenter addr:35-145-115-210.vmcwaremc.com 173.30.160.68	VMware
TestVm15	FlsH_1VM_20230318	Regular	Failover	3/21/2023 8:36 AM	3	a300-vca05.sh...	vcenter addr:35-145-115-210.vmcwaremc.com 173.30.160.68	VMware
TestVm16	FlsH_1VM_20230318	Regular	Failover	3/21/2023 8:37 AM	3	a300-vca05.sh...	vcenter addr:35-145-115-210.vmcwaremc.com 173.30.160.68	VMware
WinSQL401	FlsH_Rep001_20230313	Regular	Failover	3/17/2023 8:38 AM	6	a300-vca05.sh...	vcenter addr:35-145-115-210.vmcwaremc.com 173.30.160.68	VMware
WinSQL402	FlsH_Rep001_20230313	Regular	Failover	3/17/2023 8:38 AM	6	a300-vca05.sh...	vcenter addr:35-145-115-210.vmcwaremc.com 173.30.160.68	VMware
WinSQL403	FlsH_Rep001_20230313	Regular	Failover	3/17/2023 8:38 AM	6	a300-vca05.sh...	vcenter addr:35-145-115-210.vmcwaremc.com 173.30.160.68	VMware
WinSQL404	FlsH_Rep001_20230313	Regular	Failover	3/17/2023 4:00 AM	6	a300-vca05.sh...	vcenter addr:35-145-115-210.vmcwaremc.com 173.30.160.68	VMware
WinSQL405	FlsH_Rep001_20230313	Regular	Failover	3/17/2023 4:02 AM	6	a300-vca05.sh...	vcenter addr:35-145-115-210.vmcwaremc.com 173.30.160.68	VMware



Veeam Backup & Replication stops all replication activities for the source VM until its replica is returned to the Ready state.

For detailed information about failover plans, refer to [Failover Plans](#).

## Step 4: Failback to the Production site

When the failover plan is running, it is considered as an intermediate step and needs to be finalized based on the requirement. The options include the following:

- **Failback to production** - switch back to the original VM and transfer all changes that took place while the VM replica was running to the original VM.



When you perform failback, changes are only transferred but not published. Choose **Commit failback** (once the original VM is confirmed to work as expected) or **Undo failback** to get back to the VM replica If the original VM is not working as expected.

- **Undo failover** - switch back to the original VM and discard all changes made to the VM replica while it was running.
- **Permanent Failover** - permanently switch from the original VM to a VM replica and use this replica as the original VM.

In this demo, Failback to production was chosen. Failback to the original VM was selected during the Destination step of the wizard and “Power on VM after restoring” check box was enabled.

The screenshot shows the Veeam Backup & Replication software interface. The main window displays a list of backup jobs and their details. A modal dialog box titled "Failback" is open, showing a list of "Replicas" available for failback. One replica, "TestVeeam02", is selected. The "Replica for failback" table lists various replicas with their names, sizes, original locations, and platform information. Buttons at the bottom of the dialog box include "Select All", "Clear All", and "Populate".

Name	Size	Original location
TestVeeam02	20.6 MB	[x]200-vc005.vhdc.com](...)
TestVeeam10	472.1 MB	[x]200-vc005.vhdc.com](...)
TestVeeam02	N/A	[x]200-vc005.vhdc.com](...)
TestVeeam12	40.1 MB	[x]200-vc005.vhdc.com](...)
TestVeeam09	31.1 MB	[x]200-vc005.vhdc.com](...)
TestVeeam08	76.2 MB	[x]200-vc005.vhdc.com](...)
TestVeeam07	45.1 MB	[x]200-vc005.vhdc.com](...)
TestVeeam13	38.4 MB	[x]200-vc005.vhdc.com](...)
WinSQL402	302.7 MB	[x]200-vc005.vhdc.com](...)
WinSQL404	550.2 MB	[x]200-vc005.vhdc.com](...)
TestVeeam14	38.1 MB	[x]200-vc005.vhdc.com](...)
TestVeeam01	N/A	[x]200-vc005.vhdc.com](...)
TestVeeam11	28.6 MB	[x]200-vc005.vhdc.com](...)
TestVeeam18	40.1 MB	[x]200-vc005.vhdc.com](...)
TestVeeam04	40.1 MB	[x]200-vc005.vhdc.com](...)
TestVeeam05	11.1 MB	[x]200-vc005.vhdc.com](...)

The screenshot shows the Veeam Backup & Replication interface with a blue banner at the top right reading "VMs failing back to OnPrem vCenter Server". The main pane displays a list of replicated VMs, including TestVms01 through TestVms18 and WinSQL401. A detailed view of TestVms01 is shown in the center-right, with tabs for "Fallback", "Summary", "Destination", and "Failback Mode". The "Failback Mode" tab is selected, showing options like "Fallback mode: To the original location", "Switchover Auto", and "DR site group: Automatic selection". Buttons for "Finish" and "Cancel" are visible at the bottom.

Fallback commit is one of the ways to finalize failback operation. When failback is committed, it confirms that the changes sent to the VM which is failed back (the production VM) are working as expected. After the commit operation, Veeam Backup & Replication resumes replication activities for the production VM.


For detailed information about the failback process, refer Veeam documentation for [Failover and Failback for replication](#).

The screenshot shows the Veeam Backup & Replication interface with a blue banner at the top right reading "Commit Failback" to complete the Failback Task. The main pane displays a list of replicated VMs, identical to the previous screenshot. A progress bar at the bottom indicates the task is 100% complete.

The screenshot shows the Veeam Backup & Replication interface with a blue banner at the top right reading "Task successful" and "Failback Complete". The main pane displays a list of replicated VMs, identical to the previous screenshots. A table at the bottom summarizes the task details:

Job Name	Session Type	Status	Start Time	End Time
WinSQL401	Commit Failback	Success	3/24/2023 2:07 AM	3/24/2023 2:08 AM
WinSQL404	Commit Failback	Success	3/24/2023 2:07 AM	3/24/2023 2:08 AM
WinSQL403	Commit Failback	Success	3/24/2023 2:07 AM	3/24/2023 2:08 AM
WinSQL402	Commit Failback	Success	3/24/2023 1:29 AM	3/24/2023 1:30 AM
WinSQL401	Commit Failback	Success	3/24/2023 1:23 AM	3/24/2023 1:24 AM
TestVms01	Commit Failback	Success	3/24/2023 1:23 AM	3/24/2023 1:24 AM
TestVms02	Commit Failback	Success	3/24/2023 1:23 AM	3/24/2023 1:24 AM
TestVms03	Commit Failback	Success	3/24/2023 1:23 AM	3/24/2023 1:24 AM
TestVms04	Commit Failback	Success	3/24/2023 1:23 AM	3/24/2023 1:24 AM
TestVms05	Commit Failback	Success	3/24/2023 1:23 AM	3/24/2023 1:24 AM
TestVms06	Commit Failback	Success	3/24/2023 1:23 AM	3/24/2023 1:24 AM
TestVms07	Commit Failback	Success	3/24/2023 1:23 AM	3/24/2023 1:24 AM
TestVms08	Commit Failback	Success	3/24/2023 1:23 AM	3/24/2023 1:24 AM
TestVms09	Commit Failback	Success	3/24/2023 1:23 AM	3/24/2023 1:24 AM
TestVms10	Commit Failback	Success	3/24/2023 1:23 AM	3/24/2023 1:24 AM
TestVms11	Commit Failback	Success	3/24/2023 1:23 AM	3/24/2023 1:24 AM
TestVms12	Commit Failback	Success	3/24/2023 1:23 AM	3/24/2023 1:24 AM
TestVms13	Commit Failback	Success	3/24/2023 1:23 AM	3/24/2023 1:24 AM
TestVms14	Commit Failback	Success	3/24/2023 1:23 AM	3/24/2023 1:24 AM
TestVms15	Commit Failback	Success	3/24/2023 1:23 AM	3/24/2023 1:24 AM
TestVms16	Commit Failback	Success	3/24/2023 1:23 AM	3/24/2023 1:24 AM
TestVms17	Commit Failback	Success	3/24/2023 1:23 AM	3/24/2023 1:24 AM
TestVms18	Commit Failback	Success	3/24/2023 1:23 AM	3/24/2023 1:24 AM
TestVms01	Switch Replica T...	Success	3/24/2023 1:56 AM	3/24/2023 1:59 AM
TestVms02	Switch Replica T...	Success	3/24/2023 1:59 AM	3/24/2023 1:59 AM

After failback to production is successful, the VMs are all restored back to the original production site.

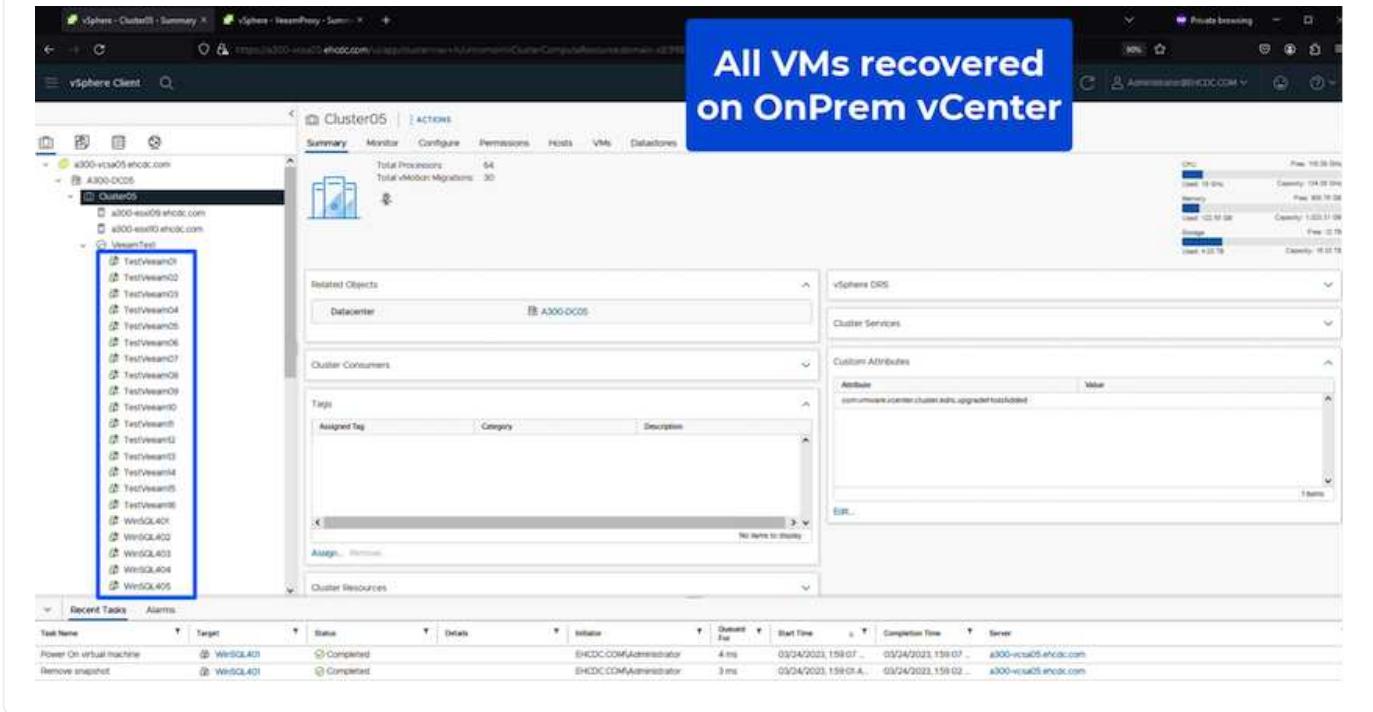

## Conclusion

FSx for ONTAP datastore capability enables Veeam or any validated third-party tool to provide low-cost DR solution using Pilot light cluster and without standing up large number of hosts in the cluster just to accommodate the VM replica copy. This provides a powerful solution to handle a tailored, customized disaster recovery plan and also allows to reuse existing backup products in house to meet the DR needs, thus enabling cloud-based disaster recovery by exiting DR datacentres on-premises. Failover can be done as planned failover or failover with a click of a button when disaster occurs, and decision is made to activate the DR site.

To learn more about this process, feel free to follow the detailed walkthrough video.

<https://netapp.hosted.panopto.com/Panopto/Pages/Embed.aspx?id=15fed205-8614-4ef7-b2d0-b061015e925a>

## Migrating Workloads on AWS / VMC

### TR 4942: Migrate Workloads to FSx ONTAP datastore using VMware HCX

Author(s): NetApp Solutions Engineering

**Overview:** Migrating virtual machines with VMware HCX, FSx ONTAP supplemental datastores, and VMware Cloud

A common use case for VMware Cloud (VMC) on Amazon Web Services (AWS), with its supplemental NFS datastore on Amazon FSx for NetApp ONTAP, is the migration of VMware workloads. VMware HCX is a preferred option and provides various migration methods to move on-premises virtual machines (VMs) and their data, running on any VMware supported datastores, to VMC datastores, which includes supplemental NFS datastores on FSx for ONTAP.

VMware HCX is primarily a mobility platform that is designed to simplify workload migration, workload rebalancing, and business continuity across clouds. It is included as part of VMware Cloud on AWS and offers

many ways to migrate workloads and can be used for disaster recovery (DR) operations.

This document provides step-by-step guidance for deploying and configuring VMware HCX, including all its main components, on-premises and on the cloud data center side, which enables various VM migration mechanisms.

For more information, see [Introduction to HCX Deployments](#) and [Install Checklist B - HCX with a VMware Cloud on AWS SDDC Destination Environment](#).

## High-level steps

This list provides the high-level steps to install and configure VMware HCX:

1. Activate HCX for the VMC software-defined data center (SDDC) through VMware Cloud Services Console.
2. Download and deploy the HCX Connector OVA installer in the on-premises vCenter Server.
3. Activate HCX with a license key.
4. Pair on-premises VMware HCX Connector with VMC HCX Cloud Manager.
5. Configure the network profile, compute profile, and service mesh.
6. (Optional) Perform Network Extension to extend the network and avoid re-IP.
7. Validate the appliance status and ensure that migration is possible.
8. Migrate the VM workloads.

## Prerequisites

Before you begin, make sure the following prerequisites are met. For more information, see [Preparing for HCX Installation](#). After the prerequisites are in place, including connectivity, configure and activate HCX by generating a license key from the VMware HCX Console at VMC. After HCX is activated, the vCenter Plug-in is deployed and can be accessed by using the vCenter Console for management.


The following installation steps must be completed before proceeding with HCX activation and deployment:

1. Use an existing VMC SDDC or create a new SDDC following this [NetApp link](#) or this [VMware link](#).
2. The network path from the on-premises vCenter environment to the VMC SDDC must support migration of VMs by using vMotion.
3. Make sure the required [firewall rules and ports](#) are allowed for vMotion traffic between the on-premises vCenter Server and the SDDC vCenter.
4. The FSx for ONTAP NFS volume should be mounted as a supplemental datastore in the VMC SDDC. To attach the NFS datastores to the appropriate cluster, follow the steps outlined in this [NetApp link](#) or this [VMware link](#).

## High Level Architecture

For testing purposes, the on-premises lab environment used for this validation was connected through a site-to-site VPN to AWS VPC, which allowed on-premises connectivity to AWS and to VMware cloud SDDC through External transit gateway. HCX migration and network extension traffic flows over the internet between on-premises and VMware cloud destination SDDC. This architecture can be modified to use Direct Connect private virtual interfaces.

The following image depicts the high-level architecture.

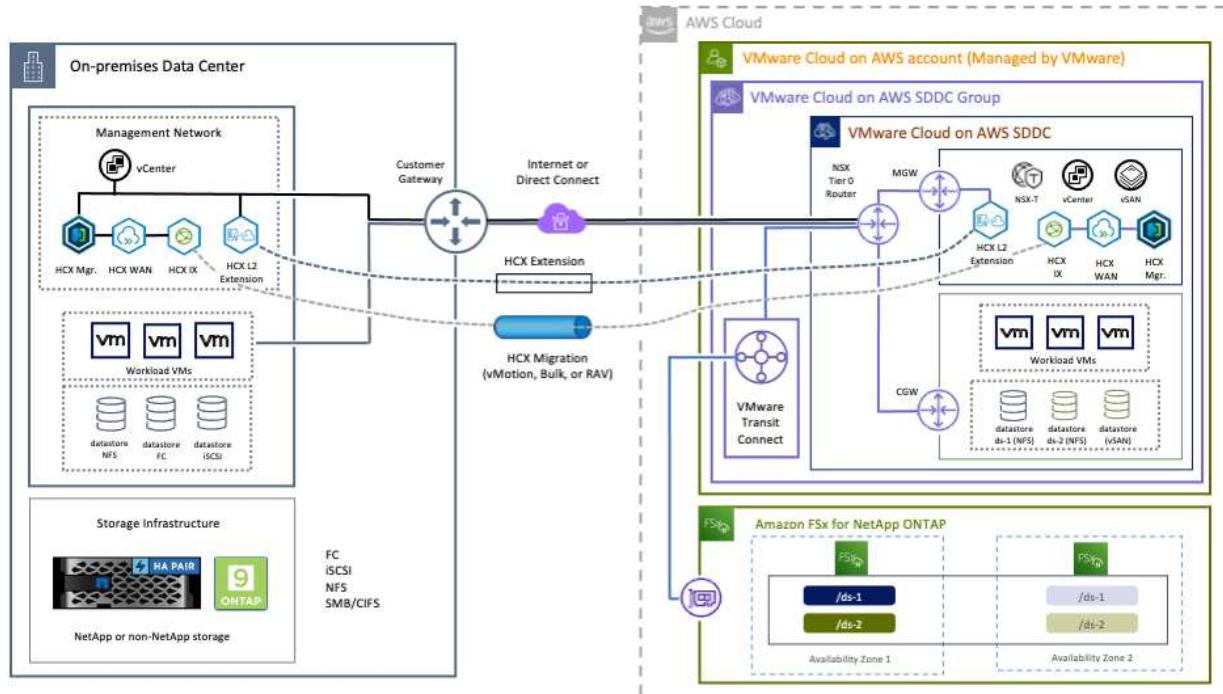

## Solution Deployment

Follow the series of steps to complete the deployment of this solution:

## Step 1: Activate HCX through VMC SDDC using the Add-ons option

To perform the installation, complete the following steps:

1. Log in to the VMC Console at [vmc.vmware.com](https://vmc.vmware.com) and access Inventory.
2. To select the appropriate SDDC and access Add-ons, click View Details on SDDC and select the Add Ons tab.
3. Click Activate for VMware HCX.



This step takes up to 25 minutes to complete.


The screenshot shows the VMC Add-ons page for the FSxNDemoSDDC. The VMware HCX card is highlighted with a blue border around its 'ACTIVATE' button. The NSX Advanced Firewall card also has its 'ACTIVATE' button highlighted. Both cards have a 'Available for Purchase' status indicator. Other cards visible include Site Recovery and vRealize Automation Cloud, each with their own 'ACTIVATE' and 'LEARN MORE' buttons.

4. After the deployment is complete, validate the deployment by confirming that HCX Manager and its associated plug-ins are available in vCenter Console.
5. Create the appropriate Management Gateway firewalls to open the ports necessary to access HCX Cloud Manager. HCX Cloud Manager is now ready for HCX operations.

## Step 2: Deploy the installer OVA in the on-premises vCenter Server

For the on-premises Connector to communicate with the HCX Manager in VMC, make sure that the appropriate firewall ports are open in the on-premises environment.

1. From the VMC Console, navigate to the HCX Dashboard, go to Administration, and select the Systems Update tab. Click Request a Download Link for the HCX Connector OVA image.
2. With the HCX Connector downloaded, deploy the OVA in the on-premises vCenter Server. Right-click vSphere Cluster and select the Deploy OVF Template option.

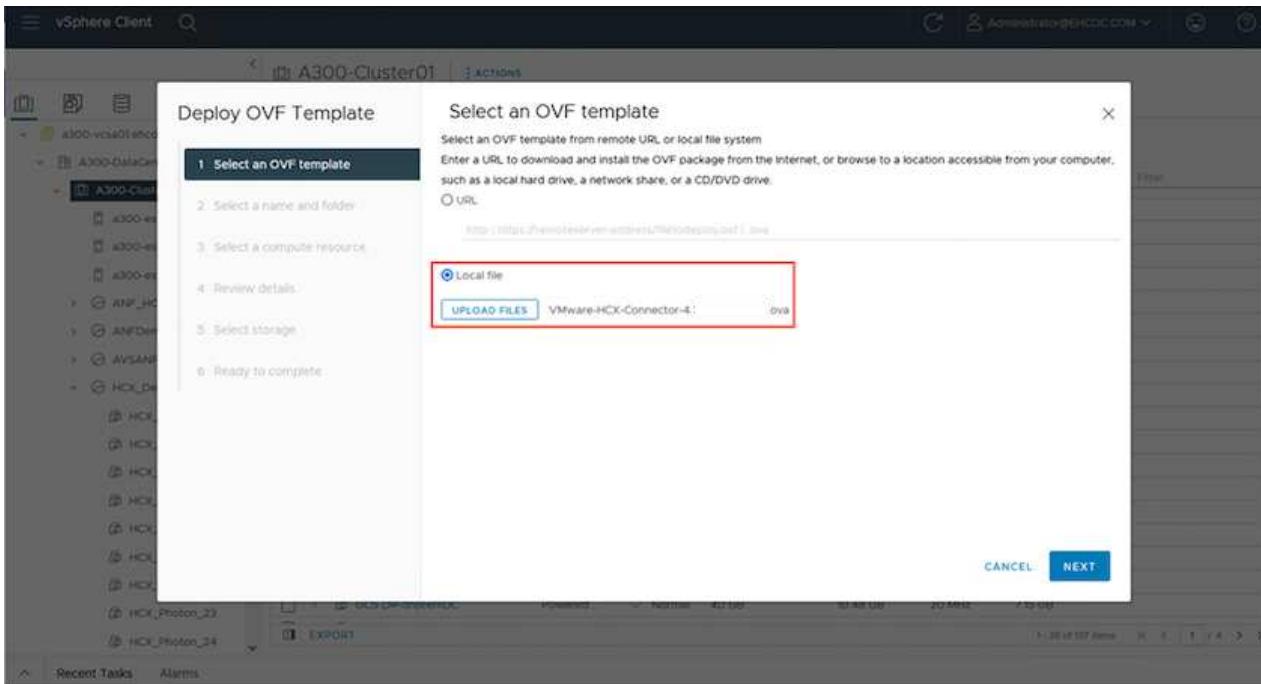

3. Enter the required information in the Deploy OVF Template wizard, click Next and then Finish to deploy the VMware HCX Connector OVA.
4. Power on the virtual appliance manually. For step-by-step instructions, go to [VMware HCX User Guide](#).

### Step 3: Activate HCX Connector with the license key

After you deploy the VMware HCX Connector OVA on-premises and start the appliance, complete the following steps to activate HCX Connector. Generate the license key from the VMware HCX Console at VMC and input the license during the VMware HCX Connector setup.

1. From the VMware Cloud Console, go to Inventory, select the SDDC, and click View Details. From the Add Ons tab, in the VMware HCX tile, click Open HCX.
2. From the Activation Keys tab, click Create Activation Key. Select the System Type as HCX Connector and click Confirm to generate the key. Copy the activation key.

Activation Key	Status	Subscription	System Type	System Id	Created	
ABIEE	73	CONSUMED	VMware Cloud on AWS (	HDX Connector	202	73 9/19/22, 9:24 AM
92C1	75	CONSUMED	VMware Cloud on AWS (	HDX Cloud	201	75 9/16/22, 9:56 AM
101	1846	DEACTIVATED	VMware Cloud on AWS	HDX Cloud	202	76 8/11/22, 12:23 PM



A separate key is required for each HCX Connector deployed on-premises.

3. Log in to the on-premises VMware HCX Connector at <https://hcxconnectorIP:9443> using administrator credentials.



Use the password defined during the OVA deployment.

4. In the Licensing section, enter the activation key copied from step 2 and click Activate.



The on-premises HCX Connector must have internet access for the activation to complete successfully.

5. Under Datacenter Location, provide the desired location for installing the VMware HCX Manager on-premises. Click Continue.
6. Under System Name, update the name and click Continue.
7. Select Yes and then Continue.
8. Under Connect Your vCenter, provide the IP address or fully qualified domain name (FQDN) and the credentials for the vCenter Server and click Continue.



Use the FQDN to avoid communication issues later.

9. Under Configure SSO/PSC, provide the Platform Services Controller's FQDN or IP address and click Continue.
10. Enter the vCenter Server's IP address or FQDN.
11. Verify that the information is entered correctly and click Restart.
12. After complete, the vCenter Server is displayed as green. Both the vCenter Server and SSO must

have the correct configuration parameters, which should be the same as the previous page.




This process should take approximately 10–20 minutes and for the plug-in to be added to the vCenter Server.

The screenshot shows the HCX Manager dashboard for the appliance VMware-HCX-440. The top navigation bar includes links for Dashboard, Appliance Summary, Configuration, and Administration, along with system information (IP: 172.21.254.157, Version: 4.4.1.0, Type: Connector) and a user account (admin). The main content area displays the following details:

- VMware-HCX-440** summary:
  - FQDN: VMware-HCX-440.ehcde.com
  - IP Address: 172.21.254.157
  - Version: 4.4.1.0
  - Uptime: 20 days, 21 hours, 9 minutes
  - Current Time: Tuesday, 13 September 2022 07:44:11 PM UTC
- Resource Usage:**
  - CPU: Free 688 MHZ, Used 1407 MHZ, Capacity 2095 MHZ, 67% usage
  - Memory: Free 2316 MB, Used 9691 MB, Capacity 12008 MB, 81% usage
  - Storage: Free 98G, Used 29G, Capacity 127G, 23% usage
- Connectivity:**
  - vCenter:** https://a300-vcsa01.ehcde.com (highlighted with a red box)
  - SSO:** https://a300-vcsa01.ehcde.com (highlighted with a red box)
- Management:** Buttons for NSX, vCenter, and SSO management.

## Step 4: Pair on-premises VMware HCX Connector with VMC HCX Cloud Manager

1. To create a site pair between the on-premises vCenter Server and the VMC SDDC, log in to the on-premises vCenter Server and access the HCX vSphere Web Client Plug-in.

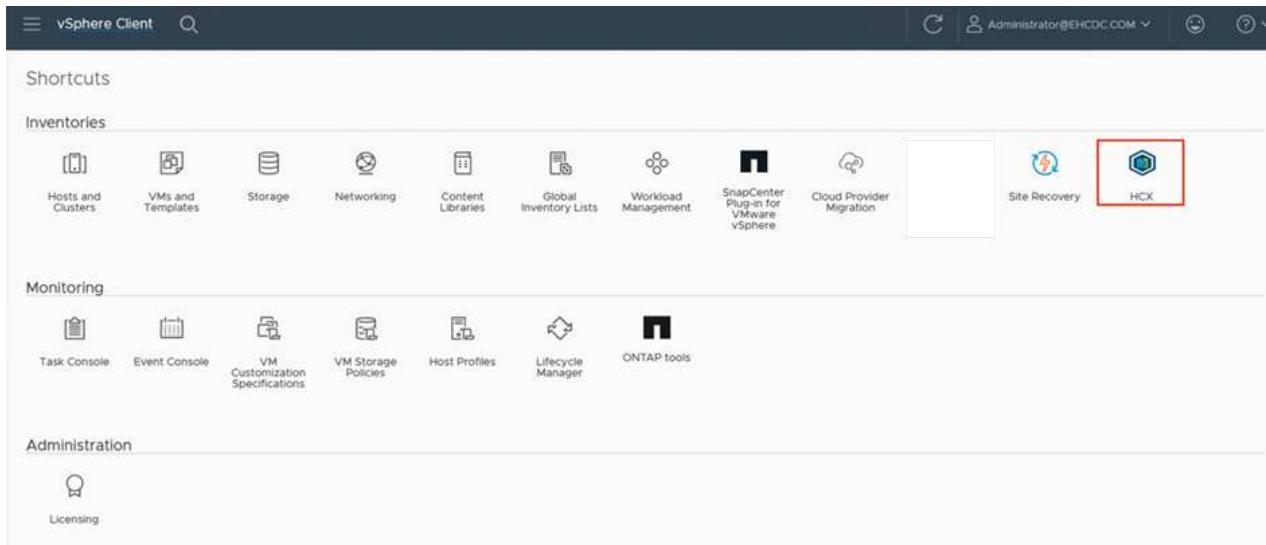

2. Under Infrastructure, click Add a Site Pairing. To authenticate the remote site, enter the VMC HCX Cloud Manager URL or IP address and the credentials for the CloudAdmin role.



HCX information can be retrieved from the SDDC Settings page.

The screenshot shows the VMware Cloud SDDC Settings page for the 'FSxNDemoSDDC' cluster. The left sidebar includes options like Launchpad, Inventory, Subscriptions, Activity Log, Tools, Developer Center, Maintenance, and Notification Preferences. The main content area has tabs for Summary, Networking & Security, Storage, Add Ons, Maintenance, Troubleshooting, Settings (selected), and Support. Under 'vCenter Information', there are links for Default vCenter User Account, vSphere Client (HTML5), vCenter Server API Explorer, PowerCLI Connect, and vCenter FQDN. Under 'HCX Information', it shows the HCX FQDN (https://hc.vmc.com) with an IP of 172.30.161.215. Under 'NSX Information', it lists NSX Manager button default access and URLs.

The screenshot shows the vSphere Client interface with the 'Site Pairing' dialog box open. The dialog box is titled 'Connect to Remote Site' and contains fields for 'Remote HCX URL' (http://hc), 'Username' (cloudadmin@vmc.local), and 'Password'. There are 'CANCEL' and 'CONNECT' buttons at the bottom. The background shows the 'Site Pairing' section of the HCX dashboard.

3. To initiate the site pairing, click Connect.



VMware HCX Connector must be able to communicate with the HCX Cloud Manager IP over port 443.

4. After the pairing is created, the newly configured site pairing is available on the HCX Dashboard.

## Step 5: Configure the network profile, compute profile, and service mesh

The VMware HCX Interconnect (HCX-IX) appliance provides secure tunnel capabilities over the internet and private connections to the target site that enable replication and vMotion-based capabilities. The interconnect provides encryption, traffic engineering, and an SD-WAN. To create the HCI-IX Interconnect Appliance, complete the following steps:

1. Under Infrastructure, select Interconnect > Multi-Site Service Mesh > Compute Profiles > Create Compute Profile.



Compute profiles contain the compute, storage, and network deployment parameters required to deploy an interconnect virtual appliance. They also specify which portion of the VMware data center will be accessible to the HCX service.

For detailed instructions, see [Creating a Compute Profile](#).

The screenshot shows the vSphere Client interface with the URL <https://a300-vcsa01.ehcdc.com/ui/app/plugin/com.vmware.hybridity/com.vmware.hcx/hybridConnect>. The left sidebar is expanded to show the HCX section, specifically the Interconnect category. The main pane displays the 'hcxdemo' Compute Profile. It includes sections for Service Resources (a300-vcsa01.ehcdc.com, A300-Cluster01), Deployment Container (a300-vcsa01.ehcdc.com, A300-Cluster01), Datastore (A300\_NFS\_D504), and Networks (VM\_3510 (Management), vSphere Replication, Uplink, vMotion). A warning message at the top states: "Host a300-esxi01.ehcdc.com(d-host-3292) is in critical (red) state for service compute" and "Host a300-esxi01.ehcdc.com(d-host-3292) is in critical (red) state for deployment container compute". A note below says "This Compute Profile is being used in 2 Service Mesh(es)". At the bottom are buttons for EDIT, DELETE, and REVIEW CONNECTION RULES.

2. After the compute profile is created, create the network profile by selecting Multi-Site Service Mesh > Network Profiles > Create Network Profile.
3. The network profile defines a range of IP address and networks that will be used by HCX for its virtual appliances.



This will require two or more IP address. These IP addresses will be assigned from the management network to virtual appliances.

The screenshot shows the vSphere Client interface for HCX. The left sidebar has sections for Site Pairing, Infrastructure, Services, and System. Under Infrastructure, 'Interconnect' is selected. Under Services, 'Network Extension' is listed. The main pane is titled 'Interconnect' and 'Multi-Site Service Mesh'. It shows a network profile named 'VM\_3510' with the following details:

Network Details	MTU	IP Pools
Backing: VM_3510	9000	IP Ranges: 172.21.254.80 - 172.21.254.95 IP Usage(Used/Total): 4 / 16 Prefix Length: 24 Gateway: 172.21.254.230

Buttons for 'EDIT' and 'DELETE' are at the bottom.

For detailed instructions, see [Creating a Network Profile](#).



If you are connecting with an SD-WAN over the internet, you have to reserve public IPs under the Networking and Security section.

4. To create a service mesh, select the Service Mesh tab within the Interconnect option and select on-premises and VMC SDDC sites.

The service mesh establishes a local and remote compute and network profile pair.

The screenshot shows the VMware HCX interface. The left sidebar has sections for Dashboard, Infrastructure, Site Pairing, Interconnect, Transport Analytics, Services, Administration, and DICE. Under Infrastructure, 'Interconnect' is selected. Under Services, 'Network Extension' is listed. The main pane is titled 'Interconnect' and 'Service Mesh'. It shows a service mesh named 'ICCO07' with the following details:

SM Pairing: VMware-HCX-440 → hcx.firebaseio.com


HDX Services: A grid of icons representing various HDX services.

Buttons for 'VIEW APPLIANCES', 'RESYNC', 'EDIT', 'DELETE', and 'MORE...' are at the bottom.




Part of this process involves deploying HCX appliances that will be automatically configured on both the source and target sites, creating a secure transport fabric.

5. Select the source and remote compute profiles and click Continue.

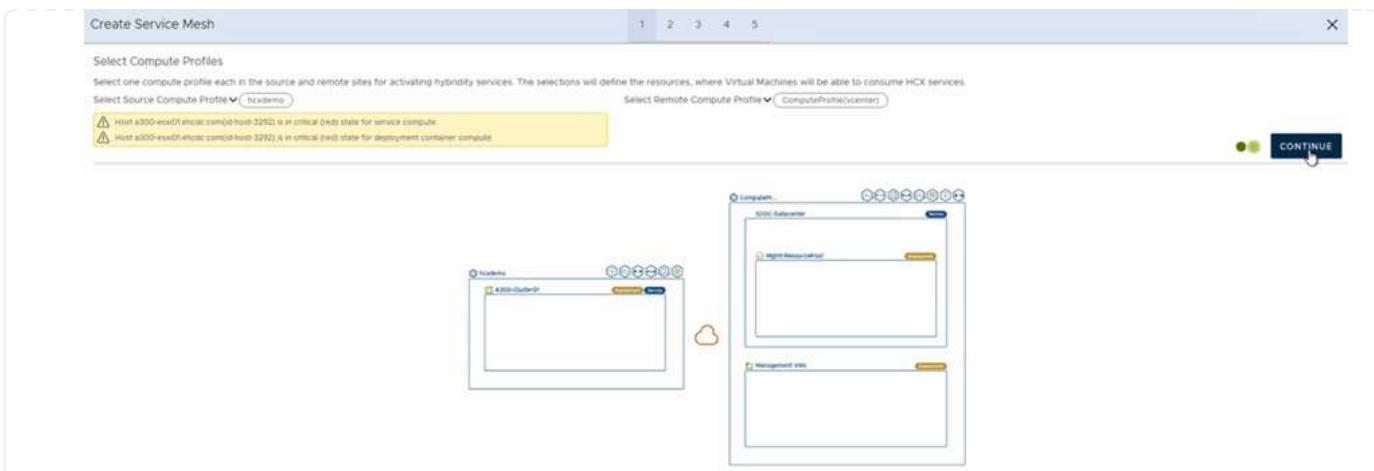

#### 6. Select the service to be activated and click Continue.

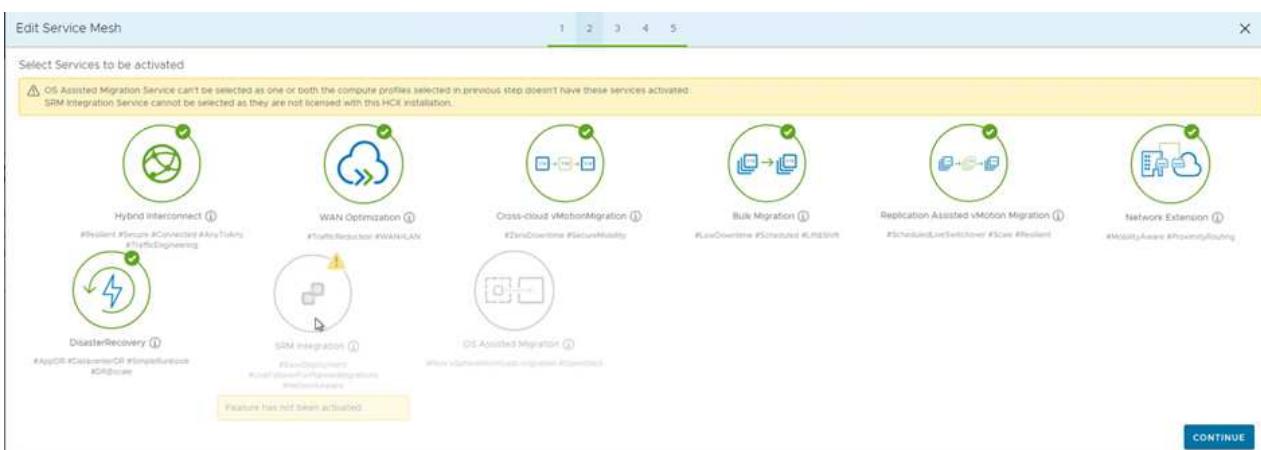

An HCX Enterprise license is required for Replication Assisted vMotion Migration, SRM Integration, and OS Assisted Migration.

#### 7. Create a name for the service mesh and click Finish to begin the creation process. The deployment should take approximately 30 minutes to complete. After the service mesh is configured, the virtual infrastructure and networking required to migrate the workload VMs has been created.

67% https://a300-vsa01.ehdc.com/ui/app/plugin/com.vmware.hybridity/com.vmware.hci/hybridConnect

vSphere Client

**Interconnect**

Appliances

Appliance Name	Type	IP Address	Tunnel Status	Current Version	Available Version
IC0001-hd-0	HCI-Host-Ext	172.21.204.89	Established	4.4.0.0	4.4.10
IC0001-hd-0	HCI-NET-EXT	172.21.204.89	Established	4.4.0.0	4.4.10
IC0001-hd-0	HCI-Host-DPT		N/A	7.3.0	N/A

Appliances on hci.bebf1fb057ddfae0a3795.westeurope.azure.com#cloud

Appliance Name	Appliance Type	IP Address	Current Version
IC0001-hd-0	HCI-Host-Ext	172.30.10.17	4.4.0.0
IC0001-hd-0	HCI-NET-EXT	172.30.10.48	4.4.0.0
IC0001-hd-0	HCI-Host-DPT		7.3.0

## Step 6: Migrating Workloads

HCX provides bidirectional migration services between two or more distinct environments such as on-premises and VMC SDDCs. Application workloads can be migrated to and from HCX activated sites using a variety of migration technologies such as HCX bulk migration, HCX vMotion, HCX Cold migration, HCX Replication Assisted vMotion (available with HCX Enterprise edition), and HCX OS Assisted Migration (available with HCX Enterprise edition).

To learn more about available HCX migration technologies, see [VMware HCX Migration Types](#)

The HCX-IX appliance uses the Mobility Agent service to perform vMotion, Cold, and Replication Assisted vMotion (RAV) migrations.



The HCX-IX appliance adds the Mobility Agent service as a host object in the vCenter Server. The processor, memory, storage and networking resources displayed on this object do not represent actual consumption on the physical hypervisor hosting the IX appliance.

The screenshot shows the vSphere Client interface. On the left, the navigation tree displays a datacenter named 'A300-DataCenter' containing clusters like 'A300-Cluster01' and hosts like '172.21.254.82'. The host '172.21.254.82' is currently selected. The main pane shows the 'Summary' tab for this host. The host summary table includes the following information:


Host Details	Value
Hypervisor	VMware ESXi, 7.0.3, 20305777
Model	VMware Mobility Platform
Processor Type	VMware Virtual Processor
Logical Processors	768
NICs	8
Virtual Machines	0
State	Connected
Uptime	29 days

## VMware HCX vMotion


This section describes the HCX vMotion mechanism. This migration technology uses the VMware vMotion protocol to migrate a VM to VMC SDDC. The vMotion migration option is used for migrating the VM state of a single VM at a time. There is no service interruption during this migration method.

-  Network Extension should be in place (for the port group in which the VM is attached) in order to migrate the VM without the need to make an IP address change.


- From the on-premises vSphere client, go to Inventory, right- click on the VM to be migrated, and select HCX Actions > Migrate to HCX Target Site.

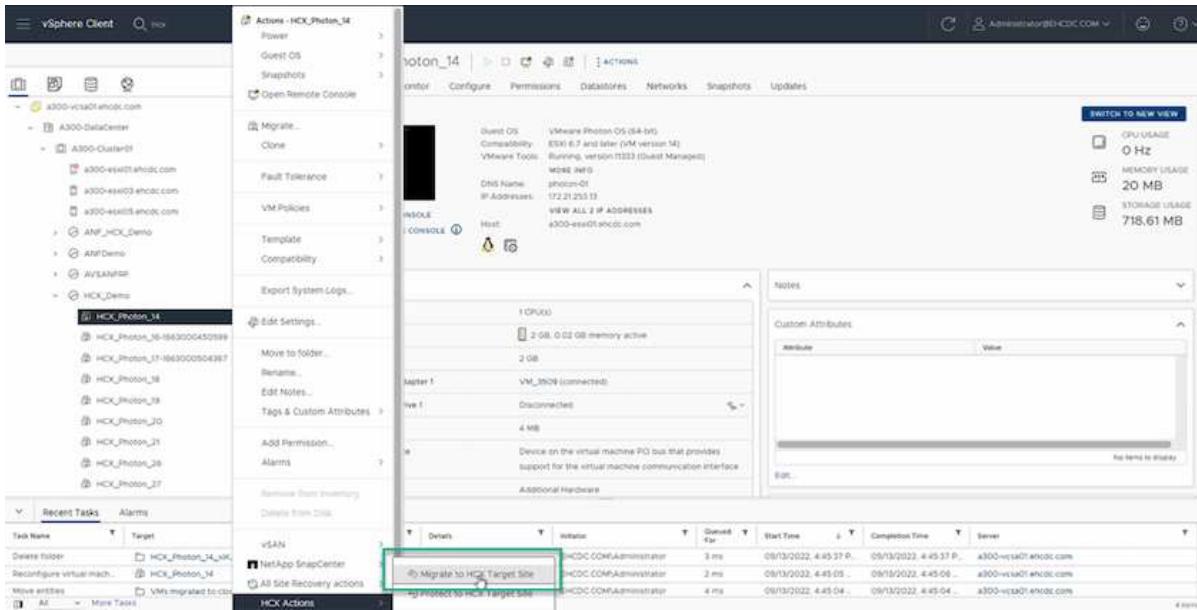

- In the Migrate Virtual Machine wizard, select the Remote Site Connection (target VMC SDDC).

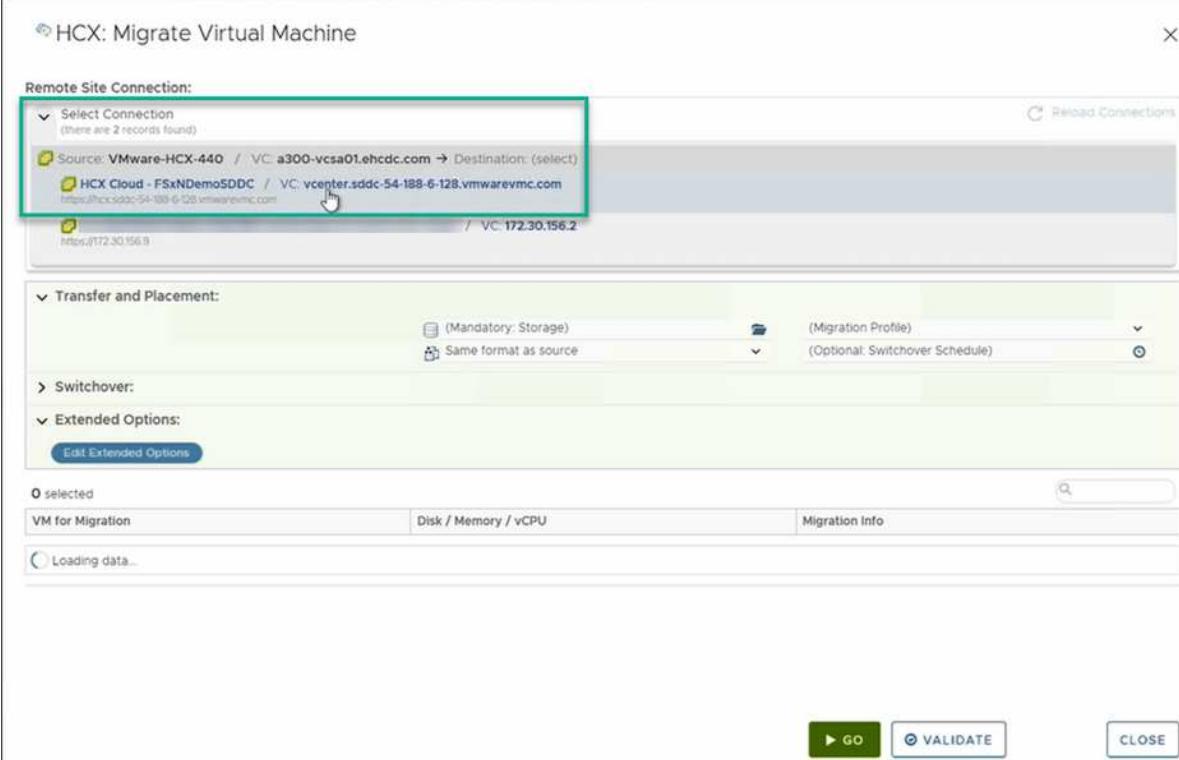

3. Add a group name and under Transfer and Placement, update the mandatory fields (Cluster, Storage, and Destination Network), Click Validate.

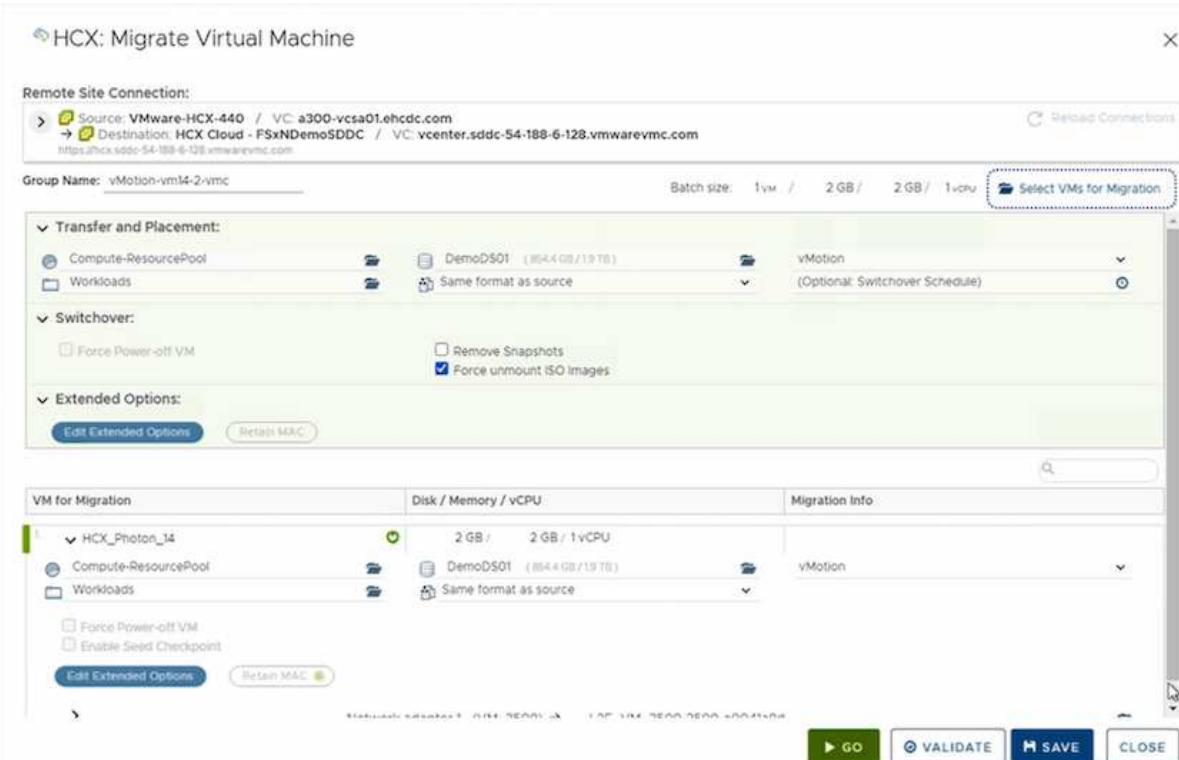

4. After the validation checks are complete, click Go to initiate the migration.



The vMotion transfer captures the VM active memory, its execution state, its IP address, and its MAC address. For more information about the requirements and limitations of HCX vMotion, see [Understanding VMware HCX vMotion and Cold Migration](#).

5. You can monitor the progress and completion of the vMotion from the HCX > Migration dashboard.


The screenshot shows the vSphere Client interface with the HCX tab selected. In the left sidebar, under the HCX section, the 'Migration' option is highlighted. The main pane displays the 'Migration' dashboard, which includes a table for tracking VMs and their migration status. One row in the table shows a vMotion task for 'vMotion\_vmf4.2.vmc' from 'a300-vcsa01.hcxdn.com' to 'vcenter.sddc-54-188-6-128.vmwarevmc.com'. The task is at 100% completion, 0 of 1 hosts have been synchronized, and it has been running for 24 hours and 55 minutes. Below the table, there are sections for Destination Resource Pool, Destination Datacenter, Destination Folder, and Migration Options. At the bottom of the dashboard, there is a table titled 'Switchover Events' showing the status of four hosts. A separate table at the very bottom lists recent tasks, including one for 'Relocate virtual machine' and another for 'ReSync host storage sys'.

Task Name	Target	Status	Details	Initiator	Quiesce For	Start Time	Completion Time	Server
Relocate virtual machine	HCX_Photon_14	100%	Migrating Virtual Machine ac...	HCXDC.COM\Administrator	3 ms	09/13/2022, 4:59:08...		a300-vcsa01.hcxdn.com
ReSync host storage sys	172.21.254.82	Completed		HCXDC.COM\Administrator	3 ms	09/13/2022, 4:57:41 F...	09/13/2022, 4:57:43 F...	a300-vcsa01.hcxdn.com

## VMware Replication Assisted vMotion

As you might have noticed from VMware documentation, VMware HCX Replication Assisted vMotion (RAV) combines the benefits of bulk migration and vMotion. Bulk migration uses vSphere Replication to migrate multiple VMs in parallel—the VM gets rebooted during switchover. HCX vMotion migrates with no downtime, but it is performed serially one VM at a time in a replication group. RAV replicates the VM in parallel and keeps it in sync until the switchover window. During the switchover process, it migrates one VM at a time with no downtime for the VM.

The following screenshot shows the migration profile as Replication Assisted vMotion.

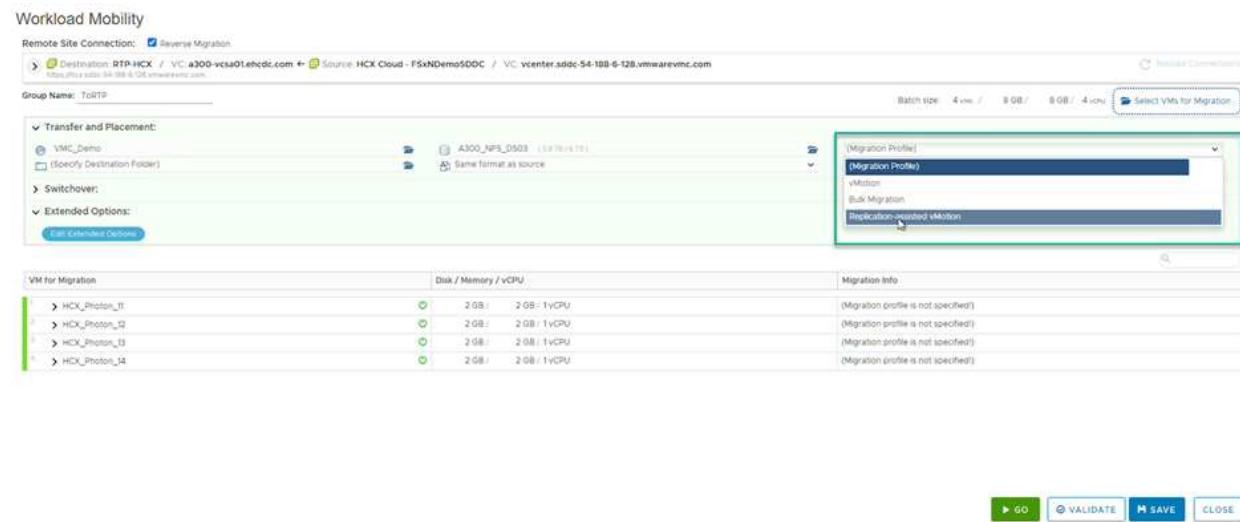

The duration of the replication might be longer compared to the vMotion of a small number of VMs. With RAV, only sync the deltas and include the memory contents. The following is a screenshot of the migration status—it shows how the start time of the migration is the same and the end time is different for each VM.

A screenshot of the vSphere Client interface, specifically the 'Migration' tab under the 'HCX' category. The left sidebar shows navigation links for Infrastructure, Site Planning, Interconnect, Transport Analytics, Services, and Systems. The 'Migration' link is selected. The main pane displays a table of migration tasks. One task is shown in progress, moving from 'vcenter.addc-54-188-6-128.vmwarevm.com' to 'a300-vcsa01.hcxdic.com'. This task has four sub-tasks, each labeled 'HCX\_Photon\_x' (x=11, 12, 13, 14), which are all listed as 'Migration Complete'. The start time for all sub-tasks is '2022-09-22 15:24:07Z' and the end time varies from '2022-09-22 15:25:19Z' to '2022-09-22 15:25:21Z'. Below this, another task is listed: 'FromSCP...' to 'vcenter.addc-54-188-6-128.vmwarevm.com'. At the bottom of the screen, a table of recent tasks is visible, showing various operations like 'Delete virtual machine', 'Unregister virtual machine', 'Refresh virtual machine', 'Relocate virtual machine', 'CHAA virtual machine', and 'Refresh host storage sys.'.

For additional information about the HCX migration options and on how to migrate workloads from on-premises to VMware Cloud on AWS using HCX, see the [VMware HCX User Guide](#).



VMware HCX vMotion requires 100Mbps or higher throughput capability.



The target VMC FSx for ONTAP datastore must have sufficient space to accommodate the migration.

## Conclusion

Whether you are targeting all-cloud or hybrid cloud and data residing on any type/vendor storage in on-premises, Amazon FSx for NetApp ONTAP along with HCX provide excellent options to deploy and migrate the workloads while reducing the TCO by making the data requirements seamless to the application layer. Whatever the use case, choose VMC along with FSx for ONTAP datastore for rapid realization of cloud benefits, consistent infrastructure, and operations across on-premises and multiple clouds, bidirectional portability of workloads, and enterprise-grade capacity and performance. It is the same familiar process and procedures used to connect the storage and migrate VMs using VMware vSphere replication, VMware vMotion or even NFC copy.

## Takeaways

The key points of this document include:

- You can now use Amazon FSx ONTAP as a datastore with VMC SDDC.
- You can easily migrate data from any on-premises datacenter to VMC running with FSx for ONTAP datastore
- You can easily grow and shrink the FSx ONTAP datastore to meet the capacity and performance requirements during migration activity.

## Where to find additional information

To learn more about the information described in this document, refer to the following website links:

- VMware Cloud documentation

<https://docs.vmware.com/en/VMware-Cloud-on-AWS/>

- Amazon FSx for NetApp ONTAP documentation

<https://docs.aws.amazon.com/fsx/latest/ONTAPGuide>

VMware HCX User Guide

- <https://docs.vmware.com/en/VMware-HCX/4.4/hcx-user-guide/GUID-BFD7E194-CFE5-4259-B74B-991B26A51758.html>

## Region Availability – Supplemental NFS datastore for VMC

The availability of supplemental NFS datastores on AWS / VMC is defined by Amazon. First, you need to determine if both VMC and FSxN are available in a specified region. Next, you need to determine if the FSxN supplemental NFS datastore is supported in that region.

- Check the availability of VMC [here](#).
- Amazon's pricing guide offers information on where FSxN (FSx ONTAP) is available. You can find that information [here](#).
- Availability of the FSxN supplemental NFS datastore for VMC is coming soon.

While information is still being released, the following chart identifies the current support for VMC, FSxN and FSxN as a supplemental NFS datastore.

## Americas

AWS Region	VMC Availability	FSx ONTAP Availability	NFS Datastore Availability
US East (Northern Virginia)	Yes	Yes	Yes
US East (Ohio)	Yes	Yes	Yes
US West (Northern California)	Yes	No	No
US West (Oregon)	Yes	Yes	Yes
GovCloud (US West)	Yes	Yes	Yes
Canada (Central)	Yes	Yes	Yes
South America (Sao Paulo)	Yes	Yes	Yes

Last updated on: June 2, 2022.

## EMEA

AWS Region	VMC Availability	FSx ONTAP Availability	NFS Datastore Availability
Europe (Ireland)	Yes	Yes	Yes
Europe (London)	Yes	Yes	Yes
Europe (Frankfurt)	Yes	Yes	Yes
Europe (Paris)	Yes	Yes	Yes
Europe (Milan)	Yes	Yes	Yes
Europe (Stockholm)	Yes	Yes	Yes

Last updated on: June 2, 2022.

## Asia Pacific

AWS Region	VMC Availability	FSx ONTAP Availability	NFS Datastore Availability
Asia Pacific (Sydney)	Yes	Yes	Yes
Asia Pacific (Tokyo)	Yes	Yes	Yes
Asia Pacific (Osaka)	Yes	No	No
Asia Pacific (Singapore)	Yes	Yes	Yes
Asia Pacific (Seoul)	Yes	Yes	Yes
Asia Pacific (Mumbai)	Yes	Yes	Yes
Asia Pacific (Jakarta)	No	No	No
Asia Pacific (Hong Kong)	Yes	Yes	Yes

Last updated on: September 28, 2022.

## **Copyright information**

Copyright © 2023 NetApp, Inc. All Rights Reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means—graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system—with prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

LIMITED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (b)(3) of the Rights in Technical Data -Noncommercial Items at DFARS 252.227-7013 (FEB 2014) and FAR 52.227-19 (DEC 2007).

Data contained herein pertains to a commercial product and/or commercial service (as defined in FAR 2.101) and is proprietary to NetApp, Inc. All NetApp technical data and computer software provided under this Agreement is commercial in nature and developed solely at private expense. The U.S. Government has a non-exclusive, non-transferrable, nonsublicensable, worldwide, limited irrevocable license to use the Data only in connection with and in support of the U.S. Government contract under which the Data was delivered. Except as provided herein, the Data may not be used, disclosed, reproduced, modified, performed, or displayed without the prior written approval of NetApp, Inc. United States Government license rights for the Department of Defense are limited to those rights identified in DFARS clause 252.227-7015(b) (FEB 2014).

## **Trademark information**

NETAPP, the NETAPP logo, and the marks listed at <http://www.netapp.com/TM> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.