

GAMMA

Γ α γ

GAMMA: A Strict yet Fair Programming Language

Ben Caimano - blc2129@columbia.edu

Weiyuan Li - wl2453@columbia.edu

Matthew H Maycock - mhm2159@columbia.edu

Arthy Padma Anandhi Sundaram - as4304@columbia.edu

A Project for Programming Languages and Translators,
taught by Stephen Edwards

1 Introduction

1.1 Why GAMMA? – The Core Concept

We propose to implement an elegant yet secure general purpose object-oriented programming language. Interesting features have been selected from the history of object-oriented programming and will be combined with the familiar ideas and style of modern languages.

GAMMA combines three disparate but equally important tenets:

1. Purely object-oriented

GAMMA brings to the table a purely object oriented programming language where every type is modeled as an object—including the standard primitives. Integers, Strings, Arrays, and other types may be expressed in the standard fashion but are objects behind the scenes and can be treated as such.

2. Controllable

GAMMA provides innate security by choosing object level access control as opposed to class level access specifiers. Private members of one object are inaccessible to other objects of the same type. Overloading is not allowed. No subclass can turn your functionality on its head.

3. Versatile

GAMMA allows programmers to place "refinement methods" inside their code. Alone these methods do nothing, but may be defined by subclasses so as to extend functionality at certain important positions. Anonymous instantiation allows for extension of your classes in a quick easy fashion.

1.2 The Motivation Behind GAMMA

GAMMA is a reaction to the object-oriented languages before it. Obtuse syntax, flaws in security, and awkward implementations plague the average object-oriented language. GAMMA is intended as a step toward ease and comfort as an object-oriented programmer.

The first goal is to make an object-oriented language that is comfortable in its own skin. It should naturally lend itself to constructing API-layers and abstracting general models. It should serve the programmer towards their goal instead of exerting unnecessary effort through verbosity and awkwardness of structure.

The second goal is to make a language that is stable and controllable. The programmer in the lowest abstraction layer has control over how those higher may procede. Unexpected runtime behavior should be reduced through firmness of semantic structure and debugging should be a straight-forward process due to pure object and method nature of GAMMA.

1.3 GAMMA Feature Set

GAMMA will provide the following features:

- Universal objecthood
- Optional "refinement" functions to extend superclass functionality
- Anonymous class instantiation
- Static typing
- Access specifiers that respect object boundaries, not class boundaries

1.4 ray: The GAMMA Compiler

The compiler will proceed in two steps. First, the compiler will interpret the source containing possible syntactic shorthand into a file consisting only of the most concise and structurally sound GAMMA core. After this the compiler will transform general patterns into (hopefully portable) C code, and compile this to machine code with whatever compiler the user specifies.

Contents

1	Introduction	3
1.1	Why GAMMA? – The Core Concept	3
1.2	The Motivation Behind GAMMA	3
1.3	GAMMA Feature Set	3
1.4	ray: The GAMMA Compiler	4
2	Language Tutorial	7
3	LRM	9
3.1	Lexical Elements	9
3.1.1	Whitespace	9
3.1.2	Identifiers	9
3.1.3	Keywords	9
3.1.4	Operators	9
3.1.5	Literal Classes	9
3.1.6	Comments	11
3.1.7	Separators	11
3.2	Semantics	11
3.2.1	Types and Variables	11
3.2.2	Classes, Subclasses, and Their Members	11
3.2.3	Methods	12
3.2.4	Refinements	12
3.2.5	Constructors (init)	13
3.2.6	Main	13
3.2.7	Expressions and Statements	13
3.3	Syntax	13
3.3.1	Statement Grouping via Bodies	13
3.3.2	Variables	14
3.3.3	Methods	15
3.3.4	Classes	16
3.3.5	Conditional Structures	18
3.3.6	Refinements	18
3.4	Operators and Literal Types	19
3.4.1	The Operator =	19
3.4.2	The Operators != and <>	19
3.4.3	The Operator <	19
3.4.4	The Operator >	20
3.4.5	The Operator <=	20

3.4.6	The Operator <code>>=</code>	20
3.4.7	The Operator <code>+</code>	20
3.4.8	The Operator <code>-</code>	20
3.4.9	The Operator <code>*</code>	20
3.4.10	The Operator <code>/</code>	20
3.4.11	The Operator <code>%</code>	20
3.4.12	The Operator <code>^</code>	21
3.4.13	The Operator <code>:=</code>	21
3.4.14	The Operators <code>+=</code> , <code>-=</code> , <code>*=</code> , <code>/=</code> , <code>%=</code> , and <code>^=</code>	21
3.4.15	The Operator <code>and</code>	21
3.4.16	The Operator <code>or</code>	21
3.4.17	The Operator <code>not</code>	21
3.4.18	The Operator <code>nand</code>	21
3.4.19	The Operator <code>nor</code>	21
3.4.20	The Operator <code>xor</code>	21
3.4.21	The Operator <code>refinable</code>	21
4	Project Planning	22
4.1	Planning Techniques	22
4.2	Ocaml Style Guide for the Development of the Ray Compiler	22
4.3	Project Timeline	24
4.4	Team Roles	25
4.5	Development Environment	26
4.5.1	Programming Languages	26
4.5.2	Development Tools	26
4.6	Project Log	27
5	Architectural Design	29
5.1	Block Diagrams	29
5.1.1	Structure by Module	29
5.1.2	Structure by Toplevel Ocaml Function	30
5.2	Component Connective Interfaces	30
5.3	Component Authorship	31
6	Test Plan	33
6.1	Examples Gamma Programs	33
6.1.1	Hello World	33
6.1.2	I/O	36
6.1.3	Argument Reading	40

2 Language Tutorial

The structure of the example below should be intimately familiar to any student of Object-Oriented Programming.

```
1  class IOTest:
2      public:
3          init():
4              super()
5
6          void interact():
7              Printer p := system.out
8              Integer i := promptInteger("Please enter an integer")
9              Float f := promptFloat("Please enter a float")
10             p.printString("Sum of integer + float = ")
11             p.printFloat(i.toF() + f)
12             p.printString("\n")
13
14     private:
15         void prompt(String msg):
16             system.out.printString(msg)
17             system.out.printString(": ")
18
19         Integer promptInteger(String msg):
20             prompt(msg)
21             return system.in.scanInteger()
22
23         Float promptFloat(String msg):
24             prompt(msg)
25             return system.in.scanFloat()
26
27     main(System system, String[] args):
28         IOTest test := new IOTest()
29         test.interact()
```

Example 1: "A simple I/O example"

We start with a definition of our class.

```
1  class IOTest:
```

We follow by starting a **public** access level, defining an **init** method for our class, and calling the **super** method inside the **init** method. (Since we have not indicated a superclass for **IOTest**, this **super** method is for **Object**.)

```
1      public:
2          init():
3              super()
```

We also define the **private** access level with three methods: a generic method that prints a prompt message and two prompts for **Integers** and **Floats** respectively. These prompts call the generic message and then read from **system.in**.


```

1 private:
2     void prompt(String msg):
3         system.out.println(msg)
4         system.out.println(": ")
5
6     Integer promptInteger(String msg):
7         prompt(msg)
8         return system.in.scanInteger()
9
10    Float promptFloat(String msg):
11        prompt(msg)
12        return system.in.scanFloat()

```

We then write a method under the **public** access level. This calls our **private** level methods, convert our **Integer** to a **Float** and print our operation.

```

1 void interact():
2     Printer p := system.out
3     Integer i := promptInteger("Please enter an integer")
4     Float f := promptFloat("Please enter a float")
5     p.println("Sum of integer + float = ")
6     p.printFloat(i.toFloat() + f)
7     p.println("\n")

```

Finally, we define the **main** method for our class. We just make a new object of our class in that method and call our sole public method on it.

```

1 main(System system, String[] args):
2     IOTest test := new IOTest()
3     test.interact()

```

3 LRM

3.1 Lexical Elements

3.1.1 Whitespace

The new line (line feed), form feed, carriage return, and vertical tab characters will all be treated equivalently as vertical whitespace. Tokens are separated by horizontal (space, tab) and vertical (see previous remark) whitespace of any length (including zero).

3.1.2 Identifiers

Identifiers are used for the identification of variables, methods and types. An identifier is a sequence of alphanumeric characters, uppercase and lowercase, and underscores. A type identifier must start with an uppercase letter; all others must start with a lower case letter. Additionally, the lexeme of a left bracket followed immediately by a right bracket – `[]` – may appear at the end of a type identifier in certain contexts, and that there may be multiple present in this case (denoting arrays, etc). The legal contexts for such will be described later.

3.1.3 Keywords

The following words are reserved keywords. They may not be used as identifiers:

and	class	else	elsif	extends	false
if	init	main	nand	new	nor
not	or	private	protected	public	refinable
refine	refinement	return	super	this	to
true	void	while	xor		

3.1.4 Operators

There are a large number of (mostly binary) operators:

=	!=	<>	<	<=	>	>=
+	-	*	/	%	^	:=
+=	-=	*=	/=	%=	^=	
and	or	not	nand	nor	xor	refinable

3.1.5 Literal Classes

A literal class is a value that may be expressed in code without the use of the new keyword. These are the fundamental units of program.

Integer Literals An integer literal is a sequence of digits. It may be prefaced by a unary minus symbol. For example:

- 777
- 42
- 2

- -999
- 0001

Float Literals A float literal is a sequence of digits and exactly one decimal point/period. It must have at least one digit before the decimal point and at least one digit after the decimal point. It may also be prefaced by a unary minus symbol. For example:

- 1.0
- -0.567
- 10000.1
- 00004.70000
- 12345.6789

Boolean Literals A boolean literal is a single keyword, either `true` or `false`.

String Literals A string literal consists of a sequence of characters enclosed in double quotes. Note that a string literal can have the new line escape sequence within it (among others, see below), but cannot have a new line (line feed), form feed, carriage return, or vertical tab within it; nor can it have the end of file. Please note that the sequence may be of length zero. For example:

- "Yellow matter custard"
- ""
- "Dripping\n from a dead"
- "'s 3y3"

The following are the escape sequences available within a string literal; a backslash followed by a character outside of those below is an error.

- `\a` - u0007/alert/BEL
- `\b` - u0008/backspace/BB
- `\f` - u000c/form feed/FF
- `\n` - u000a/linefeed/LF
- `\r` - u000d/carriage return/CR
- `\t` - u0009/horizontal tab/HT
- `\v` - u000b/vertical tab/VT
- `\'` - u0027/single quote
- `\"` - u0022/double quote
- `\\` - u005c/backslash
- `\0` - u0000/null character/NUL

3.1.6 Comments

Comments begin with the sequence `/*` and end with `*/`. Comments nest within each other. Comments must be closed before the end of file is reached.

3.1.7 Separators

The following characters delineate various aspects of program organization (such as method arguments, array indexing, blocks, and expressions):

[] () { ,

A notable exception is that `[]` itself is a lexeme related to array types and there can be no space between the two characters in this regard.

3.2 Semantics

3.2.1 Types and Variables

Every *variable* in Gamma is declared with a *type* and an *identifier*. The typing is static and will always be known at compile time for every variable. The variable itself holds a reference to an instance of that type. At compile time, each variable reserves space for one reference to an instance of that type; during run time, each instantiation reserves space for one instance of that type (i.e. *not* a reference but the actual object). To be an instance of a type, an instance must be an instance of the class of the same name as that type or an instance of one of the set of descendants (i.e. a subclass defined via **extends** or within the transitive closure therein) of that class. For the purposes of method and refinement return types there is a special keyword, **void**, that allows a method or refinement to use the **return** keyword without an expression and thus not produce a value.

Array Types When specifying the type of a variable, the type identifier may be followed by one or more `[]` lexemes. The lexeme implies that the type is an *array type* of the *element type* that precedes it in the identifier. Elements of an array are accessed via an expression resulting in an array followed by a left bracket `[`, an expression producing an offset index of zero or greater, and a right bracket `]`. Elements are of one dimension less and so are themselves either arrays or are individual instances of the overall class/type involved (i.e. **BankAccount**).

3.2.2 Classes, Subclasses, and Their Members

GAMMA is a pure object-oriented language, which means every value is an object – with the exception that **this** is a special reference for the object of the current context; the use of **this** is only useful inside the context of a method, **init**, or refinement and so cannot be used in a **main**. **init** and **main** are defined later.

A class always extends another class; a class inherits all of its superclass's methods and may refine the methods of its superclass. A class must contain a constructor routine named *init* and it must invoke its superclass's constructor via the **super** keyword – either directly or transitively by referring to other constructors within the class. In the scope of every class, the keyword **this** explicitly refers to the instance itself. Additionally, a class contains three sets of *members* organized in *private*, *protected*, and *public* sections. Members may be either variables or methods. Members in the public section may be accessed (see syntax) by any other object. Members of the protected section may be accessed only by an object of that type or a descendant (i.e. a subtype defined transitively via the **extends** relation). Private members are only accessible by the members defined in that class (and are not accessible to descendants). Note that access

is enforced at object boundaries, not class boundaries – two `BankAccount` objects of the same exact type cannot access each other’s balance, which is in fact possible in both Java & C++, among others. Likewise if `SavingsAccount` extends `BankAccount`, an object of savings account can access the protected instance members of `SavingsAccount` related to its own data, but *cannot* access those of another object of similar type (`BankAccount` or a type derived from it).

The Object Class The Object class is the superclass of the entire class hierarchy in GAMMA. All objects directly or indirectly inherit from it and share its methods. By default, class declarations without extending explicitly are subclasses of Object.

The Literal Classes There are several *literal classes* that contain uniquely identified members (via their literal representation). These classes come with methods developed for most operators. They are also all subclasses of Object.

Anonymous Classes A class can be anonymously subclassed (such must happen in the context of instantiation) via refinements. They are a subclass of the class they refine, and the objects are a subtype of that type. Note that references are copied at anonymous instantiation, not values.

3.2.3 Methods

A method is a reusable subdivision of code that takes multiple (possibly zero) values as arguments and can either return a value of the type specified for the method, or not return any value in the case that the return type is `void`.

It is a semantic error for two methods of a class to have the same signature – which is the return type, the name, and the type sequence for the arguments. It is also a semantic error for two method signatures to only differ in return type in a given class.

Operators Since all variables are objects, every operator is in truth a method called from one of its operands with the other operands as arguments – with the notable exception of the assignment operators which operate at the language level as they deal not with operations but with the maintenance of references (but even then they use methods as `+=` uses the method for `+` – but the assignment part itself does not use any methods). If an operator is not usable with a certain literal class, then it will not have the method implemented as a member.

3.2.4 Refinements

Methods and constructors of a class can have *refine* statements placed in their bodies. Subclasses must implement *refinements*, special methods that are called in place of their superclass’ refine statements, unless the refinements are guarded with a boolean check via the `refinable` operator for their existence – in which case their implementation is optional.

It is a semantic error for two refinements of a method to have the same signature – which is the return type, the method they refine, the refinement name, and the type sequence for the arguments. It is also a semantic error for two method signatures to only differ in return type in a given class.

A refinement cannot be implemented in a class derived by a subclass, it must be provided if at all in the subclass. If it is desired that further subclassing should handle refinement, then these further refinements can be invoked inside the refinements themselves (syntactic sugar will make this easier in future releases). Note that refining within a refinement results in a refinement of the same method. That is, using `refine extra(someArg) to String` inside the refinement `String toString.extra(someType someArg)`

will (possibly, if not guarded) require the next level of subclassing to implement the extra refinement for `toString`.

3.2.5 Constructors (`init`)

Constructors are invoked to arrange the state of an object during instantiation and accept the arguments used for such. It is a semantic error for two constructors to have the same signature – that is the same type sequence.

3.2.6 Main

Each class can define at most one `main` method to be executed when that class will ‘start the program execution’ so to speak. Main methods are not instance methods and cannot refer to instance data. These are the only ‘static’ methods allowed in the Java sense of the word. It is a semantic error for the main to have a set of arguments other than a system object and a String array.

3.2.7 Expressions and Statements

The fundamental nature of an expression is that it generates a value. A statement can be a call to an expression, thus a method or a variable. Not every statement is an expression, however.

3.3 Syntax

The syntactic structures presented in this section may have optional elements. If an element is optional, it will be wrapped in the lexemes `<<` and `>>`. This grouping may nest. On rare occasions, a feature of the syntax will allow for truly alternate elements. The elements are presented in the lexemes `{` and `}`, each feature is separated by the lexeme `|`. If an optional element may be repeated without limit, it will finish with the lexeme `...`.

3.3.1 Statement Grouping via Bodies

A body of statements is a series of statements at the same level of indentation.

```
1  <<stmt1_statement>>
2  <<stmt2_statement>>
3  <<...>>
```

This pattern is elementary to write.

```
1  Mouse mouse = new Mouse()
2  mouse.click()
3  mouse.click_fast()
4  mouse.click("Screen won't respond")
5  mouse.defenestrate()
```

Example 2: Statement Grouping of a Typical Interface Simulator

3.3.2 Variables

Variable Assignment Assigning an instance to a variable requires an expression and a variable identifier:

```
1 var_identifier := val_expr
```

If we wanted to assign instances of Integer for our pythagorean theorem, we'd do it like so:

```
1 a := 3
2 b := 4
```

Example 3: Variable Assignment for the Pythagorean Theorem

Variable Declaration Declaring a variable requires a type and a list of identifiers delimited by commas. Each identifier may be followed by the assignment operator and an expression so as to combine assignment and declaration.

```
1 var_type var1_identifier << := val1_expr >> << , var2_identifier << := val2_expr >> >>
   <<...>>
```

If we wanted to declare variables for the pythagorean theorem, we would do it like so:

```
1 Float a, b, c
```

Example 4: Variable Initialization for the Pythagorean Theorem

Array Declaration Declaring an array is almost the same as declaring a normal variable, simply add square brackets after the type. Note that the dimension need be given.

```
1 element_type []...[] array_identifier << := new element_type [] (dim1_expr, ..., dimN_expr) >>
```

If we wanted a set of triangles to operate on, for instance:

```
1 Triangle [] triangles := new Triangle [] (42)
```

Example 5: Array Declaration and Instantiation of Many Triangles

Or perhaps, we want to index them by their short sides and initialize them later:

```
1 Triangle [][] triangles
```

Example 6: Array Declaration of a 2-Degree Triangle Array

Array Dereferencing To dereference an instance of an array type down to an instance its element type, place the index of the element instance inside the array instance between [and] lexemes after the variable identifier. This syntax can be used to provide a variable for use in assignment or expressions.

```
1 var_identifier [dim1_index] ... [dimN_index]
```

Perhaps we care about the fifth triangle in our array from before for some reason.

```
1 Triangle my_triangle := triangles[4]
```

Example 7: Array Dereferencing a Triangle

3.3.3 Methods

Method Invocation Invoking a method requires at least an identifier for the method of the current context (i.e. implicit **this** receiver). The instance that the method is invoked upon can be provided as an expression. If it is not provided, the method is invoked upon **this**.

```
1 << instance_expr.>>method_identifier(<<arg1_expr>> <<, arg2_expr>> <<...>>)
```

Finishing our pythagorean example, we use method invocations and assignment to calculate the length of our third side, c.

```
1 c := ((a.power(2)).plus(b.power(2))).power(0.5)
```

Example 8: Method Invocation for the Pythagorean Theorem Using Methods

Method Invocation Using Operators Alternatively, certain base methods allow for the use of more familiar binary operators in place of a method invocation.

```
1 op1_expr operator op2_expr
```

Using operators has advantages in clarity and succinctness even if the end result is the same.

```
1 c := ( a^2 + b^2 )^0.5
```

Example 9: Method Invocation for the Pythagorean Theorem Using Operators

Operator Precedence In the previous examples, parentheses were used heavily in a context not directly related to method invocation. Parentheses have one additional function: they modify precedence among operators. Every operator has a precedence in relation to its fellow operators. Operators of higher precedence are enacted first. Please consider the following table for determining precedence:

:=	+=	-=	*=	/=	%=	^=
or	xor	nor				
and	nand					
=	<>	=/=				
>	<	>=	<=			
+	-					
*	/	%				
unary minus						
not	^					
array dereferencing	()				
method invocation						

Table 1: Operator Precedence

Method Declaration & Definition A method definition begins with the return type – either a type (possibly an n-dimensional array) or void. There is one type and one identifier for each parameter; and they are delimited by commas. Following the parentheses is a colon before the body of the method at an increased level of indentaiton. There can be zero or more statements in the body. Additionally, refinements may be placed throughout the statements.

```

1  {{return_type | Void}} method_identifier (<<arg1_type arg1_identifier>> <<, arg2_type
   arg2_identifier>> <<...>>): method_body

```

Finally, we may define a method to do our pythagorean theorem calculation.

```

1  Float pythagorean_theorem(Float a, Float b):
2      Float c
3      c := ( a^2 + b^2 ) ^0.5
4      return c

```

Example 10: Method Definition for the Pythagorean Theorem

3.3.4 Classes

Section Definition Every class always has at least one section that denotes members in a certain access level. A section resembles a body, it has a unified level of indentation throughout a set of variable and method declarations, including `init` methods.

```

1  <<{{method1_decl | var1_decl | init1_decl}}>>
2  <<{{method2_decl | var2_decl | init2_decl}}>>
3  <<...>>

```

Class Declaration & Definition A class definition always starts with the keyword `class` followed by a type (i.e. capitalized) identifier. There can be no brackets at the end of the identifier, and so this is a case where the type must be purely alphanumeric mixed with underscores. It optionally has the keyword `extends` followed by the identifier of the superclass. What follows is the class body at consistent indentation: an

optional `main` method, the three access-level member sections, and refinements. There may be `init` methods in any of the three sections, and there must be (semantically enforced, not syntactically) an `init` method either in the protected or public section (for otherwise there would be no way to generate instances).

While the grammar allows multiple main methods to be defined in a class, any more than one will result in an error during compilation.

```

1  class class_identifier <<extends superclass_identifier>>:
2      <<main.method>>
3      <<{{private | protected | public | refinement}} section1>>
4      <<{{private | protected | public | refinement}} section1>>
5      <<...>>

```

Let's make a basic geometric shape class in anticipation of later examples. We have private members, two access-level sections and an `init` method. No `extends` is specified, so it is assumed to inherit from `Object`.

```

1  class Geometric_Shape:
2      private:
3          String name
4          Float area
5          Float circumference
6      public:
7          init (String name):
8              this.name = name
9              if (refinable(improve_name)):
10                 this.name += refine improve_name() to String
11
12             return
13
14         Float get_area():
15             Float area
16             area := refine custom_area() to Float

```

Example 11: Class Declaration for a Geometric Shape class

Class Instantiation Making a new instance of a class is simple.

```

1  new class_identifier(<<arg1_expr>> <<arg2_expr>> <<...>>)

```

For instance:

```

1  Geometric_Shape = new Geometric_Shape("circle")

```

Example 12: Class Instantiation for a Geometric Shape class

Anonymous Classes An anonymous class definition is used in the instantiation of the class and can only provide refinements, no additional public, protected, or private members. Additionally no `init` or `main` can be given.

```

1 new superclass_identifier(<<arg1_expr>> <<,arg2_expr>> <<...>>):
2   <<refinements>>

```

3.3.5 Conditional Structures

If Statements The fundamental unit of an if statement is a keyword, followed by an expression between parentheses to test, and then a body of statements at an increased level of indentaiton. The first keyword is always **if**, each additional condition to be tested in sequence has the keyword **elsif** and a final body of statements may optionally come after the keyword **else**.

```

1 if (test1_expr): if1_body
2 <<elsif (test2_expr) if2_body>>
3 <<elsif (test3_expr) if3_body>>
4 <<...>>
5 <<else if4_body>>

```

While Statements A while statement consists of only the **while** keyword, a test expression and a body.

```

1 while (test_expr): while_body

```

3.3.6 Refinements

The Refine Invocation A refine invocation will eventually evaluate to an expression as long as the appropriate refinement is implemented. It is formed by using the keyword **refine**, the identifier for the refinement, the keyword **to**, and the type for the desired expression. Note that a method can only invoke its own refinements, not others – but refinements defined *within* a class can be called. This is done in addition to normal invocation. Also note that all overloaded methods of the same name share the same refinements.

```

1 refine refine_identifier to refine_type

```

The Refinable Test The original programmer cannot guarantee that future extenders will implement the refinement. If it is allowable that the refinement does not happen, then the programmer can use the **refinable** keyword as a callable identifier that evaluates to a Boolean instance. If the programmer contrives a situation where the compiler recognizes that a refinement is guarded but still executes a refine despite the refinement not existing, a runtime error will result.

```

1 refinable(refinement_identifier)

```

The Refinement Declaration To declare a refinement, declare a method in your subclass' refinement section with the special identifier `supermethod_identifier.refinement_identifier`.

3.4 Operators and Literal Types

The following defines the approved behaviour for each combination of operator and literal type. If the literal type is not listed for a certain operator, the operator's behaviour for the literal is undefined. These operators never take operands of different types.

3.4.1 The Operator =

Integer If two Integer instances have the same value, = returns `true`. If they do not have the same value, it returns `false`.

Float If two Float instances have an absolute difference of less than or equal to an epsilon of 2^{-24} , = returns `true`. If the absolute difference is greater than that epsilon, it returns `false`.

Boolean If two Boolean instances have the same keyword, either `true` or `false`, = returns `true`. If their keyword differs, it returns `false`.

String If two String instances have the same sequence of characters, = returns `true`. If their sequence of characters differs, it returns `false`.

3.4.2 The Operators != and <>

Integer If two Integer instances have a different value, != and <> return `true`. If they do have the same value, they return `false`.

Float If two Float instances have an absolute difference of greater than an epsilon of 2^{-24} , != returns `true`. If the absolute difference is less than or equal to that epsilon, it returns `false`.

Boolean If two Boolean instances have different keywords, != and <> return `true`. If their keywords are the same, they return `false`.

String If two String instances have the different sequences of characters, != and <> return `true`. If their sequence of characters is the same, they return `false`.

3.4.3 The Operator <

Integer and float If the left operand is less than the right operand, < returns `true`. If the right operand is less than or equal to the left operand, it returns `false`.

String If the left operand comes before the right operand in dictionary order, < returns `true`. If the left operand comes after the right operand in dictionary order, it returns `false`. If the two operands have the same sequence of characters, it returns `false`.

3.4.4 The Operator >

Integer and float If the left operand is greater than the right operand, > returns **true**. If the right operand is greater than or equal to the left operand, it returns **false**.

String If the left operand comes after the right operand in dictionary order, < returns **true**. If the left operand comes before the right operand in dictionary order, it returns **false**. If the two operands have the same sequence of characters, it returns **false**.

3.4.5 The Operator <=

Integer and float If the left operand is less than or equal to the right operand, < returns **true**. If the right operand is less than the left operand, it returns **false**.

String If the left operand comes before the right operand in dictionary order, < returns **true**. If the left operand comes after the right operand in dictionary order, it returns **false**. If the two operands have the same sequence of characters, it returns **true**.

3.4.6 The Operator >=

Integer and float If the left operand is greater than or equal to the right operand, > returns **true**. If the right operand is greater than the left operand, it returns **false**.

String If the left operand comes after the right operand in dictionary order, < returns **true**. If the left operand comes before the right operand in dictionary order, it returns **false**. If the two operands have the same sequence of characters, it returns **true**. `iiiii HEAD`

3.4.7 The Operator +

Integer and Float + returns the sum of the two operands.

String + returns the concatenation of the right operand onto the end of the left operand.

3.4.8 The Operator -

Integer and Float - returns the right operand subtracted from the left operand.

3.4.9 The Operator *

Integer and Float * returns the product of the two operands.

3.4.10 The Operator /

Integer and Float / returns the left operand divided by the right operand.

3.4.11 The Operator %

Integer and Float % returns the modulo of the left operand by the right operand.

3.4.12 The Operator `^`

Integer and Float `^` returns the left operand raised to the power of the right operand.

3.4.13 The Operator `:=`

Integer, Float, Boolean, and String `:=` assigns the right operand to the left operand and returns the value of the the right operand. This is the sole right precedence operator.

3.4.14 The Operators `+=`, `-=`, `*=`, `/=`, `%=`, and `^=`

Integer, Float, Boolean, and String This set of operators first applies the operator indicated by the first character of each operator as normal on the operands. It then assigns this value to its left operand.

3.4.15 The Operator `and`

Boolean `and` returns the conjunction of the operands.

3.4.16 The Operator `or`

Boolean `or` returns the disjunction of the operands.

3.4.17 The Operator `not`

Boolean `not` returns the negation of the operands.

3.4.18 The Operator `nand`

Boolean `nand` returns the negation of the conjunction of the operands.

3.4.19 The Operator `nor`

Boolean `nor` returns the negation of the disjunction of the operands.

3.4.20 The Operator `xor`

Boolean `xor` returns the exclusive disjunction of the operands.

3.4.21 The Operator `refinable`

Boolean `refinable` returns `true` if the refinement is implemented in the current subclass. It returns `false` otherwise.

4 Project Planning

4.1 Planning Techniques

The vast majority of all planning happened over a combination of email and google hangouts. The team experimented with a variety of communication methods. We found some success with using Glip late in our process. Zoho docs and google docs were also used without major utility.

The specification of new elements was routinely proposed via an email to all members with an example of the concept and a description of the concepts involved behind it. This proved surprisingly effective at achieving a consensus.

Development was heavily facilitated through the use of a shared git repository. Topical google hangouts would be started involving all members. Team members would describe what they were working on with the immediate tasks. Any given team member could only afford to work at the same time as any one other generally, so conflicts over work were rare.

Testing suites were developed concurrently with code. Given the well-traversed nature of object oriented programming, the necessary tests were fairly obvious.

4.2 Ocaml Style Guide for the Development of the Ray Compiler

Expert Ocaml technique is not expected for the development of ray, however there are some basic stylistic tendencies that are preferred at all times.

All indentation should be increments of four spaces. Tabs and two space increment indentation are not acceptable.

```
1  let x = 2
2  let z =
3      let add5 a =
4          + a 5 in
5      add5 x
```

When constructing a `let...in` statement, the associated `in` must not be alone on the final line. For a large `let` statement that defines a variable, store the final operational call in a dummy variable and return that dummy. For all but the shortest right-hand sides of `let` statements, the right-hand side should be placed at increased indentation on the next line.

```
1  let get_x =
2      ...
3      let n = 2 in
4      let x =
5          x_functor1 (x_functor2 y z) n in
6      x
```

`match` statements should always include a `|` for the first item. The `|` operators that are used should have aligned indentation, as should `->` operators, functors that follow such operators and comments. Exceedingly long functors should be placed at increased indentaiton on the next line. (These rules also apply to `type` definitions.)

```

1  let unify_it var =
2      match var with
3      | X(y)      -> y                (* pop out *)
4      | Y(y) :: _ -> to_X y          (* convert *)
5      | Z(y)      ->
6          to_X (to_Y (List.hd (List.rest y))) (* mangle *)

```

All records should maintain a basic standard of alignment and indentation for readability. (Field names, colons, and type specs should all be aligned to like.)



```

1  type person = {
2      names  : string list;
3      job    : string option; (* Not everybody has one *)
4      family : person list;
5      female : bool;
6      age    : int;
7  }

```


4.3 Project Timeline

The following gantt charts show the intended project timeline broken down by weeks of the four months of this semester. The loose units were intended to make our schedules more workable.

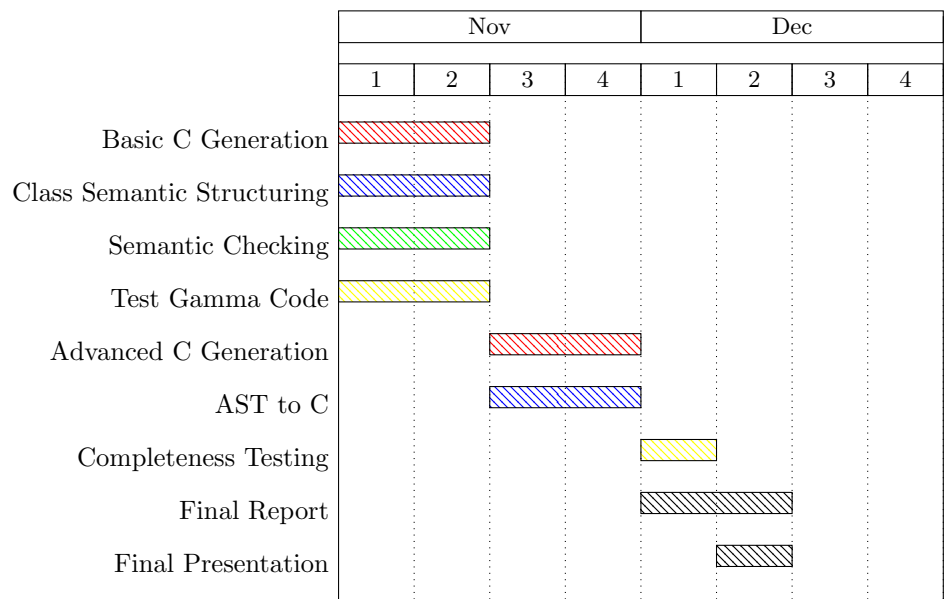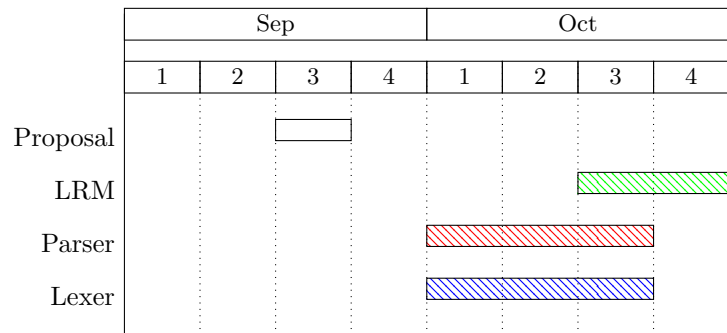

4.4 Team Roles

Ben Caimano

- Primary Documentation Officer
- Co-Organizer
- Parser Contributor
- Cast/C Contributor

Weiyuan Li

- Lexer Contributor
- Sast Contributor
- Cast/C Contributor
- Test Suite Contributor

Mathew H. Maycock

- Programming Lead
- Grammar Designer
- Quality Assurance Officer
- Lt. Documentation Officer
- Parser Contributor
- Sast Contributor
- Cast/C Contributor
- Test Suite Contributor

Arthy Sundaram

- Co-Organizer/President
- Parser Contributor
- Sast Contributor
- Cast/C Contributor
- Test Suite Contributor

4.5 Development Environment

4.5.1 Programming Languages

All Gamma code is compiled by the ray compiler to an intermediary file of C (ANSI ISO C90) code which is subsequently compiled to a binary file. Lexographical scanning, semantic parsing and checking, and compilation to C is all done by custom-written code in Ocaml 4.01.

The Ocaml code is compiled using the Ocaml bytecode compiler (`ocamlc`), the Ocaml parser generator (`ocamlyacc`), and the Ocaml lexer generator (`ocamllex`). Incidentally, documentation of the Ocaml code for internal use is done using the Ocaml documentation generator (`ocamldoc`). The compilation from intermediary C to bytecode is done using the GNU project C and C++ compiler (GCC) 4.7.3.

Scripting of our Ocaml compilation and other useful command-level tasks is done through a combination of the GNU make utility (a Makefile) and the dash command interpreter (shell scripts).

4.5.2 Development Tools

Our development tools were minimalistic. Each team member had a code editor of choice (emacs, vim, etc.). Content management and collaboration was done via git. Our git repository was hosted on BitBucket by Atlassian Inc. The ocaml interpreter shell was used for testing purposes, as was a large suite of testing utilities written in ocaml for the task. Among these created tools were:

- canonical - Takes an input stream of brace-style code and outputs the whitespace-style equivalent
- cannonize - Takes an input stream of whitespace-style code and outputs the brace-style equivalent
- classinfo - Analyzes the defined members (methods and variables) for a given class
- freevars - Lists the variables that remain unbound in the program
- inspect - Stringify a given AST
- prettify - Same as above but with formatting
- streams - Check a whitespace-style source for formatting issues


4.6 Project Log

- September 9th - Team Formed
- September 18th - Proposal drafting begins
- September 19th - A consensus is reached, basic form of the language is hashed out as a Beta-derived object oriented language.
- September 24-25th - Propose written, language essentials described
- October 9-10th - Grammar written
- October 18-20th - Bulk of the lexer/parser is written
- October 24th - Inspector written
- October 26th - Parser officially compiled for first time
- October 29th - Language resource manual finished, language structure semi-rigidly defined
- November 11th - General schedule set, promptly falls apart under the mutual stress of projects and midterms
- November 24th - Class data collection implemented
- November 30th - SAST structure defined
- December 8-10th - Team drama happens
- December 10th - SAST generation code written
- December 12th - CAST and CAST generation begun
- December 14th - C generation development started
- December 15th - Approximate CAST generation written
- December 16th - First ray binary made
- December 19th - Ray compilation of basic code successful
- December 22nd - Ray passes the test suite


5 Architectural Design

5.1 Block Diagrams

5.1.1 Structure by Module

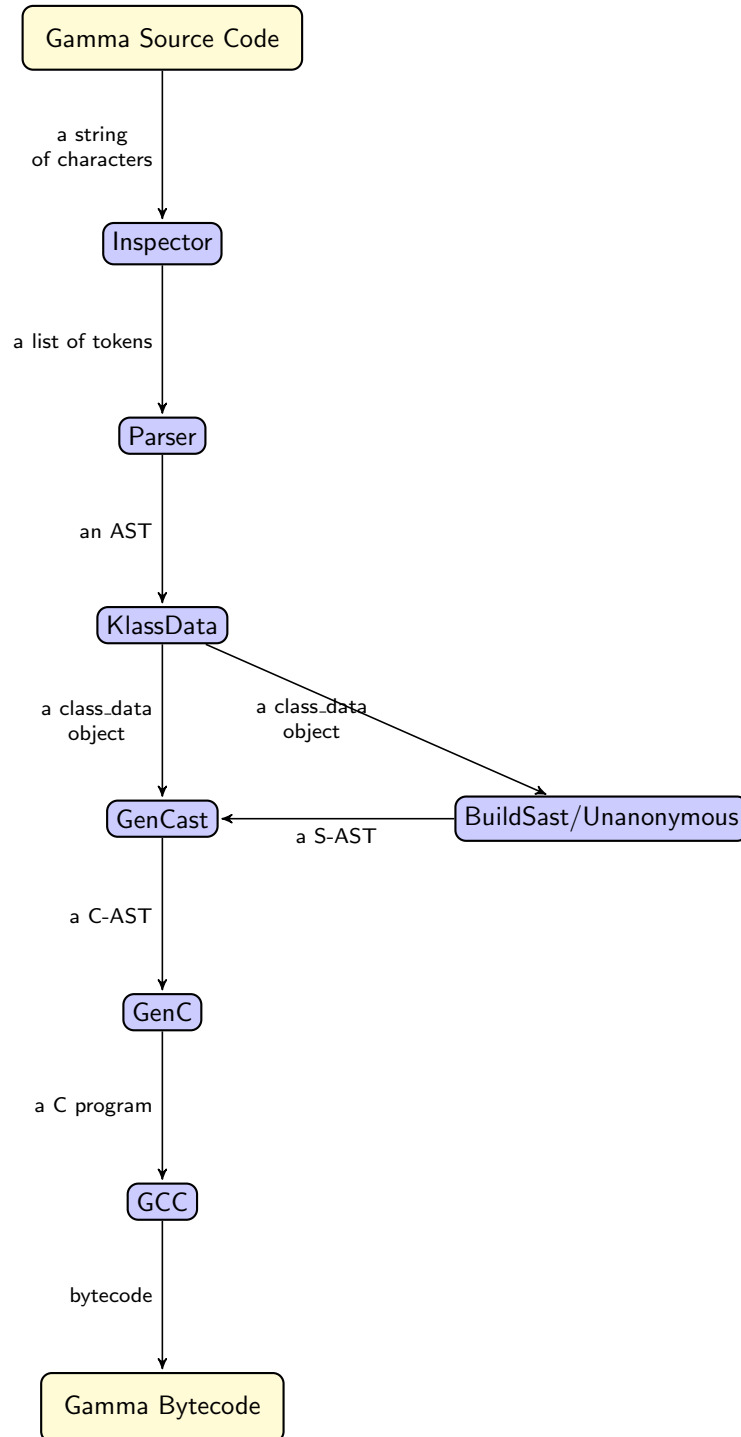

5.1.2 Structure by Toplevel Ocaml Function

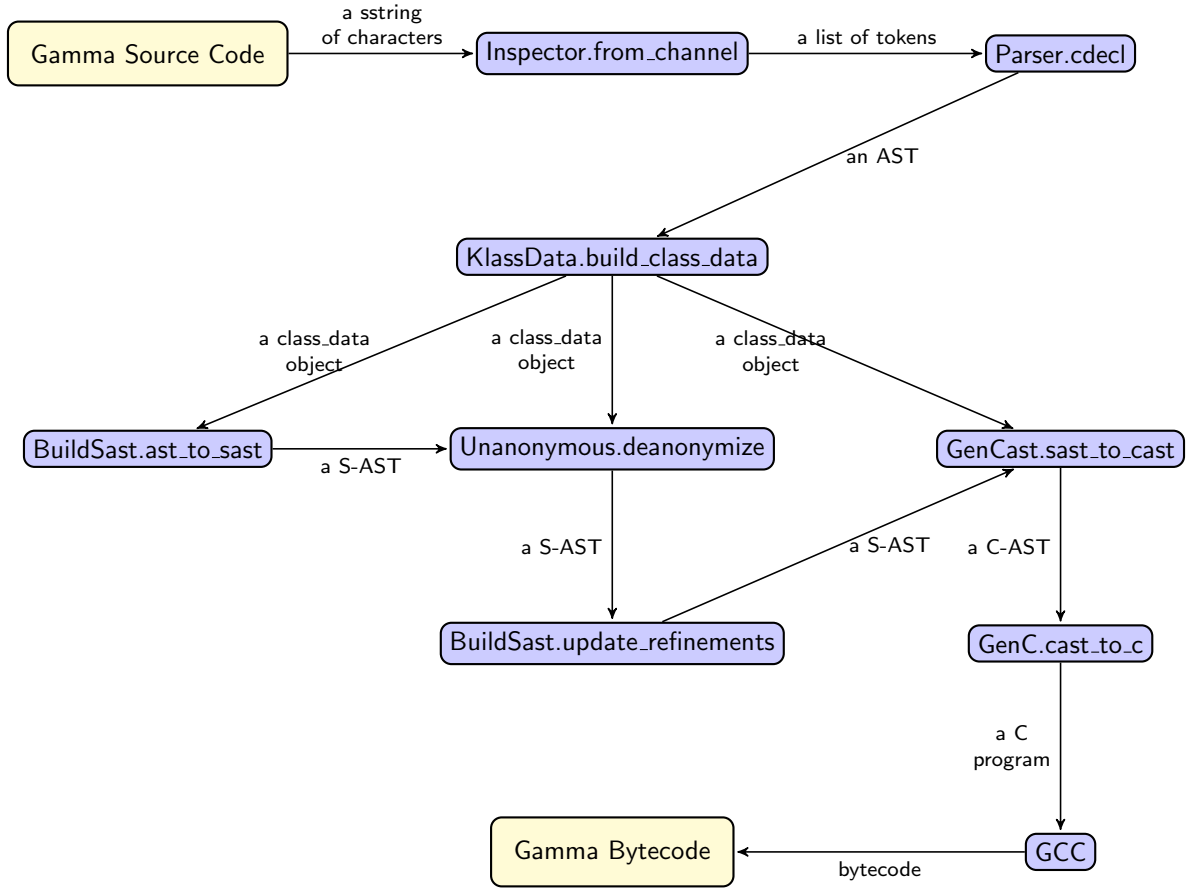

5.2 Component Connective Interfaces

```

let get_data ast =
  let (which, builder) = if (Array.length Sys.argv <= 2)
    then ("Normal", KlassData.build_class_data)
    else ("Experimental", KlassData.build_class_data_test) in
  output_string (Format.sprintf " * Using %s KlassData Builder" which);
  match builder ast with
  | Left(data) -> data
  | Right(issue) -> Printf.fprintf stderr "%s\n" (KlassData.errstr issue); exit 1

let do_deanon klass_data sast = match Unanonymous.deanonimize klass_data sast with
  | Left(result) -> result
  | Right(issue) -> Printf.fprintf stderr "Error Deanonimizing:\n%s\n" (KlassData.errstr issue); exit 1

let source_cast _ =
  output_string " * Reading Tokens...";
  let tokens = with_file Inspector.from_channel Sys.argv.(1) in
  output_string " * Parsing Tokens...";
  let ast = Parser.cdecls (WhiteSpace.lextoks tokens) (Lexing.from_string "") in
  output_string " * Generating Global Data...";
  let klass_data = get_data ast in

```

```

output_string " * Building Semantic AST...";
let sast = BuildSast.ast_to_sast klass_data in
output_string " * Deanonymizing Anonymous Classes.";
let (klass_data, sast) = do_deanon klass_data sast in
output_string " * Rebinding refinements.";
let sast = BuildSast.update_refinements klass_data sast in
output_string " * Generating C AST...";
GenCast.sast_to_cast klass_data sast

let main _ =
  Printexc.record_backtrace true;
  output_string "/* Starting Build Process...";
  try
    let source = source_cast () in
    output_string " * Generating C...";
    output_string " */";
    GenC.cast_to_c source stdout;
    print_newline ();
    exit 0
  with excn ->
    let backtrace = Printexc.get_backtrace () in
    let reraise = ref false in
    let out = match excn with
      | Failure(reason) -> Format.sprintf "Failed: %s\n" reason
      | Invalid_argument(msg) -> Format.sprintf "Argument issue somewhere: %s\n"
msg
      | Parsing.Parse_error -> "Parsing error."
      | _ -> reraise := true; "Unknown Exception" in
    Printf.fprintf stderr "%s\n%s\n" out backtrace;
    if !reraise then raise(excn) else exit 1

```

Example 13: The Main Ray Compiler Ocaml (Trimmed)

The primary functionality of the compiler is collected into convenient ocaml modules. From the lexer to the C-AST to C conversion, the connections are the passing of data representations of the current step to the main function of the following module. We utilize as data representations three ASTs (basic, semantic, and C-oriented), a more searchable tabulation of class data, and, of course, a source string and a list of tokens. The presence of Anonymous classes complicates the building of the array of class data and the sast as can be seen by the functor `do_deanon`. Our testing experiences also lead to a more verbose form of AST generation for experimental features, hence `get_data`. In all other cases, the result of the previous step is simply stored in a variable by `let` and passed to the next step. The output of ray is a C file. The user must manually do the final step of compiling this file to bytecode using GCC.

5.3 Component Authorship

Each component was a combined effort. This is expressed somewhat in the project role section. However, for clarity, it will be reexpressed in terms of the module architecture above:

- Inspector - Weiyuan/Arthy
- Parser - Ben/Arthy/Matthew
- KlassData - Matthew
- Unanonymouse - Matthew
- BuildSast - Matthew/Weiyuan/Arthy
- GenCast - Matthew/Weiyuan/Ben/Arthy

- GenC - Matthew/Weiyuan/Ben/Arthy
- GCC - GNU

6 Test Plan

6.1 Examples Gamma Programs

6.1.1 Hello World

This program simply prints "Hello World". It demonstrates the fundamentals needed to write a Gamma program.

```
1  class HelloWorld:
2      public:
3          String greeting
4          init():
5              super()
6              greeting := "Hello World!"
7
8      main(System system, String[] args):
9          HelloWorld hw := new HelloWorld()
10         system.out.printString(hw.greeting)
11         system.out.printString("\n")
```

Example 14: "Hello World in Gamma"

```
1  /* Starting Build Process...
2     * Reading Tokens...
3     * Parsing Tokens...
4     * Generating Global Data...
5     * Using Normal KlassData Builder
6     * Building Semantic AST...
7     * Deanonymizing Anonymous Classes.
8     * Rebinding refinements.
9     * Generating C AST...
10     * Generating C...
11     */
12
13
14     /*
15     * Passing over code to find dispatch data.
16     */
17
18
19     /*
20     * Gamma preamble — macros and such needed by various things
21     */
22     #include "gamma-preamble.h"
23
24
25
26     /*
27     * Ancestry meta-info to link to later.
28     */
29     char *m_classes[] = {
30         "t_Boolean", "t_Float", "t_HelloWorld", "t_Integer", "t_Object", "t_Printer",
31         "t_Scanner", "t_String", "t_System"
32     };
33
34
35     /*
36     * Enums used to reference into ancestry meta-info strings.
37     */
```

```

38 enum m_class_idx {
39     T_BOOLEAN = 0, T_FLOAT, T_HELLOWORLD, T_INTEGER, T_OBJECT, T_PRINTER, T_SCANNER,
40     T_STRING, T_SYSTEM
41 };
42
43
44 /*
45  * Header file containing meta information for built in classes.
46  */
47 #include "gamma-builtin-meta.h"
48
49
50
51 /*
52  * Meta structures for each class.
53  */
54 ClassInfo M_HelloWorld;
55
56 void init_class_infos() {
57     init_built_in_infos();
58     class_info_init(&M_HelloWorld, 2, m_classes[T_OBJECT], m_classes[T_HELLOWORLD]);
59 }
60
61
62
63 /*
64  * Header file containing structure information for built in classes.
65  */
66 #include "gamma-builtin-struct.h"
67
68
69
70 /*
71  * Structures for each of the objects.
72  */
73 struct t_HelloWorld {
74     ClassInfo *meta;
75
76     struct {
77         struct t_System *v_system;
78     } Object;
79
80     struct {
81         struct t_String *v_greeting;
82     } HelloWorld;
83 };
84
85 };
86
87
88
89
90 /*
91  * Header file containing information regarding built in functions.
92  */
93 #include "gamma-builtin-functions.h"
94
95
96
97 /*
98  * All of the function prototypes we need to do magic.
99  */
100 struct t_HelloWorld *f_00000001_init(struct t_HelloWorld *);
101 void f_00000002_main(struct t_System *, struct t_String **);
102

```

```

103
104 /*
105  * All the dispatching functions we need to continue the magic.
106  */
107
108
109 /*
110  * Array allocators also do magic.
111  */
112
113
114 /*
115  * All of the functions we need to run the program.
116  */
117 /* Place-holder for struct t_Boolean *boolean_init(struct t_Boolean *this) */
118 /* Place-holder for struct t_Float *float_init(struct t_Float *this) */
119 /* Place-holder for struct t_Integer *float_to_i(struct t_Float *this) */
120 /* Place-holder for struct t_Integer *integer_init(struct t_Integer *this) */
121 /* Place-holder for struct t_Float *integer_to_f(struct t_Integer *this) */
122 /* Place-holder for struct t_Object *object_init(struct t_Object *this) */
123 /* Place-holder for struct t_Printer *printer_init(struct t_Printer *this, struct
124    t_Boolean *v_stdout) */
125 /* Place-holder for void printer_print_float(struct t_Printer *this, struct t_Float *
126    v_arg) */
127 /* Place-holder for void printer_print_integer(struct t_Printer *this, struct t_Integer *
128    v_arg) */
129 /* Place-holder for void printer_print_string(struct t_Printer *this, struct t_String *
130    v_arg) */
131 /* Place-holder for struct t_Scanner *scanner_init(struct t_Scanner *this) */
132 /* Place-holder for struct t_Float *scanner_scan_float(struct t_Scanner *this) */
133 /* Place-holder for struct t_Integer *scanner_scan_integer(struct t_Scanner *this) */
134 /* Place-holder for struct t_String *scanner_scan_string(struct t_Scanner *this) */
135 /* Place-holder for struct t_String *string_init(struct t_String *this) */
136 /* Place-holder for void system_exit(struct t_System *this, struct t_Integer *v_code) */
137 /* Place-holder for struct t_System *system_init(struct t_System *this) */
138
139 struct t_HelloWorld *f_00000001_init(struct t_HelloWorld *this)
140 {
141     object_init((struct t_Object *) (this));
142     ( (this->HelloWorld).v_greeting = ((struct t_String *) (LIT_STRING(" Hello World!"))) )
143     ;
144     return ( this );
145 }
146
147 void f_00000002_main(struct t_System *v_system, struct t_String **v_args)
148 {
149     struct t_HelloWorld *v_hw = ((struct t_HelloWorld *) (f_00000001_init(MAKE_NEW(
150     HelloWorld)))));
151     ( printer_print_string(((struct t_Printer *) ((v_system)->System.v_out)), (v_hw)->
152     HelloWorld.v_greeting) );
153     ( printer_print_string(((struct t_Printer *) ((v_system)->System.v_out)), LIT_STRING("
154     \n"))) );
155 }
156
157 /*
158  * Dispatch looks like this.
159  */
160
161
162 /*
163  * Array allocators.
164  */

```

```

160
161
162  /*
163  * The main.
164  */
165  #define CASES "HelloWorld"
166
167  int main(int argc, char **argv) {
168      INIT_MAIN(CASES)
169      if (!strcmp(gmain, "HelloWorld", 11)) { f_00000002_main(&global_system, str_args);
170          return 0; }
171      FAIL_MAIN(CASES)
172      return 1;
173  }

```

Example 15: "Hello World in Compiled C"

6.1.2 I/O

This program prompts the user for an integer and a float. It converts the integer to a float and adds the two together. It then prints the equation and result. (You might recognize this from the tutorial.)

```

1  class IOTest:
2      public:
3          init():
4              super()
5
6          void interact():
7              Printer p := system.out
8              Integer i := promptInteger("Please enter an integer")
9              Float f := promptFloat("Please enter a float")
10             p.printString("Sum of integer + float = ")
11             p.printFloat(i.toFloat() + f)
12             p.printString("\n")
13
14         private:
15             void prompt(String msg):
16                 system.out.printString(msg)
17                 system.out.printString(": ")
18
19             Integer promptInteger(String msg):
20                 prompt(msg)
21                 return system.in.scanInteger()
22
23             Float promptFloat(String msg):
24                 prompt(msg)
25                 return system.in.scanFloat()
26
27         main(System system, String[] args):
28             IOTest test := new IOTest()
29             test.interact()

```

Example 16: "I/O in Gamma"

```

1  /* Starting Build Process...
2  * Reading Tokens...
3  * Parsing Tokens...
4  * Generating Global Data...
5  * Using Normal KlassData Builder

```

```

6  * Building Semantic AST...
7  * Deanonymizing Anonymous Classes.
8  * Rebinding refinements.
9  * Generating C AST...
10 * Generating C...
11 */
12
13
14 /*
15  * Passing over code to find dispatch data.
16  */
17
18
19 /*
20  * Gamma preamble — macros and such needed by various things
21  */
22 #include "gamma-preamble.h"
23
24
25
26 /*
27  * Ancestry meta-info to link to later.
28  */
29 char *m_classes[] = {
30     "t_Boolean", "t_Float", "t_IOTest", "t_Integer", "t_Object", "t_Printer", "t_Scanner"
31     ,
32     "t_String", "t_System"
33 };
34
35 /*
36  * Enums used to reference into ancestry meta-info strings.
37  */
38 enum m_class_idx {
39     T_BOOLEAN = 0, T_FLOAT, T_IOTEST, T_INTEGER, T_OBJECT, T_PRINTER, T_SCANNER,
40     T_STRING, T_SYSTEM
41 };
42
43
44 /*
45  * Header file containing meta information for built in classes.
46  */
47 #include "gamma-builtin-meta.h"
48
49
50
51 /*
52  * Meta structures for each class.
53  */
54 ClassInfo M_IOTest;
55
56 void init_class_infos() {
57     init_built_in_infos();
58     class_info_init(&M_IOTest, 2, m_classes[T_OBJECT], m_classes[T_IOTEST]);
59 }
60
61
62
63 /*
64  * Header file containing structure information for built in classes.
65  */
66 #include "gamma-builtin-struct.h"
67
68
69

```

```

70  /*
71  * Structures for each of the objects.
72  */
73  struct t_IOTest {
74      ClassInfo *meta;
75
76      struct {
77          struct t_System *v_system;
78      } Object;
79
80
81      struct { BYTE empty_vars; } IOTest;
82  };
83
84
85
86
87  /*
88  * Header file containing information regarding built in functions.
89  */
90  #include "gamma-builtin-functions.h"
91
92
93
94  /*
95  * All of the function prototypes we need to do magic.
96  */
97  struct t_IOTest *f_00000001_init(struct t_IOTest *);
98  void f_00000002_interact(struct t_IOTest *);
99  void f_00000003_prompt(struct t_IOTest *, struct t_String *);
100 struct t_Integer *f_00000004_promptInteger(struct t_IOTest *, struct t_String *);
101 struct t_Float *f_00000005_promptFloat(struct t_IOTest *, struct t_String *);
102 void f_00000006_main(struct t_System *, struct t_String **);
103
104
105 /*
106 * All the dispatching functions we need to continue the magic.
107 */
108
109
110 /*
111 * Array allocators also do magic.
112 */
113
114
115 /*
116 * All of the functions we need to run the program.
117 */
118 /* Place-holder for struct t_Boolean *boolean_init(struct t_Boolean *this) */
119 /* Place-holder for struct t_Float *float_init(struct t_Float *this) */
120 /* Place-holder for struct t_Integer *float_to_i(struct t_Float *this) */
121 /* Place-holder for struct t_Integer *integer_init(struct t_Integer *this) */
122 /* Place-holder for struct t_Float *integer_to_f(struct t_Integer *this) */
123 /* Place-holder for struct t_Object *object_init(struct t_Object *this) */
124 /* Place-holder for struct t_Printer *printer_init(struct t_Printer *this, struct
    t_Boolean *v_stdout) */
125 /* Place-holder for void printer_print_float(struct t_Printer *this, struct t_Float *
    v_arg) */
126 /* Place-holder for void printer_print_integer(struct t_Printer *this, struct t_Integer *
    v_arg) */
127 /* Place-holder for void printer_print_string(struct t_Printer *this, struct t_String *
    v_arg) */
128 /* Place-holder for struct t_Scanner *scanner_init(struct t_Scanner *this) */
129 /* Place-holder for struct t_Float *scanner_scan_float(struct t_Scanner *this) */
130 /* Place-holder for struct t_Integer *scanner_scan_integer(struct t_Scanner *this) */

```

```

131 /* Place-holder for struct t_String *scanner_scan_string(struct t_Scanner *this) */
132 /* Place-holder for struct t_String *string_init(struct t_String *this) */
133 /* Place-holder for void system_exit(struct t_System *this, struct t_Integer *v_code) */
134 /* Place-holder for struct t_System *system_init(struct t_System *this) */
135
136 struct t_IOTest *f_00000001_init(struct t_IOTest *this)
137 {
138     object_init((struct t_Object *) (this));
139     return ( this );
140 }
141
142
143 void f_00000002_interact(struct t_IOTest *this)
144 {
145     struct t_Printer *v_p = ((struct t_Printer *) (((this->Object).v_system)->System.v_out
146 ));
147     struct t_Integer *v_i = ((struct t_Integer *) (f_00000004_promptInteger(((struct
148 t_IOTest *) (this)), LIT_STRING("Please enter an integer"))));
149     struct t_Float *v_f = ((struct t_Float *) (f_00000005_promptFloat(((struct t_IOTest *)
150 (this)), LIT_STRING("Please enter a float"))));
151     ( printer_print_string(((struct t_Printer *) (v_p)), LIT_STRING("Sum of integer +
152 float = ")) );
153     ( printer_print_float(((struct t_Printer *) (v_p)), ADD_FLOAT_FLOAT( integer_to_f(((
154 struct t_Integer *) (v_i))) , v_f )) );
155     ( printer_print_string(((struct t_Printer *) (v_p)), LIT_STRING("\n")) );
156 }
157
158 void f_00000003_prompt(struct t_IOTest *this, struct t_String *v_msg)
159 {
160     ( printer_print_string(((struct t_Printer *) (((this->Object).v_system)->System.v_out
161 ), v_msg) );
162     ( printer_print_string(((struct t_Printer *) (((this->Object).v_system)->System.v_out
163 ), LIT_STRING(": ") ) );
164 }
165
166 struct t_Integer *f_00000004_promptInteger(struct t_IOTest *this, struct t_String *v_msg)
167 {
168     ( f_00000003_prompt(((struct t_IOTest *) (this)), v_msg) );
169     return ( scanner_scan_integer(((struct t_Scanner *) (((this->Object).v_system)->System
170 .v_in))) );
171 }
172
173 struct t_Float *f_00000005_promptFloat(struct t_IOTest *this, struct t_String *v_msg)
174 {
175     ( f_00000003_prompt(((struct t_IOTest *) (this)), v_msg) );
176     return ( scanner_scan_float(((struct t_Scanner *) (((this->Object).v_system)->System.
177 v_in))) );
178 }
179
180 void f_00000006_main(struct t_System *v_system, struct t_String **v_args)
181 {
182     struct t_IOTest *v_test = ((struct t_IOTest *) (f_00000001_init(MAKENEW(IOTest))));
183     ( f_00000002_interact(((struct t_IOTest *) (v_test))) );
184 }
185
186 /*
187  * Dispatch looks like this.
188  */

```



```

187
188 /*
189  * Array allocators.
190  */
191
192
193 /*
194  * The main.
195  */
196 #define CASES "IOTest"
197
198 int main(int argc, char **argv) {
199     INIT_MAIN(CASES)
200     if (!strcmp(gmain, "IOTest", 7)) { f_00000006.main(&global_system, str_args); return
201         0; }
202     FAIL_MAIN(CASES)
203     return 1;
204 }

```

Example 17: "I/O in Compiled C"

6.1.3 Argument Reading

This program prints out each argument passed to the program.

```

1  class Test:
2      public:
3          init():
4              super()
5
6      main(System sys, String[] args):
7          Integer i := 0
8          Printer p := sys.out
9
10         while (i < sys.args):
11             p.printString("arg[")
12             p.printInteger(i)
13             p.printString("] = ")
14             p.printString(args[i])
15             p.printString("\n")
16             i += 1

```

Example 18: "Argument Reading in Gamma"

```

1  /* Starting Build Process...
2  * Reading Tokens...
3  * Parsing Tokens...
4  * Generating Global Data...
5  * Using Normal KlassData Builder
6  * Building Semantic AST...
7  * Deanonymizing Anonymous Classes.
8  * Rebinding refinements.
9  * Generating C AST...
10 * Generating C...
11 */
12
13
14 /*
15 * Passing over code to find dispatch data.

```

```

16  */
17
18
19  /*
20  * Gamma preamble — macros and such needed by various things
21  */
22  #include "gamma-preamble.h"
23
24
25
26  /*
27  * Ancestry meta-info to link to later.
28  */
29  char *m_classes[] = {
30      "t_Boolean", "t_Float", "t_Integer", "t_Object", "t_Printer", "t_Scanner",
31      "t_String", "t_System", "t_Test"
32  };
33
34
35  /*
36  * Enums used to reference into ancestry meta-info strings.
37  */
38  enum m_class_idx {
39      T_BOOLEAN = 0, T_FLOAT, T_INTEGER, T_OBJECT, T_PRINTER, T_SCANNER, T_STRING,
40      T_SYSTEM, T_TEST
41  };
42
43
44  /*
45  * Header file containing meta information for built in classes.
46  */
47  #include "gamma-builtin-meta.h"
48
49
50
51  /*
52  * Meta structures for each class.
53  */
54  ClassInfo M_Test;
55
56  void init_class_infos() {
57      init_built_in_infos();
58      class_info_init(&M_Test, 2, m_classes[T_OBJECT], m_classes[T_TEST]);
59  }
60
61
62
63  /*
64  * Header file containing structure information for built in classes.
65  */
66  #include "gamma-builtin-struct.h"
67
68
69
70  /*
71  * Structures for each of the objects.
72  */
73  struct t_Test {
74      ClassInfo *meta;
75
76      struct {
77          struct t_System *v_system;
78      } Object;
79
80

```

```

81     struct { BYTE empty-vars; } Test;
82 };
83
84
85
86
87 /*
88  * Header file containing information regarding built in functions.
89  */
90 #include "gamma-builtin-functions.h"
91
92
93
94 /*
95  * All of the function prototypes we need to do magic.
96  */
97 struct t_Test *f_00000001_init(struct t_Test *);
98 void f_00000002_main(struct t_System *, struct t_String **);
99
100
101 /*
102  * All the dispatching functions we need to continue the magic.
103  */
104
105
106 /*
107  * Array allocators also do magic.
108  */
109
110
111 /*
112  * All of the functions we need to run the program.
113  */
114 /* Place-holder for struct t_Boolean *boolean_init(struct t_Boolean *this) */
115 /* Place-holder for struct t_Float *float_init(struct t_Float *this) */
116 /* Place-holder for struct t_Integer *float_to_i(struct t_Float *this) */
117 /* Place-holder for struct t_Integer *integer_init(struct t_Integer *this) */
118 /* Place-holder for struct t_Float *integer_to_f(struct t_Integer *this) */
119 /* Place-holder for struct t_Object *object_init(struct t_Object *this) */
120 /* Place-holder for struct t_Printer *printer_init(struct t_Printer *this, struct
    t_Boolean *v_stdout) */
121 /* Place-holder for void printer_print_float(struct t_Printer *this, struct t_Float *
    v_arg) */
122 /* Place-holder for void printer_print_integer(struct t_Printer *this, struct t_Integer *
    v_arg) */
123 /* Place-holder for void printer_print_string(struct t_Printer *this, struct t_String *
    v_arg) */
124 /* Place-holder for struct t_Scanner *scanner_init(struct t_Scanner *this) */
125 /* Place-holder for struct t_Float *scanner_scan_float(struct t_Scanner *this) */
126 /* Place-holder for struct t_Integer *scanner_scan_integer(struct t_Scanner *this) */
127 /* Place-holder for struct t_String *scanner_scan_string(struct t_Scanner *this) */
128 /* Place-holder for struct t_String *string_init(struct t_String *this) */
129 /* Place-holder for void system_exit(struct t_System *this, struct t_Integer *v_code) */
130 /* Place-holder for struct t_System *system_init(struct t_System *this) */
131
132 struct t_Test *f_00000001_init(struct t_Test *this)
133 {
134     object_init((struct t_Object *) (this));
135     return ( this );
136 }
137
138
139 void f_00000002_main(struct t_System *v_sys, struct t_String **v_args)
140 {
141     struct t_Integer *v_i = ((struct t_Integer *) (LIT_INT(0)));

```

```

142     struct t_Printer *v_p = ((struct t_Printer *)((v_sys)->System.v_out));
143     while ( BOOLOF( NTEST_LESS_INT_INT( v_i , (v_sys)->System.v_argc ) ) ) {
144         ( printer_print_string(((struct t_Printer *)v_p), LIT_STRING("arg[")) );
145         ( printer_print_integer(((struct t_Printer *)v_p), v_i) );
146         ( printer_print_string(((struct t_Printer *)v_p), LIT_STRING("] = ") ) );
147         ( printer_print_string(((struct t_Printer *)v_p), ((struct t_String **)(v_args)
148         ) [INTEGER_OF((v_i))]) ) );
149         ( printer_print_string(((struct t_Printer *)v_p), LIT_STRING("\n")) );
150         ( v_i = ((struct t_Integer *) (ADD_INT_INT( v_i , LIT_INT(1) )) ) );
151     }
152
153
154
155     /*
156     * Dispatch looks like this.
157     */
158
159
160     /*
161     * Array allocators.
162     */
163
164
165     /*
166     * The main.
167     */
168     #define CASES "Test"
169
170     int main(int argc, char **argv) {
171         INIT_MAIN(CASES)
172         if (!strcmp(gmain, "Test", 5)) { f_00000002_main(&global_system, str_args); return
173         0; }
174         FAIL_MAIN(CASES)
175         return 1;
176     }

```

Example 19: "Argument Reading in Compiled C"

7 Lessons Learned

Arthy

First of all, I should thank my wonderful team mates and I enjoyed every bit working with them. Be it clearly silly questions on the language or design or OCAML anything and everything they were always there! And without them it would have certainly not been possible to have pulled this project i must confess well yea at the last moment. Thanks guys!

Thanks to Professor Edwards for making this course so much fun - you never feel the pressure of taking a theoretical course as this - as he puts it - "...in how many other theoretical courses have you had a lecture that ends with a tatoood hand.."

As any team projects we had our own idiosyncracies that left us with missing deadlines and extending demo deadline and what not - so we were not that one off team which miraculously fit well - we were just like any other team but a team that learnt lessons quickly applied them - left ego outside the door - and worked for the fun of the project! If the team has such a spirit that's all that is required.

Advice 1. Do have a team lead 2. Do have one person who is good in OCAML if possible or at least has had experiences with modern programming languages. 3. Have one who is good in programming language theory 4. Ensure you have team meetings - if people do not turn up or go missing - do open up talk to them 5. Ensure everyone is comfortable with the project and is at the same pace as yours early on 6. Discuss the design and make a combined decision - different people think differently that definitely will help. 7. This is definitely a fun course and do not spoil it by procastration - with OCAML you just have few lines to code why not start early and get it done early (Smiley) 8. I may want to say do not be ambitious - but in retrospect - I learnt a lot - and may be wish some more - so try something cool - after all that's what is grad school for!

Good luck

Ben

This class has been amazing in terms of a practical experience in writting low-level programing and forming a platform for others to write at a higher more abstract-level. I came into this expecting a lot of what the others say they have learned, the most important learning for me is how vital it is to understand your team as much as possible. We are four people with a very diverse set of talents and styles. Applied properly, we probably could have done just about anything with our collective talents. (Spoiler, we did not apply our group talents effectively as would have been hoped.)

My advice to future teams is to get to know each other as computer scientists and people first. If you have the time, do a small (day-long) project together like a mini hackathon. Figure out if your styles differ and write a style guide on which you can all agree. Realistically look at who will have time when. This is not the only thing on anyone's plate, you might have to front-load one member and back-load another. Establish clear leadership and a division of tasks. We just pushed people at the task at hand and were delaying by half-days for a given component to be ready. Write in parallel, it's easier to make your code match up than write linearly and mix schedules and styles. (If you could see the amount of formatting and style correction commits on our repository...)

Good luck. This course is worth it but a real challenge.

Matthew

I had a beginning of an idea of how OOP stuff worked underneath the hood, but this really opened my eyes up to how much work was going on.

It also taught me a lot about making design decisions, and how it's never a good idea to say "this time we'll just use strings and marker values cause we need it done sooner than later" – if Algebraic Data Types are available, use them. Even if it means you have to go back and adjust old code because of previous ideas fall out of line with new ones.

I learned how annoying the idea of a NULL value in a typed system can be when we don't give casting as an option (something we should have thought about before), and how smart python is by having methods accept and name the implicit parameter themselves. Good job, GvR.

Advice

- Start early and procrastinate less
- Have a team leader and communicate better
- Enjoy it

Weiyuan

First I would like to say that this is a very cool, educational and fun project.

One thing I learned from this project is that I take modern programming languages for granted. I enjoyed many comfortable features and syntactic sugar but never realized there is so much craziness under the hood. We had a long list of ambitious goals at the beginning. Many of them had to be given up as the project went on. From parsing to code generation, I faced a lot of design decisions that I did not even know existed. I gained a much better understanding of how programming languages work and why they are designed the way they are. Also, now I have a completely refreshed view when I see posts titled "Java vs. C++" on the Internet.

Another thing I learned is that proper task division, time management and effective communication are extremely important for a team project. Doing things in parallel and communicating smoothly can save you a lot of trouble.

Finally, I learned my first functional programming language OCaml and I do like it, though I still feel it's weird sometimes.