


There are 2 .bat files which were made in order not to launch SoapUI client when running tests. In v1.bat and v3.bat change paths, first one should point to SoapUI's bin directory, second one should point to project.xml, third one is location to which reports will be exported. You also need (only once) to go to v3 project properties and change the values of FILE_PATH and FILE_NAME according to where your file currently is.

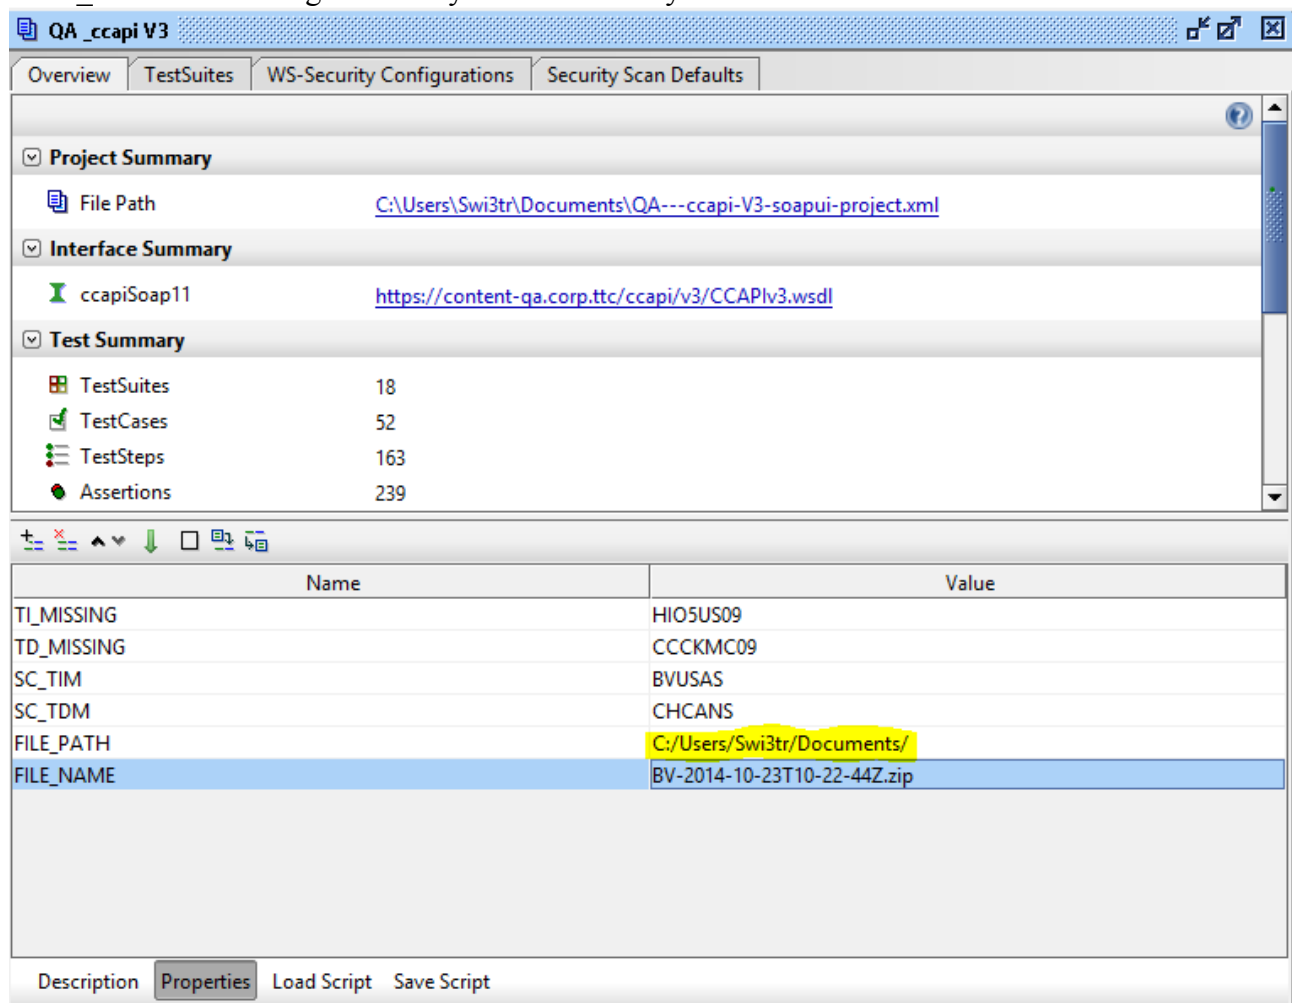

QA_ccapi V3

Overview | TestSuites | WS-Security Configurations | Security Scan Defaults

☒ **Project Summary**

File Path <C:\Users\Swi3tr\Documents\QA---ccapi-V3-soapui-project.xml>

☒ **Interface Summary**

ccapiSoap11 <https://content-qa.corp.ttc/ccapi/v3/CCAPIv3.wsdl>

☒ **Test Summary**

TestSuites	18
TestCases	52
TestSteps	163
Assertions	239

Name	Value
TI_MISSING	HIO5US09
TD_MISSING	CCCKMC09
SC_TIM	BVUSAS
SC_TDM	CHCANS
FILE_PATH	C:/Users/Swi3tr/Documents/
FILE_NAME	BV-2014-10-23T10-22-44Z.zip

Description | **Properties** | Load Script | Save Script

After every next launch it will be renamed automatically (UploadTIAndGetStatus->groovy script) so there's no need to manually repeat this.