

Figure 1: Common navigation flow from event listing to hosting page and embedded player.



Figure 2: Comparison of the three page roles used by the extraction workflow.

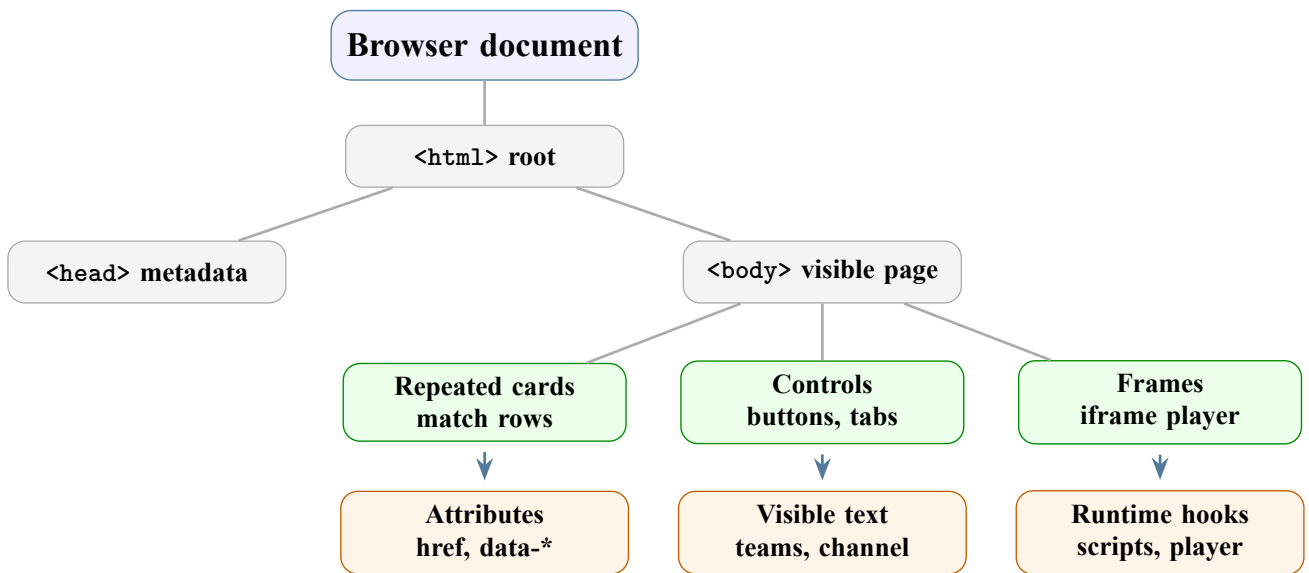


Figure 3: Simplified DOM tree showing how a browser represents an HTML document.

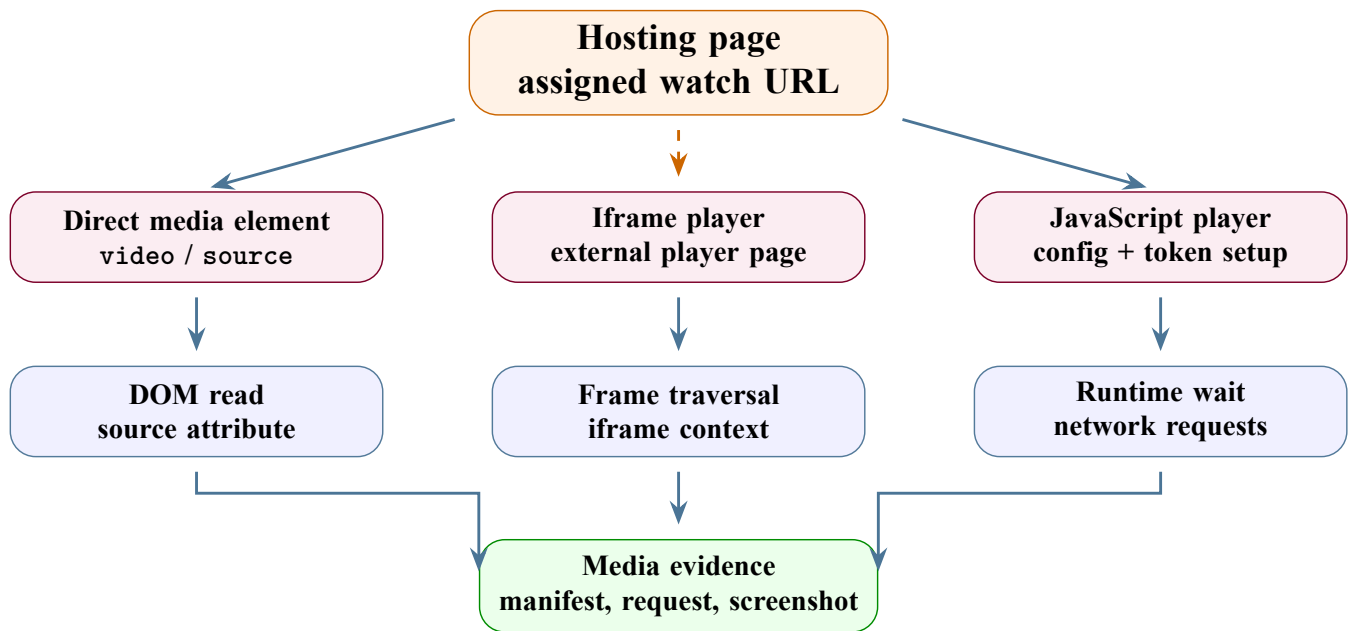


Figure 4: Main paths from a hosting page to media evidence, with embedded pages treated as an explicit fallback when the hosting page exposes a player URL.

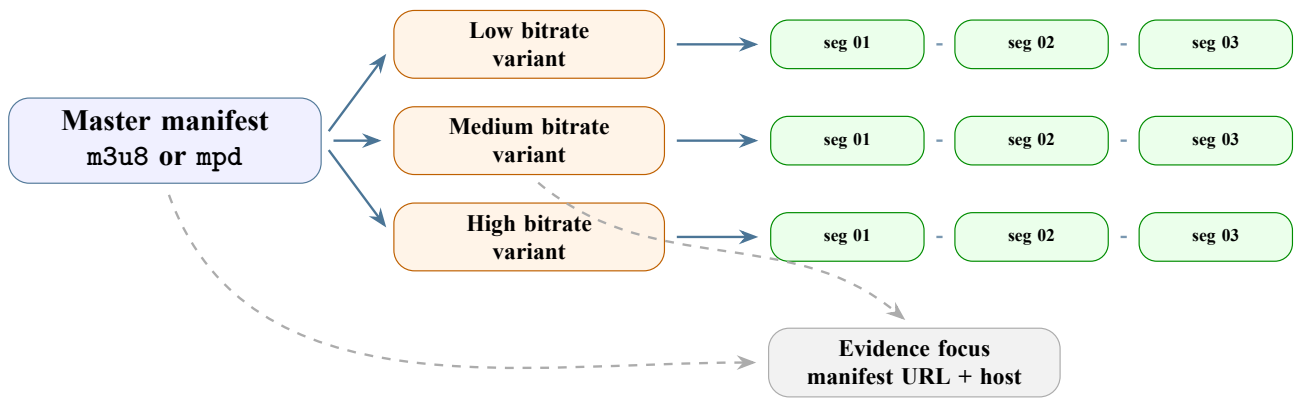


Figure 5: Simplified adaptive streaming hierarchy used by HLS and MPEG-DASH.

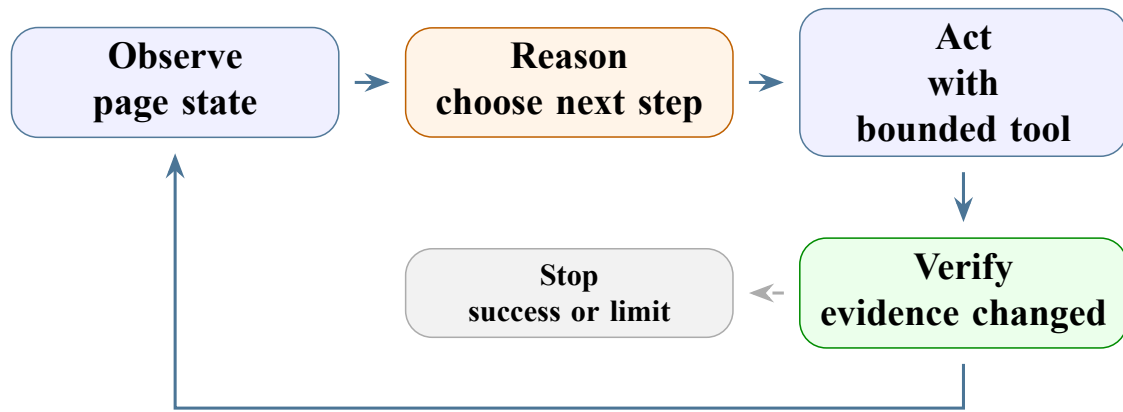


Figure 6: Observe-act-verify loop used by browser agents.

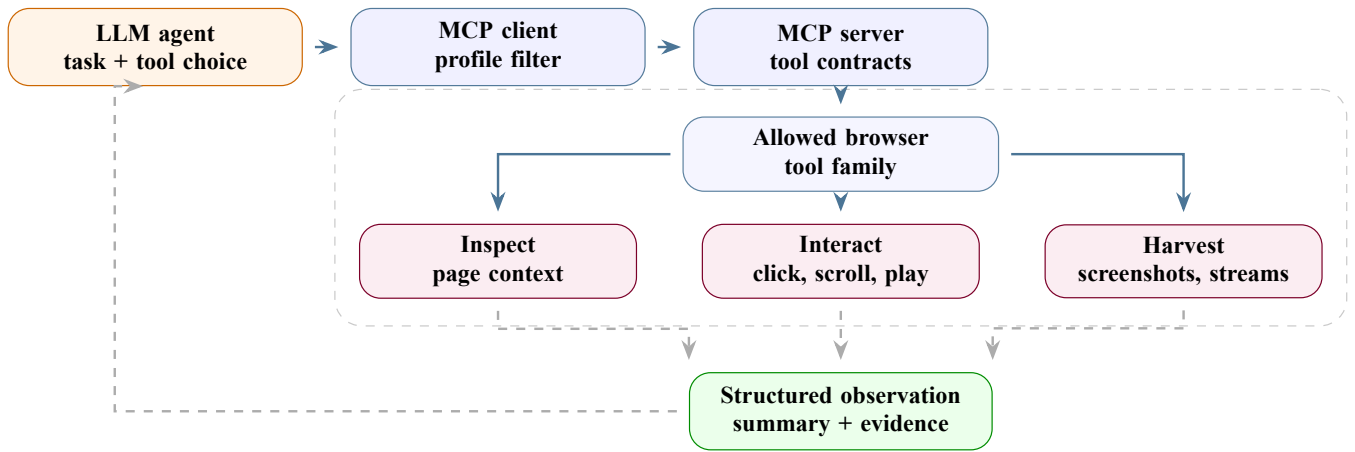


Figure 7: General relationship between an LLM agent, profile-scoped MCP tools, and structured browser observations.