CodexControl Interface Atlas

Version 1.2.0 - ARGELLAN. Local rc3 reference for canonical base `8a3c532e1b4fb323649b00b07fa3b5a4e14cb55d` plus integrated documentation, artwork, packaging and test changes; deployment and publication remain separate. This atlas identifies controls and evidence meanings. Use the manual for procedures and recovery. Schematics explain layout; they are not application captures or performance evidence. Actual synthetic screenshots are provided separately in the demo guide.

Atlas index


The PDF has one reference topic per page after this index. Body, table and schematic labels are at least 10 pt. Full-resolution application captures remain separate so their small UI labels are not reduced to unreadable print thumbnails.

Reference topic	What to find
Header and workspace	Navigation and linked panels
Scope and clocks	Live source window versus frozen replay
Flow relationships	Calls, results, workers and missing evidence
Ribbon lanes	Source-timed records and aggregation
Zoom and navigation	Separate view scales and keyboard alternatives
Inspector	Identity, timestamps, provenance and limits
Investigation context and evidence basket	Temporary references and bounded comparisons
History and Replay	Durable pages, gaps and return to Live
Usage counters	Inclusive counts, subsets and unknown values
Reviewed exports and Handoff	Preview, disclosure and confirmation
GitHub repository evidence	Independent metadata clock and coverage
Settings, Profile and Dot	Personal settings and capability boundaries
Optional archive analytics	CLI/MCP location, availability and projection limits
Preservation and limits	Archive distinctions and support evidence

Header and workspace

Where: top header and the main workbench. Applies to 1.2.0. The schematic shows functional relationships, not pixel positions at every viewport.

SCHEMATIC - invented identities; no live operation is depicted

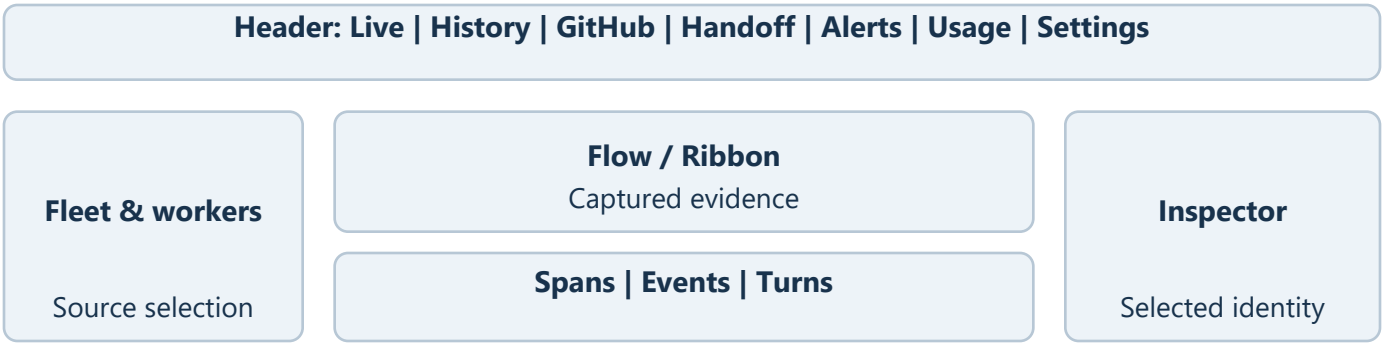

Label	Meaning and action
Live / History	Current observation window / retained journal browsing
GitHub	Optional separately timed repository metadata
Handoff	Freeze a bounded selection for reviewed local export
Alerts / Usage / Settings	Attention evidence / numeric observations / supported configuration
Fleet & workers	Authorized hosts and observed sessions; select a lane
Flow / Ribbon	Two presentations of captured source evidence
Spans / Events / Turns	Paired operations / individual records / turn context
Inspector	Details for the selected host, worker, route or event

Keyboard: Tab and Shift+Tab move focus; Enter or Space activate native controls. Use the first **Skip to workspace** link to reach the main surface. Layouts and small viewports can hide or rearrange panels while collection continues.

Related task: manual, **Orient yourself in the workspace**.

Scope and clocks

Where: investigation strip and command bar above the observation plane. The header also shows wall-clock time and connection state.

Reading	Meaning and alternate state
LIVE and Window	Current source-time window over newly received and retained evidence
REPLAY and source time	Frozen evidence selection at the replay position
Host / Project / category	Presentation filters within existing authorization
Worker search / All lanes	Narrow matching workers; clear only the selected lane
Reset filters	Clear filters and lane while keeping Window/replay position
Previous context	Return to an earlier compatible investigation selection
Return to live	Leave Replay and inspect the current feed

Complete caveat: **Replay host health is unknown. Current inventory does not reconstruct historical host health.** A connected source may be quiet, and an old screen may be retained during disconnection. These states do not prove current execution or successful completion.


Wall clocks, source timestamps, receipt times and the replay cursor are distinct. Changing a display clock does not rewrite evidence. Keyboard/touch users can use the native selectors and buttons; no drag gesture is required for those choices.

Related tasks: manual, **Filter without changing collection** and **Replay and browse durable events**.

Flow relationships

Where: **Flow** in the observation-plane header. Use **Key** for the application legend. This diagram is schematic and uses invented identities.

SCHEMATIC - invented identities; no live operation is depicted

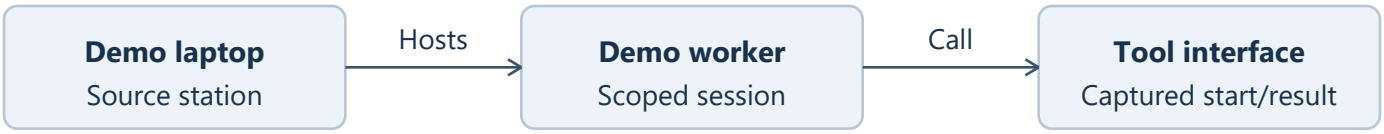

A result requires the same scoped call. A line crossing proves nothing.

Visual	Evidence meaning
Source station	Machine that supplied observations; a heartbeat is not a running model turn
Worker station	Observed session with a host-scoped identity
Outbound call	A captured tool start for the scoped call
Return	A result captured for that same scoped call
Parent/hosting branch	Explicit recorded relationship; no traffic implied
Job report	Target report with explicit originating worker binding
Quiet/historical route	Retained context without new live activity
Missing result	Completion was not captured; ongoing execution is unknown

Select a route or station to inspect its source evidence. Enter/Space provides the keyboard equivalent for focusable map controls. A group can represent multiple calls: inspect its members rather than treating the drawn path as one execution.

Complete caveat: **Crossing lines do not establish a relationship. A recorded return is not independent acceptance or verification of task success.**

Related task: manual, **Read the Flow map**.

Ribbon lanes

Where: **Ribbon**, beside Flow. Applies to 1.2.0. Worker lanes share the source-time axis; thickness and groups represent recorded events, not a packet trace or one marker per token.

SCHEMATIC - invented identities; no live operation is depicted



Control or mark	Meaning and action
Worker lane	Source records grouped under a worker identity
Event cluster	Bounded representation of source events in a time bin; inspect members
Inspect events	Open an inspectable event route to the same retained evidence
Key	Open the Ribbon legend
Pause	Pause presentation motion; capture continues
Expand	Give the Ribbon more room; restore with the same control
Cursor / time axis	The current Live window or Replay source clock

Select a marker for evidence. Use **Inspect events** or the timeline for a keyboard-accessible record list. The Ribbon viewport accepts focus and arrow-key scrolling; visible zoom buttons avoid requiring a wheel gesture.

Quiet lanes and missing returns do not establish ongoing work. A grouped marker is a visual projection; the underlying durable record is not discarded by aggregation. The synthetic capture does not qualify live throughput or a fleet-size limit.

Related task: manual, **Inspect the timeline and Ribbon**.

Zoom and navigation

Where: the observation-plane header and its scrollable view. Flow and Ribbon maintain independent zoom values.

Action	Behavior and boundary
Zoom out / Zoom in	Change the current view's scale within 50-300%
Fit	Reset the current view to its fitted 100% scale
Ctrl + mouse wheel	Zoom inside the observation view around the pointer
Scroll / arrow keys in Ribbon	Pan available content
Expand / restore	Change presentation space without changing capture
Timeline density	Seek captured source activity, possibly entering Replay
Previous context	Revisit earlier investigation scope when available

The visible native buttons are keyboard/touch alternatives to wheel zoom. Source inspection and button exercise are distinct from a physical Ctrl+wheel or touch-device test. Do not describe this documentation job as qualifying those devices or gestures.

Zoom does not change a record's identity, source timestamp, collection scope or retention. Switching Flow/Ribbon restores each view's own scale. Source labels and selection should be interpreted at the named clock and scope.

Related tasks: manual, **Read the Flow map** and **Keep an investigation context**.

Inspector

Where: select a map route, worker, event or timeline operation. **Investigation tools → Dock inspector** can keep it beside the evidence views.

Field	Interpretation
Event ID / Session / Host	Scoped captured identity; compare these across views
Kind / category	Sanitized event classification
Outcome	Source-reported result state; not independent acceptance
Duration	Available paired elapsed time, or unknown/open
Turn / Call / item	Native correlation identifiers when captured
Time source / Delivery / Source	Timestamp basis, bootstrap/backfill/live distinction and provenance
Group members	Underlying source records for an aggregated route

An open start has no captured matching completion. The dashed duration stops at captured evidence rather than declaring indefinite execution. **Focus this session** narrows the presentation. Escape clears selected map evidence; the Inspector close button dismisses its view.

An observed failure directs investigation back to the native source for deliberately excluded details. Prompts, arguments, raw output and private reasoning are not reconstructed here.

Related task: manual, **Sign in and inspect your first event**.

Investigation context and evidence basket

Where: **Investigation tools** above the command bar. These are temporary browser investigation aids.

Control	Meaning and limit
Pin this context / Return to pinned context	Save and revisit one compatible presentation reference
Mark review point / Since review	Compare later visible evidence in the same Live scope
Pin comparison window / Compare windows	Compare bounded browser selections
Pin selected evidence	Add an event reference to the basket
Evidence basket	Review at most 64 references; remove any reference
Open retained History	Request missing retained records on demand
Review available pins in Handoff	Export review only for available pinned source records
Dock inspector	Keep Inspector visible alongside the workbench

References do not duplicate or replace journal records. If a referenced record has left the browser cache, the basket says so and offers History. It does not infer a substitute or guarantee the record still exists in retained history. A permission/authority change clears incompatible state.

Use the native disclosure and buttons with Tab/Enter/Space. A disabled comparison/review control usually lacks a compatible context; read the scope strip before drawing a conclusion.

Related tasks: manual, **Keep an investigation context** and **Pin evidence for review**.

History and Replay

Where: header **History**, command-bar **Replay**, and the replay range controls.

Control or state	Meaning
Before local time / Load	Request a bounded page before the chosen source-time boundary
Older page	Move to earlier retained records when available
Select event / Replay page	Inspect that event or the loaded page at source time
Play replay / 1x, 4x, 16x	Advance the presentation cursor; no agent execution
Recent window / All retained	Choose the frozen capture range
Catching up	Historical recovery without new-live marker animation
Offline retained view	Earlier evidence remains; current source state is unknown
Gap / changed epoch	Continuity limit requiring an honest boundary

Return with **Live** or **Return to live**. Newly arriving observations can continue to collect while the frozen Replay selection remains unchanged. Reload, reconnect and backfill must not turn old records into fabricated live traffic.

A bounded page or current browser buffer is not complete history. A historical gap stays a gap. Replay does not reconstruct native conversations, historical host health, private outputs or past token flights.

Related task: manual, **Replay and browse durable events**.

Usage counters

Where: header **Usage**, the usage strip and expandable **Captured response evidence**.

Counter or scope	Interpretation
Inclusive input	Contains cached input already
Cached input	Input subset; never add it a second time
Cache-write input	Separate source component where reported
Inclusive output	Contains numeric reasoning output already
Reasoning	Numeric output subset; no reasoning text
Reported total	Source total with its own scope
Response / last response / turn / thread	Different, potentially overlapping scopes; do not sum

Visual channels are I new input, O inclusive output and C cached input. Letters and patterns supplement color. Configured model/effort is context, not established producing-model attribution.

Missing counters remain unavailable. A comparable ratio can use a smaller valid source subset while a complete response sum stays unavailable; inspect numerator, denominator and coverage before comparison. Sampled burn is counter increase divided by an observation window, not provider generation speed or billing.

Native account allowances require separate opt-in/source/role conditions. They use wall-clock readings and remain independent of map Replay. Separate accounts are not pooled.

Related tasks: manual, **Read compute and token usage** and **Understand the six counters**.

Reviewed exports and Handoff

Where: **Usage** → **Preview local export**, or header **Handoff**. Both freeze bounded snapshots for local review.

Surface	Controls and boundary
Usage preview	Scope, row count, caveats, image and first allowlisted rows
Disclosure choices	Raw identities and precise timestamps start off; each requires a separate choice
Usage formats	JSON, CSV, SVG and PNG; at most 1,000 rows
Handoff table	Readable rows; Previous 50 / Next 50 changes only the page
Raw JSON	Exact sanitized frozen Handoff payload
Reviewer summary	Optional text, at most 2,000 characters; included as reviewed
Reviewed checkbox	Required before Handoff download; changing summary clears it
Handoff ZIP	Markdown, observations JSON and manifest; no automatic vault access

Aliases and day-level dates do not guarantee anonymity. Review activity patterns before sharing. An open preview does not automatically download, post or send anything. Reopen it to capture a newer selection. A downloaded bounded packet is not a full archive, conversation or independently verified result.

Related tasks: manual, **Export a usage view** and **Prepare an Obsidian handoff**.

GitHub repository evidence

Where: header **GitHub**. Optional administrator enrollment supplies read-only scoped GitHub.com metadata.

Record or state	Meaning and boundary
Repository / branch / PR	Stable IDs, source binding and exact base/head SHAs
Check / commit status / workflow run	Reported metadata with its available permissions and coverage
Artifact	Metadata and reported digest; bytes are not downloaded or independently verified
Captured history	Immutable metadata observations, including conditional validations
Refresh view	Return to the latest stored summary; not a forced API collection
Current / partial / stale / unavailable	Independent capture state, not permission to merge or proof of a passing build
Archive custody	Separate GitHub metadata archive state

The GitHub panel has its own capture/validation clock and does not follow map Replay. Unavailable checks are not passing or empty checks. Token-specific effective permissions and Checks enrollment must be qualified separately. No merge, approval, dispatch, cancellation, source-content retrieval or artifact download is supplied.

Keyboard: native repository selectors, disclosures and links. See the GitHub guide for enrollment; keep credentials out of the browser and artifacts.

Related task: manual, **Inspect GitHub repository evidence**.

Settings, Profile and Dot

Where: header **Settings**, **Profile** and **Dot**. Available destinations depend on authenticated role and configured capabilities.

Destination	Meaning and limit
Personal appearance/layouts/clocks/motion	Saved presentation; collection continues
Find a setting / Section picker	Local task search and navigation, including narrow windows
Save changes / Discard draft	Revision-checked settings draft; account/enrollment actions are separate
Accounts / enrollment / history / diagnostics	Protected administration when configured
Backup & recovery	Managed snapshots and staged restore instructions; staging is not a completed restore
Control	Explicit unavailable control boundary; no remote operation
Profile	Observer identity, private photo and access; distinct from the Codex subscription
Dot	Observed presence/artwork; no native voice/mute/audio/transcript feed

Use visible focus and native buttons. Dirty Settings drafts offer **Keep editing** or **Discard & close**. After a lost mutation response, refresh authoritative state before retrying. Keep unknown, failed and confirmed-empty reads distinct.

Reduced/paused motion stops presentation movement without stopping capture. Screen-reader and physical touch qualification remain separate from source inspection and desktop keyboard checks.

Related tasks: manual, **Work safely in Settings**, **Your profile and Dot**, and administrator recovery procedures.

Optional archive analytics

Where: authenticated `history-analytics` CLI query, `codexcontrol_history_analytics` STDIO MCP tool, or the on-demand administrator HTTP API after separate activation. This feature adds no browser control or continuous polling.

Reading or boundary	Meaning
Daily / responses	Archived source reports; daily session deltas and account readings stay separate
Pending segments / last projected time	Projection lag and import time, not source freshness or complete archive coverage
Exact integer strings / known	Precision-preserving known subtotals with contributor counts; missing is not zero
Conflicts / exclusions / truncated	Explicit limits on usable identities and bounded output groups
Ratio coverage	Comparable source numerator/denominator populations, not a complete account total
Unavailable	Missing/unqualified engine, projection or transport is not an empty history result

The engine is an optional separately installed Python/DuckDB runtime, with its database on local storage at the analytics host. Full-scope authenticated administrator access and a qualified pinned transport are required. The immutable archive remains authoritative; projection neither acknowledges custody nor reconstructs the hot-cache head. V3 GitHub metadata is retained separately from token totals. Target-host/service/resource/catch-up qualification and activation remain separate from local source acceptance.

Related task: manual, **Query qualified archived reports**. Setup and recovery: historical analytics.

Preservation and limits

Where: **Usage** → **Usage database**, **Settings** → **History & archive**, and the support matrix.

SCHEMATIC - invented identities; no live operation is depicted

Event journal	**Usage versions**	**GitHub metadata**
Local SQLite	Exact-version receipts	Separate custody

Active databases stay local. Pending evidence survives archive failure.

Evidence family	Durable boundary
Event journal	Local SQLite replay/recovery; no verified off-host event receipt path in this baseline
Usage versions	Full-fidelity captured versions; exact-current-version durable receipt required before cache eviction
GitHub metadata	Separate immutable metadata history and archive custody
Aggregates / visual bins	Additional projections; do not replace captured source records
Backups	Verified coherent snapshots; a receipt count alone is not a restore test

Complete caveat: **Archive loss preserves pending records and exposes backlog/storage pressure. Never delete pending evidence merely to meet a cache target.** Active SQLite stays local to its engine; NAS storage holds closed immutable segments and verified snapshots.

The reference hub is a Pi 5 with 8 GB. Smaller Pi variants, other hubs, actual Safari, native collectors and lifecycle paths require their own evidence. No screenshot, callback-gap sample or successful process start establishes universal compatibility or sustained 60 fps.

MIT code, T3's retained MIT notice, the JetBrains Mono OFL and the separate ARGELLAN trademark policy remain applicable. This atlas grants no execution authority, publication approval or expanded collection permission.

Related tasks: manual, **Understand preservation and storage** and **Administrator: backups and recovery**.

Maintainers: the release protocol provides candidate-bound evidence structure. Its validator establishes consistency only, not authenticated evidence, full-instance recovery, certification or action authority. It adds no runtime telemetry or hub PowerShell dependency.