


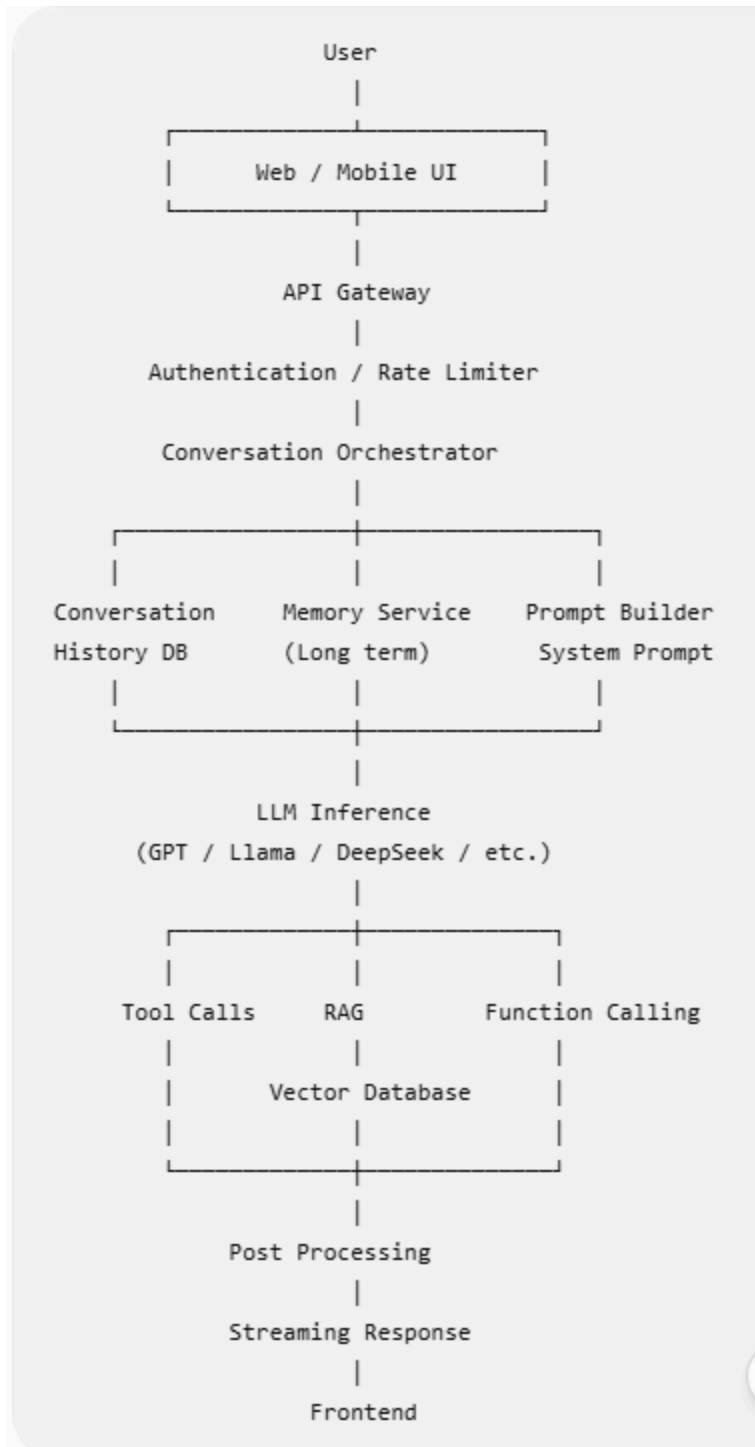

- 1) Input – text/voice
- 2) 1000+ words → context length → summary → context → LLM ,
Guardrails –> hack the system (intent)

Def checking(input):

If system_prompt: hack, reveal system info

Denied request - default - reply - sry i cant give u any info on thid

2 ways - 1) certain models predefined, 2) can define

3) LLM

Hugging face –llama tiny, gemma1.5, mistral, whisper model(speech)

App- 128000 tokens only

User- 50000 tokens

Uploads pdf - 50000

System prompt - 40000

1) DB -> 1) current conversation,

2) History → past conversation

Tell me cuurrrrenttrnd Ai -> prompt(check- spellings auto correction)- prompt rebuild →LLM

1) Redis - cache

2) Mongodb - json {user:what is the weather today} {Response:'its sunny today'}

3) Postgres /mysql- user , sessions, activity time.

Streamlit

Fast api

html/css – react (adaptive)

User→ Sentiment understanding/summary/ intent detection →LLM

TExt → function checks(retrieve context) 1)who initiate, purpose, resolution/ expectation

Memory (4.5 to 5) –memory

RAG → processing → text → chunks→ embed → vector DB→ prompt → LLM

Token size

1) Agent frameworks - plan, tool call (calculator, when api called)

2) Non -streaming- searching - token1 -process, token2-> process

3) Streaming-

- 4) Doc processing - agent(LLM)
- 5) VErify user (agent) - LLM