

# INTERNET AND WEB PROGRAMMING CSE3002 (A2 L47+L48)

PROFESSOR: ARCHANA T

# PROJECT ON

#### FIFA PLAYER MANAGEMENT SYSTEM

FIFA(INTERNATIONAL FEDERATION OF ASSOCIATION FOOTBALL)

18BCE0682 - ANUJ KAPOOR

#### **Review 3**

#### Abstract:

'FIFA 18 Player management system' is player management software for monitoring and accessing players based on their FIFA 18 PC or XBOX Game ratings. The project will be developed using HTML, CSS and JavaScript for frontend and PHP, MySQL for back-end, which focuses on basic operation like adding a new player, new statistics, searching players with detailed information and edit as they grow their skills. This project is a web based application designed and developed to help user's access players and organise teams. This project also aims at providing best user interface along with searching, insertion, and deletion with procedure capabilities for each player in FIFA.

#### Hardware and software requirements:

- Windows 7 or higher version OS
- WAMPP web server
- Google chrome v70.0.3538 or greater
- 1.7 or more GHz processor
- 32/64-bit processor
- i3 or greater intel processor chip

#### Introduction:

The project will have player details, which will describe about player biodata such as age and nationality. It will also consist of player stats which describes about players technical skills. It will also consist of tables containing details such as player earnings, club information and preferred position of playing. It will also provide a strong searching, updating, deleting and inserting operations with a user friendly web based UI. The project will help the users to keep track of the player details in a computerised way without any trouble. The project will contain 7 stored procedures and 3 triggers per table. Stored procedures are used in search engine. Every time the user searches through the database, a procedure is called and the

results is collected and displayed for the user in a structured manner. It also has 3 trigger namely "Insert, Delete and Update" triggers assigned separately to each table. Whenever operations such as insert or delete or update will be performed on any table, these triggers will be automatically called, and the logs will be captured into 3 separate tables, individually for each trigger. Hence use of triggers will provide users to trace back all the latest as well as the oldest changes into any table at any point of time.

#### Website Structure

Home page

- Menus
- Home
- Search
- Update\*
- Insert\*
- Database
  - Report
- Procedures\*
  - About

#### At Center

Category based Search option


Categories: (of players)

- Age
- Nationality
- Overall rating
  - Player ID
- Player Name


<sup>\*</sup>Further in each menu option there will sub menus or operations

- Player Position
  - Team


# Web Screenshots:

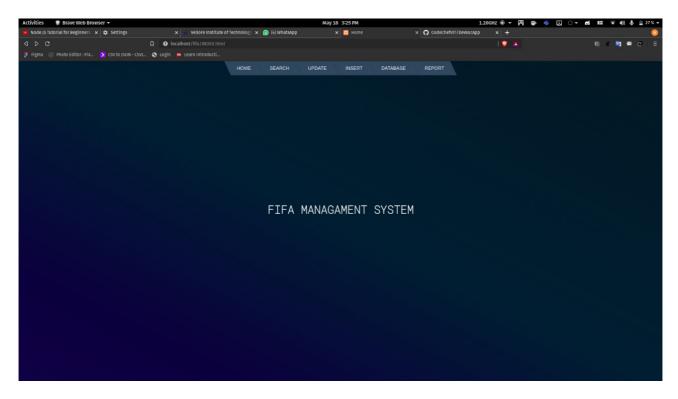


**HomePage** 

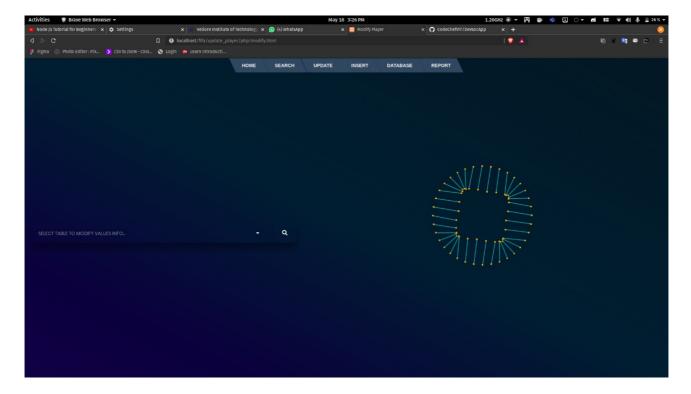

# Modify (UpdateData) in Database:

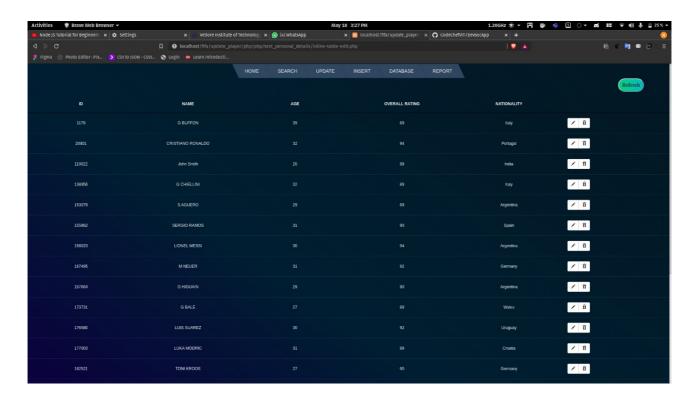



### FootballTeamDatabse:

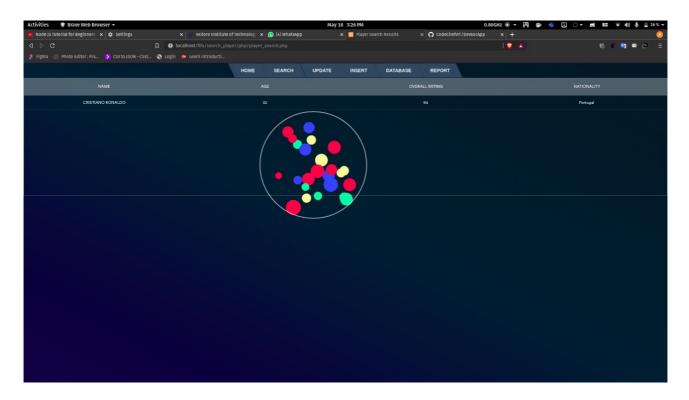

# OnClick screen:


# PlayerDatabse:

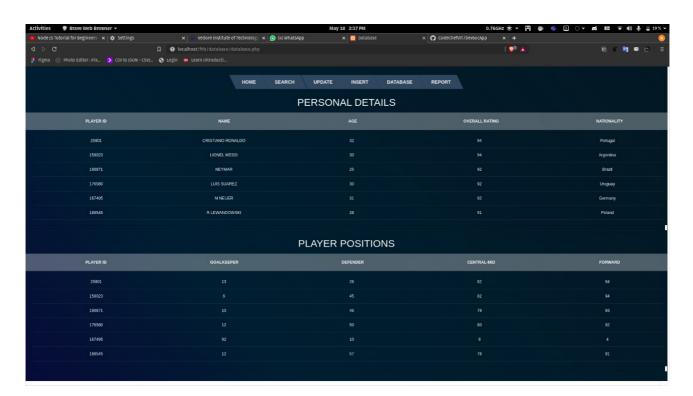

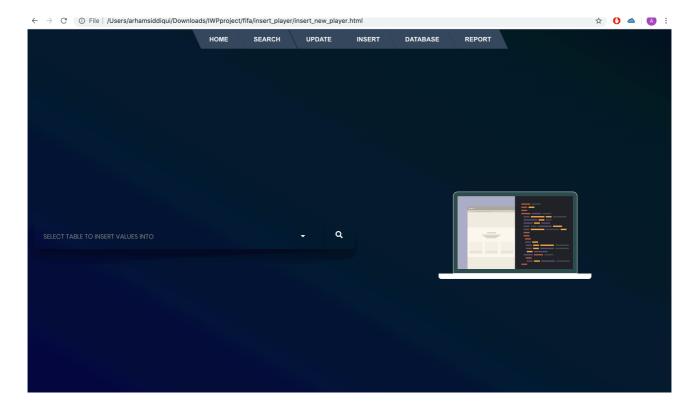

# Insert (ToEdit PlayerDetails):

# ReportTab:

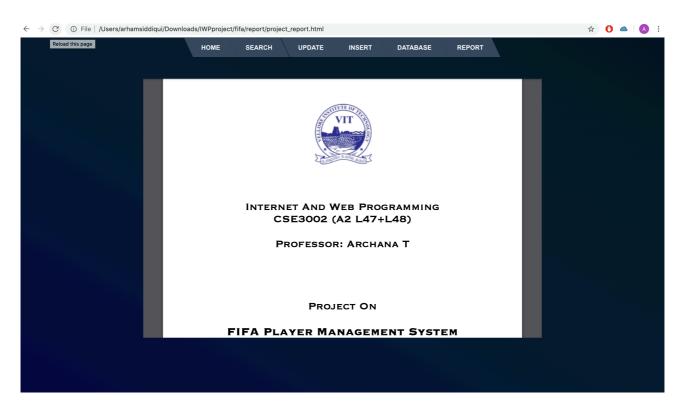

# **Code Snippets:**

# Js index.js

```
var createClass = function () {
  function defineProperties(target, props) {
    for (var i = 0; i < props.length; i++) {</pre>
      var descriptor = props[i];
      descriptor.enumerable = descriptor.enumerable || false;
      descriptor.configurable = true;
      if ("value" in descriptor)
        descriptor.writable = true;
      Object.defineProperty(target, descriptor.key, descriptor);
    }
  return function (Constructor, protoProps, staticProps) {
    if (protoProps)
      defineProperties(Constructor.prototype, protoProps);
    if (staticProps) defineProperties(Constructor, staticProps);
      return Constructor;
    };
  }();
  function classCallCheck(instance, Constructor) {
    if (!(instance instanceof Constructor)) {
      throw new TypeError("Cannot call a class as a function");
  }
// TextScramble
//
var
TextScramble = function () {
  function TextScramble(el) {_classCallCheck(this, TextScramble);
    this.el = el;
    this.chars = '!<>- \\/[]{}-=+*^?#
    this.update = this.update.bind(this);
  }_createClass(TextScramble, [{ key: 'setText', value: function setText(
    newText) {var _this = this;
      var oldText = this.el.innerText;
      var length = Math.max(oldText.length, newText.length);
      var promise = new Promise(function (resolve) {return this.resolve
= resolve; });
      this.queue = [];
      for (var i = 0; i < length; i++) {
        var from = oldText[i] ||
        var to = newText[i] | |
        var start = Math.floor(Math.random() * 40);
        var end = start + Math.floor(Math.random() * 40);
        this.queue.push({ from: from, to: to, start: start, end: end });
      cancelAnimationFrame(this.frameRequest);
```

```
this.frame = 0;
      this.update();
      return promise;
    } }, { key: 'update', value: function update()
      var output = '';
      var complete = 0;
      for (var i = 0, n = this.queue.length; i < n; i++) {var queue$i =</pre>
        this.queue[i],from = queue$i.from,to = queue$i.to,start =
_queue$i.start,end = _queue$i.end,char = _queue$i.char;
        if (this.frame >= end) {
          complete++;
          output += to;
        } else if (this.frame >= start) {
          if (!char | Math.random() < 0.28) {
            char = this.randomChar();
            this.queue[i].char = char;
          output += '<span class="dud">' + char + '</span>';
        } else {
          output += from;
        }
      this.el.innerHTML = output;
      if (complete === this.queue.length) {
        this.resolve();
      } else {
        this.frameRequest = requestAnimationFrame(this.update);
        this.frame++;
    } }, { key: 'randomChar', value: function randomChar()
      return this.chars[Math.floor(Math.random() * this.chars.length)];
    } }]);return TextScramble;}();
// —
// Example
// ----
var phrases = [
  'FIFA MANAGAMENT SYSTEM',
  'DEVELOPED WITH LOVE AND PASSION',
  'BY Anuj Kapoor And Md Arham Siddiqui'];
var el = document.querySelector('.text');
var fx = new TextScramble(el);
var counter = 0;
var next = function next() {
  fx.setText(phrases[counter]).then(function () {
    setTimeout(next, 1700);
  counter = (counter + 1) % phrases.length;
};
next();
```

### Css:

#### Menu.css

```
.cf:before, .cf:after {
  content:" ";
 display: table;
}
.cf:after {
 clear: both;
}
.cf {
  *zoom: 1;
.menu {
  list-style:none;
 margin: 1px auto;
 width: 800px;
 width: -moz-fit-content;
 width: -webkit-fit-content;
 width: fit-content;
}
.menu > li {
 background: #34495e;
  float: left;
  position: relative;
  -webkit-transform: skewX(25deg);
}
.menu a {
 display: block;
  color: #fff;
  text-transform: uppercase;
  text-decoration: none;
  font-family: Arial, Helvetica;
  font-size: 14px;
.menu li:hover {
 background: #e74c3c;
.menu > li > a {
  -webkit-transform: skewX(-25deg);
 padding: 1em 2em;
}
/* Dropdown */
.submenu {
  position: absolute;
 width: 200px;
  left: 50%;
 margin-left: -100px;
  -webkit-transform: skewX(-25deg);
  -webkit-transform-origin: left top;
}
```

```
.submenu li {
  background-color: #34495e;
  position: relative;
 overflow: hidden;
.submenu > li > a {
  padding: 1em 2em;
.submenu > li::after {
  content: '';
  position: absolute;
 top: -125%;
 height: 100%;
 width: 100%;
 box-shadow: 0 0 50px rgba(0, 0, 0, .9);
}
/* Odd stuff */
.submenu > li:nth-child(odd) {
  -webkit-transform: skewX(-25deg) translateX(0);
.submenu > li:nth-child(odd) > a {
  -webkit-transform: skewX(25deg);
.submenu > li:nth-child(odd)::after {
  right: -50%;
  -webkit-transform: skewX(-25deg) rotate(3deg);
}
/* Even stuff */
.submenu > li:nth-child(even) {
  -webkit-transform: skewX(25deg) translateX(0);
}
.submenu > li:nth-child(even) > a {
  -webkit-transform: skewX(-25deg);
.submenu > li:nth-child(even)::after {
  left: -50%;
  -webkit-transform: skewX(25deg) rotate(3deg);
/* Show dropdown */
.submenu, .submenu li {
  opacity: 0;
  visibility: hidden;
}
.submenu li {
 transition: .2s ease -webkit-transform;
}
.menu > li:hover .submenu, .menu > li:hover .submenu li {
  opacity: 1;
 visibility: visible;
}
.menu > li:hover .submenu li:nth-child(even) {
 -webkit-transform: skewX(25deg) translateX(15px);
.menu > li:hover .submenu li:nth-child(odd) {
  -webkit-transform: skewX(-25deg) translateX(-15px);
}
```

### insert new player.html

```
<body style="background:linear-gradient(to right top, #050744, #072031,</pre>
#071823);">
    <canvas class="fireworks">
   </canvas>
   <section>
        <a href="../INDEX.html">Home</a>
         <a href="../search player/player search.html">Search</a>
<1i><a
href="../update player/update player.html">Update</a>
         <a href="insert new player.html">Insert</a>
         <a href="../database/database.php">Database</a>
           <a href="../report/project report.html">Report</a>
         <!-- <li><a
href="../procedures/procedures.html">Procedures</a>
         <a href="../about/about.html">About</a> -->
<div class="s003">
     <form action="php/try insert into.php" method="post">
       <div class="inner-form" style="margin-left: auto;">
         <div class="input-field first-wrap" style="width: inherit;">
           <div class="input-select">
             <select data-trigger="" name="choices-single-defaul">
               <option placeholder="">SELECT TABLE TO INSERT VALUES
INTO</option>
               <option>PERSONAL DETAILS
               <option>PLAYER POSITION</option>
               <option>PLAYER EARNINGS
               <option>PLAYER STATS
               <option>PLAYER CLUB</option>
             </select>
           </div>
         </div>
         <!-- <div class="input-field second-wrap">
           <input id="search" type="text" placeholder="Search..."</pre>
name="input search keyword">
         </div> -->
         <div class="input-field third-wrap" style="position: inherit;">
           <button class="btn-search" type="submit"</pre>
onclick="php/try_insert_into.php" >
             <svg class="svg-inline--fa fa-search fa-w-16" aria-</pre>
hidden="true" data-prefix="fas" data-icon="search" role="img"
xmlns="http://www.w3.org/2000/svg" viewBox="0 0 512 512">
               <path fill="currentColor" d="M505 442.7L405.3 343c-4.5-</pre>
4.5-10.6-7-17-7H372c27.6-35.3 44-79.7 44-128C416 93.1 322.9 0 208 0S0
93.1 0 208s93.1 208 208 208c48.3 0 92.7-16.4 128-44v16.3c0 6.4 2.5 12.5 7
17199.7 99.7c9.4 9.4 24.6 9.4 33.9 0128.3-28.3c9.4-9.4 9.4-24.6.1-34zM208
336c-70.7 0-128-57.2-128-128 0-70.7 57.2-128 128-128 70.7 0 128 57.2 128
128 0 70.7-57.2 128-128 128z"></path>
             </svg>
           </button>
         </div>
```

```
</div>
</form>
<div class="wrap">
  <div class="comp">
    <div class="monitor">
      <div class="mid">
        <div class="site">
          <div class="topbar">
            <div class="cerrar">
              <div class="circl"></div>
              <div class="circl"></div>
              <div class="circl"></div>
            </div>
          </div>
          <div class="inhead">
            <div class="mid">
              <div class="item"></div>
            </div>
            <div class="mid txr">
              <div class="item"></div>
              <div class="item"></div>
              <div class="item"></div>
              <div class="item"></div>
            </div>
          </div>
          <div class="inslid">
          </div>
          <div class="incont">
            <div class="item"></div>
            <div class="item"></div>
            <div class="item"></div>
            <div class="item"></div>
            <div class="wid">
              <div class="itwid">
                <div>
                  <div class="contfoot"></div>
                </div>
              </div>
              <div class="itwid">
                <div>
                  <div class="contfoot"></div>
                </div>
              </div>
              <div class="itwid">
                  <div class="contfoot"></div>
                </div>
              </div>
              <div class="clearfix"></div>
            </div>
            <div class="infoot">
            </div>
          </div>
        </div>
      </div>
      <div class="mid codigo">
        <div class="line">
```

```
<div class="item var"></div>
  <div class="item cont"></div>
  <div class="clearfix"></div>
</div>
<div class="line">
  <div class="item min var"></div>
  <div class="item min fun"></div>
  <div class="clearfix"></div>
</div>
<div class="line">
  <div class="item min var"></div>
  <div class="clearfix"></div>
</div>
<div class="line">
  <div class="item var"></div>
  <div class="item atr"></div>
  <div class="item cont"></div>
  <div class="clearfix"></div>
</div>
<div class="line tab1">
  <div class="item min atr"></div>
  <div class="item lrg fun"></div>
  <div class="item min fun"></div>
  <div class="item lrg cont"></div>
  <div class="clearfix"></div>
</div>
<div class="line tab1">
  <div class="item lrg atr"></div>
  <div class="item min fun"></div>
  <div class="item min cont"></div>
  <div class="clearfix"></div>
</div>
<div class="line tab1">
  <div class="item atr"></div>
  <div class="item min fun"></div>
  <div class="item atr"></div>
  <div class="clearfix"></div>
</div>
<div class="line tab1">
  <div class="item min atr"></div>
  <div class="item min cont"></div>
  <div class="item lrg atr"></div>
  <div class="item fun"></div>
  <div class="clearfix"></div>
</div>
<div class="line tab1">
  <div class="item min atr"></div>
  <div class="item lrg fun"></div>
  <div class="item lrg cont"></div>
  <div class="item min fun"></div>
  <div class="clearfix"></div>
</div>
<div class="line tab1">
  <div class="item min var"></div>
  <div class="clearfix"></div>
</div>
<div class="line tab1">
 <div class="item min var"></div>
 <div class="clearfix"></div>
```

```
<div class="line tab2">
            <div class="item min var"></div>
            <div class="clearfix"></div>
          </div>
          <div class="line tab2">
            <div class="item min atr"></div>
            <div class="item min fun"></div>
            <div class="clearfix"></div>
          </div>
          <div class="line tab3">
            <div class="item min atr"></div>
            <div class="item min fun"></div>
            <div class="item lrg fun"></div>
            <div class="item lrg cont"></div>
            <div class="clearfix"></div>
          </div>
          <div class="line tab3">
            <div class="item min atr"></div>
            <div class="item min fun"></div>
            <div class="item lrg atr"></div>
            <div class="item lrg cont"></div>
            <div class="clearfix"></div>
          </div>
          <div class="line tab4">
            <div class="item min fun"></div>
            <div class="item lrg atr"></div>
            <div class="clearfix"></div>
          </div>
          <div class="line tab1">
            <div class="item atr"></div>
            <div class="item var"></div>
            <div class="item cont"></div>
            <div class="clearfix"></div>
          </div>
          <div class="line tab3">
            <div class="item min var"></div>
            <div class="clearfix"></div>
          </div>
          <div class="line tab4">
            <div class="item min atr"></div>
            <div class="item min fun"></div>
            <div class="item lrg atr"></div>
            <div class="item lrg cont"></div>
            <div class="clearfix"></div>
          </div>
          <div class="line">
            <div class="item min var"></div>
            <div class="clearfix"></div>
          </div>
        </div>
      </div>
      <div class="base">
      </div>
    </div>
 </div>
</div>
```

</div>

```
<defs>
          <radialGradient cx="50%" cy="0%" fx="50%" fy="0%" r="50%"</pre>
id="radialGradient-1">
            <stop stop-color="#329FFF" offset="0%"></stop>
            <stop stop-color="#206EFF" offset="100%"></stop>
          </radialGradient>
          <radialGradient cx="50%" cy="0%" fx="50%" fy="0%" r="50%"
id="radialGradient-2">
            <stop stop-color="#FF7894" offset="0%"></stop>
            <stop stop-color="#FF324A" offset="100%"></stop>
          </radialGradient>
          <radialGradient cx="50%" cy="0%" fx="50%" fy="0%" r="100%"</pre>
id="radialGradient-3">
            <stop stop-color="#FF7894" offset="0%"></stop>
            <stop stop-color="#FF324A" offset="100%"></stop>
          </radialGradient>
          <radialGradient cx="50%" cy="0%" fx="50%" fy="0%" r="100%"</pre>
id="radialGradient-4">
            <stop stop-color="#359FFC" offset="0%"></stop>
            <stop stop-color="#206EFF" offset="100%"></stop>
          </radialGradient>
          <radialGradient cx="50%" cy="0%" fx="50%" fy="0%" r="50%"
id="radialGradient-5">
            <stop stop-color="#5FFFD2" offset="0%"></stop>
            <stop stop-color="#31FFA6" offset="100%"></stop>
          </radialGradient>
        <g stroke="none" stroke-width="1" fill="none" fill-</pre>
rule="evenodd">
          <rect id="dot-js" x="80" y="352" width="32" height="32"</pre>
rx="16"></rect>
        </q>
    </section>
```

## Database (php):

```
<?php
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "fifa";
$conn = mysqli connect($servername, $username, $password, $dbname);
// Check connection
if ($conn->connect_error) {
die("Connection failed: " . $conn->connect_error);
}
?>
 <h1>PERSONAL DETAILS</h1>
     class "tbl-header"
   <thead>
      PLAYER ID
        NAME
        AGE
```

```
OVERALL RATING
       NATIONALITY
     </thead>
  </div>
   class "tbl-content"
<!--<tbody>-->
<?php
     "SELECT * FROM personal_details ORDER BY id"
$result = $conn->query($sql);
if ($result->num_rows >0 ) {
  while($row = $result->fetch_assoc()) {
     echo ""
     echo "";
      echo ""
                    "player id" . ""
                    "player_name" . ""
       echo "" "player_name" . "
echo "" .$row["age"] . "";
      echo "" overall_rating" . ""
echo "" nationality" . """

      echo "";
     echo ""
  }
else
   echo "0 results"
}
?>
<!-- </tbody>-->
</div><br>
 <h1>PLAYER POSITIONS</h1>
     class "tbl-header"
  <thead>
     PLAYER ID
       GOALKEEPER
       DEFENDER
       CENTRAL-MID
       FORWARD
     </thead>
  </div>
   class "tbl-content"
<!--<tbody>-->
<?php
     "SELECT * FROM position ORDER BY id"
$result = $conn->query($sql);
if ($result->num_rows >0 ) {
  while($row = $result->fetch assoc()) {
     echo ""
     echo "";
      echo ""
                  "player id" . ""
      echo "" .$row["gk"]. "";
```

```
echo "" .$row["cm"]. "";</rr>
      echo "" .$row["fr"]. "";</rr>
     echo "";
     echo ""
else
   echo "0 results"
}
?>
<!-- </tbody>-->
</div><br>
 <h1>PLAYER EARNINGS</h1>
    class "tbl-header"
  <thead>
     <t.r>
      PLAYER ID
      WAGE
      VALUE
     </thead>
  </div>
   class "tbl-content"
<!--<tbody>-->
<?php
    "SELECT * FROM salary ORDER BY id"
$result = $conn->query($sql);
if ($result->num rows >0 ) {
  while($row = $result->fetch_assoc()) {
     echo ""
    echo "";
     echo ""
                 "player id" . ""
      echo "";
     echo ""
  }
else
  echo "0 results"
}
?>
<!-- </tbody>-->
</div><br>
     <h1>PLAYER STATS</h1>
    class "tbl-header"
  <thead>
     PLAYER ID
     ACCELERA TION
       BALANCE
       BALL CONTROL
       CROSSING
       CURVE
```

```
DRIBBLING
                        FINISHING
                        GK KICKING
                        GK POSITIONING
                        PENALTIES
                        SHORT PASS
                        STAMINA
                        STRENGTH
                </thead>
        </div>
          class "tbl-content"
<!--<tbody>-->
<?php
              "SELECT * FROM player stats ORDER BY id"
$result = $conn->query($sql);
if ($result->num rows >0 ) {
       while($row = $result->fetch assoc()) {
                echo ""
                echo "";
                  echo ""
                                                     "player_id" . ""
                                                  "acceleration" . ""
                echo "" .
                    echo "" .$row["balance"]. "";
                  echo "" .
                                                       "ball control" . ""
                 echo ""crossing" ""
echo ""crossing" ""
echo ""crossing" ""
echo ""crossing" ""
echo ""finishing" ""
echo ""crossing" ""crossing" ""
echo ""crossing" "<td
                 echo "" .
echo "" .
echo "" .
                                                   "gk_kicking" . ""
                                                    "gk_positioning" . ""
                  echo ""
                  echo ""
                                                       "penalties" . ""
                  echo "" short pass" . """""""
                  echo "" .$row["stamina"]. "";
echo "" . "strength" . """""""""""
                  echo "":
                echo ""
       }
  else
          echo "0 results"
 }
?>
<!-- </tbody>-->
</div><br>
   <h1>PLAYER CLUB</h1>
              class "tbl-header"
       <thead>
                PLAYER ID
                    CLUB
                    PREFERRED POSITION
                </thead>
        </div>
```

```
class "tbl-content"
<!--<tbody>-->
<?php
      "SELECT * FROM other details ORDER BY id"
$result = $conn->query($sql);
if ($result->num_rows >0 ) {
   while($row = $result->fetch assoc()) {
      echo ""
      echo "";
       echo ""
                       "player id" . ""
        echo "" .$row["club"]. "";
echo "" . "preferred_position
                        "preferred_position" . ""
       echo "";
      echo ""
   }
else
    echo "0 results"
}
$conn-> close();
?>
```

### OnClick (Burst Effect):

```
<defs>
      <radialGradient cx="50%" cy="0%" fx="50%" fy="0%" r="50%"</pre>
id="radialGradient-1">
        <stop stop-color="#329FFF" offset="0%"></stop>
        <stop stop-color="#206EFF" offset="100%"></stop>
      </radialGradient>
      <radialGradient cx="50%" cy="0%" fx="50%" fy="0%" r="50%"</pre>
id="radialGradient-2">
        <stop stop-color="#FF7894" offset="0%"></stop>
        <stop stop-color="#FF324A" offset="100%"></stop>
      </radialGradient>
      <radialGradient cx="50%" cy="0%" fx="50%" fy="0%" r="100%"</pre>
id="radialGradient-3">
        <stop stop-color="#FF7894" offset="0%"></stop>
        <stop stop-color="#FF324A" offset="100%"></stop>
      </radialGradient>
      <radialGradient cx="50%" cy="0%" fx="50%" fy="0%" r="100%"</pre>
id="radialGradient-4">
        <stop stop-color="#359FFC" offset="0%"></stop>
        <stop stop-color="#206EFF" offset="100%"></stop>
      </radialGradient>
      <radialGradient cx="50%" cy="0%" fx="50%" fy="0%" r="50%"
id="radialGradient-5">
        <stop stop-color="#5FFFD2" offset="0%"></stop>
        <stop stop-color="#31FFA6" offset="100%"></stop>
      </radialGradient>
    <g stroke="none" stroke-width="1" fill="none" fill-rule="evenodd">
      <rect id="dot-js" x="80" y="352" width="32" height="32"</pre>
rx="16"></rect>
    </q>
```

## SearchPlayer (php):

```
<?php
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "fifa";
// Create connection
$conn = new mysqli($servername, $username, $password, $dbname);
// Check connection
if ($conn->connect_error) {
die("Connection failed: " . $conn->connect error);
}
               'choices-single-defaul'
                  'input search keyword'
if ($choices == 'AGE' && ctype_digit(strval($input_name))) {
      "SELECT player name, age, nationality, overall rating FROM
personal_details pd WHERE pd.age=\"$input_name\""
     class "tbl-header"
<thead>
NAME
    AGE
    OVERALL RATING
   NATIONALITY
</thead>
</div>
    class "tbl-content"
<?php
$result = $conn->query($sql);
if ($result) {
// output data of each row
while($row = $result->fetch assoc()) {
echo ""
echo "" . "player_name" . " " . "age" .
" . "overall_rating" . "" . "nationality"
                                                 "age" . "
""
echo ""
}
}
}
else if ($choices == 'NATIONALITY' && !ctype_digit(strval($input_name)))
      "SELECT * FROM personal_details WHERE
nationality=\"$input name\""
?>
```

```
</div>
   class "tbl-header"
<thead>
<t.r>
NAME
   AGE
   OVERALL RATING
  NATIONALITY
</t.r>
</thead>
</div>
   class "tbl-content"
<?php
$result = $conn->query($sql);
if ($result) {
// output data of each row
while($row = $result->fetch assoc()) {
echo ""
"age" . "
""
echo ""
}
}
else if ($choices == 'OVERALL RATING' &&
ctype digit(strval($input name))) {
    "SELECT * FROM personal_details WHERE
overall rating=\"$input name\""
?>
</div>
   class "tbl-header"
<thead>
NAME
   AGE
   OVERALL RATING
  NATIONALITY
</thead>
</div>
   class "tbl-content"
<?php
$result = $conn->query($sql);
if ($result) {
// output data of each row
```

```
while($row = $result->fetch assoc()) {
echo ""
echo "" . "player_name" . " " . "age" . "
" . "overall_rating" . " " . "nationality" .
                                      "age" . "
""
echo ""
}
}
else if ($choices == 'PLAYER ID' && ctype digit(strval($input name))) {
     "SELECT * FROM personal_details WHERE player_id=\"$input name\""
?>
</div>
    class "tbl-header"
<thead>
NAME
   AGE
   OVERALL RATING
  NATIONALITY
</thead>
</div>
   class "tbl-content"
<?php
$result = $conn->query($sql);
if ($result) {
// output data of each row
while($row = $result->fetch assoc()) {
echo ""
                                      "age" . "
""
echo ""
}
else if ($choices == 'PLAYER NAME' && !ctype_digit(strval($input_name)))
    "SELECT * FROM personal_details WHERE player_name LIKE
\"$input name\""
?>
</div>
    class "tbl-header"
<thead>
NAME
  AGE
  OVERALL RATING
  NATIONALITY
```

```
</t.r>
</thead>
</div>
   class "tbl-content"
<?php
$result = $conn->query($sql);
if ($result) {
// output data of each row
while($row = $result->fetch_assoc()) {
echo ""
echo "" .
         "player_name" " " "age" ""
"overall_rating" "" "nationality" "
                                           "age" . "
" .
""
echo ""
}
else if ($choices == 'TEAM' && !ctype digit(strval($input_name))) {
     "SELECT
pd.player_name,pd.overall_rating,pd.age,pd.nationality,od.club FROM
personal_details pd,other_details od WHERE od.club = \"$input name\" AND
pd.player id = od.player id ORDER BY pd.player id"
?>
</div>
    class "tbl-header"
<thead>
NAME
   AGE
   OVERALL RATING
   NATIONALITY
  TEAM
</thead>
</div>
   class "tbl-content"
<?php
$result = $conn->query($sql);
if ($result) {
// output data of each row
while($row = $result->fetch_assoc()) {
echo ""
         "player_name" " " "age" "
"overall_rating" "" "nationality" "
"club" ""
echo "" .
                                           "age" . "
" .
""
echo ""
}
}
```

```
}
else if ($choices == 'PLAYING POSITION' &&
!ctype digit(strval($input name))) {
     "SELECT pd.player_name, pd.overall_rating, od.preferred_position,
p.gk, p.df, p.cm, p.fr FROM personal_details pd, other_details od,
position p WHERE od.preferred position LIKE \"$input name\" AND
p.player id = od.player id AND p.player id = pd.player id GROUP BY
pd.player id"
?>
</div>
    class "tbl-header"
<thead>
\langle t.r \rangle
   NAME
   PLAYING POSITION
   OVERALL RATING
  RATING AT OTHER POSITIONS
GOALKEEPER
   DEFENDER
   CENTER-MID
   FORWARD
</thead>
</div>
   class "tbl-content"
<?php
$result = $conn->query($sql);
if ($result) {
// output data of each row
while($row = $result->fetch_assoc()) {
echo ""
             echo "" .
   "preferred_position" . " " .
                                    "overall_rating"
           "gk" . "" . "df'
/td>" . "fr" . ""
                                "df" . ""."
   "cm" . "" .
echo ""
}
}
 else
     "Location:index.html"
$conn->close();
?>
```

### **UpdatePlayer:**

### Modify (php):

```
<?php
$servername = "localhost";
$username = "root";
$password = "";
$database = "fifa";
// Create connection
$conn = new mysqli($servername, $username, $password,$database);
// Check connection
if ($conn->connect error) {
    die("Connection failed: " . $conn->connect error);
}
$choices = $_POST["choices-single-defaul"];
if($choices=='PERSONAL DETAILS'){
header("Location:test personal details/inline-table-edit.php");
else if($choices=='PLAYER EARNINGS'){
    header("Location:test player salary/inline-table-edit.php");
}
else if($choices=='PLAYER POSITION'){
header("Location:test player position/inline-table-edit.php");
else if($choices=='PLAYER CLUB'){
header("Location:test player club/inline-table-edit.php");
else if($choices=='PLAYER STATS'){
header("Location:test player stats/inline-table-edit.php");
}
else {
     header("Location:index.html");
      echo "oopss";
} ?>
```

# **DeletePlayer** (php):

```
<?php
$servername = "localhost";
$username = "root";
$password = "";

// Create connection
$conn = new mysqli($servername, $username, $password);

// Check connection
if ($conn->connect_error) {
```

```
die("Connection failed: " . $conn->connect error);
}
                  "choices-single-defaul"
?>
<?php
if($choices=='BY AGE'){
echo "<form action=\"php submit delete/delete byage.php\"</pre>
method=\"post\">"
echo "<input id=\"input-1s\" type=\"text\" placeholder=\"PLAYER AGE\"</pre>
required autofocus name=\"page\"/>"
echo "<label for=\"input-1\">"
echo "<span class=\"label-text\">PLAYER AGE</span>"
echo "<span class=\"nav-dot\"></span>"
echo "</label>"
echo "<button type=\"submit\"</pre>
onclick=\"php submit delete/delete byage.php\" class=\"signup-
button\">DELETE</button>"
echo "Press Tab"
     echo "<div class=\"signup-button\">INSERT</div>";
echo "</form>"
}
else if($choices=='BY NAME'){
echo "<form action=\"php submit delete/delete byname.php\"</pre>
method=\"post\">"
echo "<input id=\"input-1s\" type=\"text\" placeholder=\"PLAYER NAME\"</pre>
required autofocus name=\"pname\"/>"
echo "<label for=\"input-1\">"
echo "<span class=\"label-text\">PLAYER NAME</span>"
echo "<span class=\"nav-dot\"></span>"
echo "</label>"
echo "<button type=\"submit\"</pre>
onclick=\"php submit delete/delete byname.php\" class=\"signup-
button\">DELETE</button>"
echo "Press Tab"
     echo "<div class=\"signup-button\">INSERT</div>";
echo "</form>"
}
                   'BY PLAYER ID'
echo "<form action=\"php submit delete/delete byplayerid.php\"</pre>
method=\"post\">"
echo "<input id=\"input-1s\" type=\"text\" placeholder=\"PLAYER ID\"</pre>
required autofocus name=\"pid\"
echo "<label for=\"input-1\">"
echo "<span class=\"label-text\">PLAYER ID</span>"
echo "<span class=\"nav-dot\"></span>"
echo "</label>"
echo "<button type=\"submit\"</pre>
onclick=\"php submit delete/delete playerid.php\" class=\"signup-
button\">DELETE</button>"
echo "Press Tab"
     echo "<div class=\"signup-button\">INSERT</div>";
echo "</form>"
}
```

```
else if
                   'BY OVERALL RATING'
echo "<form action=\"php submit delete/delete byoverallrating.php\"</pre>
method=\"post\">"
echo "<input id=\"input-1s\" type=\"text\" placeholder=\"OVERALL RATING\"</pre>
required autofocus name=\"poverall rating\"/>"
echo "<label for=\"input-1\">"
echo "<span class=\"label-text\">PLAYER OVERALL RATING</span>"
echo "<span class=\"nav-dot\"></span>"
echo "</label>"
echo "<button type=\"submit\"</pre>
onclick=\"php submit delete/delete byoverallrating.php\" class=\"signup-
button\">DELETE</button>"
echo "Press Tab"
     echo "<div class=\"signup-button\">INSERT</div>";
echo "</form>"
}
else if
                  'BY NATIONALITY'
echo "<form action=\"php_submit_delete/delete_bynationality.php\"</pre>
method=\"post\">"
echo "<input id=\"input-1s\" type=\"text\" placeholder=\"PLAYER</pre>
NATIONALITY\" required autofocus name=\"pnationality\" />"
echo "<label for=\"input-1\">"
echo "<span class=\"label-text\">PLAYER NATIONALITY</span>"
echo "<span class=\"nav-dot\"></span>"
echo "</label>"
echo "<button type=\"submit\"</pre>
onclick=\"php_submit_delete/delete_bynationality.php\" class=\"signup-
button\">DELETE</button>"
echo "Press Tab"
//
    echo "<div class=\"signup-button\">INSERT</div>";
echo "</form>"
}
else
       "Location:index.html"
?>
```