

INCIDENT REVIEW


Six Sundays failed. Claude Code worked fine every time.

An incident review of my weekly pipeline. Interactive sessions passed. The scheduled job did not.

SWIPE 

Three runs died quietly before I made failure loud

The job started on time. The auth failures died in about four seconds, not at a timeout. W30, W32 and W33 gave no signal.

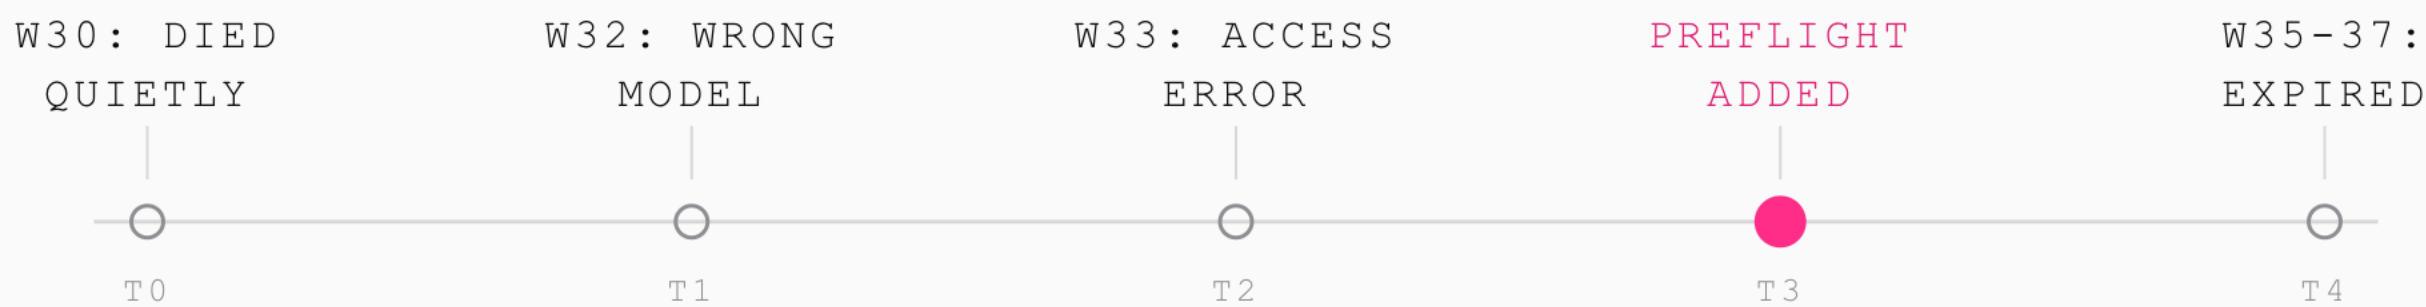

WRONG PATH TESTED

03 / 06

Same machine, same week, two paths by my diagnosis

My diagnosis, not a docs claim: the headless claude -p call authenticates through its own keychain OAuth token. Sitting at the window never tested that path.

INTERACTIVE WINDOW

— WORKED EVERY TIME

VS

SCHEDULED JOB

● FAILED UNATTENDED

The preflight proves auth the way launchd uses it

It checks binaries and env vars, then makes a real one-token auth call. On failure it aborts in seconds with the CLI's own error text.



BINARIES PRESENT

PASS



ENV VARS SET

PASS



ONE-TOKEN AUTH CALL WORKS

PASS



CLI ERROR TEXT SURFACED

LIVE

LOUD FAILURE

05 / 06

Every exit path is loud now

A macOS notification and a banner in the log on every exit, plus a one hour hard timeout. The script comment says silence is no longer a valid outcome.

L4

MACOS NOTIFICATION

L3

BANNER IN THE LOG

L2

CLI ERROR TEXT KEPT

L1

ONE HOUR HARD TIMEOUT



Test the path the scheduler actually uses

Root fix still undecided: exported API key or restored
subscription access. The run is by hand until then.

TEST THE REAL PATH