WORKSPACE TRUST

In -p mode, repo hooks run without the trust dialog

Per Claude Code's docs, interactive sessions hold hooks back until you accept trust. A -p session never shows the dialog.

OPEN THE LEDGER


ENTRY 02 · THE -P PATH

In a -p session the folder is treated as trusted

Claude Code's docs: hooks committed in a repository's .claude/settings.json run in a folder you've never trusted. Before scripting claude -p over a repo you didn't write, review its .claude/ files.

RECORDED SYSTEM

VERYDIAN

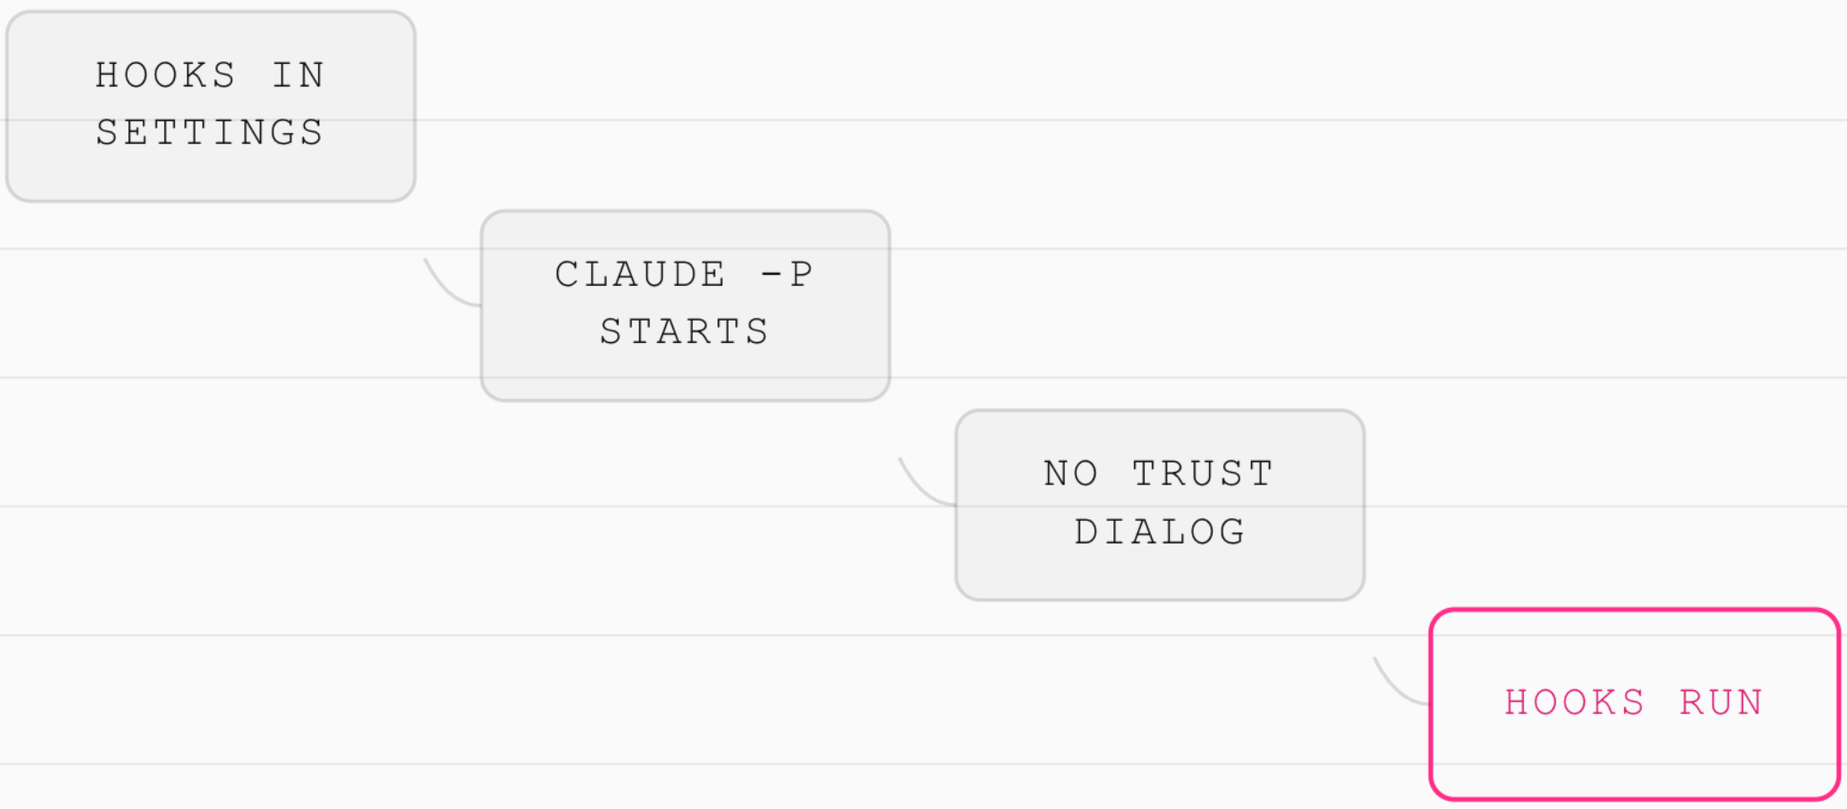


ENTRY 03 · WHAT A REPO SUPPLIES

A repo can supply more than hooks

Under -p, the permissions page marks settings hooks, the env block, helper commands like apiKeyHelper and a project skill's hooks as used. Servers in .mcp.json connect without asking.

RECORDED SYSTEM — VERYDIAN

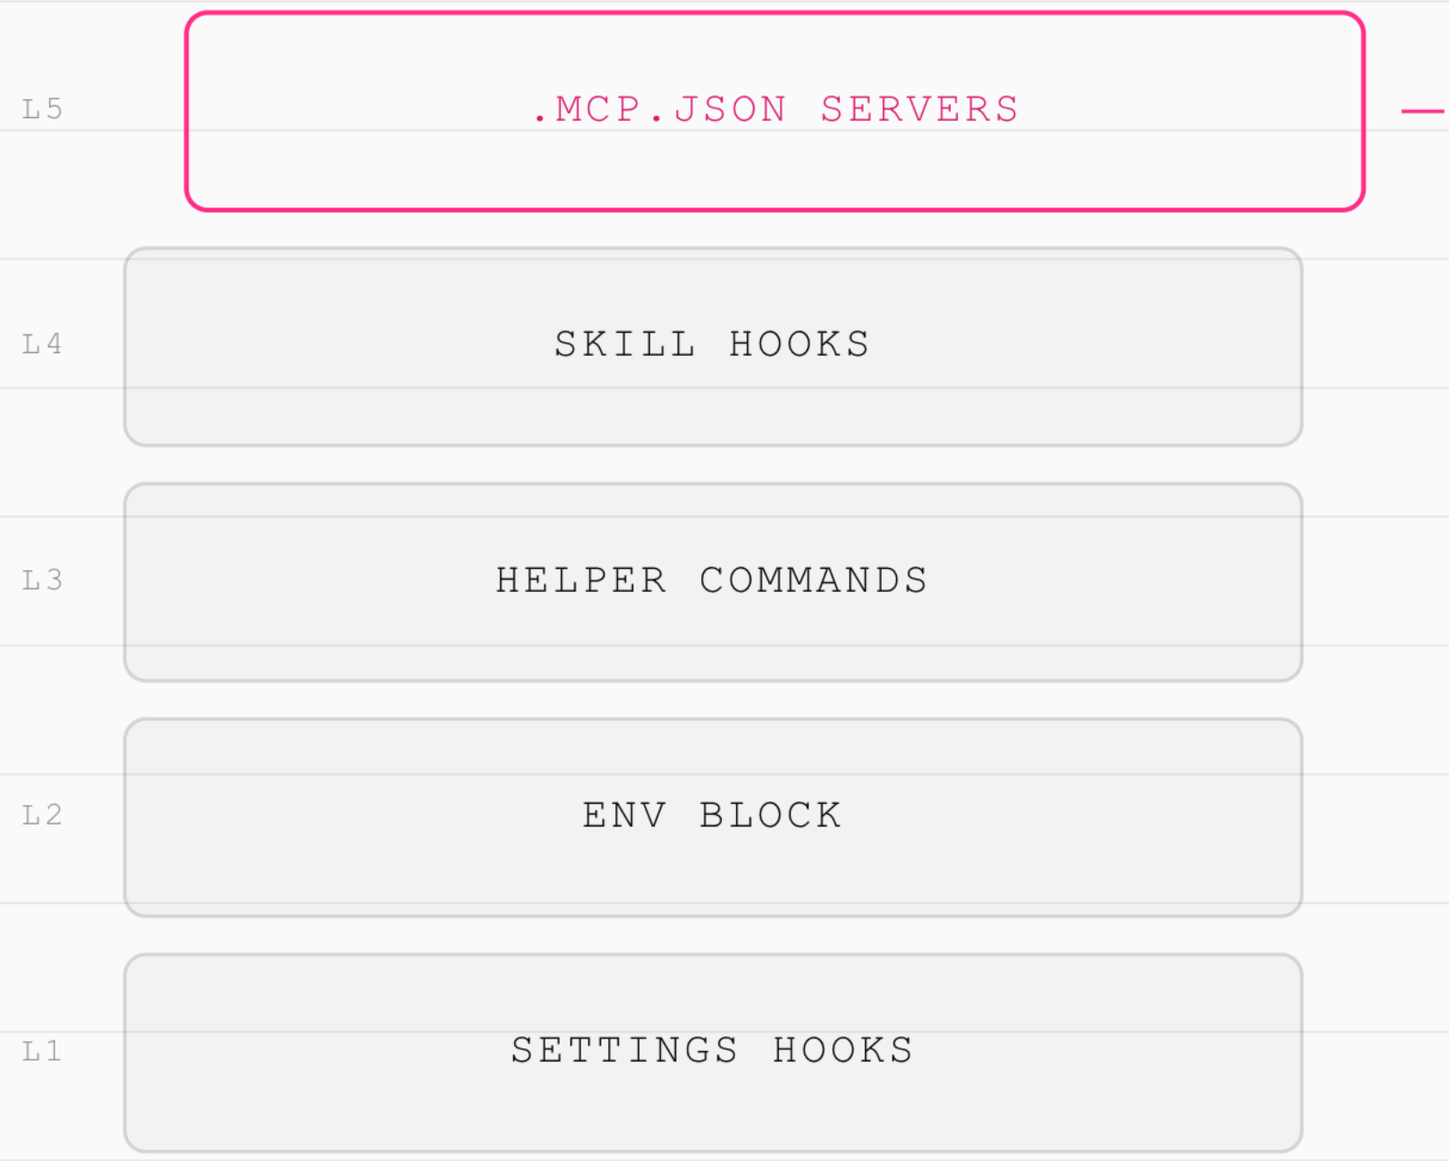

ENTRY 04 · THE INCIDENT

One commit, five files, zero source files modified

StepSecurity, June 5: GitHub disabled 73 repositories across four Microsoft GitHub organizations. The malicious commit added 5 files. The first was a .claude/settings.json SessionStart hook.

RECORDED SYSTEM

VERYDIAN



ENTRY 05 · THE MITIGATIONS

Four mitigations the docs list for claude -p

Review the project's .claude/ files first. Then use any of these. Setting disableAllHooks in your user settings alone is not enough, since the repository's settings take precedence.

RECORDED SYSTEM VERYDIAN

```
$  --BARE

$  --SETTING-SOURCES USER

$  --SETTINGS DISABLEALLHOOKS


>  DISABLEDMCPJSONSERVERS
```

ENTRY 06 · THE LOCAL CHECK

My scan: 31 config files, none define hooks

Under ~/Claude Code to depth 6: 31 files in 17 project folders, 7 MCP servers defined. Not scanned: user-level settings, plugin and skill hooks, repos elsewhere.

RECORDED SYSTEM — VERYDIAN

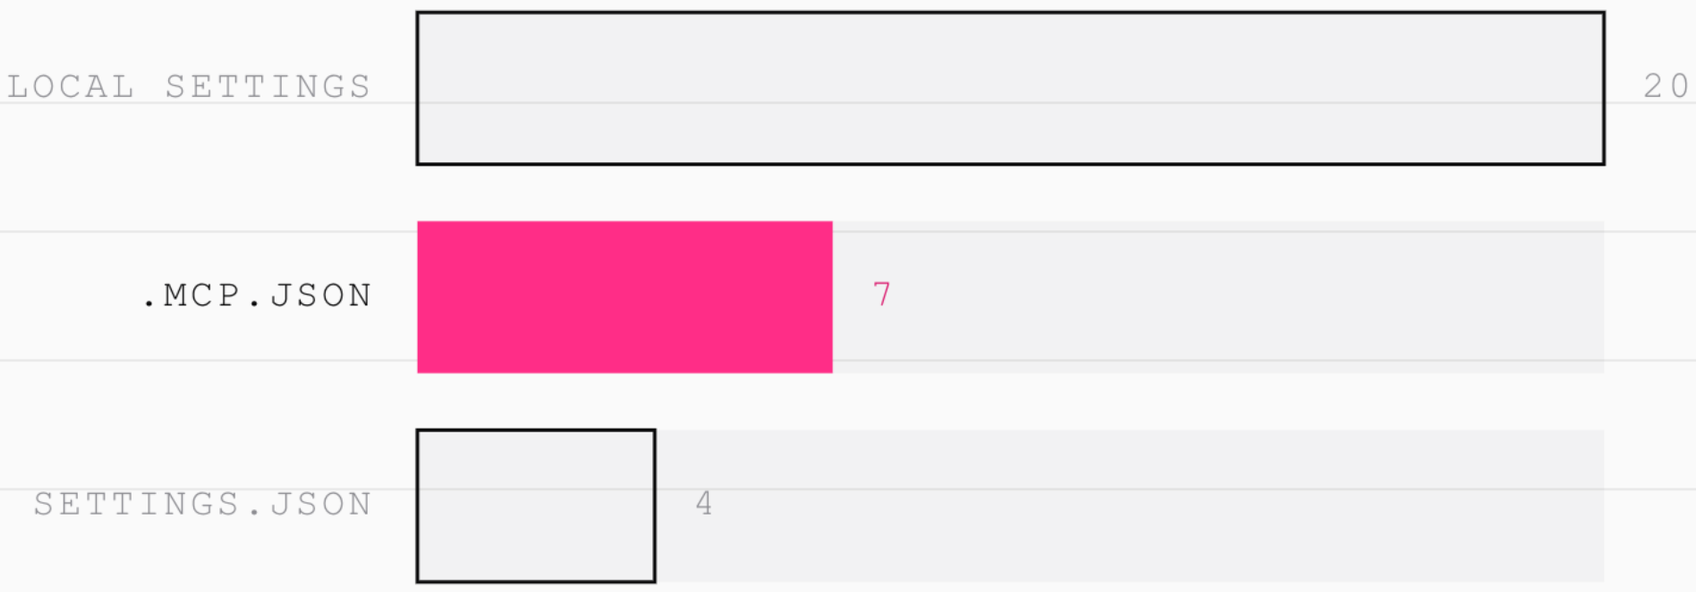

Verydian.



Count your config files before your next clone

Find them, check for a hooks key, note what you did not scan.

RUN THE COUNT