REFUSAL TELEMETRY

Claude Code can now log when something says no

Version 2.1.307 added claude_code.safety_event. The docs also list a refusal it does not log.

SWIPE

THE EVENT

02/07

One event per check that said no

A safety event fires when a check refuses a tool call or requires a permission prompt, when the sandbox proxy refuses a connection, or when a hook blocks a result.



THE CATALOG

03/07

14 categories, grouped by who said no

The category field has 14 values in the docs. I sorted them into six groups here. The grouping is mine, the values are the docs'.

01

PERMISSIONS: 3

02

HOOKS: 2

03

AUTO MODE: 2

04

SANDBOX: 3

05

CHECKS: 2

06

USER OR OTHER: 2

SWITCH IT ON

04/07

Two exports switch it on. A third adds detail.

The docs' quick start sets the first two, plus an OTLP protocol and endpoint. The third puts the command on the matching tool_decision event. The safety event itself holds none.

```
$ EXPORT CLAUDE_CODE_ENABLE_TELEMETRY=1

$ EXPORT OTEL_LOGS_EXPORTER=OTLP


> EXPORT OTEL_LOG_TOOL_DETAILS=1
```

THE DOCUMENTED GAP

05/07

The no it never logs

With neither --permission-prompt-tool nor --permission-prompts none, nobody can answer the prompt, so those refusals get no safety event. Look for tool_decision reject, source config, no safety event on that tool_use_id.

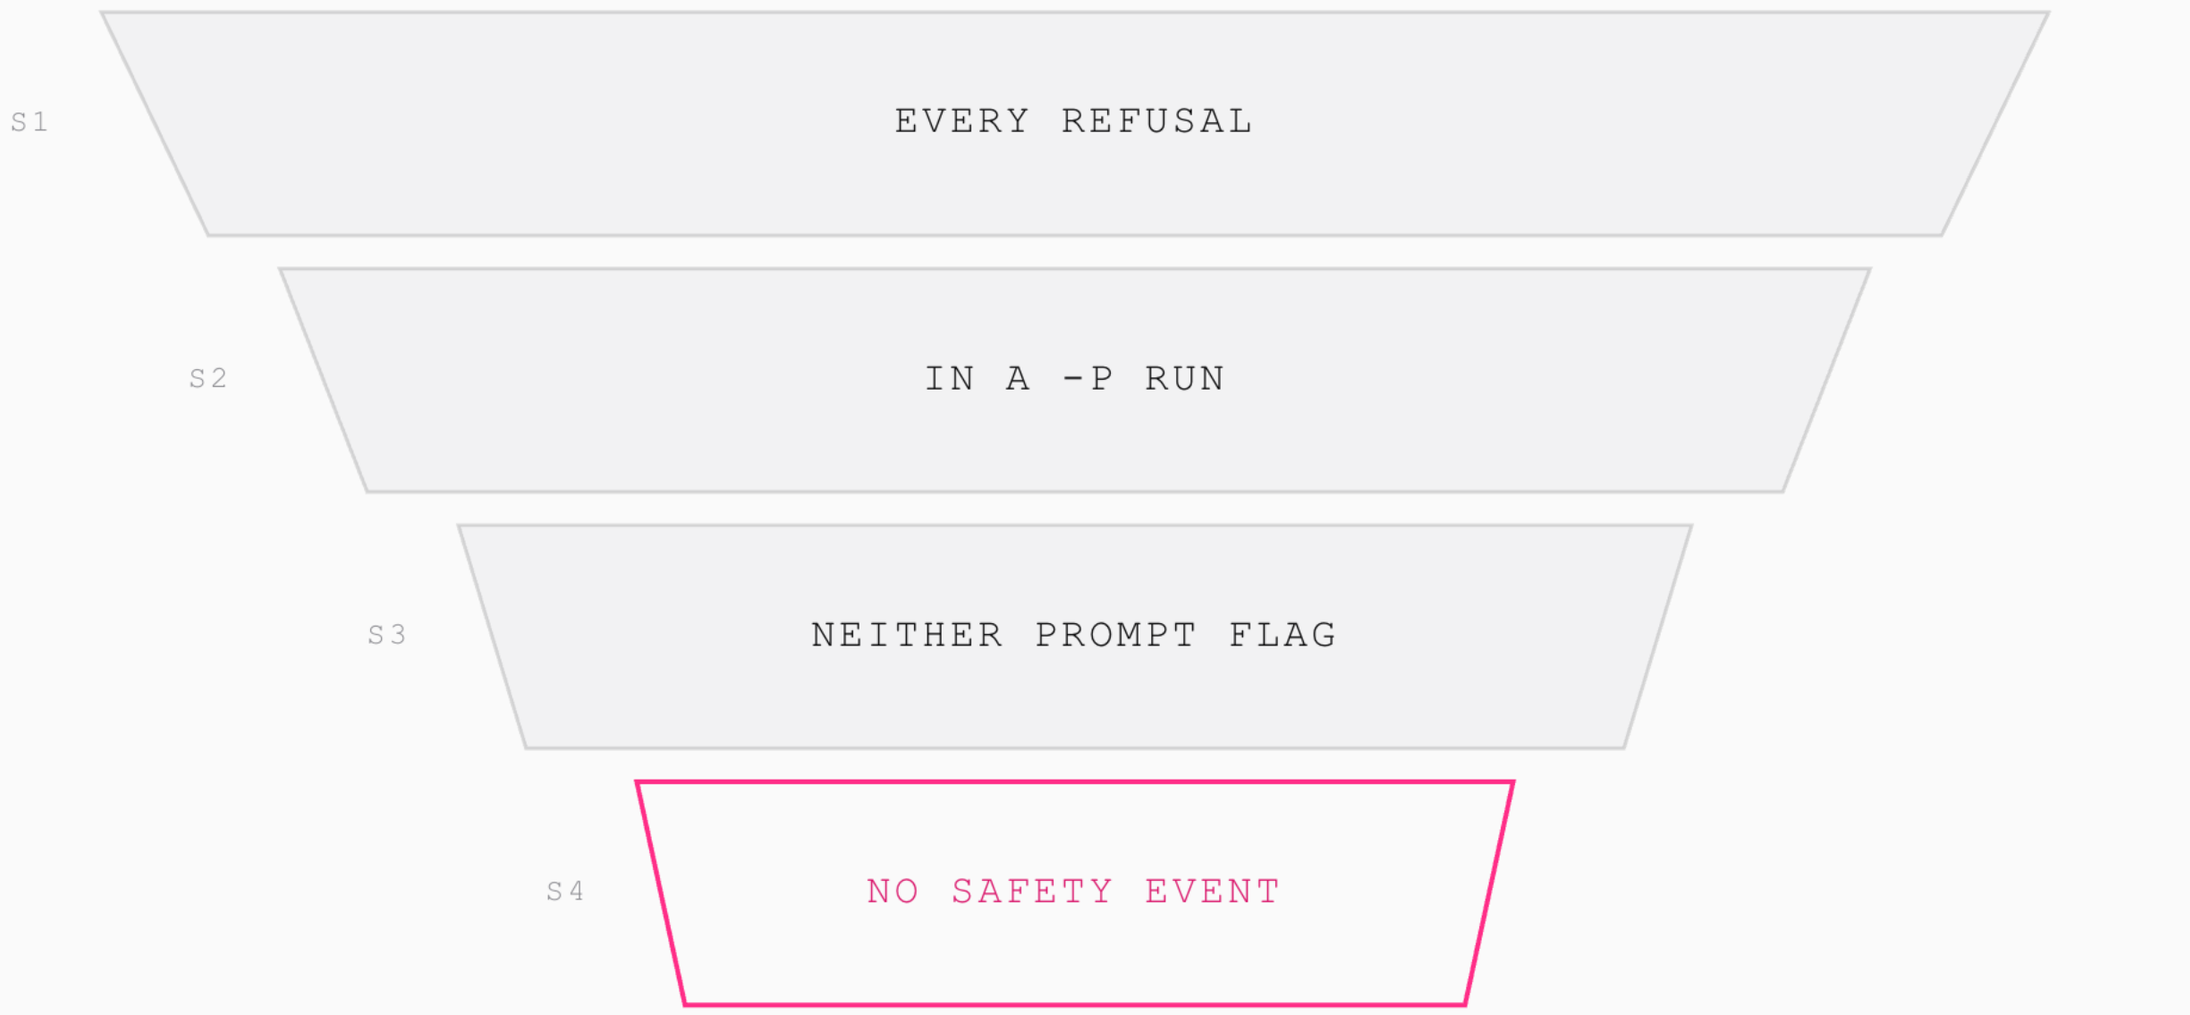

MY HONEST GAP

06/07

Stream-json shows denials. My runner doesn't surface them.

With --output-format stream-json, denials appear as permission_denied messages and in permission_denials on the result. My runner doesn't surface either, so a denial would not show on the dashboard.

STREAM-JSON EMITS

- PERMISSION_DENIED
- PERMISSION_DENIALS

VS

MY RUNNER SHOWS

- TEXT AND TOOLS
- NO DENIALS



Search your runner for permission_denied

Mine came back empty. Check what yours does with a denial.

CHECK YOUR RUNNER