ENGINE SWAP

Same Markdown file. Different guardrails per engine

In GitHub's agentic workflows the engine is one field. The command allowlist, the permission default and the loop brake are documented per engine.

SWIPE

02 · what ports

One Markdown file compiles to standard Actions YAML

GitHub's October 28 changelog: you write natural language Markdown, it compiles to Actions YAML, and it runs with read-only permissions by default in a sandbox, with a threat scan.

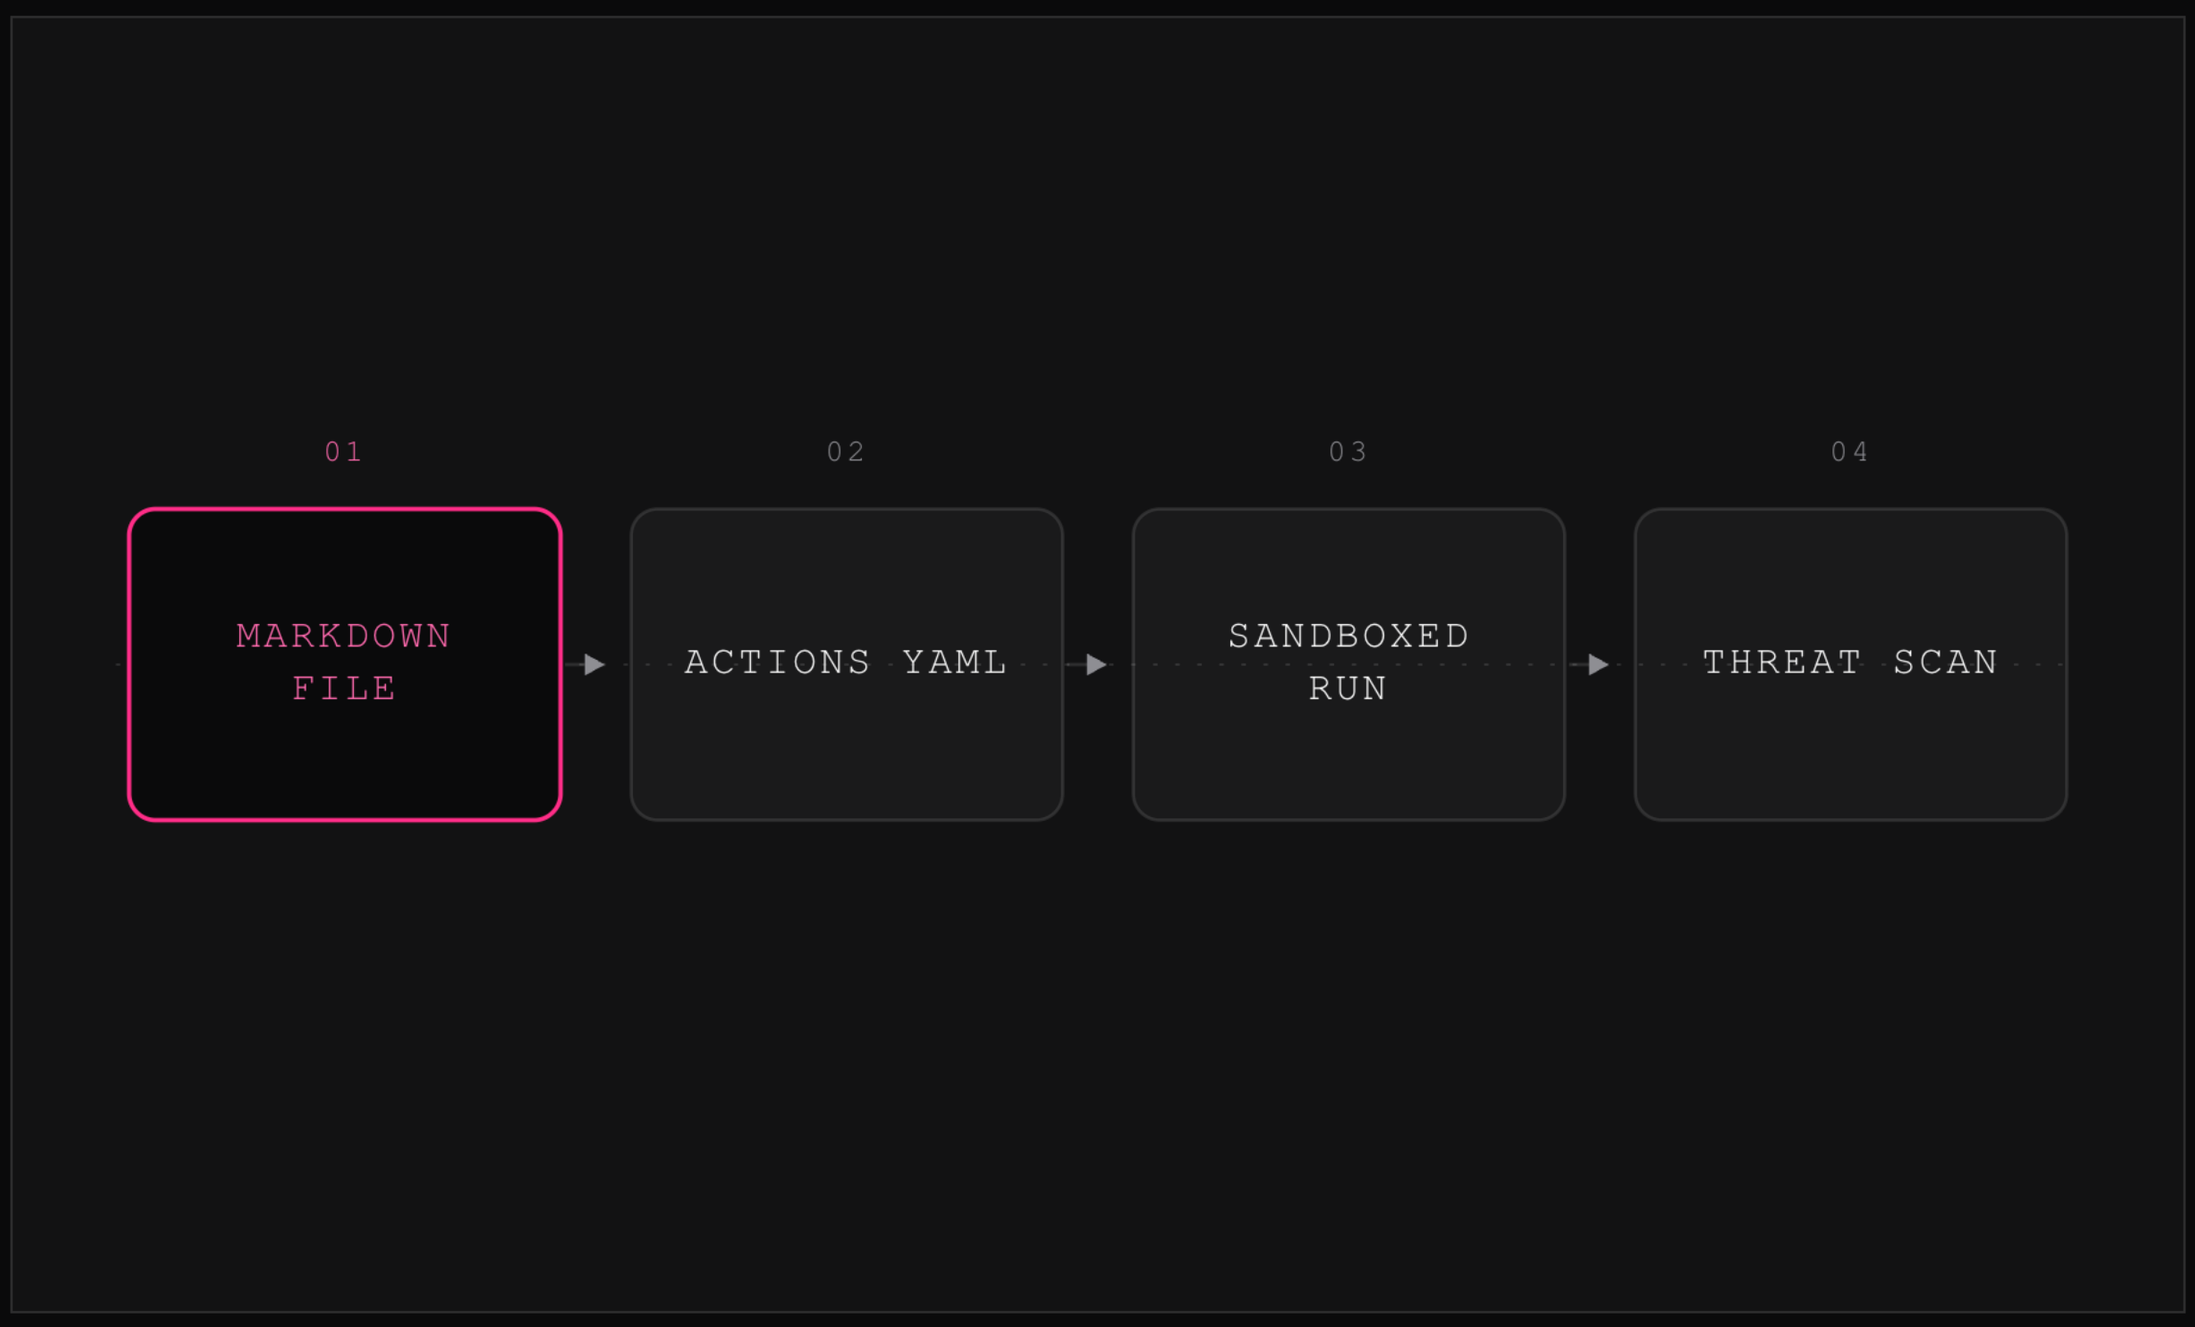


FIG. 2 · VERYDIAN

03 · what does not port

Claude's engine supports a bash allowlist. Codex's cannot.

The project's feature table: per-command bash allowlist is Yes for Claude and No for Codex. The docs: Codex can disable shell execution but cannot enforce a command allowlist.

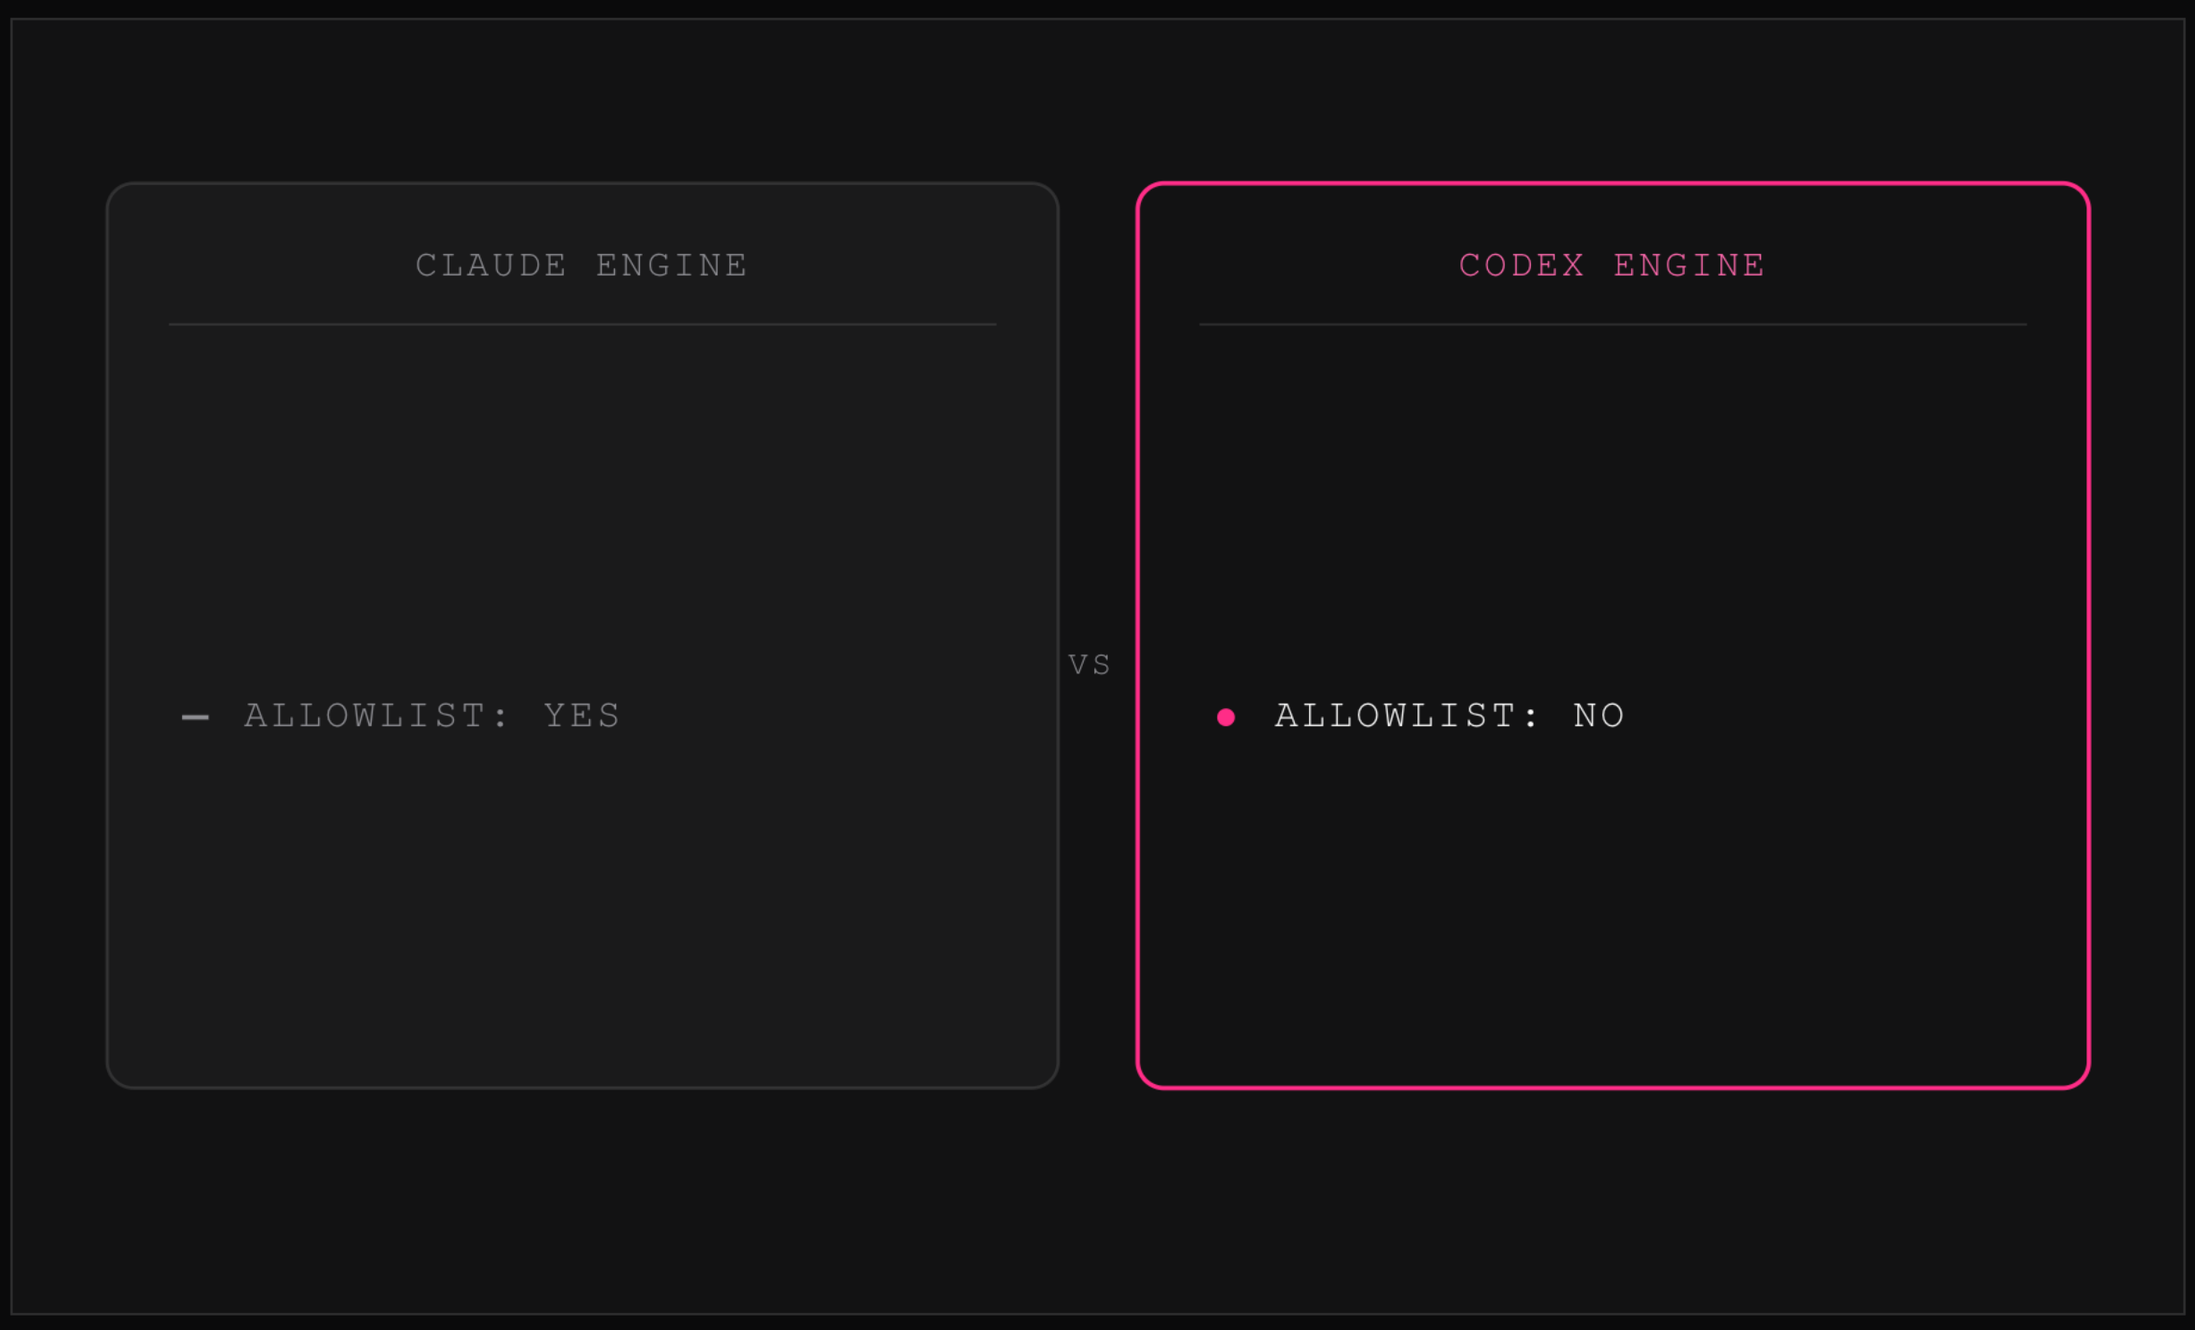


FIG. 3 · VERYDIAN

04 · claude engine

Claude's engine lists six permission modes, defaulting to dontAsk

The project's Claude engine docs: when unset, the default is dontAsk, so actions requiring approval run only when pre-approved. The allowed-tools flag pre-approves actions. It does not remove every other tool.

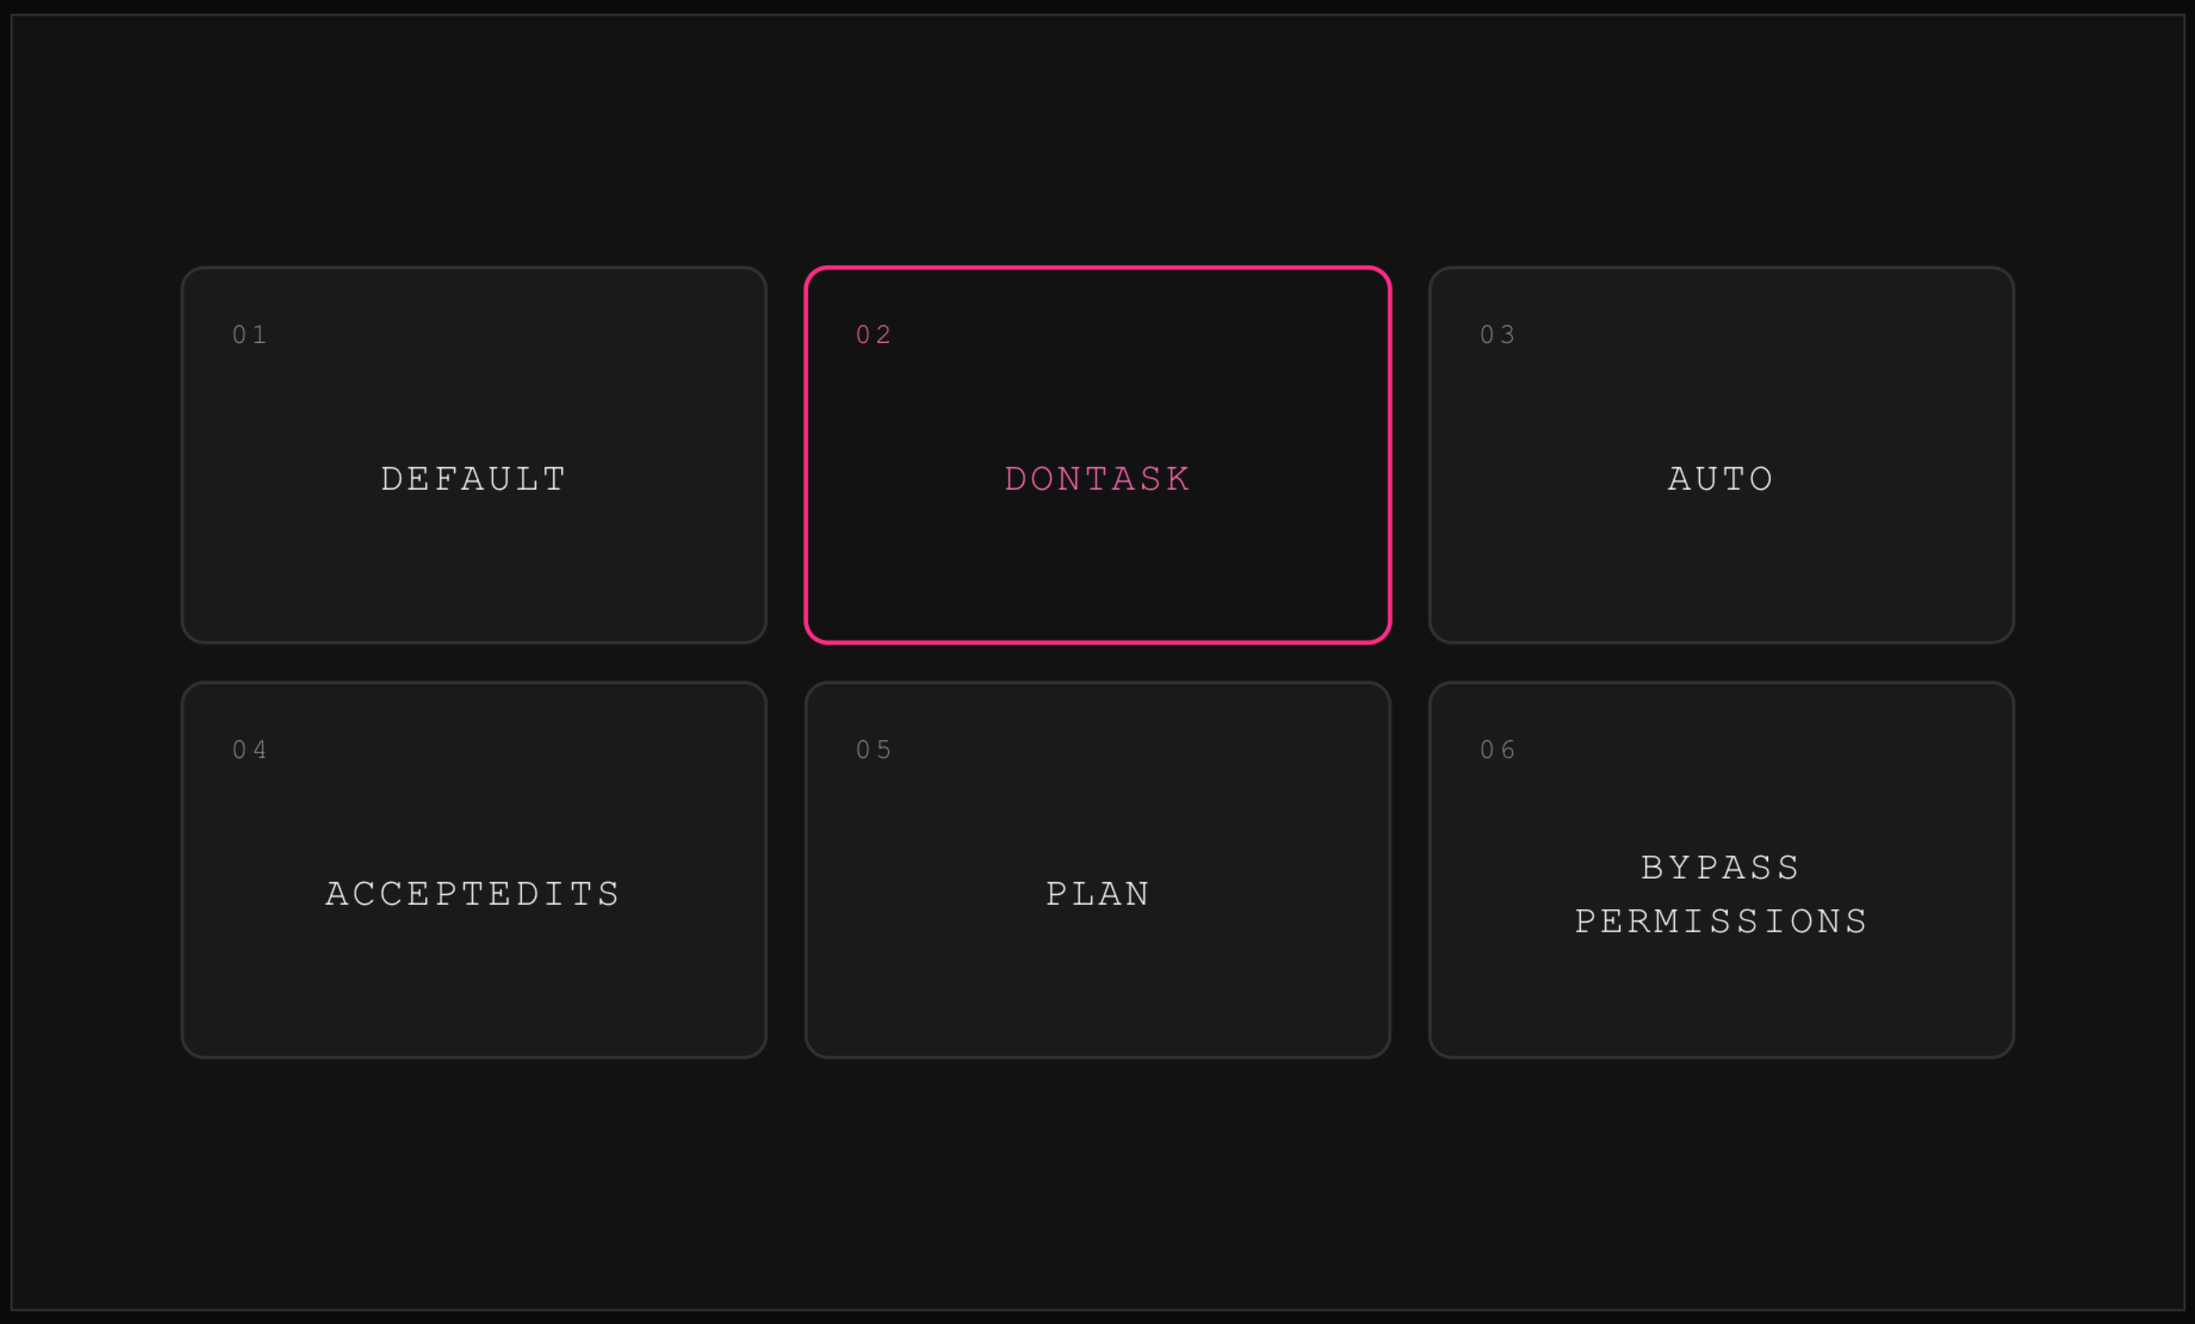


FIG. 4 · VERYDIAN

05 · codex engine

Codex's loop brake is the harness's default, not the CLI's

The brake stops a run when both rebuild_factor hits 25 and cumulative input tokens hit 1,000,000. A guard stop is not retried. That is the Agentic Workflows harness default, not an OpenAI Codex CLI default.

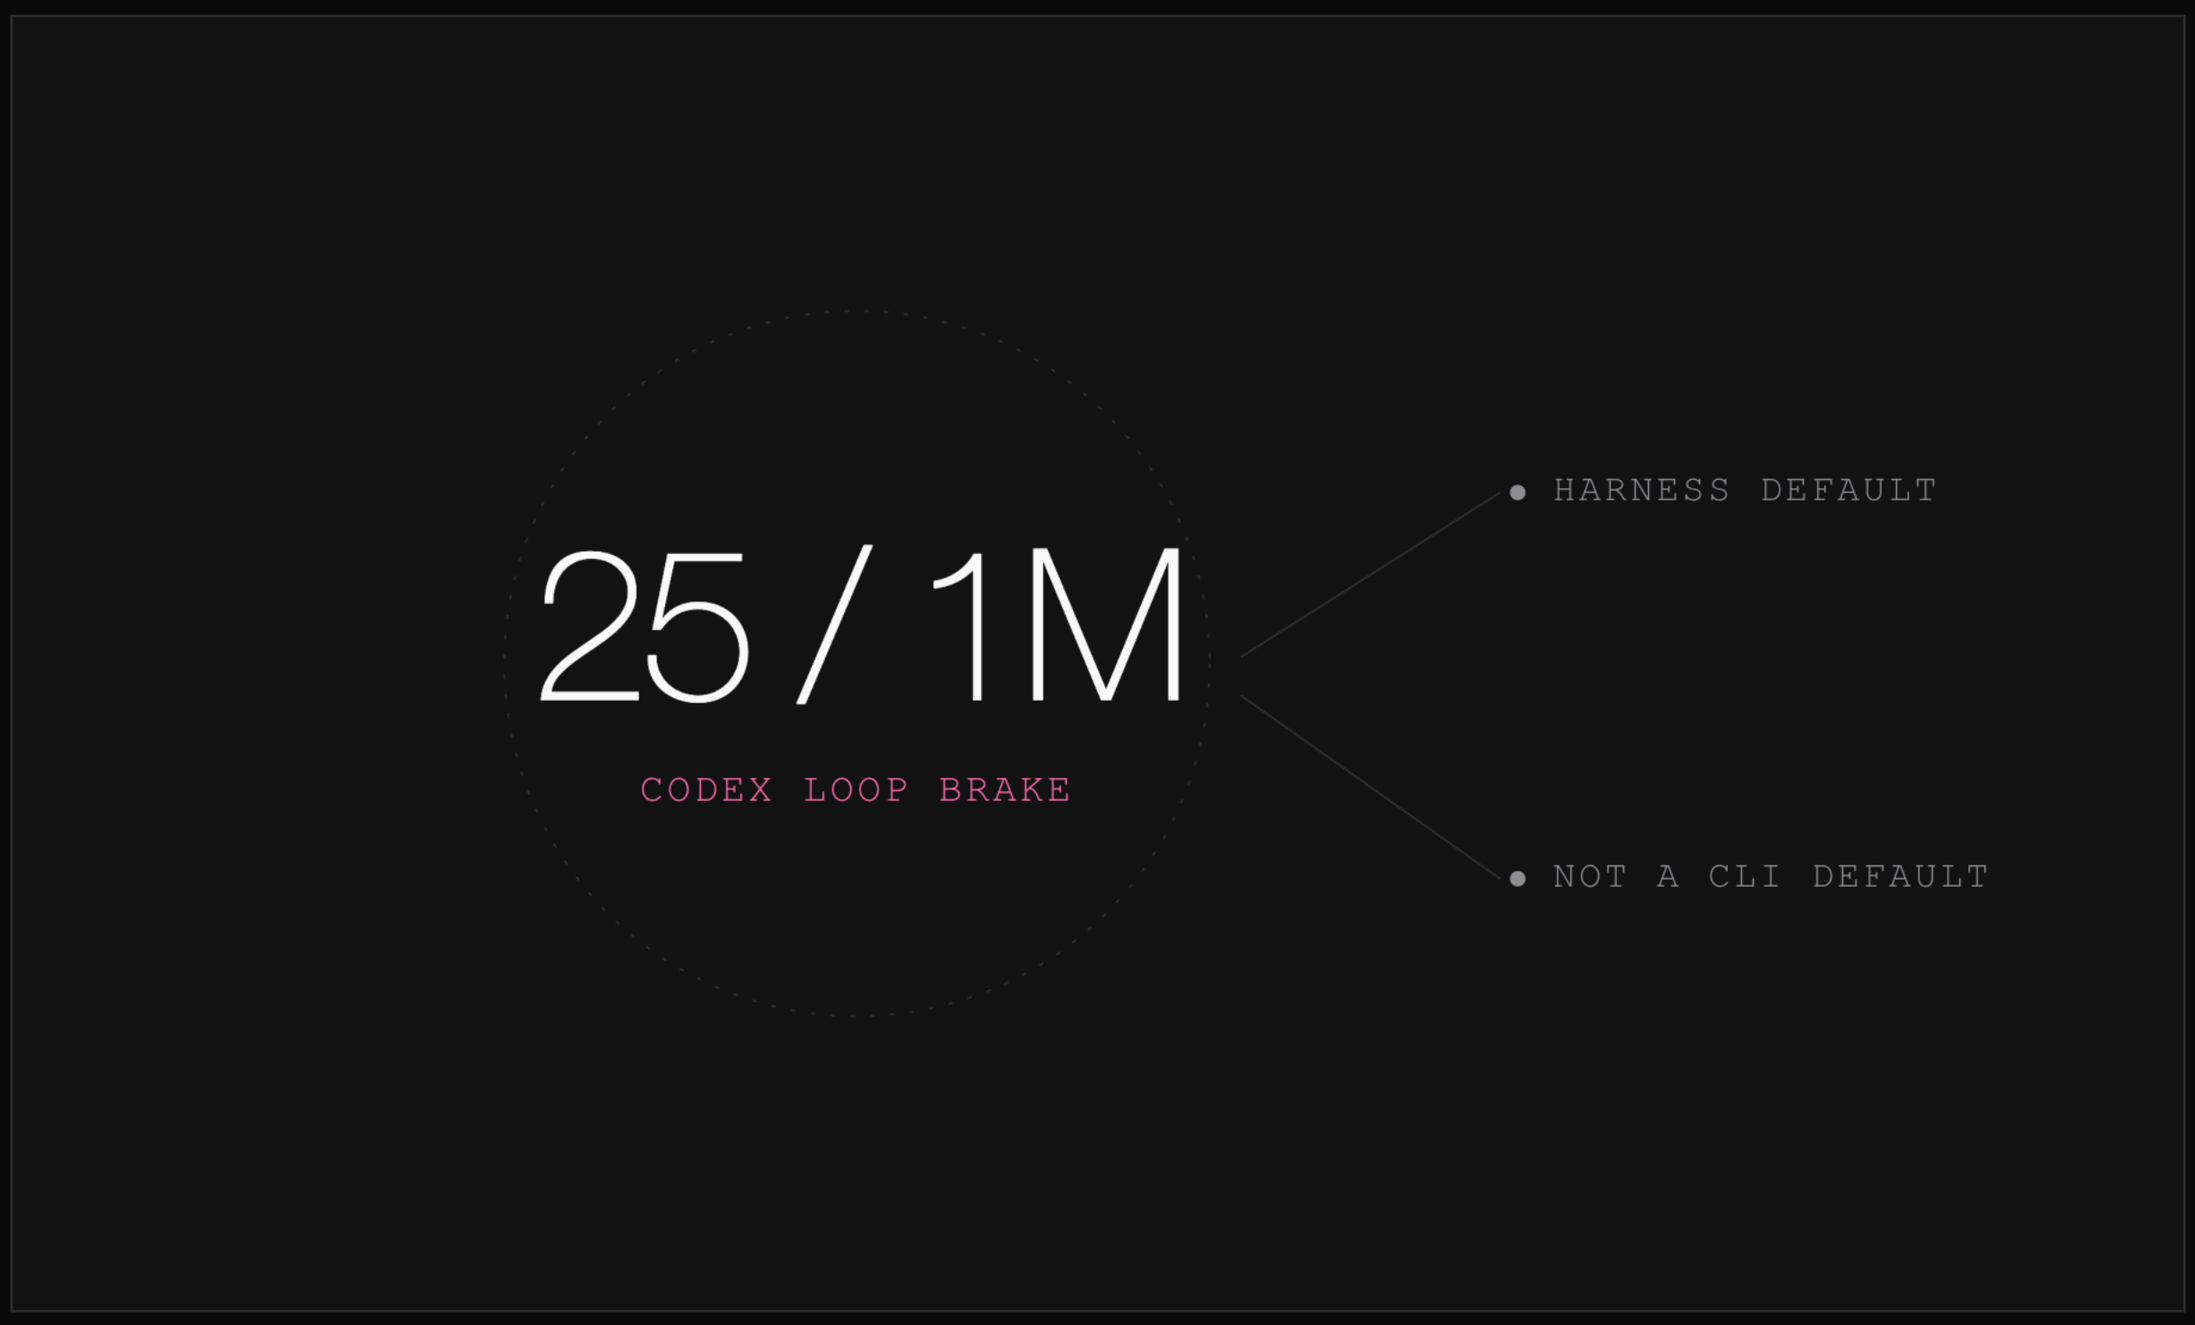


FIG. 5 · VERYDIAN

06 · before the swap

Four things to re-check before you swap engines

The docs warn that switching engines may require different credentials, models, tools, and network rules. Start with the allowlist, the permission default, the loop brake and the credentials.

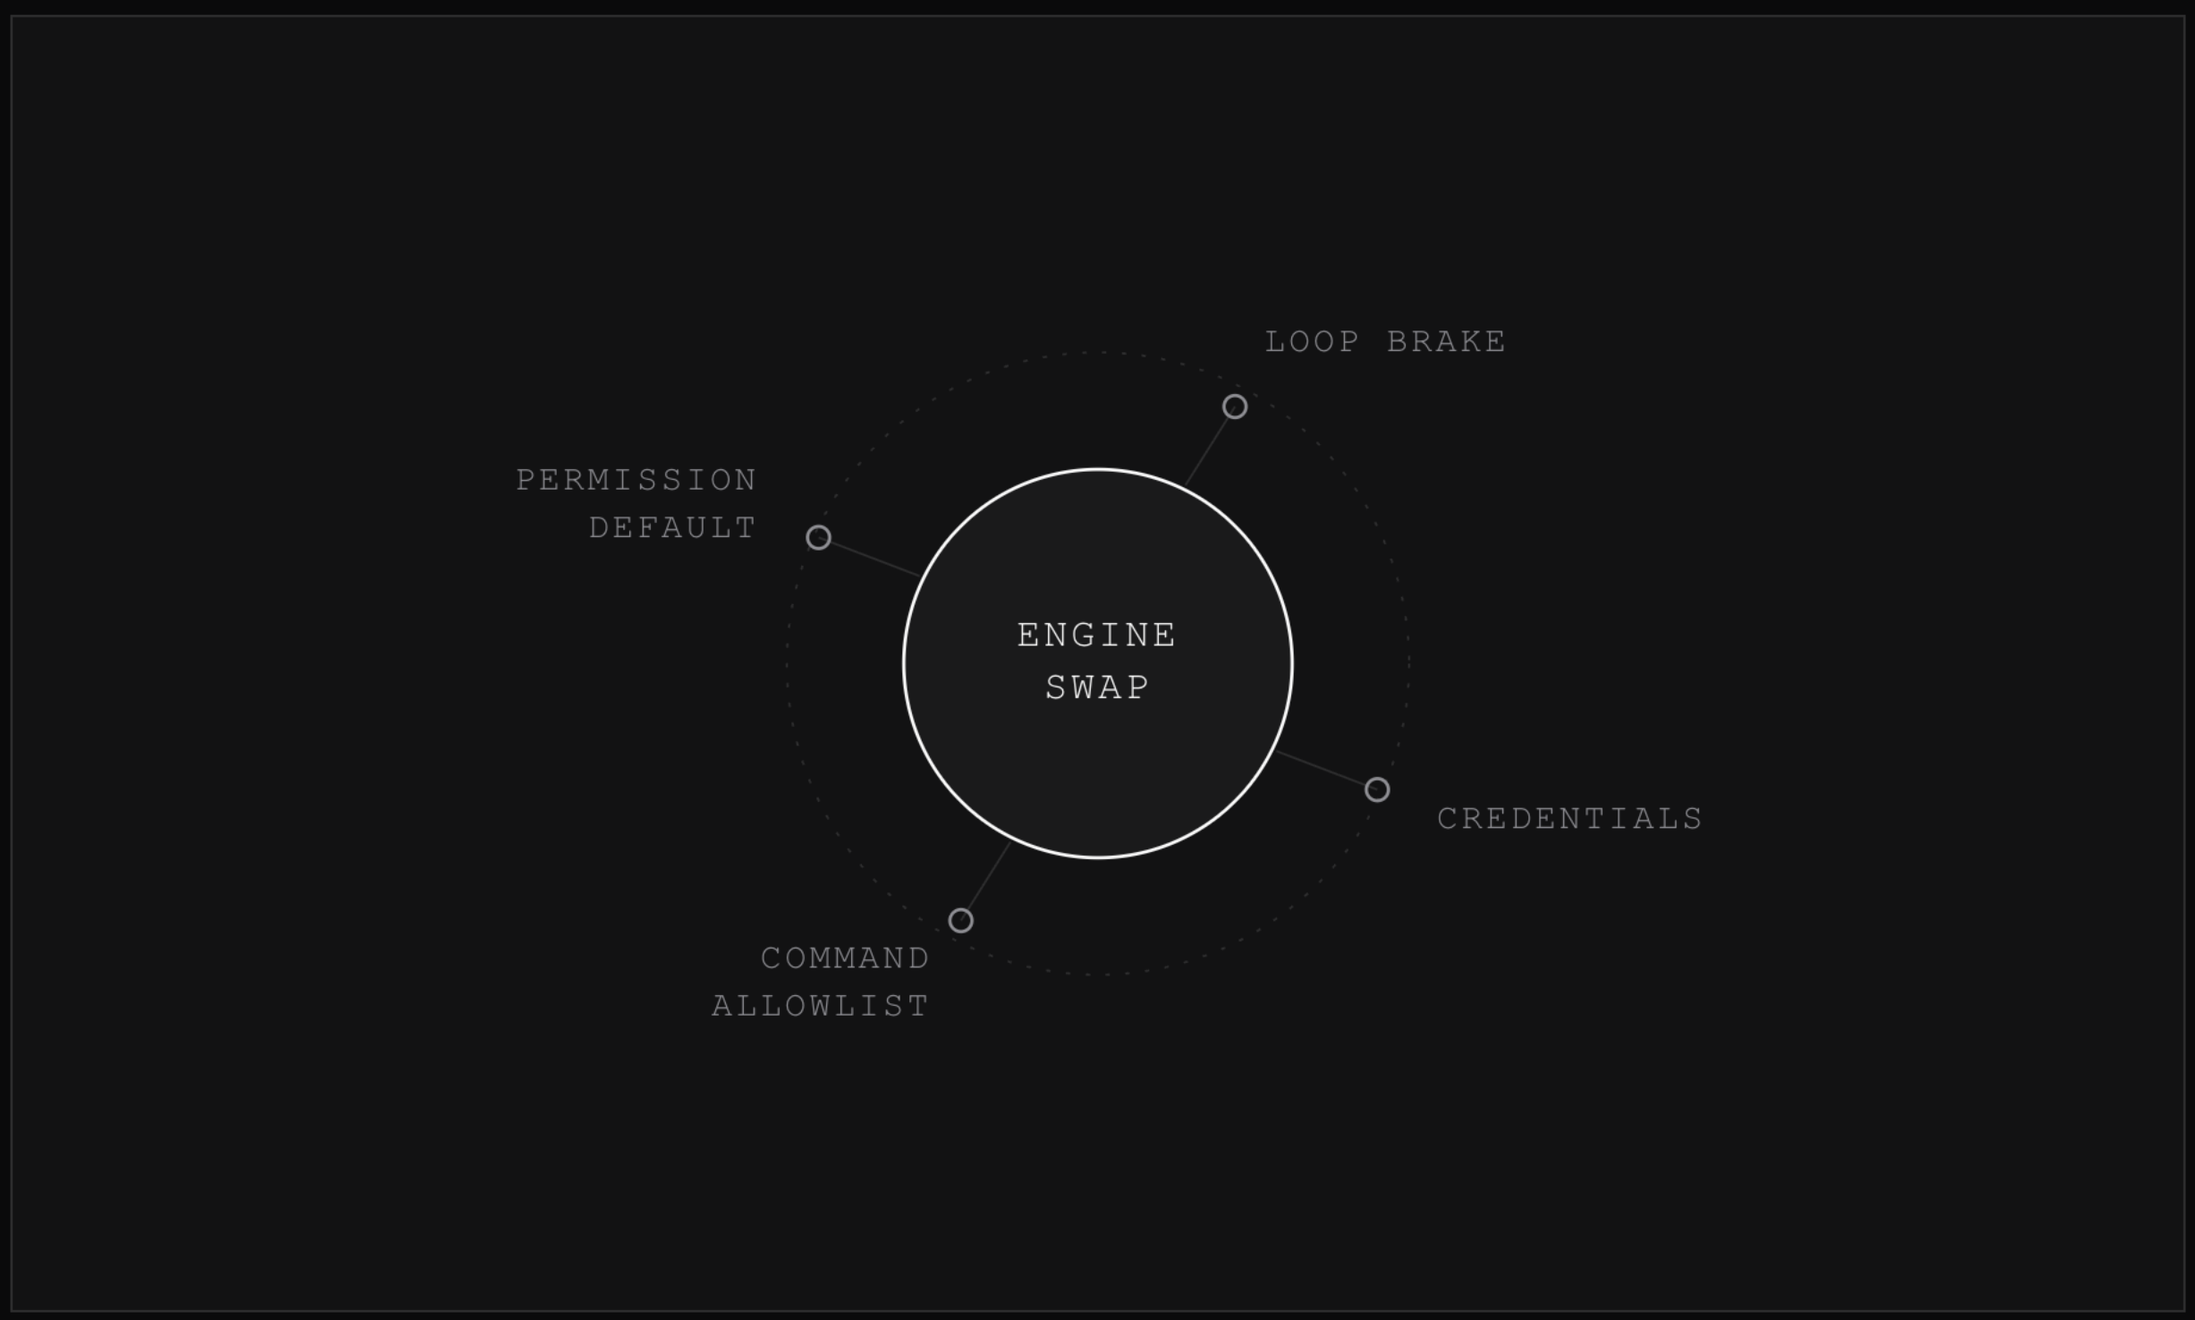


FIG. 6 · VERYDIAN



Re-check the guardrails before you swap

The docs are moving. Some features are marked experimental.

DIFF THE GUARDRAILS