

# N8N Low Code AI

## System being used in this documentation

1. Microsoft Windows 10 Home Edition (64 bit)
2. Open source n8n AI (Self-hosted)

## Overview


This is a document to install n8n Low code AI and create a simple agent using open AI (or open Router).

URL for N8n AI Documentation: <https://docs.n8n.io/>

## N8n AI Installation:

### Pre-req: install docker desktop (windows)

1. Open windows power shell.
2. Execute command : `docker volume create n8n_data`

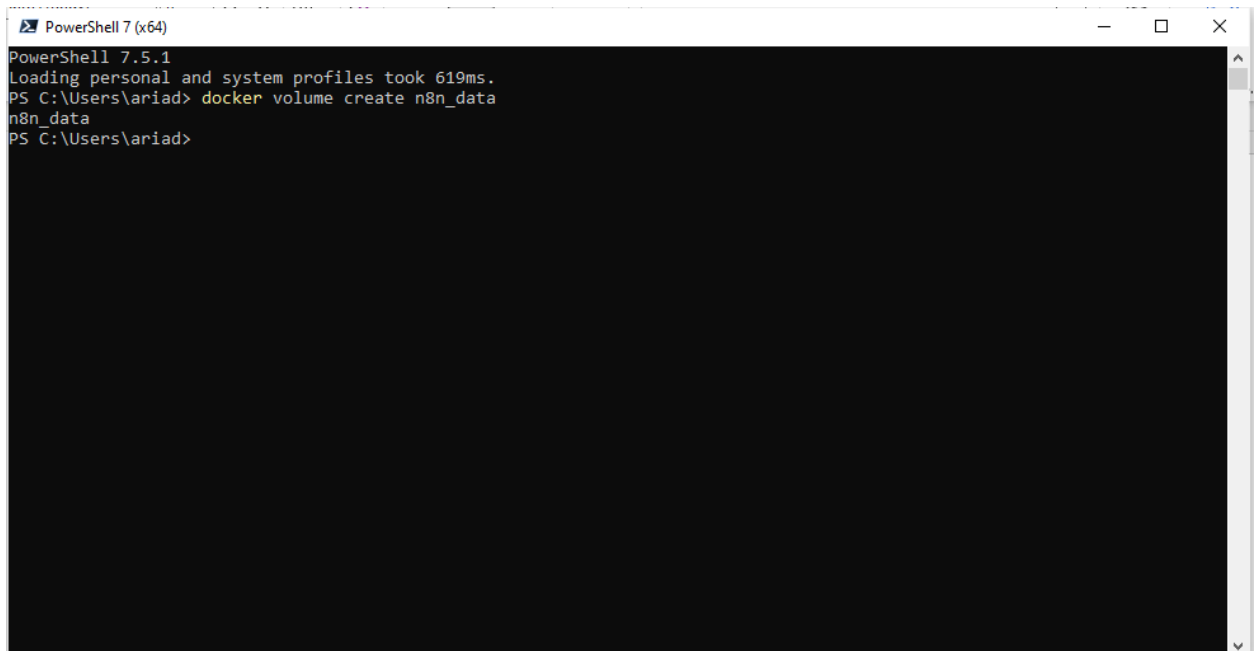A screenshot of a PowerShell terminal window titled "PowerShell 7 (x64)". The terminal shows the following text: "PowerShell 7.5.1", "Loading personal and system profiles took 619ms.", "PS C:\Users\ariad> docker volume create n8n\_data", "n8n\_data", and "PS C:\Users\ariad>". The background of the terminal is black with white text. The window has standard Windows window controls (minimize, maximize, close) in the top right corner.

3. Execute command : `docker run -it --rm --name n8n -p 5678:5678 -v n8n_data:/home/node/.n8n docker.n8n.io/n8nio/n8n`

```
PowerShell 7 (x64)
PowerShell 7.5.1
Loading personal and system profiles took 619ms.
PS C:\Users\ariad> docker volume create n8n_data
n8n_data
PS C:\Users\ariad> docker run -it --rm --name n8n -p 5678:5678 -v n8n_data:/home/node/.n8n docker.n8n.io/n8nio/n8n
Unable to find image 'docker.n8n.io/n8nio/n8n:latest' locally
latest: Pulling from n8nio/n8n
a2fdd506f8bc: Download complete
05c1247b2bae: Downloading [=====>] 19.92MB/42.95MB
301aabe3d905: Download complete
609b753813e6: Download complete
53841dc578f1: Download complete
4f4fb700ef54: Already exists
00e0cfd3cd93: Download complete
cc621c8544dd: Downloading [=====>] 51.38MB/142.9MB
b14faa6889e8: Download complete
2de80563befb: Download complete
```

Wait until the process is complete.

4. Check the localhost in browser. Open browser and put <http://localhost:5678> for the URL.

← → ↻ ⓘ localhost:5678/setup



### Set up owner account

Email \*

First Name \*

Last Name \*

Password \*

8+ characters, at least 1 number and 1 capital letter

☐ I want to receive security and product updates

Next

5. Register your account. Click 'Next'.
6. Enter your email and click 'Send me free license key' (for registering community edition)

## Get paid features for free (forever)

Receive a free activation key for the advanced features below - lifetime access.



### Workflow history

Review and restore any workflow version from the last 24 hours



### Advanced debugging

Easily fix any workflow execution that's errored, then re-run it



### Execution search and tagging

Search and organize past workflow executions for easier review



### Folders

Organize your workflows in a nested folder structure

Enter email to receive your license key \*

ariadana.somadiaredja@gmail.com

Included features may change, but once unlocked, you'll keep them forever. [More info](#)

[Skip](#)

[Send me a free license key](#)

7. Open your email, then get the license key for activating the account.
8. Setting the timezone, execute following command :  
docker volume create n8n\_data

```
docker run -it \  
--name n8n \  
-p 5678:5678 \  
-e GENERIC_TIMEZONE="Asia/Jakarta" \  
-e TZ="Asia/Jakarta" \  
-v n8n_data:/home/node/.n8n \  
docker.n8n.io/n8nio/n8n
```

```
PowerShell 7 (x64)
Check the spelling of the name, or if a path was included, verify that the path is correct and try again.
PS C:\Users\ariad> -v n8n_data:/home/node/.n8n \
-v: The term '-v' is not recognized as a name of a cmdlet, function, script file, or executable program.
Check the spelling of the name, or if a path was included, verify that the path is correct and try again.
PS C:\Users\ariad> docker.n8n.io/n8nio/n8n
docker.n8n.io/n8nio/n8n: The term 'docker.n8n.io/n8nio/n8n' is not recognized as a name of a cmdlet, function, script file, or executable program.
Check the spelling of the name, or if a path was included, verify that the path is correct and try again.
PS C:\Users\ariad> docker run -it --rm --name n8n -p 5678:5678 -e GENERIC_TIMEZONE="Asia/Jakarta" -e TZ="Asia/Jakarta" -v n8n_data:/home/node/.n8n docker.n8n.io/n8nio/n8n
docker: Error response from daemon: Conflict. The container name "/n8n" is already in use by container "bdabe381506907a6d5dc3f4ace0b8deaae9e9e66fbf1305edee47bef948d4fdb". You have to remove (or rename) that container to be able to reuse that name.

Run 'docker run --help' for more information
PS C:\Users\ariad> docker run -it --rm --name n8n -p 5678:5678 -e GENERIC_TIMEZONE="Asia/Jakarta" -e TZ="Asia/Jakarta" -v n8n_data:/home/node/.n8n docker.n8n.io/n8nio/n8n
Unable to find image 'docker.n8n.io/n8nio/n8n:latest' locally
latest: Pulling from n8nio/n8n
4f4fb700ef54: Already exists
05c1247b2bae: Downloading [====>] 4.194MB/42.95MB
301aeb3d905: Download complete
699b753813e6: Download complete
53841dc578f1: Downloading [=====>] 5.243MB/23.7MB
a2fdd506f8bc: Download complete
00e0cfd3cd93: Download complete
cc621c8544dd: Downloading [==>] 6.291MB/142.9MB
b14faa6889e8: Download complete
2de80563befb: Downloading [=====>] 4.194MB/6.278MB
```

Wait until the setup is completed.

9. Updating the n8n application. Execute command:

`docker pull docker.n8n.io/n8nio/n8n`

```
Stopping n8n...
PS C:\Users\ariad> docker pull docker.n8n.io/n8nio/n8n
Using default tag: latest
latest: Pulling from n8nio/n8n
Digest: sha256:509c9138e88a94bc0a5396f1ce3d3040034206ef74c99b5a72128d95f8101adb
Status: Image is up to date for docker.n8n.io/n8nio/n8n:latest
docker.n8n.io/n8nio/n8n:latest
PS C:\Users\ariad>
```

10. Find the container ID. Execute command: `docker ps -a`

11. Stop the container. Execute command : `docker stop <container_id>`

```
.0.0.0:8290->8290/tcp, 0.0.0.0:9164->9164/tcp
PS C:\Users\ariad> docker stop b018f29bc96d
b018f29bc96d
```

12. If the container is still available, remove the container. Execute command : `docker rm <container_id>`

13. Run the container again. Execute command :

`docker run -it --name n8n -p 5678:5678 -e GENERIC_TIMEZONE="Asia/Jakarta" -e TZ="Asia/Jakarta" -v n8n_data:/home/node/.n8n docker.n8n.io/n8nio/n8n`

14. Run the container with the tunnel. Execute command :

`<ctrl + c>` - stopping n8n container

`docker volume create n8n_data`

```
docker run -it --name n8n -p 5678:5678 -v n8n_data:/home/node/.n8n
```

```
docker.n8n.io/n8nio/n8n start --tunnel
```

```
0.0.0.0:8290->78290/tcp, 0.0.0.0:9164->79164/tcp
PS C:\Users\ariad> docker volume create n8n_data
n8n_data
PS C:\Users\ariad> docker run -it --rm --name n8n -p 5678:5678 -v n8n_data:/home/node/.n8n docker.n8n.io/n8nio/n8n start --tunnel
Permissions 0644 for n8n settings file /home/node/.n8n/config are too wide. This is ignored for now, but in the future n8n will attempt to change the permissions automa
tically. To automatically enforce correct permissions now set N8N_ENFORCE_SETTINGS_FILE_PERMISSIONS=true (recommended), or turn this check off set N8N_ENFORCE_SETTINGS_
FILE_PERMISSIONS=false.
User settings loaded from: /home/node/.n8n/config
Initializing n8n process
n8n ready on 0.0.0.0, port 5678

There is a deprecation related to your environment variables. Please take the recommended actions to update your configuration:
- N8N_RUNNERS_ENABLED -> Running n8n without task runners is deprecated. Task runners will be turned on by default in a future version. Please set `N8N_RUNNERS_ENABLED
=true` to enable task runners now and avoid potential issues in the future. Learn more: https://docs.n8n.io/hosting/configuration/task-runners/

[license SDK] Skipping renewal on init because renewal is not due yet or cert is not initialized

Waiting for tunnel ...
Tunnel URL: https://dsqvrakiohjrm41hanwnoo.hooks.n8n.cloud/

IMPORTANT! Do not share with anybody as it would give people access to your n8n instance!
Version: 1.95.3

Editor is now accessible via:
https://dsqvrakiohjrm41hanwnoo.hooks.n8n.cloud

Press "o" to open in Browser.
```

## Use Case: forgot password in a self hosted n8n

1. Find your container ID with command : `docker ps -a`

```
PS C:\Users\ariad> docker ps -a
```

| CONTAINER ID                                        | IMAGE                                                       | NAMES                                                                                                         | COMMAND                              | CREATED                  | STATUS           | PORTS               |
|-----------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|--------------------------------------|--------------------------|------------------|---------------------|
| c93156cab510                                        | docker.n8n.io/n8nio/n8n                                     | n8n                                                                                                           | "tini -- /docker-ent..."             | About an hour ago        | Up About an hour | 0.0.0.0:5678->5678/ |
| ed4125663150                                        | 094652273a19                                                | k8s_ags-integrator-container_ags-integrator-deployment-5b6d87b5df-cj679_default                               | "/home/wso2carbon/do..."             | 8 hours ago              | Up 8 hours       |                     |
| c0_10                                               | 094652273a19                                                | k8s_ags-integrator-container_ags-integrator-deployment-5b6d87b5df-8bxzc_default                               | "/home/wso2carbon/do..."             | 8 hours ago              | Up 8 hours       |                     |
| 721038fce874                                        | 094652273a19                                                | k8s_ags-integrator-container_ags-integrator-deployment-5b6d87b5df-8bxzc_default                               | "/home/wso2carbon/do..."             | 8 hours ago              | Up 8 hours       |                     |
| b2_10                                               | 094652273a19                                                | k8s_ags-integrator-container_ags-integrator-deployment-5b6d87b5df-kjj77_default                               | "/home/wso2carbon/do..."             | 8 hours ago              | Up 8 hours       |                     |
| 11da4951bd40                                        | 094652273a19                                                | k8s_ags-integrator-container_ags-integrator-deployment-5b6d87b5df-kjj77_default                               | "/home/wso2carbon/do..."             | 8 hours ago              | Up 8 hours       |                     |
| d3_11                                               | 5b161f051d01                                                | k8s_controller-ingress-nginx-controller-7d76478684-hnkf2_ingress-nginx_02d6c30a-f917-4494-b51a-401c8e77f332_9 | "/usr/bin/dumb-init ..." 8 hours ago | Up 8 hours               |                  |                     |
| 52a44d5c0c5c                                        | 5b161f051d01                                                | k8s_controller-ingress-nginx-controller-7d76478684-hnkf2_ingress-nginx_02d6c30a-f917-4494-b51a-401c8e77f332_9 | "/app/k3d-tools noop" 7 days ago     | Exited (255) 8 hours ago |                  |                     |
| 1ccb7e15cd19                                        | ghcr.io/k3d-io/k3d-tools:5.8.3                              | k3d-wasm-tools                                                                                                | "/bin/sh -c nginx-pr..." 7 days ago  | Exited (137) 8 hours ago |                  |                     |
| 80cf538e76b9                                        | ghcr.io/k3d-io/k3d-proxy:5.8.3                              | k3d-wasm-serverlb                                                                                             | "/bin/k3d-entrypoint..." 7 days ago  | Exited (143) 8 hours ago |                  |                     |
| 6111e46f849                                         | ghcr.io/deislabs/containerd-wasm-shims/examples/k3d:v0.10.0 | k3d-wasm-agent-1                                                                                              | "/bin/k3d-entrypoint..." 7 days ago  | Exited (143) 8 hours ago |                  |                     |
| 224d85997a5d                                        | ghcr.io/deislabs/containerd-wasm-shims/examples/k3d:v0.10.0 | k3d-wasm-agent-0                                                                                              | "/bin/k3d-entrypoint..." 7 days ago  | Exited (143) 8 hours ago |                  |                     |
| 05d8435d15b3                                        | ghcr.io/deislabs/containerd-wasm-shims/examples/k3d:v0.10.0 | k3d-wasm-agent-0                                                                                              | "/bin/k3d-entrypoint..." 7 days ago  | Exited (143) 8 hours ago |                  |                     |
| 052f39bfa0bb                                        | wso2/wso2-integration-control-plane:latest                  | k3d-wasm-server-0                                                                                             | "/home/wso2carbon/do..." 3 weeks ago | Exited (255) 3 weeks ago |                  | 0.0.0.0:9743->9743/ |
| tcp                                                 | integration-control-plane                                   | integration-control-plane                                                                                     | "/home/wso2carbon/do..." 3 weeks ago | Exited (255) 3 weeks ago |                  | 0.0.0.0:8253->8253/ |
| 3e91cfb9242c                                        | hellodocker:1.0.0                                           | integration-control-plane                                                                                     | "/home/wso2carbon/do..." 3 weeks ago | Exited (255) 3 weeks ago |                  | 0.0.0.0:8253->8253/ |
| tcp, 0.0.0.0:8290->8290/tcp, 0.0.0.0:9164->9164/tcp | 0.0.0.0:8290->8290/tcp, 0.0.0.0:9164->9164/tcp              | musings_margulis                                                                                              | "/home/wso2carbon/do..." 3 weeks ago | Exited (255) 3 weeks ago |                  | 0.0.0.0:8253->8253/ |

2. Get your n8n container ID

3. Execute the following command : `docker exec -it`

`<your_n8n_container_name_or_id> n8n user-management:reset`


```
PS C:\Users\ariad> docker exec -it c93156cab510 n8n user-management:reset
Permissions 0644 for n8n settings file /home/node/.n8n/config are too wide. This is ignored for now, but in the future n8n will attempt to change the permissions automa
tically. To automatically enforce correct permissions now set N8N_ENFORCE_SETTINGS_FILE_PERMISSIONS=true (recommended), or turn this check off set N8N_ENFORCE_SETTINGS_
FILE_PERMISSIONS=false.
```

4. Restart the container for n8n. Command : `docker restart`

`<your_n8n_container_name_or_id>`

```
0.0.0.0:8290->78290/tcp, 0.0.0.0:9164->79164/tcp
PS C:\Users\ariad> docker restart c93156cab510
c93156cab510
PS C:\Users\ariad>
```

Open url in browser : localhost:5678

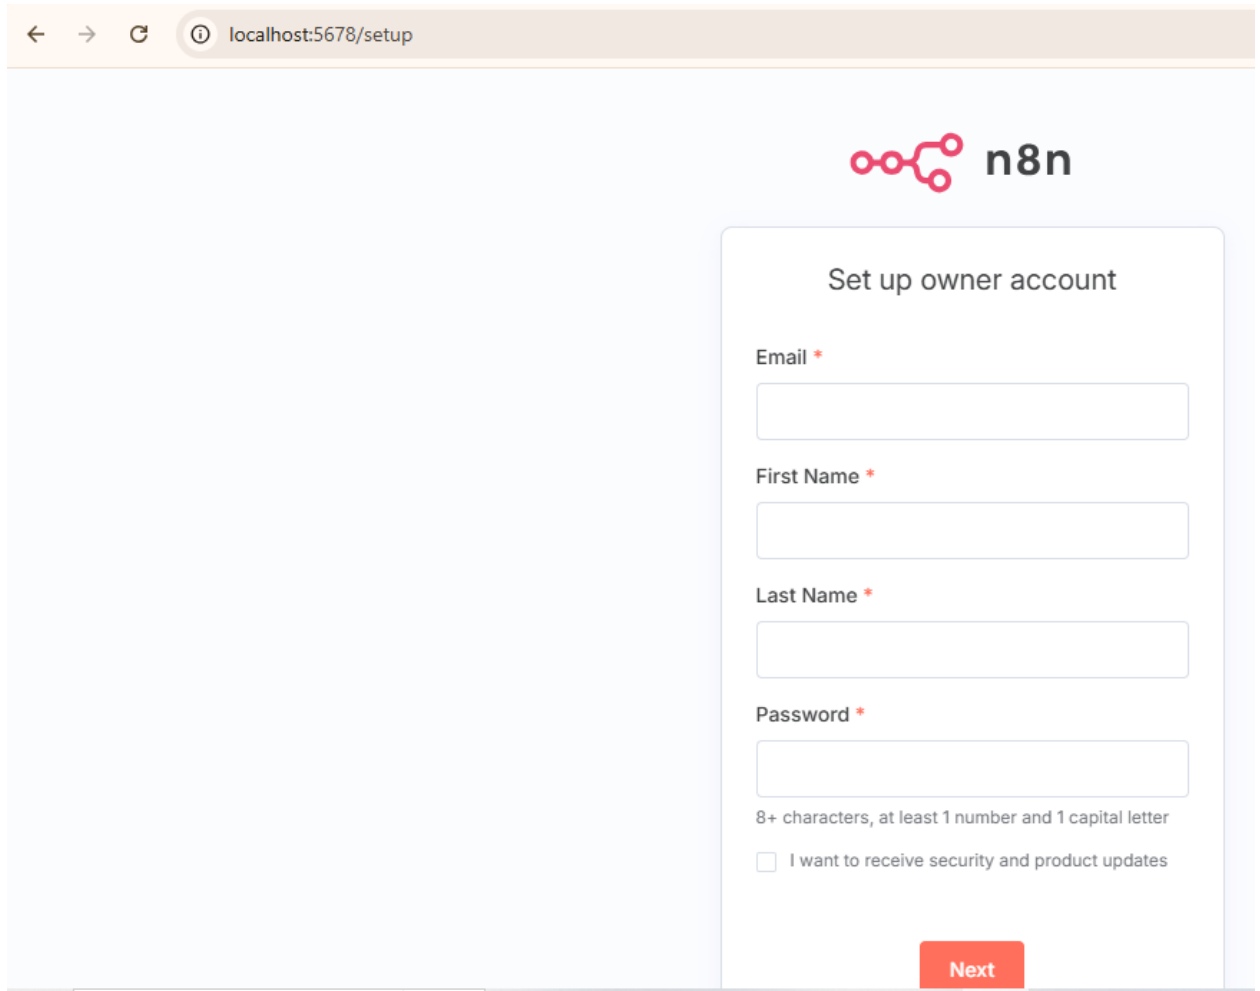

← → ↻ ⓘ localhost:5678/setup

 n8n

### Set up owner account

Email \*

First Name \*

Last Name \*

Password \*

8+ characters, at least 1 number and 1 capital letter

☐ I want to receive security and product updates


Next

5. Entering the new credentials again.


My password : \*\*\*

## Creating the work flow.

1. Login into the console localhost:5678, enter your credentials.
2. In the console, select start from scratch

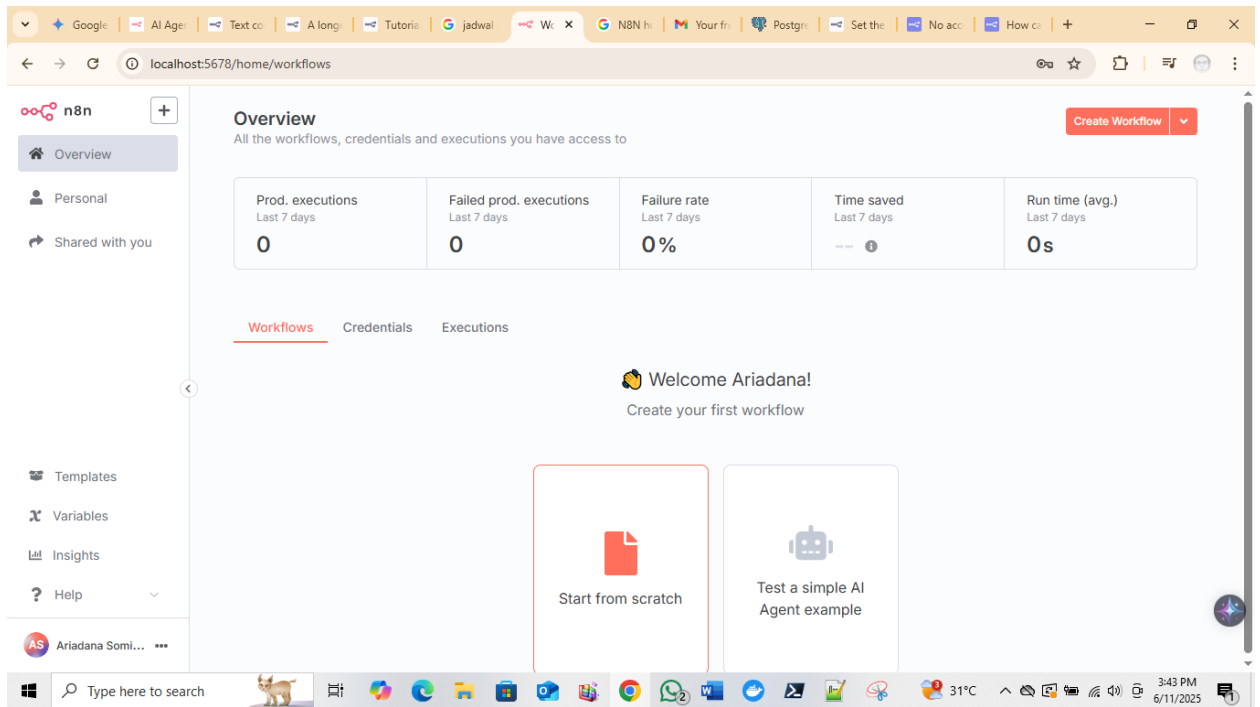


### 3. Click open node panel

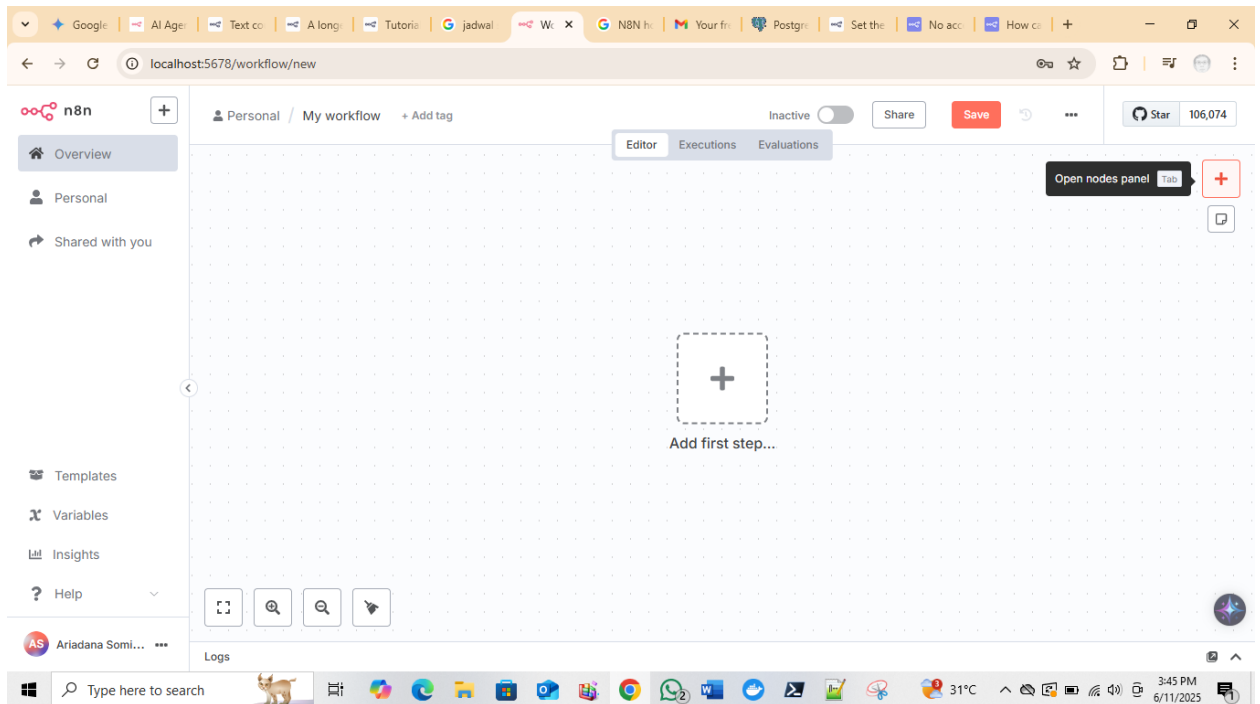


### 4. Select 'on chat message'

The image displays two screenshots of the n8n workflow editor interface. The top screenshot shows a blank canvas with a dashed box and a plus sign, labeled "Add first step...". The right sidebar lists triggers: "On form submission", "When executed by another workflow", "On chat message", "When running evaluation", and "Other ways...". The bottom screenshot shows the same interface with a "When chat message received" trigger node added to the canvas. A red "Open chat" button is visible at the bottom right of the canvas area. The interface includes a left sidebar with navigation options like Overview, Personal, Shared with you, Templates, Variables, Insights, and Help. The top bar shows the n8n logo, workflow name "Personal / My workflow", and status "Inactive". The bottom status bar shows system information like time and date.


5. Click on the + sign

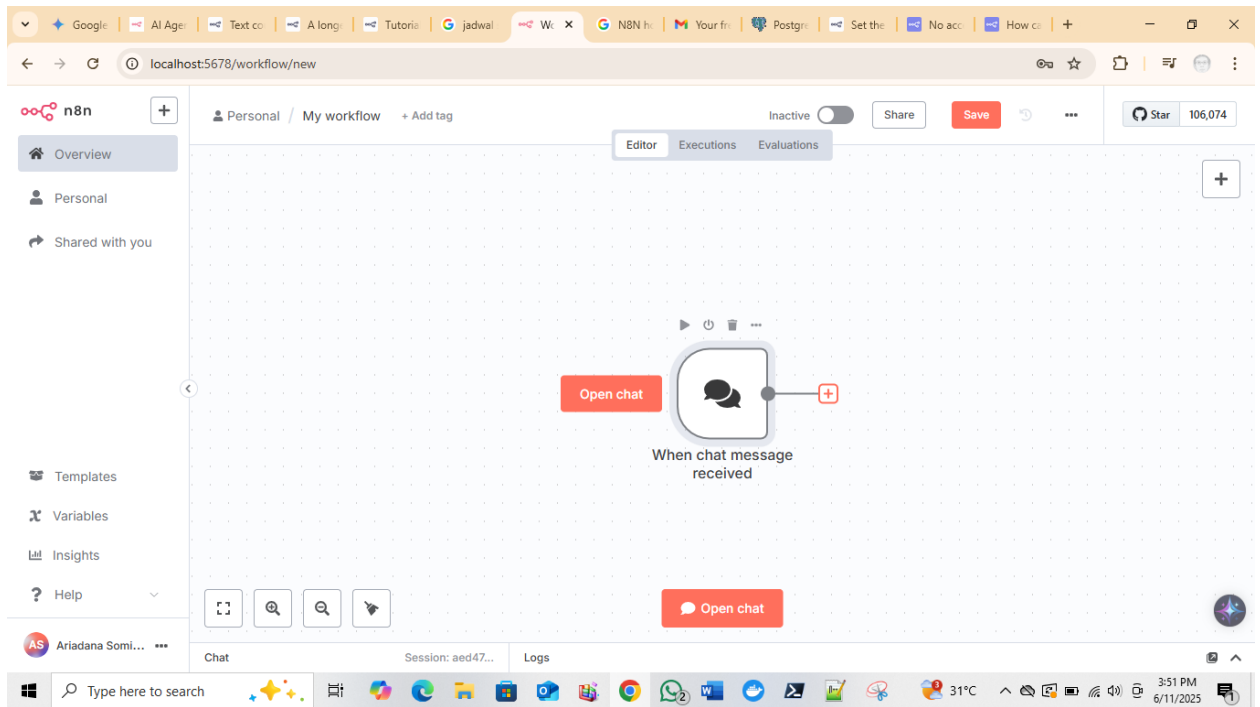


## Click AI

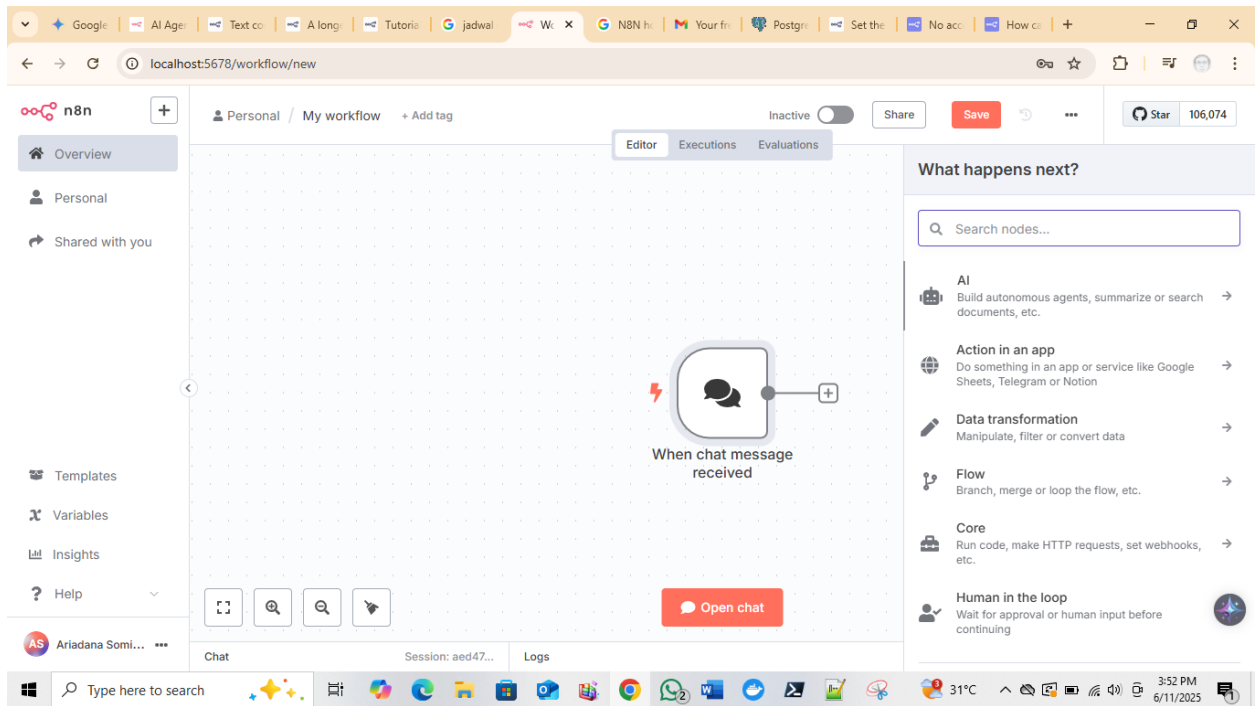


## Select AI Agent

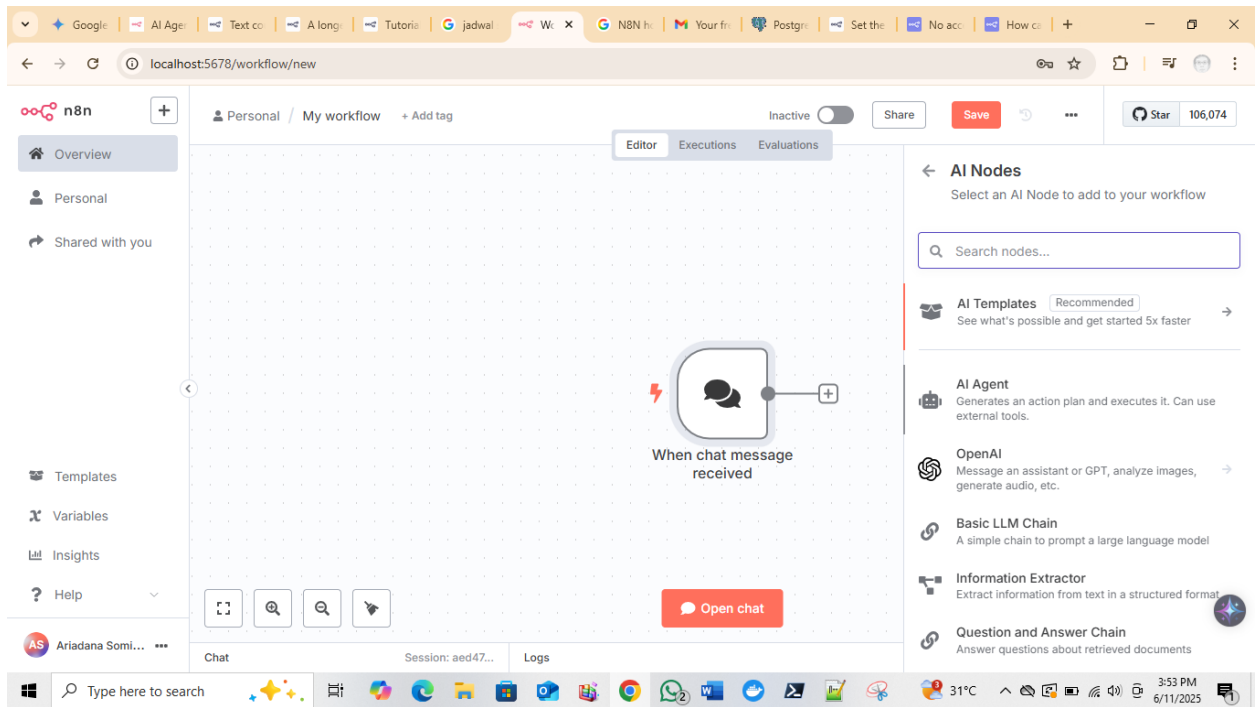


Click the + sign for Chat Model

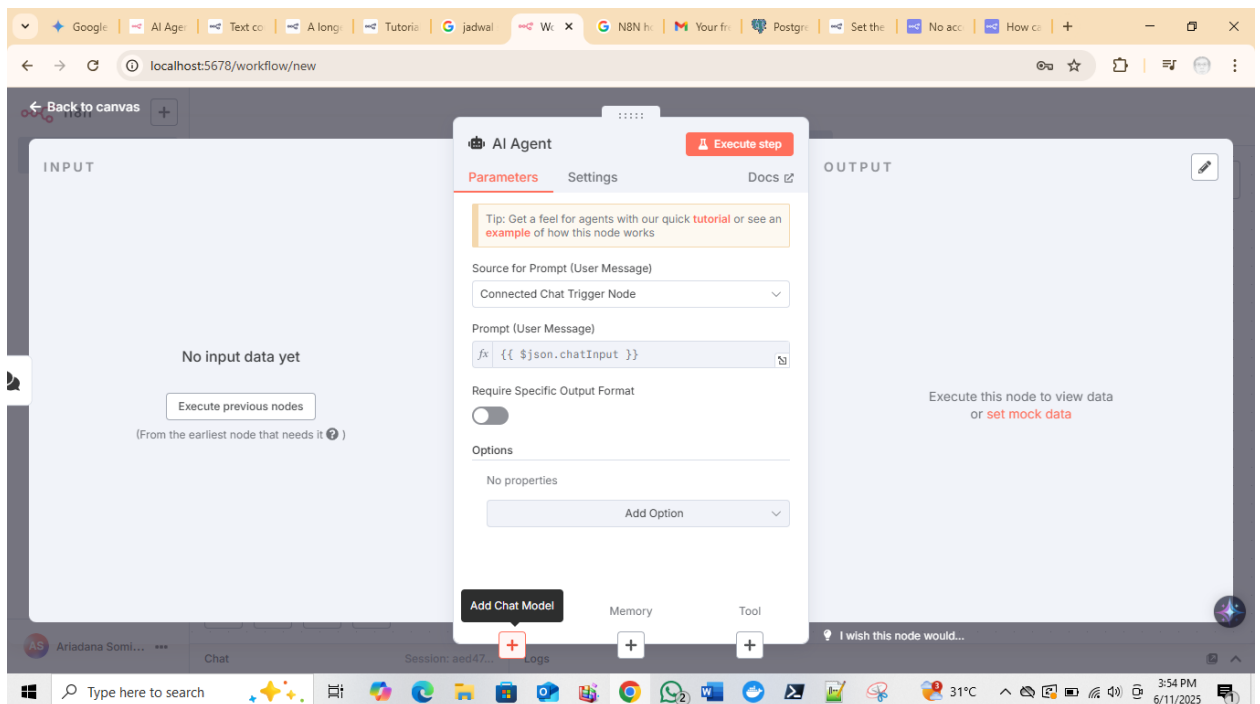

Select open ai chat model.

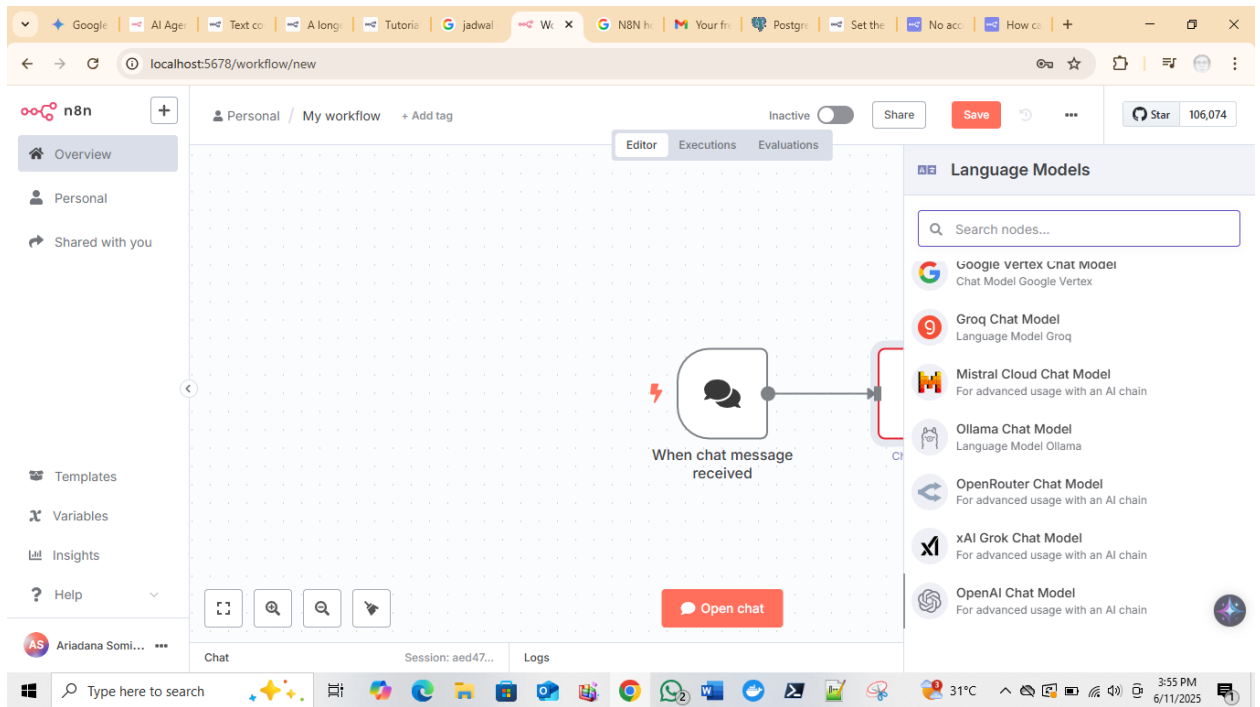


## Create new credentials

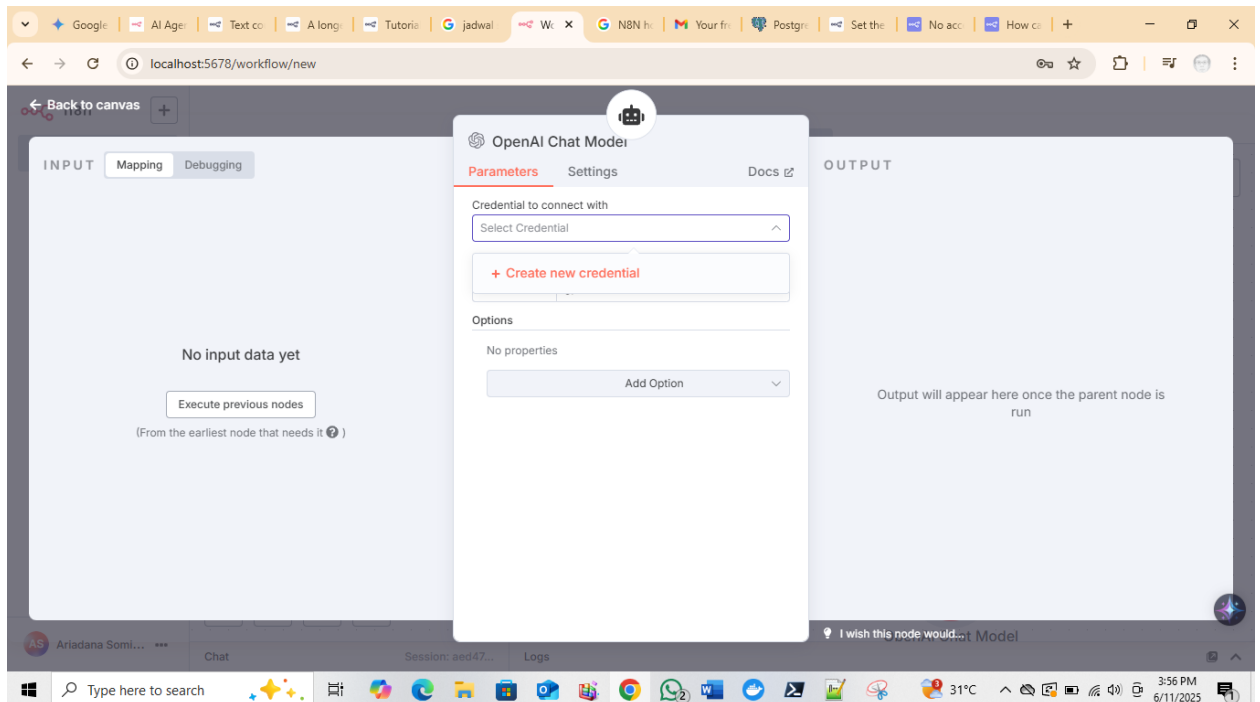


## Create Open AI account


1. Enter the url in browser : <https://platform.openai.com/>, then create your account.
2. Enter URL : <https://platform.openai.com/api-keys> and create your api key

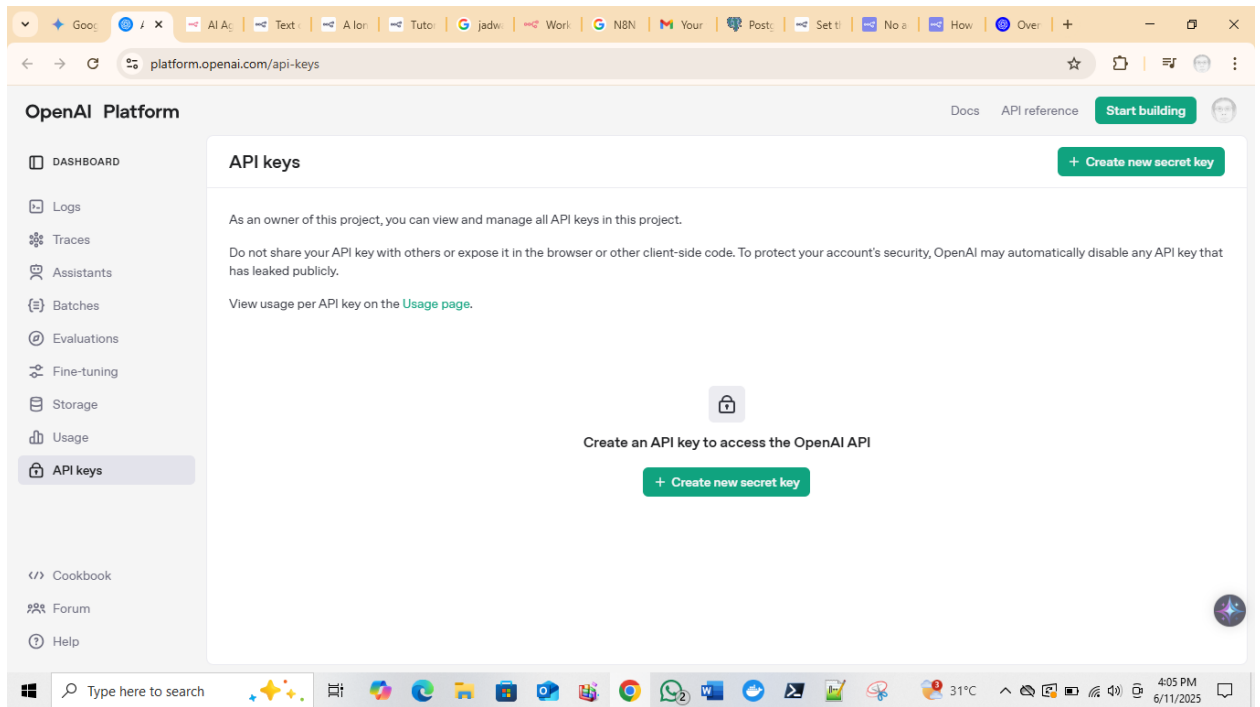

## Create new secret key

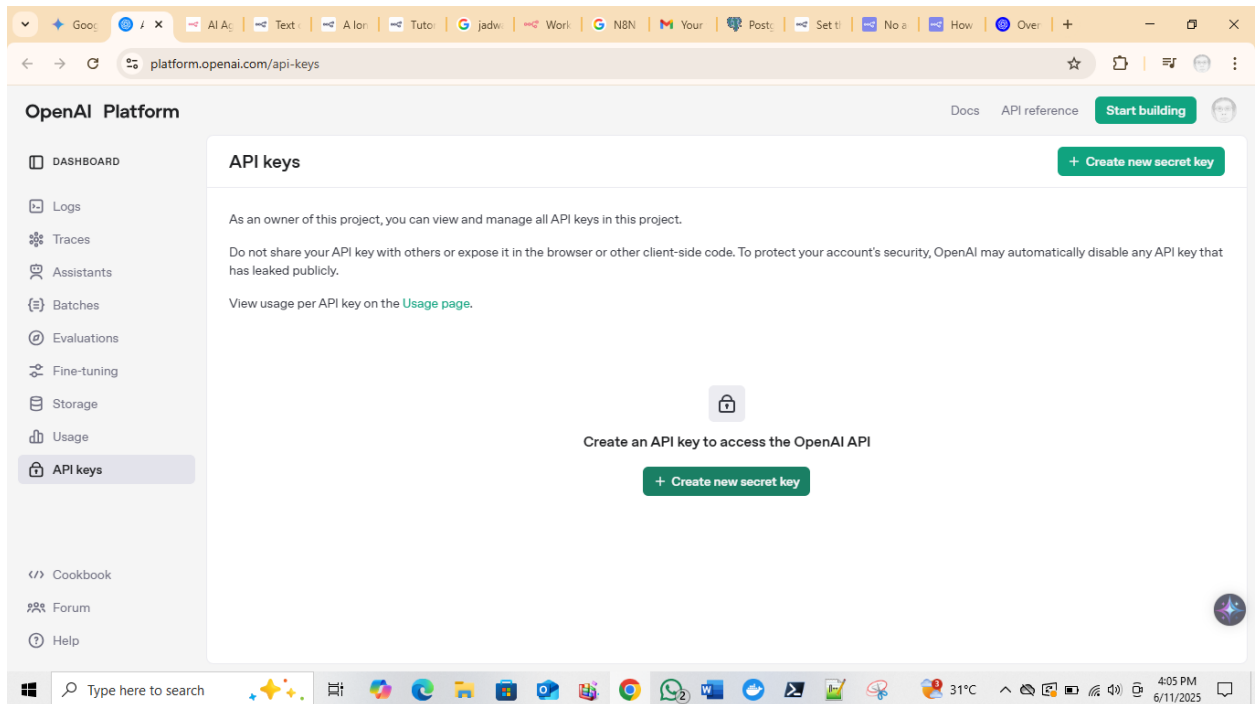

## Name your api key and click create secret key

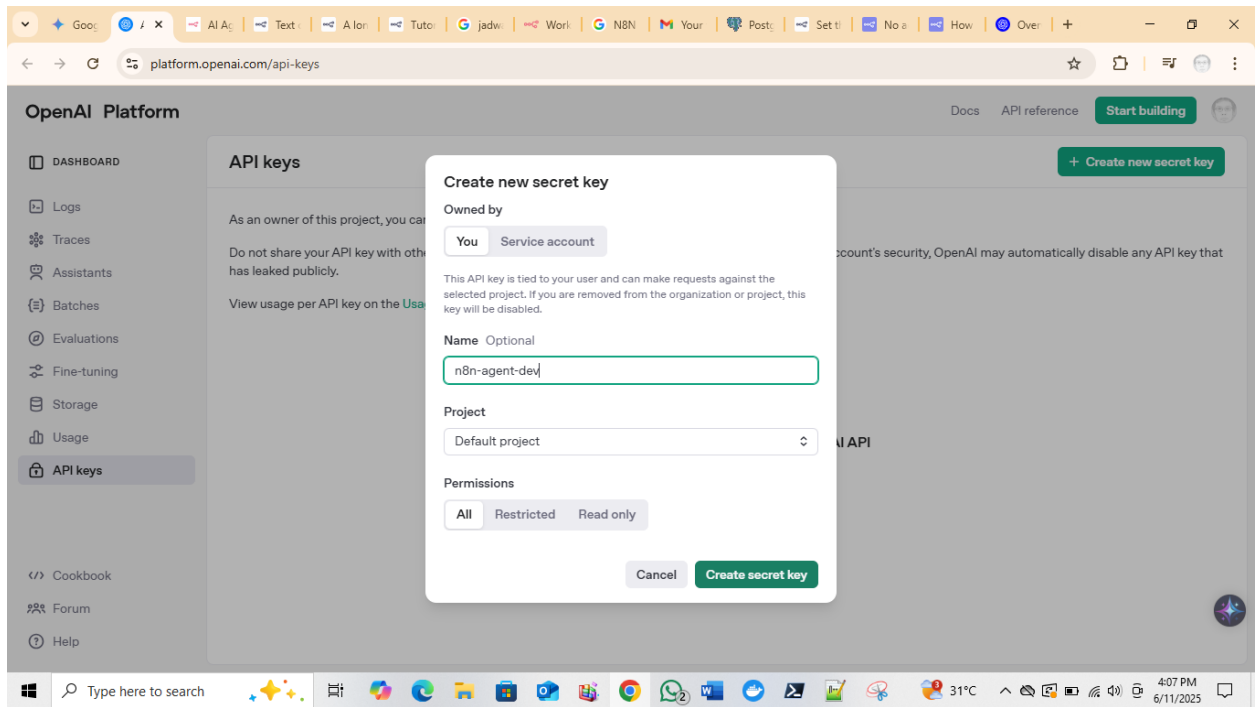


Save api key.

Apikey : \*\*\*


## Creating Open Router Account (alternative to open AI).

1. Go to URL: <https://openrouter.ai/>
2. Register with open router account.

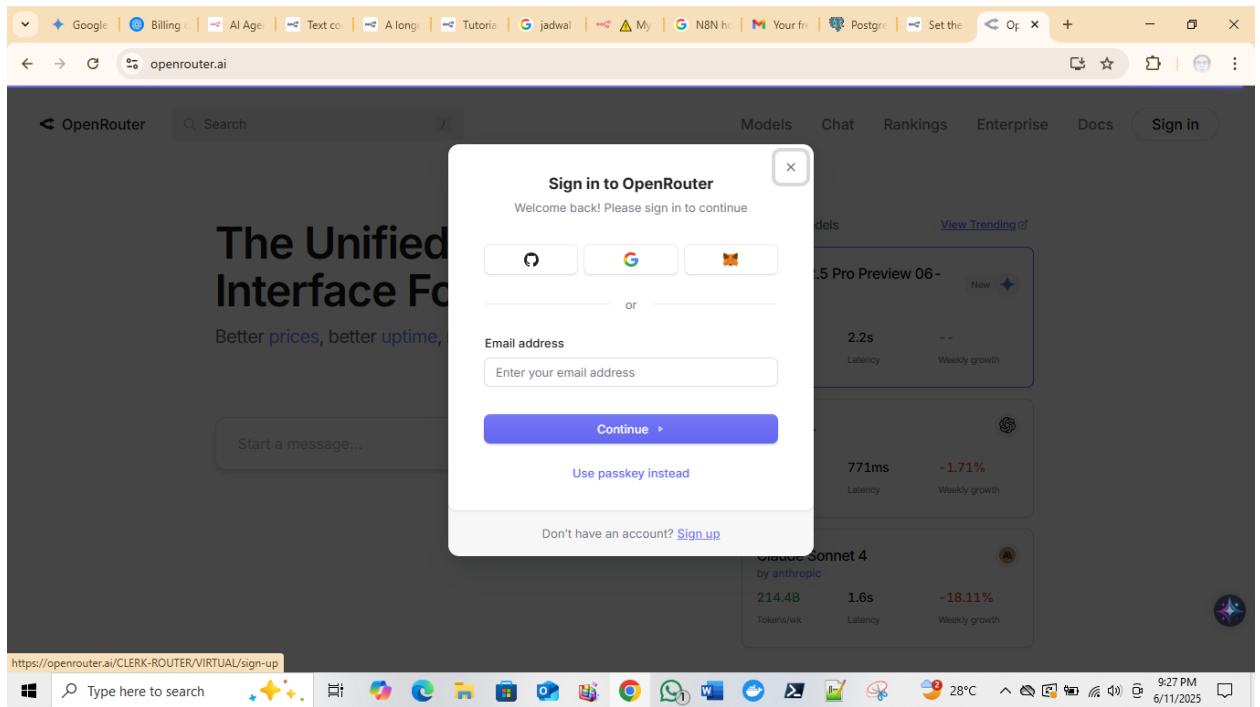


My password : \*\*\*


Select Keys

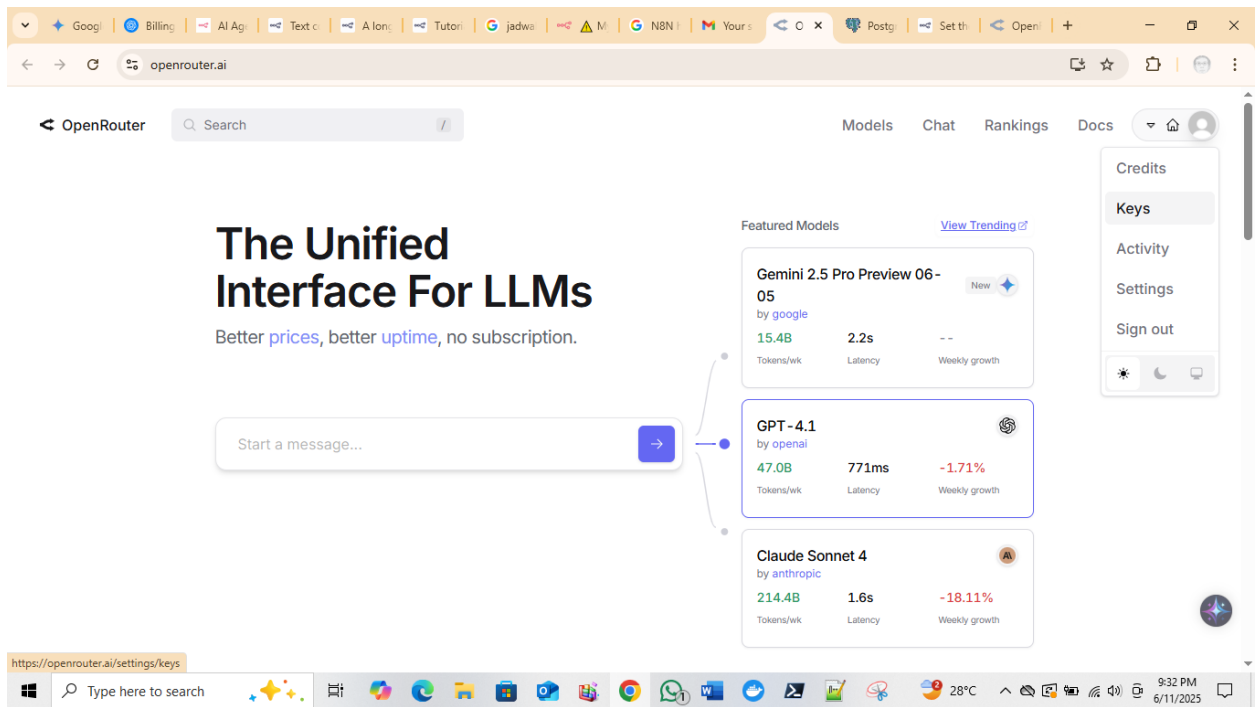

Create API key :

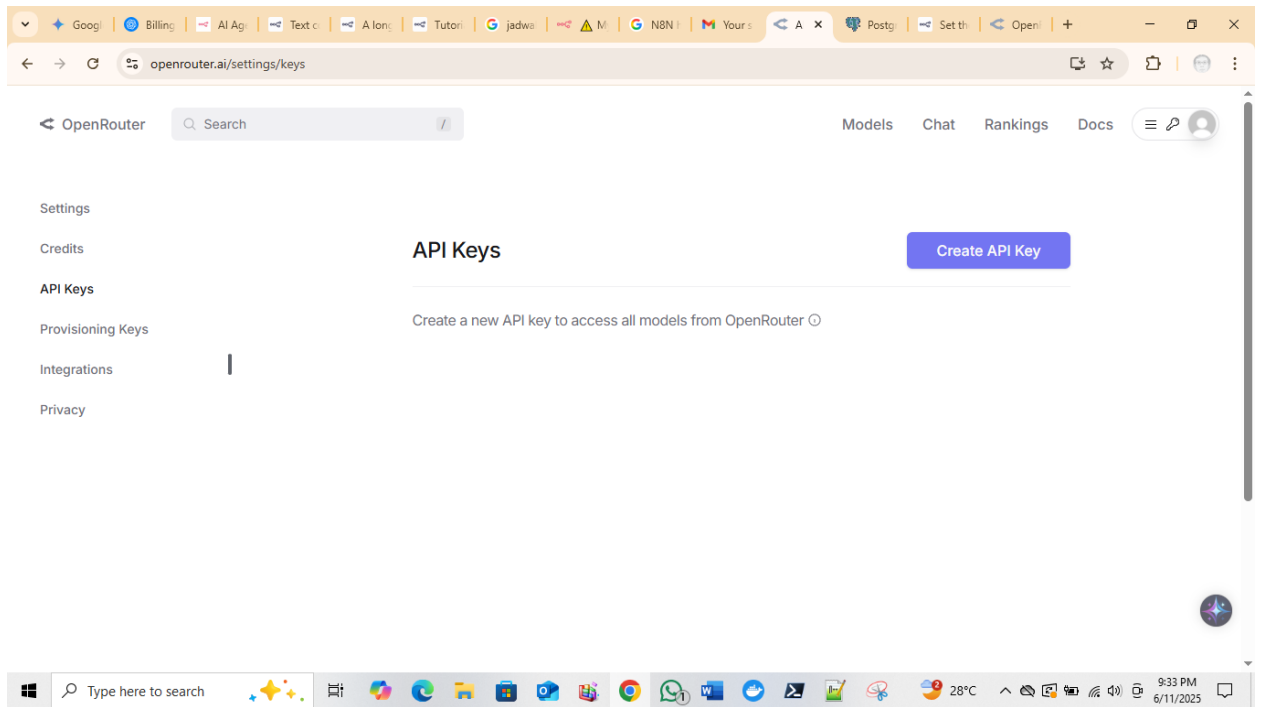

Click Create

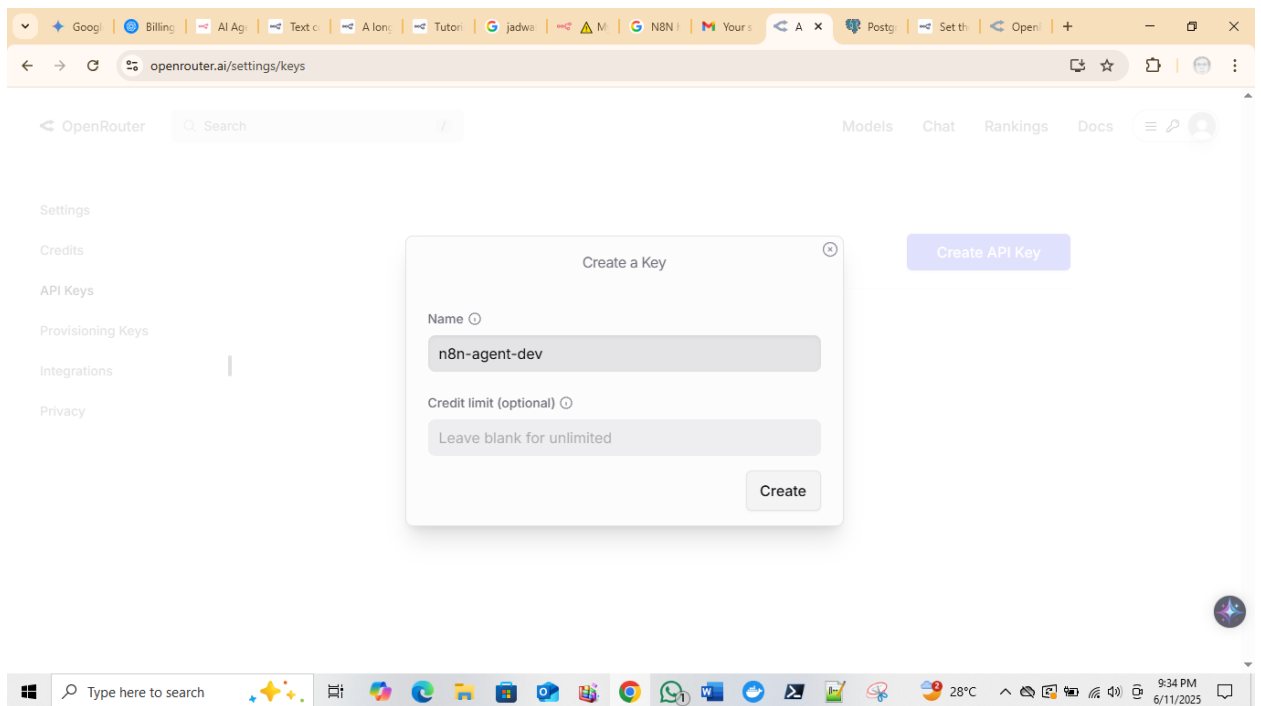

Name the api key and click save. API key.

\*\*\*

 OpenRouter account  
OpenRouter

 Saved ×

Connection

Sharing

Details

✓ Connection tested successfully

Retry

Need help filling out these fields? [Open docs](#)

API Key \*

.....

Enterprise plan users can pull in credentials from external vaults. [More info](#)

Back to n8n (localhost:5678) and enter the credentials.

 OpenAi account 

 Saved ×

Connection

Sharing

Details

✓ Connection tested successfully

Retry

Need help filling out these fields? [Open docs](#)

API Key \*

.....

Organization ID (optional)

Only required if you belong to multiple organisations

Base URL

Select gpt-4o for the model.

Credential to connect with

OpenAi account



Model

From list



gpt-4o




Options


No properties

Add Option



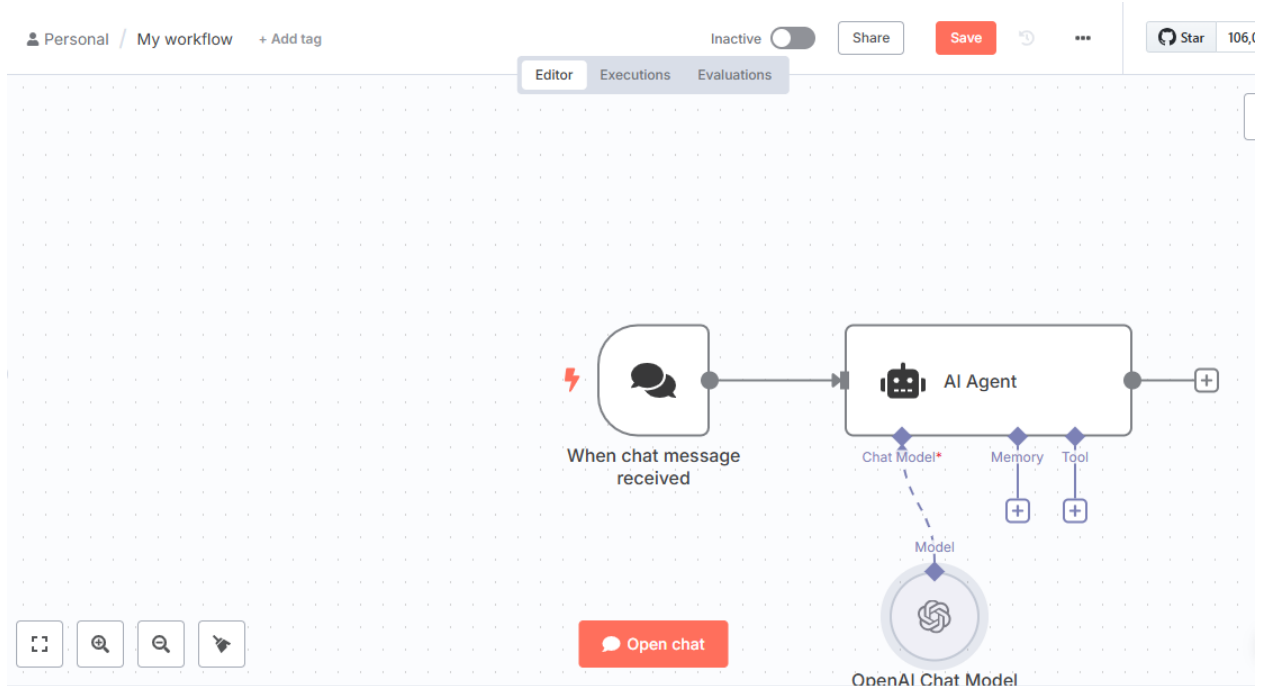

Test the ai agent, by clicking Open Chat

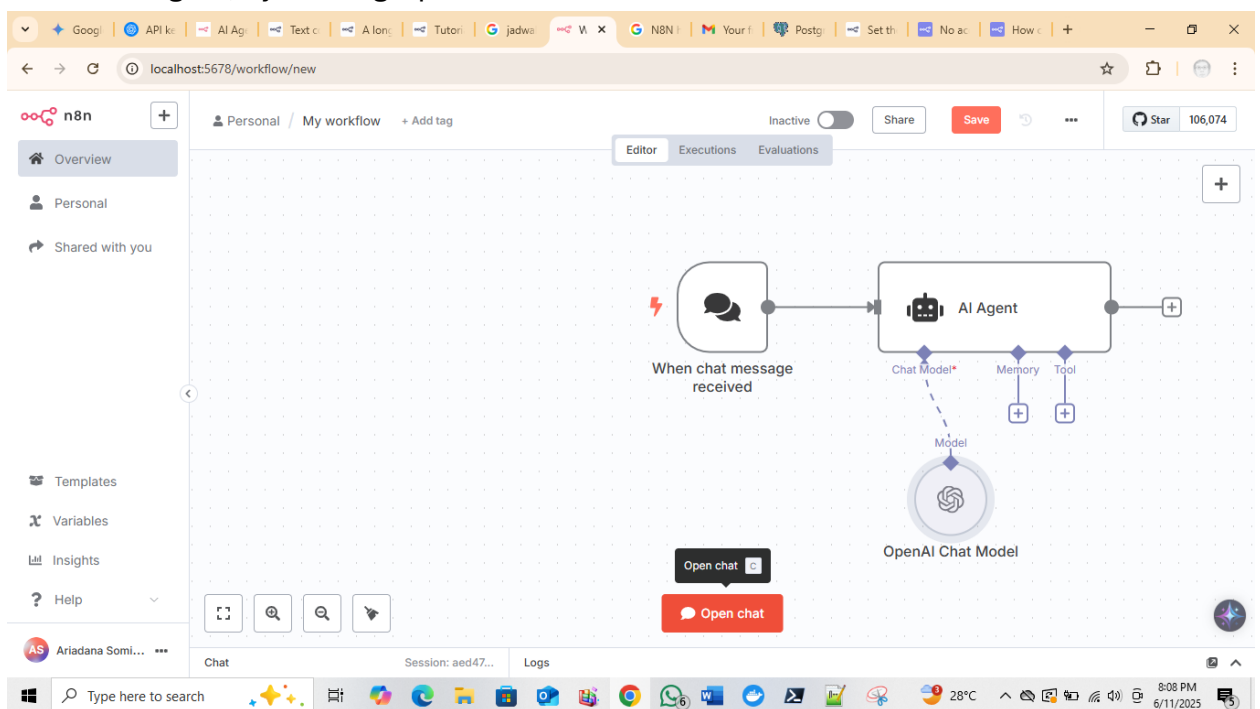

Type sample message into the chat, the AI model will response.

The screenshot shows the n8n chat interface. At the top, there's a grid with a "Model" icon and a green checkmark, labeled "OpenAI Chat Model". Below this is a "Hide chat" button. The main interface is divided into three sections: "Chat", "Logs", and "AI Agent". The "Chat" section shows a session with the message "Hello! How can I assist you today?" and a text input field. The "Logs" section shows a log entry for the "AI Agent" with a success status and 17 tokens. The "AI Agent" section shows the output of the agent, which is "Hello! How can I assist you today?".

Double Click on the AI Agent to view the flow.

The screenshot shows the n8n workflow editor. The workflow is titled "When chat message received" and is currently inactive. It consists of a single node labeled "AI Agent". The workflow is triggered by a "When chat message received" event. The output of the "AI Agent" node is connected to a "Model" node, which is then connected to a "Hide chat" button. The workflow is saved and has 106,171 stars. The interface includes a sidebar with navigation options like "Overview", "Personal", and "Shared with you". The bottom of the screen shows a Windows taskbar with various application icons and the system clock.

The screenshot shows the 'AI Agent' configuration panel in a workflow editor. The panel is divided into three main sections: INPUT, PARAMETERS, and OUTPUT.

- INPUT:** Shows a trigger node 'When chat message received' with a dropdown menu. Below it, a JSON object is displayed: 

```
{  "sessionId": "0030595bd7b44e759cdcb4fd4874f6c2",  "action": "sendMessage",  "chatInput": "Hello"}
```
- PARAMETERS:** Contains the configuration for the AI Agent.
  - Source for Prompt (User Message):** A dropdown menu set to 'Connected Chat Trigger Node'.
  - Prompt (User Message):** A text input field containing the expression `{{ $json.chatInput }}`.
  - Require Specific Output Format:** A toggle switch that is currently turned off.
  - Options:** A section with a dropdown menu set to 'No properties' and an 'Add Option' button.
- OUTPUT:** Shows the result of the agent's execution, a JSON object: 

```
{  "output": "Hello! How can I assist you today?"}
```

At the bottom of the panel, there are tabs for 'Chat Model \*', 'Memory', and 'Tool', each with a plus icon to add or configure them. A red 'Execute step' button is located at the top right of the panel.

We can change the source from prompt with our own defined input.

AI Agent

Execute step

ParametersSettingsDocs

Tip: Get a feel for agents with our quick [tutorial](#) or see an [example](#) of how this node works

Source for Prompt (User Message)  
Define below

Prompt (User Message)  
Fixed Expression  
Here is my name

Tip: Drag an [input field](#) from the left to use it here.

Options  
No properties  
Add Option

Chat Model \*MemoryTool

INPUT

When chat message received 1 item

```
[{"sessionId": "0030595bd7b44e759cdcb4fd4874f6c2", "action": "sendMessage", "chatInput": "Hello"}]
```

AI Agent

Execute step

ParametersSettingsDocs

Tip: Get a feel for agents with our quick [tutorial](#) or see an [example](#) of how this node works

Source for Prompt (User Message)  
Define below

Prompt (User Message)  
Here is my name

Require Specific Output Format

Options  
No properties  
Add Option

Chat Model \*MemoryTool


Output

1 item


```
[{"output": "Thank you for sharing! How can I assist you today?"}]
```

I wish this node would...

Click add option.

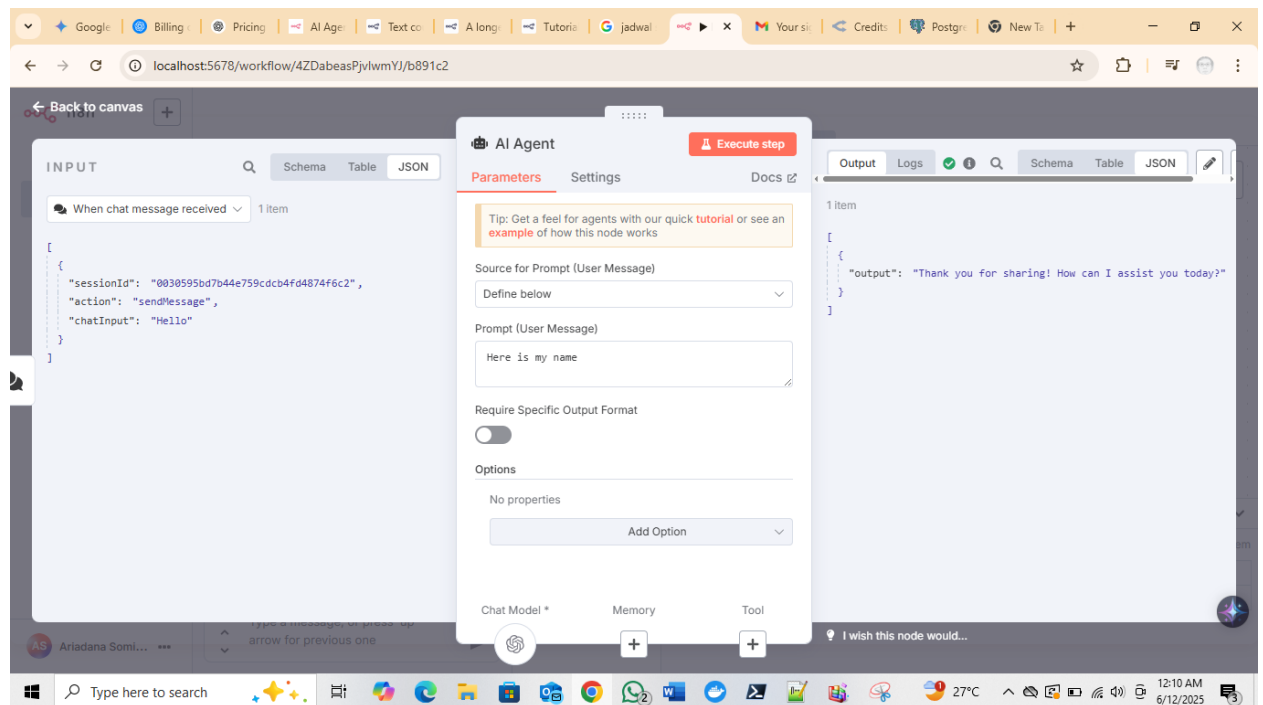

Click system message.

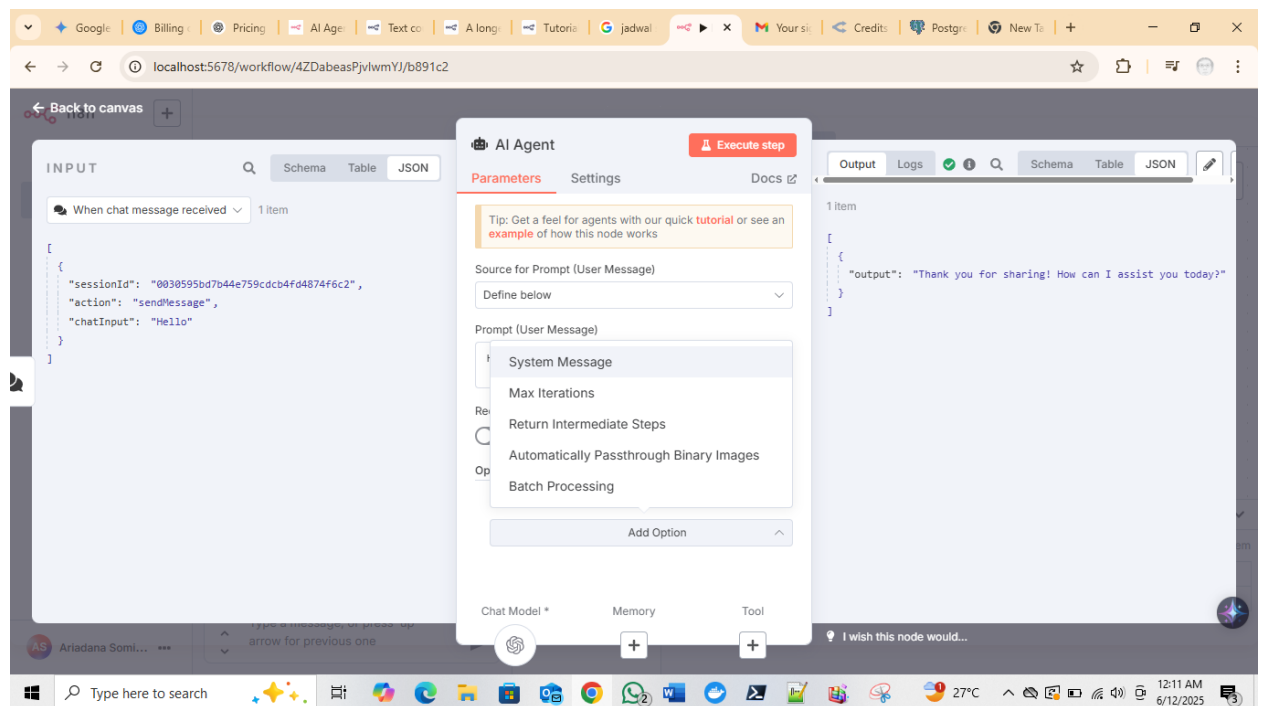

Click on expression.

localhost:5678/workflow/4ZDabeasPjvIwmYJ/b891c2

Back to canvas

INPUT

When chat message received 1 item

```
{
  "sessionId": "0030595bd7b44e759cdcb4fd4874f6c2",
  "action": "sendMessage",
  "chatInput": "Hello"
}
```

AI Agent

Parameters Settings Docs

Tip: Get a feel for agents with our quick [tutorial](#) or see an [example](#) of how this node works

Source for Prompt (User Message)

Connected Chat Trigger Node

Prompt (User Message)

`fx {{ $json.chatInput }}`

Hello

Require Specific Output Format

Options

System Message Fixed Expression

`fx You are a helpful assistant`

Result

You are a helpful assistant

Chat Model \* Memory Tool

Output

1 item

```
{
  "output": "Thank you for sharing! How can I assist you today?"
}
```

12:14 AM 6/12/2025

Type `{{now}}`

AI Agent

Execute step

Parameters

Settings

Docs

Source for Prompt (User Message)

Connected Chat Trigger Node

Prompt (User Message)

fx

{{ \$json.chatInput }}

Hello

Require Specific Output Format

Options

System Message

Fixed Expression

fx

You are a helpful assistant. Today is {{ \$now }}

Result

Item 0

You are a helpful assistant. Today is [DateTime: 2025-06-11T13:16:52.417-04:00]

Chat Model \*

Memory

Tool

Execute step.

Screenshot of a web application interface showing a workflow editor and a chat window.

**Workflow Editor:**

- INPUT:** A node "When chat message received" with 1 item. The JSON input is: 

```
{  "sessionId": "0030595bd7b44e759cdbc4f6d4874f6c2",  "action": "sendMessage",  "chatInput": "Hello"}
```
- AI Agent:** A node with parameters:
  - Source for Prompt (User Message): Connected Chat Trigger Node
  - Prompt (User Message): `fx [{{ $json.chatInput }}]`
  - System Message: `fx You are a helpful assistant. Today is [{{ $now }}]`
- OUTPUT:** A node with 1 item. The JSON output is: 

```
{  "output": "Thank you for sharing! How can I assist you today?"}
```

**Chat Window:**

- Session: 00305...
- Message: "What date is today?"
- Response: "Today's date is June 11, 2025."

**Logs:** Success in 1.417s, 54 Tokens.

Request AI to speak Bahasa.

Second screenshot of the web application interface, showing the workflow editor with a modified system message.

**Workflow Editor:**

- INPUT:** A node "When chat message received" with 1 item. The JSON input is: 


```
{  "sessionId": "0030595bd7b44e759cdbc4f6d4874f6c2",  "action": "sendMessage",  "chatInput": "What date is today?"}
```
- AI Agent:** A node with parameters:
  - Source for Prompt (User Message): Connected Chat Trigger Node
  - Prompt (User Message): `fx [{{ $json.chatInput }}]`
  - System Message: `fx You are a helpful assistant. Today is [{{ $now }}]. Output in Bahasa Indonesia.`
- OUTPUT:** A node with 1 item. The JSON output is: 

```
{  "output": "Today's date is June 11, 2025."}
```


**Chat Window:**

- Session: 00305...
- Message: "What date is today?"
- Response: "Today's date is June 11, 2025."

**Logs:** Success in 1.417s, 54 Tokens.

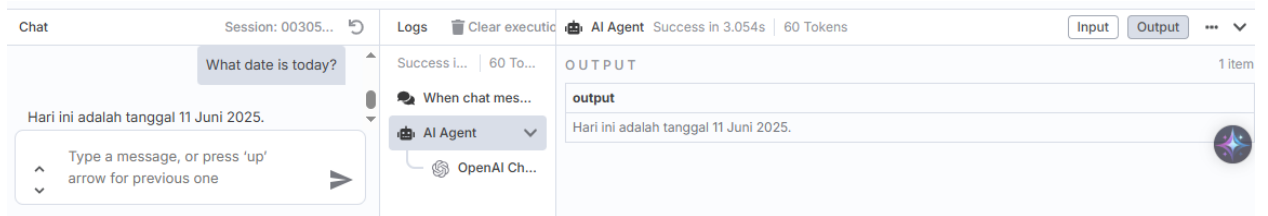

However our AI Agent doesn't have the ability to memorize yet.  
Click memory's plus sign.

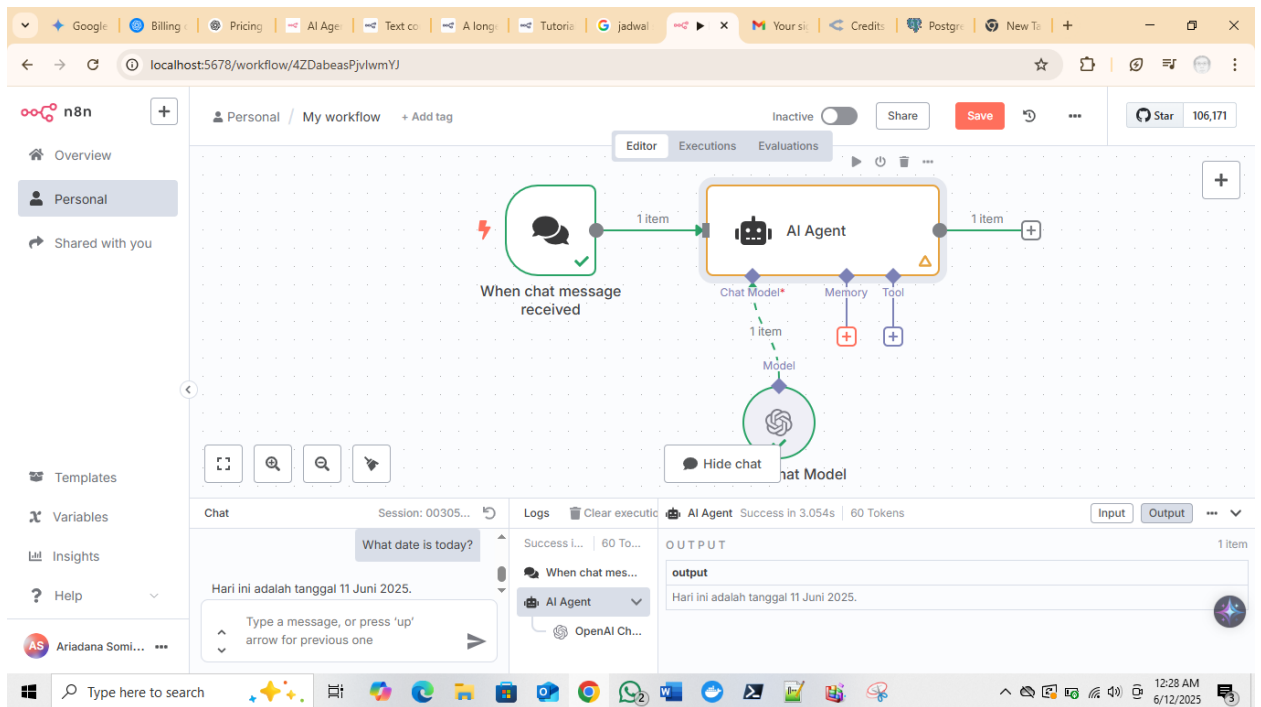

Choose simple memory.

Simple Memory

ParametersSettingsDocs

Session ID

Connected Chat Trigger Node

Session Key From Previous Node

fx

{{ \$json.sessionId }}

0030595bd7b44e759cdcb4fd4874f6c2

Context Window Length

5

How many past interactions the model receives as context

Test the AI Agent.

Chat

Session: 00305...

Logs

Clear executio

AI Agent

Success in 1.148s

73 Tokens

Input

Output

Success in... | 73 T...

When chat mes...

AI Agent

Simple Me...

OpenAI Ch...

Simple Me...


OUTPUT

1 item

output


Your name is Dana.

Toggle the make the chat publicly available.

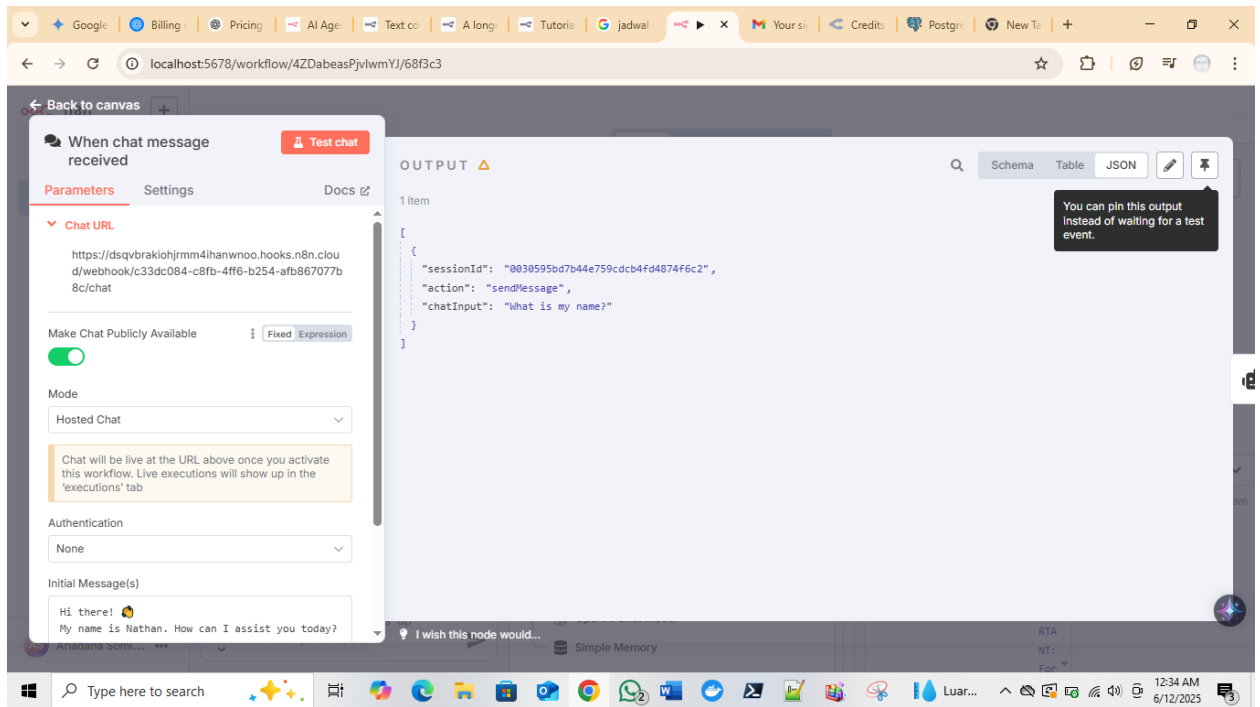


Copy the url.


<https://dsqvbrakiohjrmm4ihanwnoo.hooks.n8n.cloud/webhook/c33dc084-c8fb-4ff6-b254-afb867077b8c/chat>

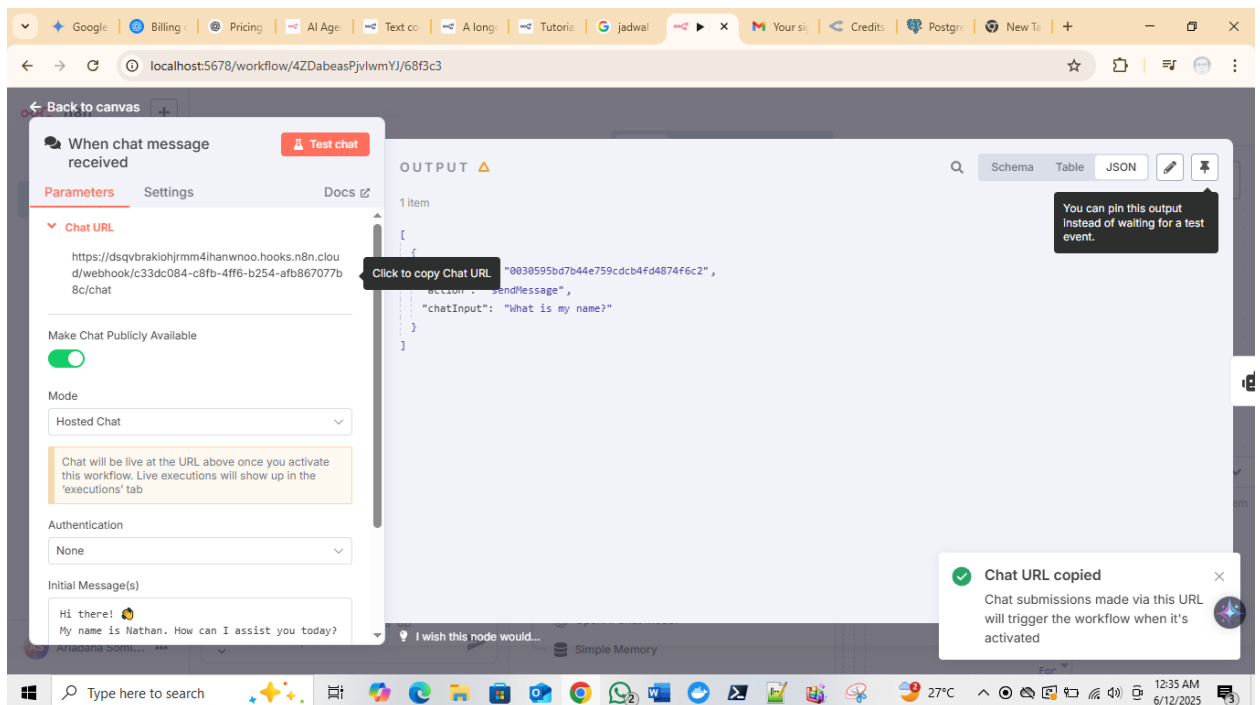

Save the workflow.

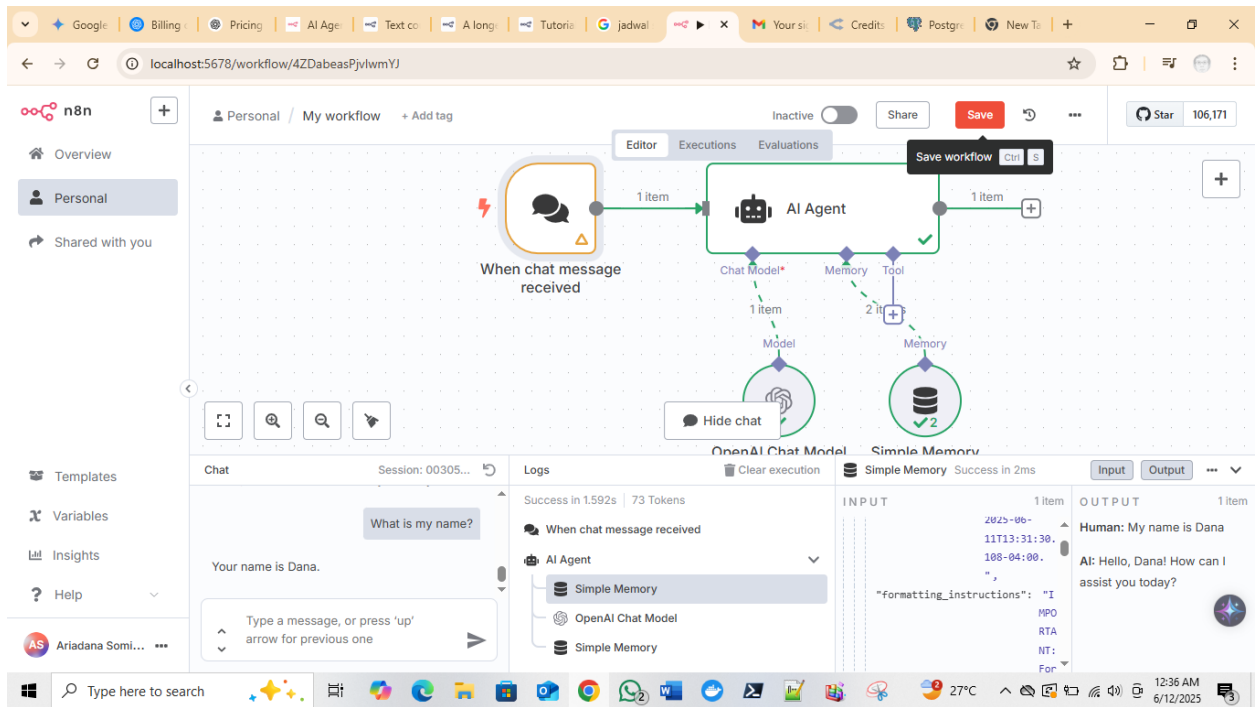

Toggle activate workflow.

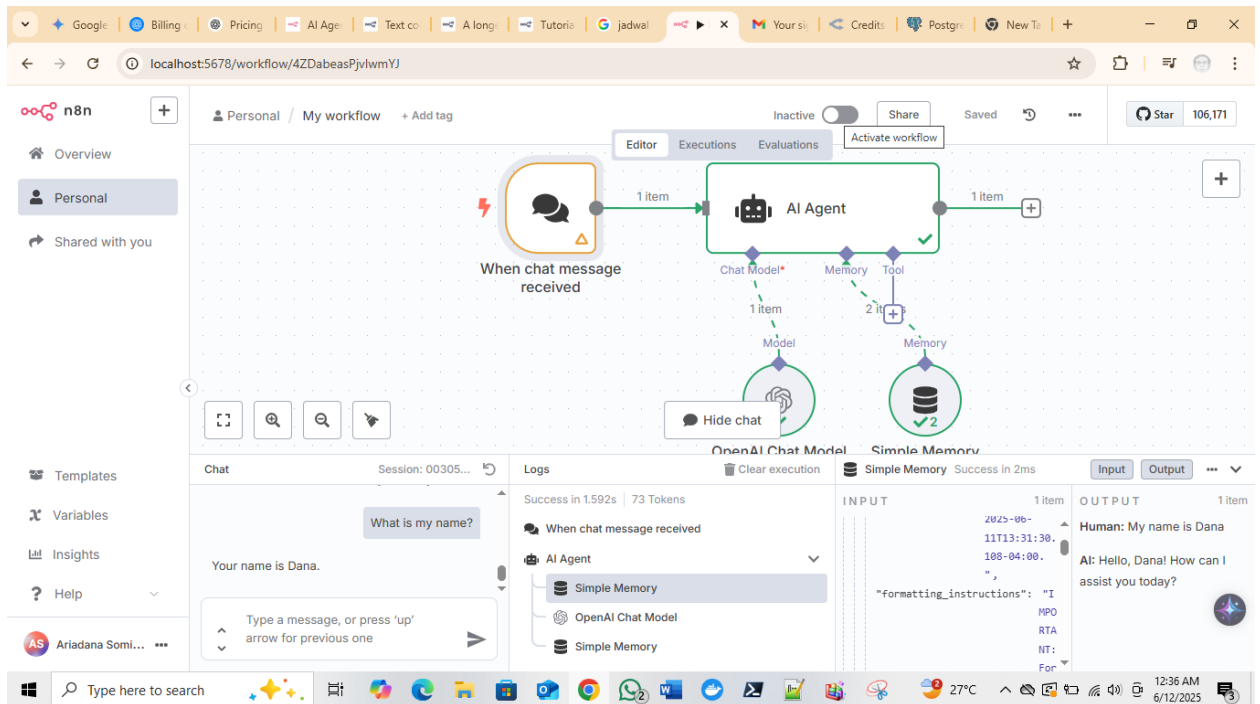

Open the url in the browser.

Use case : In case your n8n container is being removed, use this command to run the container again :

```
docker run -it --name n8n -p 5678:5678 -e GENERIC_TIMEZONE="Asia/Jakarta" -e TZ="Asia/Jakarta" -v n8n_data:/home/node/.n8n docker.n8n.io/n8nio/n8n start - tunnel
```


# NGROK

In order to be able to expose our chat agent into the public we need to install ngrok as the proxy.

## Download NGROK

url : <https://ngrok.com/>

1. Sign up to Ngrok

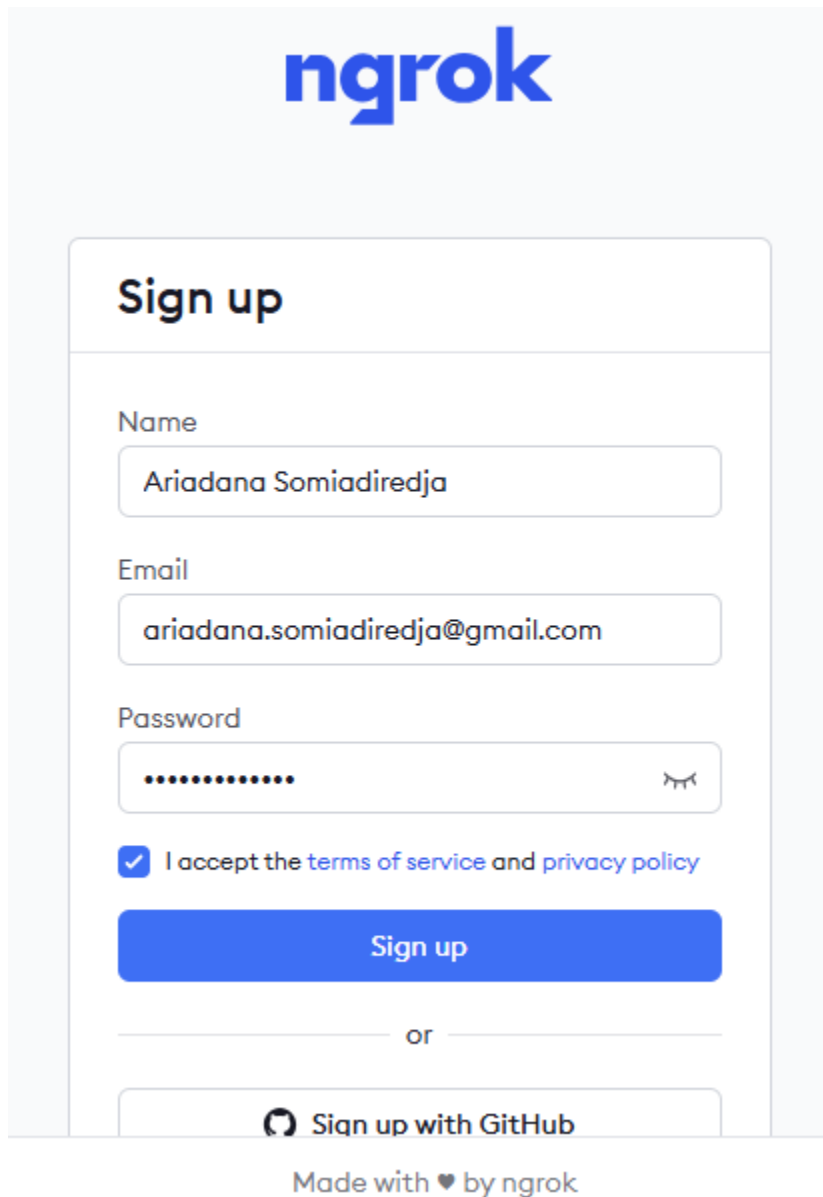The image shows the Ngrok sign-up page. At the top is the 'ngrok' logo in blue. Below it is a 'Sign up' form. The form has four input fields: 'Name' with the value 'Ariadana Somiadiredja', 'Email' with the value 'ariadana.somiadiredja@gmail.com', and 'Password' with masked characters and a toggle icon. Below the password field is a checkbox labeled 'I accept the terms of service and privacy policy' which is checked. A blue 'Sign up' button is below the checkbox. Below the button is a horizontal line with 'or' in the center. At the bottom is a button with the GitHub logo and the text 'Sign up with GitHub'. At the very bottom, it says 'Made with ♥ by ngrok'.

Password : \*\*\*

2. Run the installation, open cmd and execute command : `choco install ngrok`

Note important path for ngrok installation :

Downloading ngrok 64 bit

from '<https://bin.equinox.io/a/9ehA2XFs1ZK/ngrok-v3-3.22.1-windows-amd64.zip>'

Progress: 100% - Completed download of

C:\Users\ariad\AppData\Local\Temp\chocolatey\ngrok\3.22.1\ngrok-v3-3.22.1-windows-amd64.zip (9.28 MB).

Download of ngrok-v3-3.22.1-windows-amd64.zip (9.28 MB) completed.

Hashes match.


Extracting C:\Users\ariad\AppData\Local\Temp\chocolatey\ngrok\3.22.1\ngrok-v3-3.22.1-windows-amd64.zip to C:\ProgramData\chocolatey\lib\ngrok\tools...

C:\ProgramData\chocolatey\lib\ngrok\tools

ShimGen has successfully created a shim for ngrok.exe

The install of ngrok was successful.

Deployed to 'C:\ProgramData\chocolatey\lib\ngrok\tools'

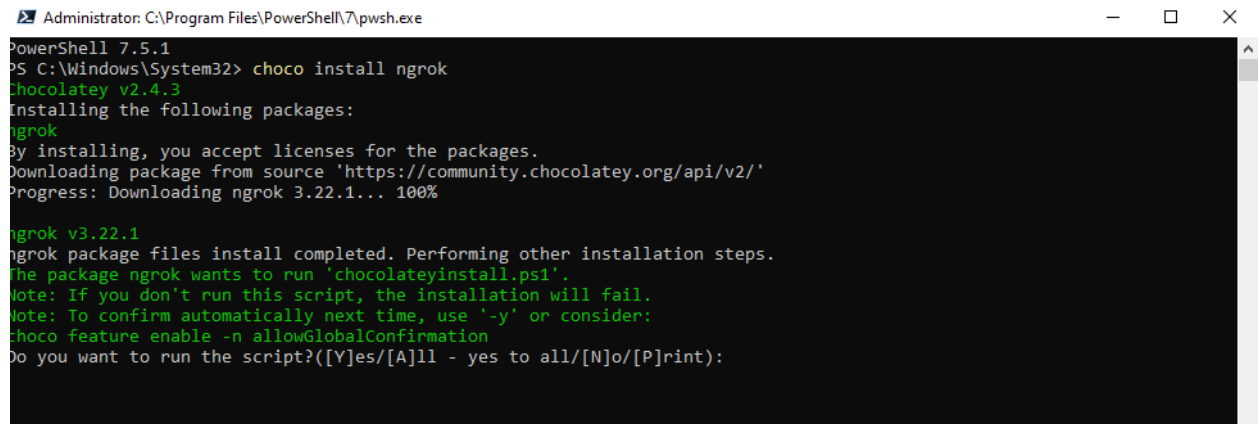

```
Administrator: C:\Program Files\PowerShell\7\pwsh.exe
PowerShell 7.5.1
PS C:\Windows\System32> choco install ngrok
Chocolatey v2.4.3
Installing the following packages:
ngrok
By installing, you accept licenses for the packages.
Downloading package from source 'https://community.chocolatey.org/api/v2/'
Progress: Downloading ngrok 3.22.1... 100%
ngrok v3.22.1
ngrok package files install completed. Performing other installation steps.
The package ngrok wants to run 'chocolateyinstall.ps1'.
Note: If you don't run this script, the installation will fail.
Note: To confirm automatically next time, use '-y' or consider:
choco feature enable -n allowGlobalConfirmation
Do you want to run the script?([Y]es/[A]ll - yes to all/[N]o/[P]rint):
```

Add token, command : ngrok config add-authtoken

2yOeW0qflt8sCAEd48QaokqWtjc\_3oRMhJGUijeVeuMixbES5

Output :

PS C:\Windows\System32> ngrok config add-authtoken

2yOeW0qflt8sCAEd48QaokqWtjc\_3oRMhJGUijeVeuMixbES5

Authtoken saved to configuration file:

C:\Users\ariad\AppData\Local\ngrok\ngrok.yml

To forward ngrok into our local : ngrok http (application port)

```
ngrok

🔗 ngrok is also now your Kubernetes-native ingress: https://ngrok.com/r/k8s

Session Status      online
Account             Ariadana Somiadiredja (Plan: Free)
Update              update available (version 3.23.1, Ctrl-U to update)
Version             3.22.1
Region              Asia Pacific (ap)
Latency             82ms
Web Interface       http://127.0.0.1:4040
Forwarding           https://5e87-120-188-37-203.ngrok-free.app -> http://localhost:5678

Connections          ttl      opn      rt1      rt5      p50      p90
                    0         0         0.00     0.00     0.00     0.00
```


Command to run webhook into NGROK URL

```
docker run -it --name n8n -p 5678:5678 -e GENERIC_TIMEZONE="Asia/Jakarta" -e TZ="Asia/Jakarta" -e
```

```
WEBHOOK_URL="YOUR_NEW_NGROK_FORWARDING_URL_HERE" -v
```

```
n8n_data:/home/node/.n8n docker.n8n.io/n8nio/n8n
```

Ngrok UI : <http://127.0.0.1:4040>

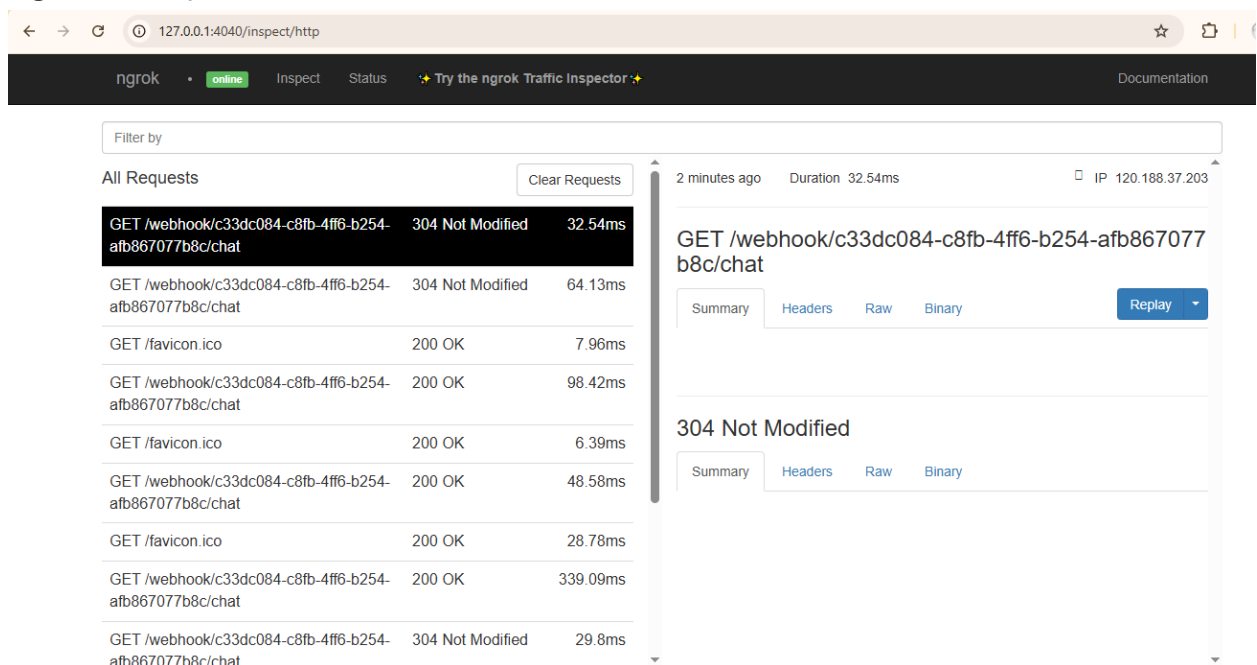

Put the your url in the browser : <https://5e87-120-188-37-203.ngrok-free.app/webhook/c33dc084-c8fb-4ff6-b254-afb867077b8c/chat>

