


Six-section DLPFC spatial evaluation: common fixed-resolution profiles and donor-pair mixing

● Harmony ● Harmony + GenoRefine ● SpaGCN ● GraphST

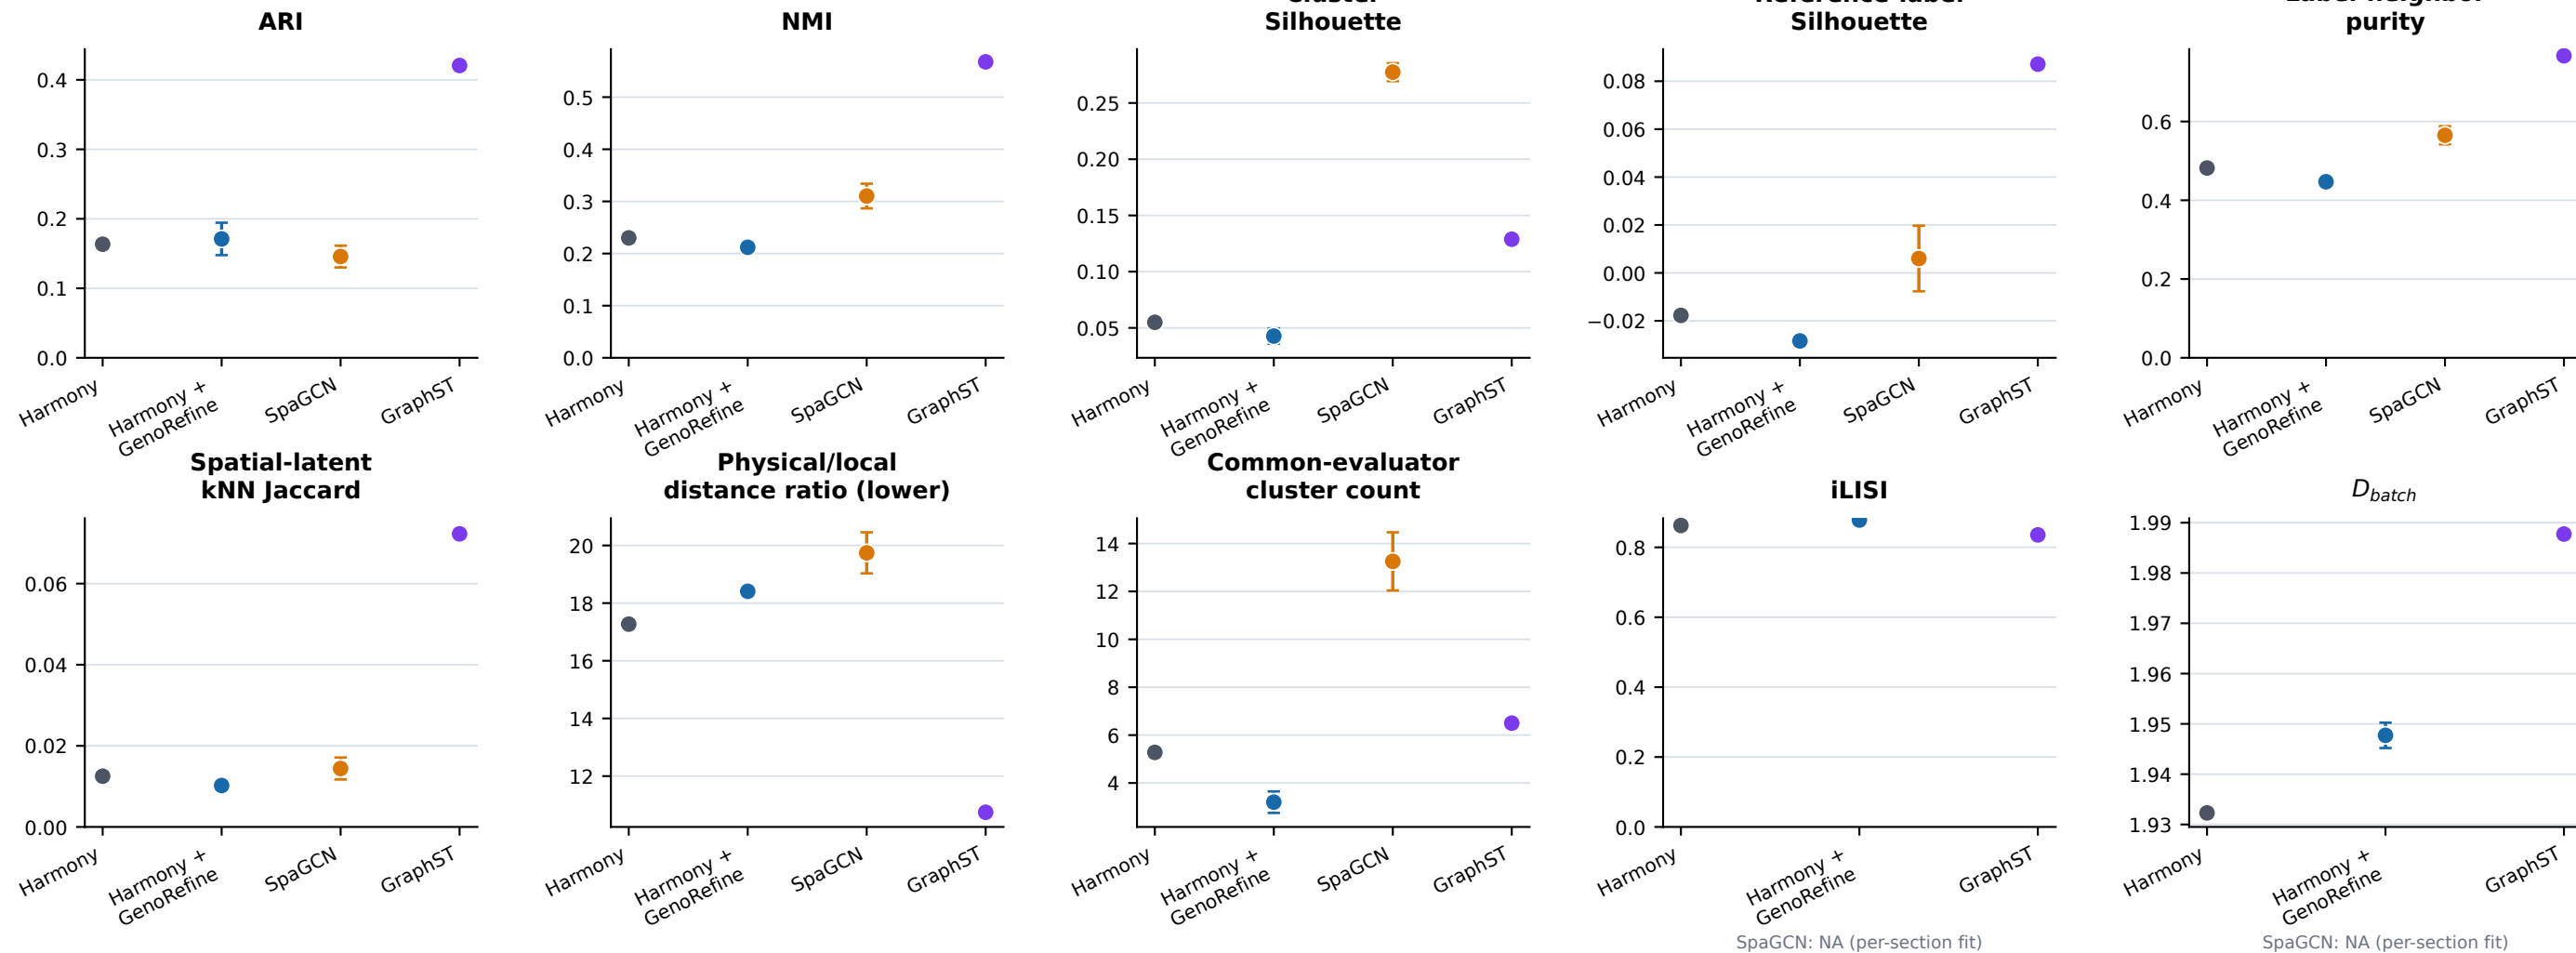

Points are donor-macro means; bars are sample SD across five algorithmic seeds (Harmony is one fixed embedding). ARI/NMI are fixed-resolution profiles, not matched-K domain recovery. GraphST uses donor-pair PASTE-aligned models; SpaGCN is fit per section, so the tasks are asymmetric.